



FCC RF Test Report

APPLICANT : Realtek Semiconductor Corp.
EQUIPMENT : 802.11b/g/n RTL8192EE Combo module
BRAND NAME : Realtek
MODEL NAME : RTL8192EEBT
FCC ID : TX2RTL8192EEBT
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

This is a partial report which is included the conducted power, radiated band edges, and spurious emission measurement test items. The product was received on Feb. 26, 2014 and testing was completed on Mar. 27, 2014. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown to be compliant with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY.....3

SUMMARY OF TEST RESULT4

1 GENERAL DESCRIPTION.....5

 1.1 Applicant5

 1.2 Manufacturer.....5

 1.3 Feature of Equipment Under Test5

 1.4 Product Specification of Equipment Under Test.....6

 1.5 Modification of EUT6

 1.6 Testing Site.....6

 1.7 Applied Standards6

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....7

 2.1 Descriptions of Test Mode7

 2.2 Test Mode.....7

 2.3 Connection Diagram of Test System.....8

 2.4 EUT Operation Test Setup8

3 TEST RESULT9

 3.1 Radiated Band Edges and Spurious Emission Measurement9

 3.2 Antenna Requirements18

4 LIST OF MEASURING EQUIPMENT.....19

5 UNCERTAINTY OF EVALUATION.....20

APPENDIX A. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR421460-01B	Rev. 01	Initial issue of report	Apr. 24, 2014



SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(d)	RSS-210 A8.5	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 2.61 dB at 2362.020 MHz
3.2	15.203 & 15.247(b)	RSS-210 A8.4	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

Realtek Semiconductor Corp.

No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300 Taiwan (R.O.C.)

1.2 Manufacturer

Realtek Semiconductor Corp.

No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300 Taiwan (R.O.C.)

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	802.11b/g/n RTL8192EE Combo module
Brand Name	Realtek
Model Name	RTL8192EEBT
FCC ID	TX2RTL8192EEBT
Installed into the host 1	Equipment Name: Notebook Band Name: lenovo Model Name: TP00066A Host with Antenna 1
Installed into the host 2	Equipment Name: Notebook Band Name: lenovo Model Name: TP00066A Host with Antenna 2
EUT supports Radios application	WLAN 11b/g/n HT20/HT40 Bluetooth v4.0 EDR/LE
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Antenna Information for Host			
Antenna 1 (WNC)	Manufacturer	WNC	
	P/N	Main:DQ6G15G8100	Aux:DQ6G15G8000
	Antenna Type	Main:PIFA Antenna	Aux:PIFA Antenna
	Peak gain	Main Antenna : WLAN: 0.12 dBi	Aux Antenna : Bluetooth: -2.16dBi WLAN: -2.16 dBi
Antenna 2 (Tongda)	Manufacturer	Tongda	
	P/N	Main:DQ690210201	Aux:DQ690210200
	Antenna Type	Main:PIFA Antenna	Aux:PIFA Antenna
	Peak gain	Main Antenna : WLAN: 0.79dBi	Aux Antenna : Bluetooth: -1.57dBi WLAN: -1.57dBi

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum (Average) Output Power to Antenna	2.93 dBm (0.0020 W)
Type of Modulation	Bluetooth LE : GFSK

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Site

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978		
Test Site No.	Sporton Site No.		FCC/IC Registration No.
	TH02-HY	03CH06-HY	722060/4086B-1

Note: The test site complies with ANSI C63.4 2003 requirement.

1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01
- ♦ ANSI C63.4-2003

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2 Test Configuration of Equipment Under Test

2.1 Descriptions of Test Mode

The RF output power was recorded in the following table:

Channel	Frequency	Bluetooth 4.0 – LE RF Output Power (Average Power)	
		Data Rate: 1Mbps	
		Modulation: GFSK	
		Duty Cycle (%): 100.00	
Ch00	2402MHz	1.82 dBm	
Ch19	2440MHz	2.81 dBm	
Ch39	2480MHz	2.93 dBm	


The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

2.2 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth 4.0 – LE / GFSK
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
Remark: All the radiated test cases were performance with host 2, adapter 1, and battery 1.	

2.3 Connection Diagram of Test System

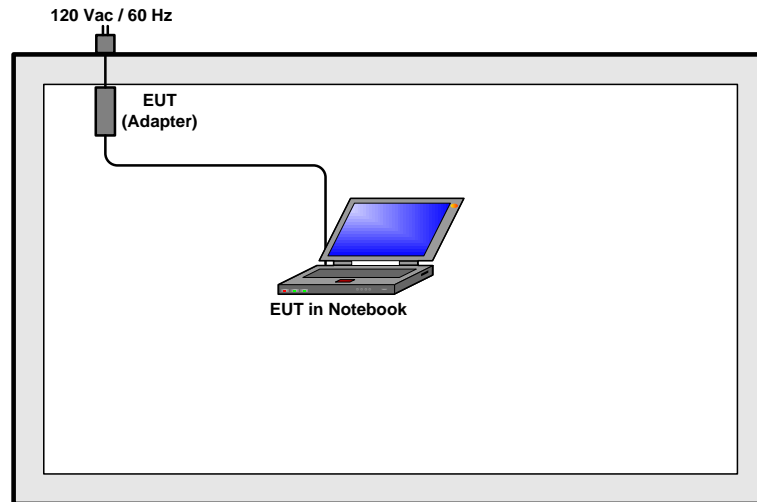

2.4 EUT Operation Test Setup

For Bluetooth function, the RF utility, "MP Tool" installed in the notebook make the notebook provides functions like channel selection and power level for continuous transmitting and receiving signals.



3 Test Result

3.1 Radiated Band Edges and Spurious Emission Measurement

3.1.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.




3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Band	Duty Cycle(%)	T(μs)	1/T(kHz)	VBW Setting
Bluetooth 4.0 - LE	100.00	-	-	10Hz

3.1.4 Test Setup


For radiated emissions below 30MHz

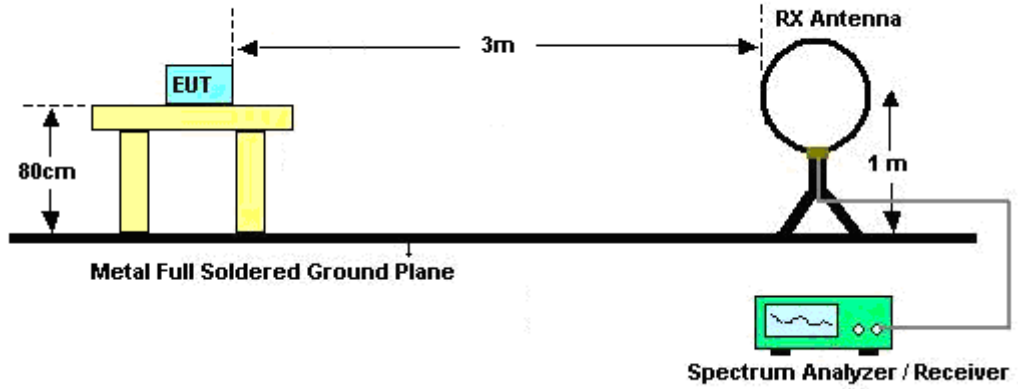

For radiated emissions from 30MHz to 1GHz

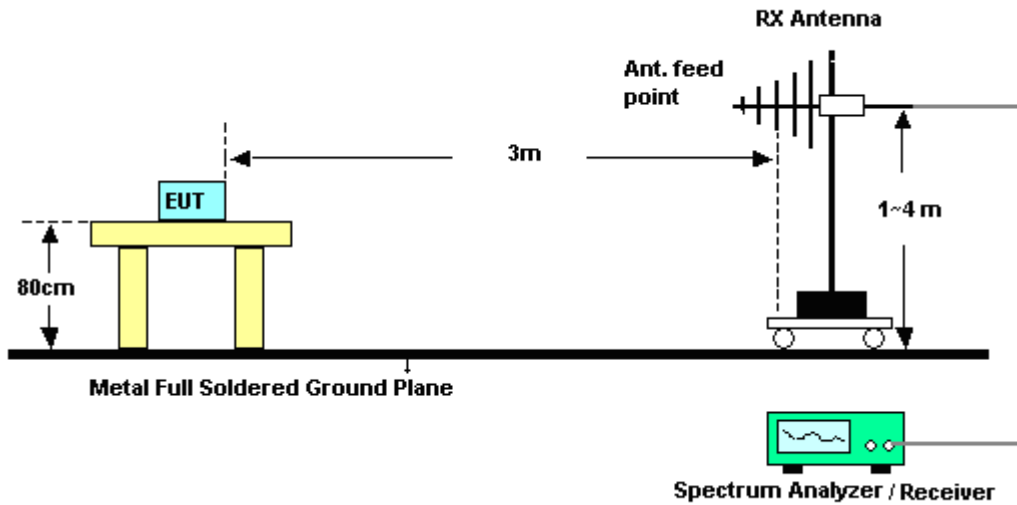

For radiated emissions above 1GHz

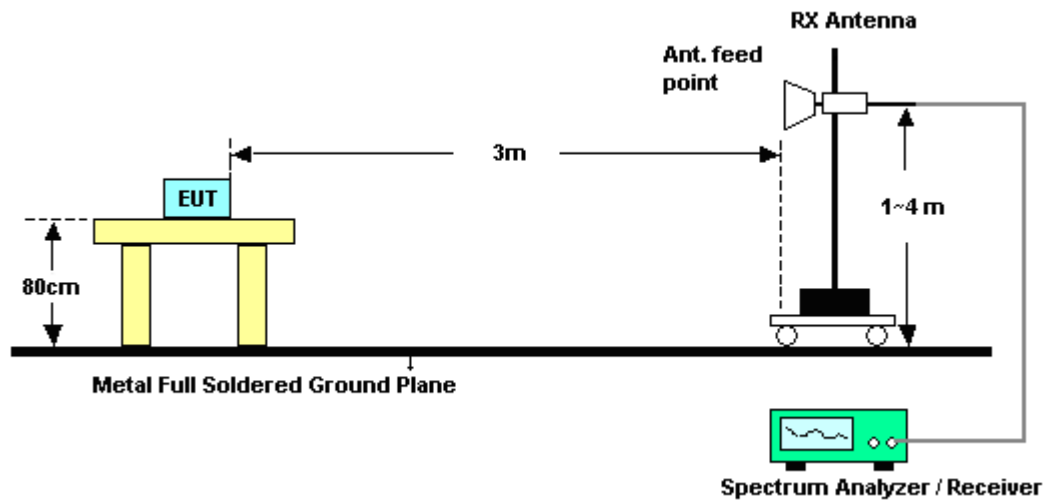

3.1.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.



3.1.6 Test Result of Radiated Spurious at Band Edges

Test Mode :	Mode 1	Temperature :	22~24°C
Test Channel :	00	Relative Humidity :	47~49%
		Test Engineer :	Marlboro Hsu

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dB μ V / m)	Over Limit (dB)	Limit Line (dB μ V / m)	Read Level (dB μ V)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2361.75	56.89	-17.11	74	52.92	31.89	6.42	34.34	140	205	Peak
2362.02	51.39	-2.61	54	47.42	31.89	6.42	34.34	140	205	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dB μ V / m)	Over Limit (dB)	Limit Line (dB μ V / m)	Read Level (dB μ V)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2361.84	55.82	-18.18	74	51.85	31.89	6.42	34.34	100	326	Peak
2362.02	49.66	-4.34	54	45.69	31.89	6.42	34.34	100	326	Average

Test Mode :	Mode 3	Temperature :	22~24°C
Test Channel :	39	Relative Humidity :	47~49%
		Test Engineer :	Marlboro Hsu

ANTENNA POLARITY : HORIZONTAL										
Frequency (MHz)	Level (dB μ V / m)	Over Limit (dB)	Limit Line (dB μ V / m)	Read Level (dB μ V)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2492.08	52.57	-21.43	74	48.27	32	6.59	34.29	160	194	Peak
2483.56	40.13	-13.87	54	35.85	31.99	6.59	34.3	160	194	Average

ANTENNA POLARITY : VERTICAL										
Frequency (MHz)	Level (dB μ V / m)	Over Limit (dB)	Limit Line (dB μ V / m)	Read Level (dB μ V)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2483.98	52.07	-21.93	74	47.79	31.99	6.59	34.3	100	342	Peak
2483.71	40.03	-13.97	54	35.75	31.99	6.59	34.3	100	342	Average



3.1.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Note: Pre-scanned all test modes and only choose the worst case mode recorded in the test report for radiated spurious emission below 1GHz.

Test Mode :	Mode 1	Temperature :	22~24°C
Test Channel :	00	Relative Humidity :	47~49%
Test Engineer :	Marlboro Hsu	Polarization :	Horizontal
Remark :	1. 2402 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
42.96	20.56	-19.44	40	40.68	10.92	0.75	31.79	-	-	Peak
274.35	32.11	-13.89	46	49.11	12.91	1.82	31.73	-	-	Peak
296.76	30.79	-15.21	46	47.48	13.14	1.89	31.72	-	-	Peak
308.4	31.6	-14.4	46	48.04	13.36	1.93	31.73	-	-	Peak
471.5	34.91	-11.09	46	47.08	17.42	2.31	31.9	100	91	Peak
812.4	30.29	-15.71	46	38.83	20.26	3.1	31.9	-	-	Peak
2402	96.88	-	-	92.84	31.92	6.45	34.33	140	205	Average
2402	98.2	-	-	94.16	31.92	6.45	34.33	140	205	Peak
4803	46.48	-27.52	74	57.47	34.41	10.16	55.56	100	0	Peak

Note: Other harmonics are lower than background noise.



Test Mode :	Mode 1	Temperature :	22~24°C
Test Channel :	00	Relative Humidity :	47~49%
Test Engineer :	Marlboro Hsu	Polarization :	Vertical
Remark :	1. 2402 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
40.8	21.29	-18.71	40	40.1	12.24	0.74	31.79	-	-	Peak
125.04	23.14	-20.36	43.5	41.64	12	1.25	31.75	-	-	Peak
275.7	26.12	-19.88	46	43.13	12.89	1.83	31.73	-	-	Peak
324.5	28.5	-17.5	46	44.57	13.7	1.97	31.74	-	-	Peak
468	35.63	-10.37	46	47.84	17.36	2.32	31.89	100	18	Peak
812.4	29.49	-16.51	46	38.03	20.26	3.1	31.9	-	-	Peak
2402	95.35	-	-	91.31	31.92	6.45	34.33	100	326	Average
2402	96.73	-	-	92.69	31.92	6.45	34.33	100	326	Peak
4803	45.04	-28.96	74	56.03	34.41	10.16	55.56	100	0	Peak

Note: Other harmonics are lower than background noise.



Test Mode :	Mode 2	Temperature :	22~24°C
Test Channel :	19	Relative Humidity :	47~49%
Test Engineer :	Marlboro Hsu	Polarization :	Horizontal
Remark :	1. 2440 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2440	97.86	-	-	93.7	31.96	6.52	34.32	163	204	Average
2440	99.25	-	-	95.09	31.96	6.52	34.32	163	204	Peak
4881	46.57	-27.43	74	57.69	34.37	10.19	55.68	100	0	Peak
7320	46.37	-27.63	74	56.07	35.6	10.94	56.24	100	0	Peak

Note: Other harmonics are lower than background noise.

Test Mode :	Mode 2	Temperature :	22~24°C
Test Channel :	19	Relative Humidity :	47~49%
Test Engineer :	Marlboro Hsu	Polarization :	Vertical
Remark :	1. 2440 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2440	95.41	-	-	91.25	31.96	6.52	34.32	100	337	Average
2440	96.69	-	-	92.53	31.96	6.52	34.32	100	337	Peak
4881	45.72	-28.28	74	56.84	34.37	10.19	55.68	100	0	Peak
7320	45.96	-28.04	74	55.66	35.6	10.94	56.24	100	0	Peak

Note: Other harmonics are lower than background noise.



Test Mode :	Mode 3	Temperature :	22~24°C
Test Channel :	39	Relative Humidity :	47~49%
Test Engineer :	Marlboro Hsu	Polarization :	Horizontal
Remark :	1. 2480 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2480	97.29	-	-	93.01	31.99	6.59	34.3	160	194	Average
2480	98.63	-	-	94.35	31.99	6.59	34.3	160	194	Peak
4959	46.97	-27.03	74	58.28	34.32	10.21	55.84	100	0	Peak
7440	46.96	-27.04	74	56.53	35.53	10.9	56	100	0	Peak

Note: Other harmonics are lower than background noise.

Test Mode :	Mode 3	Temperature :	22~24°C
Test Channel :	39	Relative Humidity :	47~49%
Test Engineer :	Marlboro Hsu	Polarization :	Vertical
Remark :	1. 2480 MHz is fundamental signal which can be ignored. 2. Average measurement was not performed if peak level went lower than the average limit.		

Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Remark
2480	95	-	-	90.72	31.99	6.59	34.3	100	342	Average
2480	96.28	-	-	92	31.99	6.59	34.3	100	342	Peak
4959	45.19	-28.81	74	56.5	34.32	10.21	55.84	100	0	Peak
7440	46.64	-27.36	74	56.21	35.53	10.9	56	100	0	Peak

Note: Other harmonics are lower than background noise.



3.2 Antenna Requirements

3.2.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.2.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.2.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Agilent	E4416A	GB412923 44	300MHz~40GHz	Jan. 28, 2014	Mar. 06, 2014	Jan. 27, 2015	Conducted (TH02-HY)
Power Sensor	Agilent	E9327A	US404415 48	300MHz~40GHz	Jan. 28, 2014	Mar. 06, 2014	Jan. 27, 2015	Conducted (TH02-HY)
Spectrum Analyzer	R&S	FSP30	101067	9kHz ~ 30GHz	Nov. 20, 2013	Mar. 27, 2014	Nov. 19, 2014	Radiation (03CH06-HY)
Spectrum Analyzer	Agilent	E4408B	MY442110 30	9kHz ~ 26.5GHz	Dec. 02, 2013	Mar. 27, 2014	Dec. 01, 2014	Radiation (03CH06-HY)
EMI Test Receiver	R&S	ESVS10	834468/00 03	20MHz ~ 1000MHz	May 06, 2013	Mar. 27, 2014	May 05, 2014	Radiation (03CH06-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	860004/00 01	9kHz ~ 30MHz	Jul. 03, 2012	Mar. 27, 2014	Jul. 02, 2014	Radiation (03CH06-HY)
Bilog Antenna	Schaffner	CBL6112B	2885	30MHz ~ 2GHz	Oct. 10, 2013	Mar. 27, 2014	Oct. 09, 2014	Radiation (03CH06-HY)
Double Ridge Horn Antenna	EMCO	3117	00066583	1GHz ~ 18GHz	Aug. 02, 2013	Mar. 27, 2014	Aug. 01, 2014	Radiation (03CH06-HY)
Amplifier	Agilent	310N	186713	9kHz ~ 1GHz	Apr. 12, 2013	Mar. 27, 2014	Apr. 11, 2014	Radiation (03CH06-HY)
Pre Amplifier	EMCI	EMC051845	SN980048	1GHz ~ 18GHz	Jul. 18, 2013	Mar. 27, 2014	Jul. 17, 2014	Radiation (03CH06-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170 251	15GHz ~ 40GHz	Oct. 03, 2013	Mar. 27, 2014	Oct. 02, 2014	Radiation (03CH06-HY)
Preamplifier	Agilent	8449B	3008A019 17	1GHz ~ 26.5GHz	Apr. 12, 2013	Mar. 27, 2014	Apr. 11, 2014	Radiation (03CH06-HY)
Turn Table	INN-CO	DS2000	420/650/00	0 ~ 360 degree	N/A	Mar. 27, 2014	N/A	Radiation (03CH06-HY)
Antenna Mast	MF	MF-7802	MF780208 212	1 m ~ 4 m	N/A	Mar. 27, 2014	N/A	Radiation (03CH06-HY)



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.50
---	------