



A D T

# Supplemental “Transmit Simultaneously” Test Report

**REPORT NO.:** IC131205E01-4

**MODEL NO.:** RTL8812AEBT

**IC:** 6317A-RTL8812AEBT

**RECEIVED:** Dec. 04, 2013

**TESTED:** Dec. 24, 2013 to Jan. 17, 2014

**ISSUED:** Feb. 10, 2014

**APPLICANT:** Realtek Semiconductor Corp.

**ADDRESS:** No. 2, Innovation Road II, Hsinchu Science Park,  
Hsinchu 300, Taiwan

**ISSUED BY:** Bureau Veritas Consumer Products Services  
(H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory

**LAB ADDRESS :** No. 81-1, Lu Liao Keng, 9th Ling,Wu Lung Tsuen,  
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,  
R.O.C.

**TEST LOCATION (1):** No. 81-1, Lu Liao Keng, 9th Ling,Wu Lung Tsuen,  
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,  
R.O.C.

**TEST LOCATION (2):** No. 49, Ln. 206, Wende Rd., Shangshan Tsuen,  
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,  
R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification

# Table of Contents

RELEASE CONTROL RECORD .....	3
1. CERTIFICATION .....	4
2. SUMMARY OF TEST RESULTS.....	5
2.1 MEASUREMENT UNCERTAINTY .....	6
3. GENERAL INFORMATION .....	7
3.1 GENERAL DESCRIPTION OF EUT.....	7
3.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:.....	12
3.3 DESCRIPTION OF SUPPORT UNITS .....	14
3.4 CONFIGURATION OF SYSTEM UNDER TEST.....	14
4. TEST TYPES AND RESULTS.....	15
4.1 CONDUCTED EMISSION MEASUREMENT.....	15
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	15
4.1.2 TEST INSTRUMENTS.....	15
4.1.3 TEST PROCEDURES .....	16
4.1.4 DEVIATION FROM TEST STANDARD.....	16
4.1.5 TEST SETUP .....	17
4.1.6 EUT OPERATING CONDITIONS.....	17
4.1.7 TEST RESULTS (WLAN 2.4GHz + BT).....	18
4.1.8 TEST RESULTS (WLAN 5GHz + BT).....	20
4.2 RADIATED EMISSION MEASUREMENT.....	22
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT.....	22
4.2.2 TEST INSTRUMENTS.....	23
4.2.3 TEST PROCEDURES .....	24
4.2.4 DEVIATION FROM TEST STANDARD.....	24
4.2.5 TEST SETUP .....	25
4.2.6 EUT OPERATING CONDITIONS.....	25
4.2.7 TEST RESULTS (Mode 1, WLAN 2.4GHz +BT) .....	26
4.2.8 TEST RESULTS (Mode 2, WLAN 2.4GHz +BT) .....	28
4.2.9 TEST RESULTS (Mode 1, WLAN 5Hz +BT).....	30
4.2.10 TEST RESULTS (Mode 2, WLAN 5Hz +BT).....	32
4.2.11 CONDUCTED OUT-BAND EMISSION MEASUREMENT.....	34
4.2.12 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT.....	34
4.2.13 TEST INSTRUMENTS.....	34
4.2.14 TEST PROCEDURE.....	34
4.2.15 DEVIATION FROM TEST STANDARD.....	35
4.2.16 TEST SETUP .....	35
4.2.17 EUT OPERATING CONDITION .....	35
4.2.18 TEST RESULTS .....	35
4. INFORMATION ON THE TESTING LABORATORIES.....	37



A D T

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
IC131205E01-4	Original release	Feb. 10, 2014



A D T

## 1. CERTIFICATION

**PRODUCT :** 802.11a/b/g/n/ac RTL8812AE Combo module  
**BRAND NAME :** Realtek  
**MODEL NO. :** RTL8812AEBT  
**TEST ITEM:** ENGINEERING SAMPLE  
**APPLICANT :** Realtek Semiconductor Corp.  
**TESTED:** Dec. 24, 2013 to Jan. 17, 2014  
**STANDARDS:** **Canada RSS-210 Issue 8 (2010-12)**  
**Canada RSS-Gen Issue 3 (2010-12)**  
ANSI C63.10-2009

The above equipment (Model: RTL8812AEBT) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY :** Midoli Peng , **DATE:** Feb. 10, 2014  
( Midoli Peng, Specialist )

**APPROVED BY :** May Chen , **DATE:** Feb. 10, 2014  
( May Chen, Manager )



A D T

## 2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

For WLAN 2.4GHz & BT

STANDARD SECTION	TEST TYPE	RESULT	REMARK
RSS-Gen 7.2.4	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -32.67dB at 1.34766MHz
RSS-210 A8.5	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -7.6dB at 7311.00MHz

For WLAN 5GHz & BT

STANDARD SECTION	TEST TYPE	RESULT	REMARK
RSS-Gen 7.2.4	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -29.20dB at 0.38828MHz
RSS-210 A8.5	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -5.8dB at 11570.00MHz



## 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Measurement	Value
Conducted emissions	2.98 dB
Radiated emissions (30MHz-1GHz)	5.37 dB
Radiated emissions (1GHz -6GHz)	3.65 dB
Radiated emissions (6GHz -18GHz)	3.88 dB
Radiated emissions (18GHz -40GHz)	4.11 dB



### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	802.11a/b/g/n/ac RTL8812AE Combo module
<b>MODEL NO.</b>	RTL8812AEBT
<b>POWER SUPPLY</b>	DC 3.3V from host equipment
<b>MODULATION TYPE</b>	<b>For WLAN</b> CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM BT-LE (GFSK) for DTS 256QAM for OFDM in 11ac mode only
	<b>For BT</b> GFSK, $\pi/4$ -DQPSK, 8DPSK
<b>MODULATION TECHNOLOGY</b>	<b>For WLAN</b> DSSS, OFDM, DTS
	<b>For BT</b> FHSS
<b>TRANSFER RATE</b>	<b>For WLAN</b> 802.11b: up to 11Mbps 802.11a / g: up to 54Mbps 802.11n: up to 300Mbps 802.11ac: up to 866.7Mbps BT-LE (GFSK): 1Mbps
	<b>For BT</b> Up to 3Mbps
<b>OPERATING FREQUENCY</b>	<b>For WLAN(Annex 9)</b> 5GHz: 5.18 ~ 5.24GHz, 5.26 ~ 5.32GHz, 5.50 ~ 5.58GHz & 5.66GHz ~ 5.70GHz
	<b>For WLAN(Annex 8)</b> 2.4GHz: 2.412 ~ 2.462GHz 5GHz: 5.745 ~ 5.825GHz BT-LE(GFSK): 2.402 ~ 2.480GHz
	<b>For BT</b> 2402MHz ~ 2480MHz



<b>NUMBER OF CHANNEL</b>	<b>For WLAN(Annex 9)</b> 16 for 802.11a, 802.11n (HT20), 802.11ac (VHT20) 7 for 802.11n (HT40), 802.11ac (VHT40) 3 for 802.11ac (VHT80)
	<b>For WLAN(Annex 8, 2.4GHz)</b> 11 for 802.11b, 802.11g, 802.11n (HT20) 7 for 802.11n (HT40) 40 for BT-LE(GFSK) <b>For WLAN(Annex 8, 5GHz)</b> 5 for 802.11a, 802.11n (HT20), 802.11ac (VHT20) 2 for 802.11n (HT40), 802.11ac (VHT40) 1 for 802.11ac (VHT80)
	<b>For BT</b> 78
<b>MAXIMUM OUTPUT POWER</b>	<b>For WLAN(Annex 9)</b> 802.11a: 147.582mW 802.11ac (VHT20): 137.730mW 802.11ac (VHT40): 139.680mW 802.11ac (VHT80): 27.530mW <b>For WLAN(Annex 8, 2.4GHz)</b> 802.11b: 123.310mW 802.11g: 572.434mW 802.11n (HT20): 514.717mW 802.11n (HT40): 393.088mW BT-LE(GFSK): 2.415mW <b>For WLAN(Annex 8, 5GHz)</b> 802.11a: 676.106mW 802.11ac (VHT20): 579.327mW 802.11ac (VHT40): 592.004mW 802.11ac (VHT80): 548.990mW
	<b>For BT</b> 2.723 mW
<b>ANTENNA TYPE</b>	Please see NOTE
<b>DATA CABLE</b>	NA
<b>I/O PORTS</b>	Refer to user's manual
<b>ASSOCIATED DEVICES</b>	NA





**Note:**

1. There are Bluetooth technology and WLAN technology used for the EUT.
2. For WLAN: 2.4GHz and 5GHz technology cannot transmit at same time.
3. WLAN & BT technology can transmit at same time.
4. The antennas provided to the EUT, please refer to the following table:

No.	Brand	Model	Antenna Type	Peak gain with cable loss (dBi) (2.4GHz)	Peak gain with cable loss(dBi) (5GHz)	Cable Loss (dB) (2.4GHz)	Cable Loss (dB) (5GHz)	Connector Type
1	LYNwave	ALA110-222050-300010 (Main) ALA110-222050-300010 (Aux)	PIFA	3.5 3.5	5 5	NA	NA	IPEX
2	JOYMAX	TWF-614XMPXX-500 (Main) TWF-614XMPXX-500 (Aux)	Dipole	3 3	5 5	NA	NA	IPEX
3	WGT	SKA91WMPB02+A (Tx1) SKA91WMPB01+A (Tx2)	PIFA	0.82 -2.23	0.94 2.18	-1.32 -0.75	-2.04 -1.17	IPEX
4	JEM	1510-0122-0027 (Tx1) 1510-0122-0027 (Tx2)	PIFA	3.23 2.31	4.89 1.89	NA	NA	RF
5	FVC	K05007014501(6-23-7W25H-010) (Tx1) K05007014501(6-23-7W25H-010) (Tx2)	PIFA	2.85 1.59	2.46 2.91	NA	NA	IPEX
6	JEM	1510-0122-0022(IA-120073) (Tx1) 1510-0122-0022(IA-120073) (Tx2)	PIFA	2.23 2.21	1.69 1.84	NA	NA	RF
7	WGT	SK81WMPB01+A (Tx1) SK81WMPB02+A (Tx2)	PIFA	1.79 0.66	1.49 -0.40	-1.88 -2.95	-3.17 -4.96	IPEX
8	WGT	SKW2UWMPB01+A (Tx1) SKW2UWMPB01+A (Tx2)	PIFA	1.36 2.88	1.92 3.16	NA	NA	IPEX
9	WGT	SKW25WMPB01+A (Tx1) SKW25WMPB01+A (Tx2)	PIFA	0.72 0.49	-0.72 -0.71	-1.41 -1.39	-2.18 -2.15	IPEX
10	WGT	SK549WMPB01+A (Tx1) SK549WMPB02+A (Tx2)	PIFA	-0.17 -2.24	-0.13 0.03	-1.04 -0.88	-1.94 -1.64	IPEX
11	WGT	SK110WMPB01+A (Tx1) SK110WMPB02+A (Tx2)	PIFA	1.05 -0.41	1.08 2.32	-0.98 -0.99	-1.52 -1.54	IPEX
12	WGT	SKW31WMPB01+A (Tx1) SKW31WMPB01+A (Tx2)	PIFA	1.85 3.14	1.74 2.10	NA	NA	IPEX
13	FVC	6-23-7B51M-031 (Tx1) 6-23-7B51M-031 (Tx2)	PIFA	1.58 1.75	2.54 2.24	NA	NA	IPEX
14	FVC	6-23-7E51Q-011 (Tx1) 6-23-7E51Q-011 (Tx2)	PIFA	2.70 2.19	1.57 2.94	NA	NA	IPEX
15	FVC	6-23-7B710-022 (WM1) 6-23-7B710-022 (WM2)	PIFA	1.51 2.04	2.99 3.02	NA	NA	IPEX



A D T

No.	Brand	Model	Antenna Type	Peak gain with cable loss (dBi) (2.4GHz)	Peak gain with cable loss(dBi) (5GHz)	Cable Loss (dB) (2.4GHz)	Cable Loss (dB) (5GHz)	Connector Type
16	WGT	SKM11WMPB03+A (Tx1) SKM11WMPB02+D (Tx2)	PIFA	-1.84 -2.93	0.44 1.35	1.17 0.89	2.02 1.54	IPEX
17	WGT	SKW23WMPB01+A (Tx1) SKW23WMPB02+A (Tx2)	PIFA	-1.61 -2.84	-0.14 -0.96	-2.10 -2.07	-3.25 -3.20	IPEX
18	WGT	SKW24WMPB01+B (WM1) SKW24WMPB01+B (WM2)	PIFA	1.25 3.17	1.95 2.42	NA NA	NA NA	IPEX
19	FVC	K05007015501(6-23-7W244-02 0-1) (Tx1) K05007015501(6-23-7W244-02 0-1) (Tx2)	PIFA	2.53 2.28	2.86 2.97	NA NA	NA NA	IPEX
20	FVC	K05007014201(6-23-7W25P-02 0) (Tx1) K05007014201(6-23-7W25P-02 0) (Tx2)	PIFA	3.00 1.52	2.82 2.21	NA NA	NA NA	IPEX
21	WGT	SKW10WMPB01+A (Tx1) SKW10WMPB02+A (Tx2)	PIFA	0.85 0.44	0.75 1.24	-1.56 -1.53	-2.42 -2.36	IPEX
22	WGT	SKCZTWMPB01+A (Tx1) SKCZTWMPB02+A (Tx2)	PIFA	0.46 -0.79	2.80 1.03	-1.56 -1.53	-2.42 -2.36	IPEX
23	JEM	IA-120266 (Tx1) IA-120267 (Tx2)	PIFA	2.60 0.53	2.61 2.60	2.12 1.76	3.48 2.87	IPEX
24	WGT	SK547WMPB01+A (Tx1) SK549WMPB02+A (Tx2)	PIFA	-0.66 0.78	-0.19 2.06	-1.42 -1.43	-2.20 -2.21	IPEX
25	WGT	SK555WMPB01+B (Tx1) SK555WMPB02+B (Tx2)	PIFA	0.76 0.09	1.97 0.56	-1.83 -1.80	-2.83 -2.78	IPEX
26	WGT	SK65EWMPB01+A (Tx1) SK650WMPB02+A (Tx2)	PIFA	0.42 -0.13	0.11 1.27	-1.56 -0.61	-2.41 -0.94	IPEX
27	WGT	SK670WMPB01+A (Tx1) SK670WMPB02+A (Tx2)	PIFA	1.48 1.15	-0.44 0.42	-2.47 -1.93	-3.82 -2.99	IPEX
28	WGT	SK740WMPB01+A (Tx1) SK740WMPB02+A (Tx2)	PIFA	-0.93 0.20	0.96 0.86	-1.39 -1.26	-2.16 -1.95	IPEX
29	WGT	SK840WMPB01+B_SN (Tx1) SK840WMPB01+B_SN (Tx2)	PIFA	3.03 0.55	4.16 0.90	-1.12 -1.20	-1.74 -1.86	IPEX
30	WGT	SK94SWMPB01+B (TX1) SK94SWMPB01+B (TX2)	PIFA	0.76 0.46	1.12 1.44	-0.32 -0.44	-0.50 -0.68	IPEX
31	WGT	SK94TWMPB01+B (TX1) SK94TWMPB01+B (TX2)	PIFA	1.32 1.86	2.59 1.57	-0.59 -0.71	-0.91 -1.10	IPEX
32	WGT	SK50SWMPB01+A (TX1) SK50SWMPB02+A (TX2)	PIFA	-0.03 -0.13	1.25 2.13	-0.86 -0.72	-1.32 -1.12	IPEX
33	WGT	SK94TWMPB01+D (TX1) SK94TWMPB01+D (TX2)	PIFA	1.32 1.86	2.59 1.57	-0.59 -0.71	-0.91 -1.10	IPEX



No.	Brand	Model	Antenna Type	Peak gain with cable loss (dBi) (2.4GHz)	Peak gain with cable loss(dBi) (5GHz)	Cable Loss (dB) (2.4GHz)	Cable Loss (dB) (5GHz)	Connector Type
34	WGT	SKC45WMPB03+B (WM1) SKC45WMPB03+B (WM2)	PIFA	2.46 2.91	2.90 2.67	NA	NA	IPEX
35	FVC	K05007015801 (WM1) K05007015901 (WM2)	PIFA	3.12 1.01	3.51 1.93	NA	NA	RF
36	WGT	SK345WMPB01+A (WM1) SK345WMPB02+A (WM2)	PIFA	0.86 2.51	2.94 3.25	NA	NA	IPEX
37	FVC	K05007014901 (WM1) K05007015001 (WM2)	PIFA	1.85 1.94	1.35 1.99	NA	NA	IPEX
38	WGT	SKX51WMPB01+C (WM1) SKX51WMPB02+C (WM2)	PIFA	3.2 2.76	2.28 2.51	NA	NA	IPEX
39	INPAQ	WA-P-LB-02-122 (Main) WA-P-LB-01-072 (Aux)	PIFA	-1.41 -0.33	-2.44 -3.87	1.23 1.86	2.06 3.12	IPEX
40	Smart Approach	SE-ECZ50-001 (Tx1) SE-ECZ50-002 (Tx2)	PIFA	-1.37 -2.17	1.83 1.86	0.96 1.45	1.73 2.62	IPEX
41	INPAQ	WA-P-LB-02-121 (Main) WA-P-LB-01-071 (Aux)	PIFA	-2.26 -4.63	-2.87 -2.49	1.32 1.95	2.22 3.28	IPEX
42	Smart Approach	SE-ECZ70-001 (Tx1) SE-ECZ70-002 (Tx2)	PIFA	-0.65 -2.39	1.52 0.58	1.03 1.52	1.87 2.76	IPEX

Antenna 1 & 2 were chosen for final test.

5. The EUT incorporates a MIMO function.

MODULATION MODE	Tx/Rx FUNCTION	Beam forming
802.11a	1Tx/2RX or 2Tx/2Rx	No
802.11b	1Tx/1Rx	No
802.11g	1Tx/2RX or 2Tx/2Rx	No
802.11n (HT20)	1Tx/2RX or 2Tx/2Rx	Yes
802.11n (HT40)	1Tx/2RX or 2Tx/2Rx	Yes
802.11ac (VHT20)	1Tx/2RX or 2Tx/2Rx	Yes
802.11ac (VHT40)	1Tx/2RX or 2Tx/2Rx	Yes
802.11ac (VHT80)	1Tx/2RX or 2Tx/2Rx	Yes

For 1Tx, 1Rx mode will fix transmission on Chain (0).

6. When the EUT operating in 802.11n, the software operation, which is defined by manufacturer, MCS (Modulation and Coding Schemes) from 0 to 15.

7. When the EUT operating in 802.11ac, the software operation, which is defined by manufacturer, MCS (Modulation and Coding Schemes) from 0 to 9.

8. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



### 3.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

#### Simultaneously Transmission Mode (WLAN 2.4GHz + BT)

EUT configure mode	Applicable to				Description
	PLC	RE<1G	RE <sup>≥</sup> 1G	OB	
Mode 1	√	√	√	√	With PIFA antenna
Mode 2	-	√	√	-	With Dipole antenna

Where PLC: Power Line Conducted Emission RE<1G RE: Radiated Emission below 1GHz  
 RE≥1G: Radiated Emission above 1GHz OB: Conducted Out-Band Emission Measurement

#### Simultaneously Transmission Mode (WLAN 5GHz + BT)

EUT configure mode	Applicable to				Description
	PLC	RE<1G	RE <sup>≥</sup> 1G	OB	
Mode 1	√	√	√	√	With PIFA antenna
Mode 2	-	√	√	-	With Dipole antenna

Where PLC: Power Line Conducted Emission RE<1G RE: Radiated Emission below 1GHz  
 RE≥1G: Radiated Emission above 1GHz OB: Conducted Out-Band Emission Measurement

### POWER LINE CONDUCTED EMISSION TEST:

Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type
2.4 GHz (802.11n (HT20)) + Bluetooth	1 to 13	6	OFDM	BPSK
	0 to 78	78	FHSS	8DPSK
5 GHz (802.11a) + Bluetooth	149 to 165	157	OFDM	BPSK
	0 to 78	78	FHSS	8DPSK



**RADIATED EMISSION TEST:**

Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type
2.4 GHz (802.11n (HT20)) + Bluetooth	1 to 13	6	OFDM	BPSK
	0 to 78	78	FHSS	8DPSK
5 GHz (802.11a) + Bluetooth	149 to 165	157	OFDM	BPSK
	0 to 78	78	FHSS	8DPSK

**CONDUCTED OUT-BAND EMISSION MEASUREMENT:**

Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type
2.4 GHz (802.11n (HT20)) + Bluetooth	1 to 13	6	OFDM	BPSK
	0 to 78	78	FHSS	8DPSK
5 GHz (802.11a) + Bluetooth	149 to 165	157	OFDM	BPSK
	0 to 78	78	FHSS	8DPSK

**TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
PLC	24deg. C, 53%RH	120Vac, 60Hz	Bear Lee
RE<1G	24deg. C, 64%RH	120Vac, 60Hz	Jason Huang
RE <sup>3</sup> 1G	23deg. C, 66%RH	120Vac, 60Hz	Nelson Tseng
OB	25deg. C, 60%RH	120Vac, 60Hz	Nelson Tseng



### 3.3 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1	NOTEBOOK COMPUTER	DELL	E6420	482T3R1	FCC DoC
2	TEST TOOL	Realtek	NA	NA	NA

No.	Signal cable description
1	NA
2	NA

Note: The power cords of the above support units were unshielded (1.8m).

### 3.4 CONFIGURATION OF SYSTEM UNDER TEST

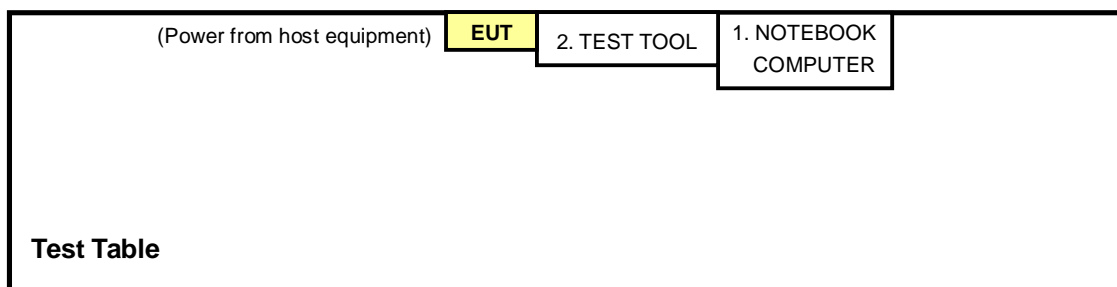



## 4. TEST TYPES AND RESULTS

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

#### 4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS 30	100375	Mar. 08, 2013	Mar. 07, 2014
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK8127	8127-522	Sep. 05, 2013	Sep. 04, 2014
Line-Impedance Stabilization Network (for Peripheral)	ENV216	100072	June 06, 2013	June 05, 2014
RF Cable (JYEBAO)	5DFB	COCCAB-001	Mar. 11, 2013	Mar. 10, 2014
50 ohms Terminator	50	EMC-03	Sep. 24, 2013	Sep. 23, 2014
Software ADT	BV ADT_Cond_V7.3.7. 3	NA	NA	NA

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.
4. Tested Date: Dec. 24, 2013



#### 4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN.
- b. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- c. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- d. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

**NOTE:**


1. The resolution bandwidth of test receiver is 9kHz for Quasi-peak detection (QP) & Average detection (AV).

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation



#### 4.1.5 TEST SETUP

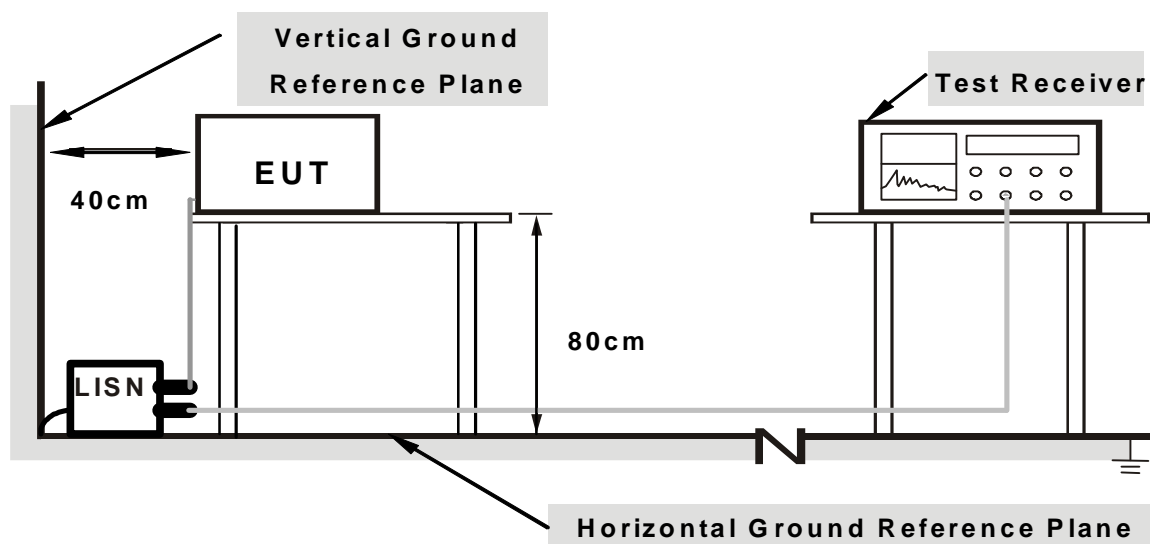

**Note: 1.Support units were connected to second LISN.**

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.1.6 EUT OPERATING CONDITIONS

1. Connect the EUT with the support unit 1 (Notebook Computer) which is placed on a testing table.
2. The communication partner run test program “MP\_Kit\_RTL11ac\_8812AE\_PCIE\_v57\_20131202<WLAN> & RTL\_BT\_MP\_Kit\_Setup\_20140123\_cer<BT>” to enable EUT under transmission/receiving condition continuously at specific channel frequency.


### 4.1.7 TEST RESULTS (WLAN 2.4GHz + BT)

PHASE	Line (L)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	0.08	31.83	19.06	31.91	19.14	65.79	55.79	-33.87	-36.64
2	0.20859	0.10	24.25	14.88	24.35	14.98	63.26	53.26	-38.91	-38.28
3	0.26719	0.11	17.45	4.25	17.56	4.36	61.20	51.20	-43.64	-46.84
<b>4</b>	<b>1.34766</b>	<b>0.18</b>	<b>17.08</b>	<b>13.15</b>	<b>17.26</b>	<b>13.33</b>	<b>56.00</b>	<b>46.00</b>	<b>-38.74</b>	<b>-32.67</b>
5	3.23438	0.25	14.49	9.30	14.74	9.55	56.00	46.00	-41.26	-36.45
6	21.57031	0.76	20.34	14.44	21.10	15.20	60.00	50.00	-38.90	-34.80

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

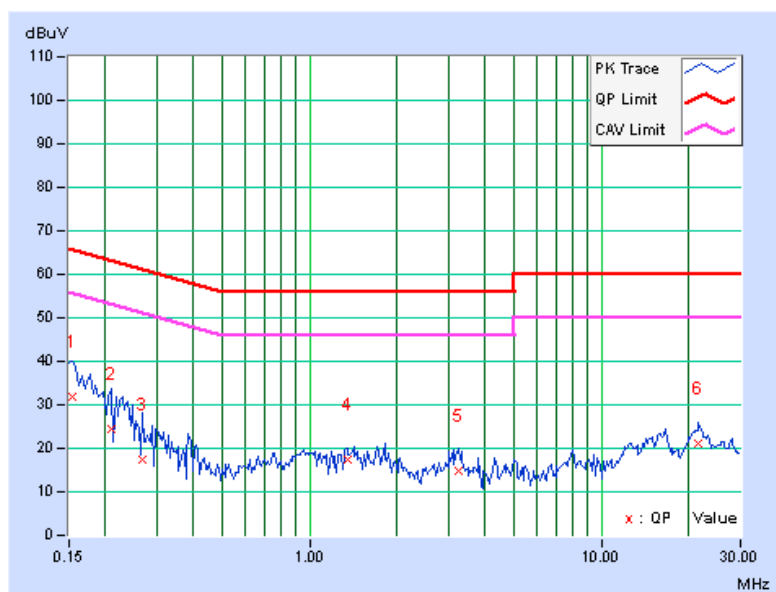




A D T

<b>PHASE</b>	Neutral (N)	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP) / Average (AV)
--------------	-------------	--------------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17734	0.10	28.59	16.69	28.69	16.79	64.61	54.61	-35.92	-37.82
2	0.27500	0.12	16.93	3.68	17.05	3.80	60.97	50.97	-43.92	-47.17
3	1.28906	0.18	15.32	13.13	15.50	13.31	56.00	46.00	-40.50	-32.69
4	3.29297	0.26	15.34	10.93	15.60	11.19	56.00	46.00	-40.40	-34.81
5	14.73828	0.61	16.87	11.50	17.48	12.11	60.00	50.00	-42.52	-37.89
6	21.40625	0.74	20.51	15.36	21.25	16.10	60.00	50.00	-38.75	-33.90

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

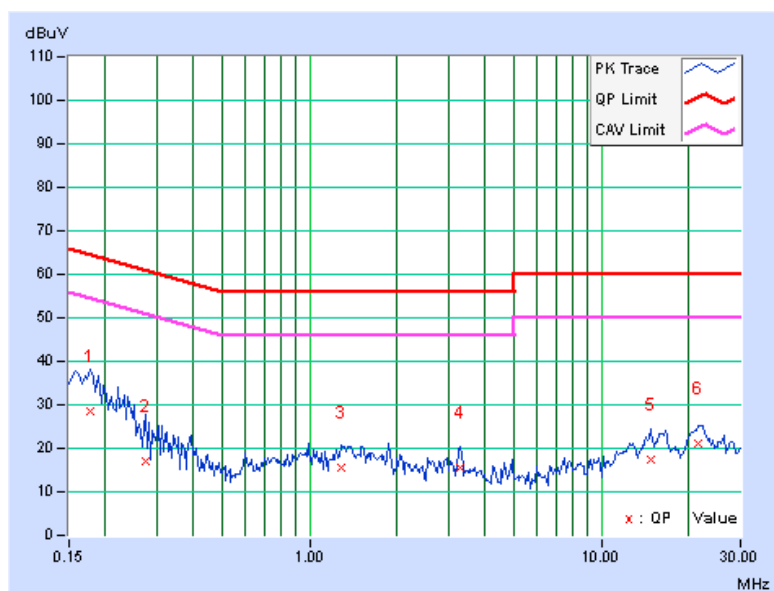


### 4.1.8 TEST RESULTS (WLAN 5GHz + BT)

<b>PHASE</b>	Line (L)	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP) / Average (AV)
--------------	----------	--------------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	0.08	32.61	18.65	32.69	18.73	66.00	56.00	-33.31	-37.27
2	0.19297	0.10	25.77	16.06	25.87	16.16	63.91	53.91	-38.04	-37.75
<b>3</b>	<b>0.38828</b>	<b>0.14</b>	<b>19.03</b>	<b>18.76</b>	<b>19.17</b>	<b>18.90</b>	<b>58.10</b>	<b>48.10</b>	<b>-38.93</b>	<b>-29.20</b>
4	1.48047	0.19	16.50	12.05	16.69	12.24	56.00	46.00	-39.31	-33.76
5	3.30859	0.26	17.26	9.83	17.52	10.09	56.00	46.00	-38.48	-35.91
6	14.78516	0.61	17.79	12.08	18.40	12.69	60.00	50.00	-41.60	-37.31
7	22.03906	0.77	19.97	14.53	20.74	15.30	60.00	50.00	-39.26	-34.70

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

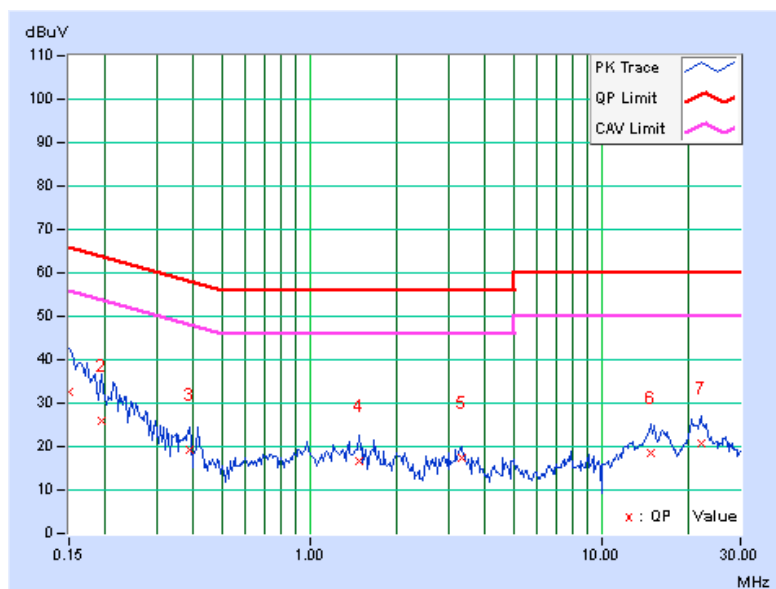




A D T

<b>PHASE</b>	Neutral (N)	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP) / Average (AV)
--------------	-------------	--------------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16953	0.09	29.30	16.58	29.39	16.67	64.98	54.98	-35.59	-38.31
2	0.20859	0.10	23.22	14.27	23.32	14.37	63.26	53.26	-39.94	-38.89
3	0.95859	0.17	14.63	12.22	14.80	12.39	56.00	46.00	-41.20	-33.61
4	3.27734	0.26	13.92	8.09	14.18	8.35	56.00	46.00	-41.82	-37.65
5	14.57422	0.60	17.05	12.44	17.65	13.04	60.00	50.00	-42.35	-36.96
6	22.08203	0.76	20.13	14.88	20.89	15.64	60.00	50.00	-39.11	-34.36

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

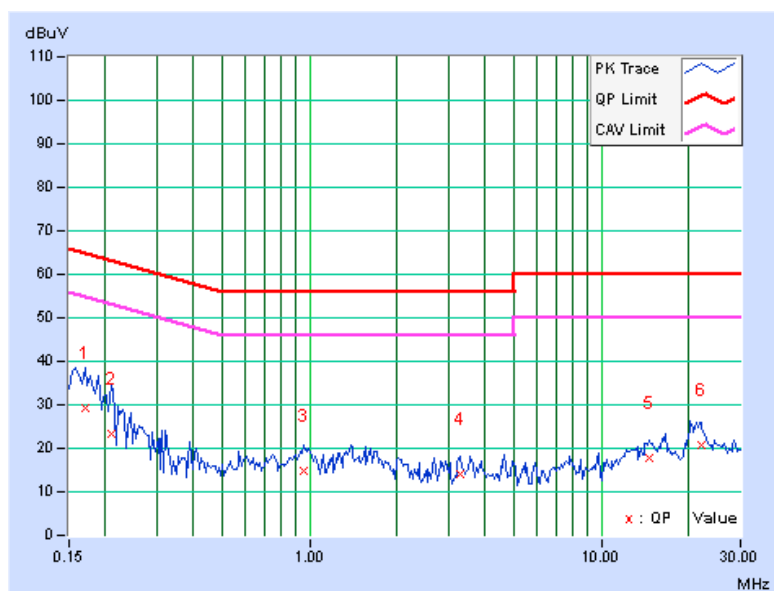



## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

#### 4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
MXE EMI Receiver Agilent	N9038A	MY51210105	Jan. 29, 2013	Jan. 28, 2014
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-03	Nov. 13, 2013	Nov. 12, 2014
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-360	Mar. 19, 2013	Mar. 18, 2014
RF Cable	NA	CHGCAB_001	Oct. 05, 2013	Oct. 04, 2014
Spectrum Analyzer R&S	FSV40	100964	July 15, 2013	July 14, 2014
Horn_Antenna AISI	AIH.8018	0000320091110	Nov. 18, 2013	Nov. 17, 2014
Pre-Amplifier Agilent	8449B	3008A02578	June 25, 2013	June 24, 2014
RF Cable	NA	RF104-201 RF104-203 RF104-204	Dec. 12, 2013	Dec. 11, 2014
Spectrum Analyzer Agilent	E4446A	MY48250253	Aug. 28, 2013	Aug. 27, 2014
Pre-Amplifier SPACEK LABS	SLKka-48-6	9K16	Nov. 13, 2013	Nov. 12, 2014
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 08, 2013	Oct. 07, 2014
Software	ADT_Radiated _V8.7.07	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
- 3 The test was performed in 966 Chamber No. G.
4. The FCC Site Registration No. is 966073.
- 5 The VCCI Site Registration No. is G-137.
- 6 The CANADA Site Registration No. is IC 7450H-2.
- 7 Tested Date: Jan. 17, 2014



### 4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

#### NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ( $10 \log(1/\text{duty cycle})$ ).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.


### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation




### 4.2.5 TEST SETUP

#### <Frequency Range below 1GHz>

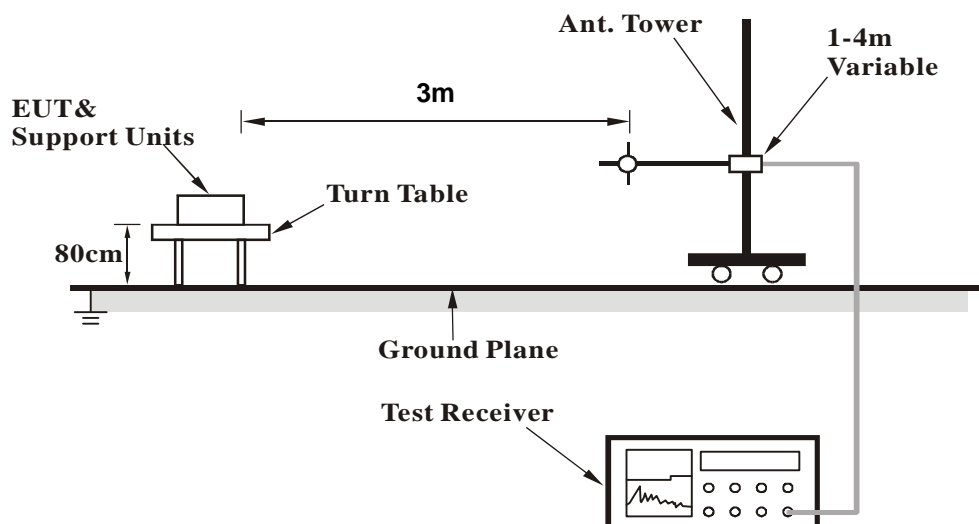

#### <Frequency Range above 1GHz>

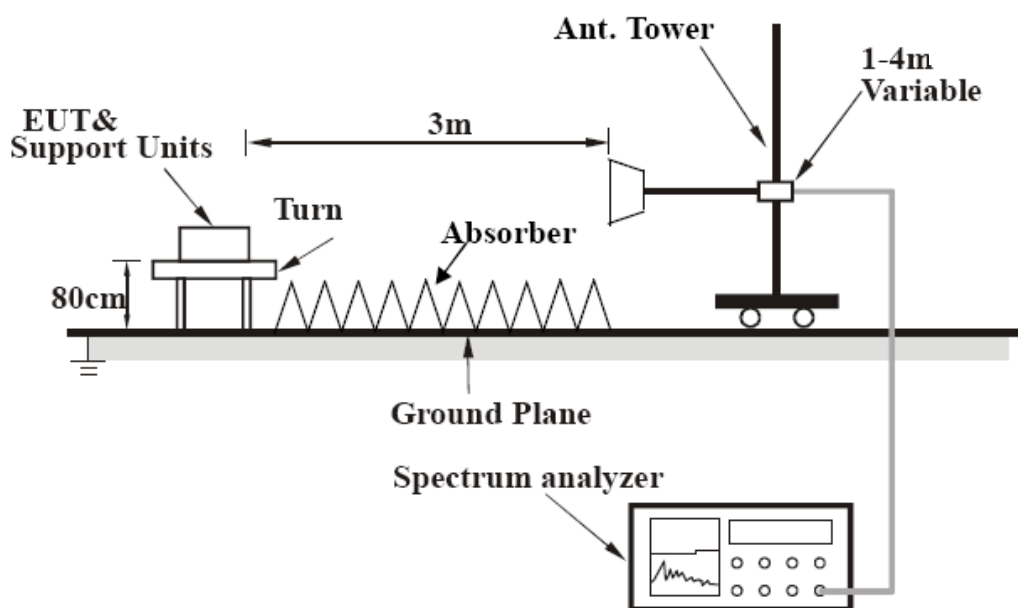

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

### 4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6



A D T

### 4.2.7 TEST RESULTS (MODE 1, WLAN 2.4GHz +BT)

#### BELOW 1GHz DATA :

<b>FREQUENCY RANGE</b>	Below 1GHz	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
------------------------	------------	--------------------------	-----------------

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	118.42	29.3 QP	43.5	-14.2	1.50 H	37	44.67	-15.34
2	147.52	28.3 QP	43.5	-15.2	2.00 H	224	41.93	-13.63
3	167.51	32.7 QP	43.5	-10.8	2.00 H	81	46.55	-13.83
4	232.34	33.5 QP	46.0	-12.5	1.50 H	237	49.09	-15.59
5	243.22	33.3 QP	46.0	-12.7	1.00 H	212	47.96	-14.65
6	400.00	30.2 QP	46.0	-15.8	1.00 H	34	40.11	-9.91

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	117.43	33.3 QP	43.5	-10.3	1.50 V	179	48.62	-15.37
2	146.74	30.2 QP	43.5	-13.3	1.50 V	42	43.77	-13.56
3	249.12	30.4 QP	46.0	-15.6	1.00 V	241	44.78	-14.35
4	260.54	30.1 QP	46.0	-15.9	2.00 V	73	44.12	-13.99
5	400.01	29.5 QP	46.0	-16.5	1.00 V	157	39.42	-9.91
6	960.40	31.2 QP	54.0	-22.8	1.50 V	89	30.15	1.03

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

### ABOVE 1GHz DATA

<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz	<b>DETECTOR FUNCTION</b>	Peak (PK) Average (AV)
------------------------	--------------	--------------------------	---------------------------

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4874.00	50.2 PK	74.0	-23.8	1.06 H	348	42.87	7.33
2	4874.00	37.0 AV	54.0	-17.0	1.06 H	348	29.67	7.33
3	4960.00	51.3 PK	74.0	-22.7	1.06 H	354	43.72	7.58
4	4960.00	37.0 AV	54.0	-17.0	1.06 H	354	29.42	7.58
5	7311.00	57.3 PK	74.0	-16.7	1.02 H	116	42.34	14.96
6	7311.00	44.1 AV	54.0	-9.9	1.02 H	116	29.14	14.96
7	7440.00	58.6 PK	74.0	-15.4	1.03 H	155	43.75	14.85
8	7440.00	44.1 AV	54.0	-9.9	1.03 H	155	29.25	14.85

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4874.00	55.0 PK	74.0	-19.0	1.02 V	177	47.67	7.33
2	4874.00	43.5 AV	54.0	-10.5	1.02 V	177	36.17	7.33
3	4960.00	51.7 PK	74.0	-22.3	1.05 V	358	44.12	7.58
4	4960.00	43.4 AV	54.0	-10.6	1.05 V	358	35.82	7.58
5	7311.00	58.7 PK	74.0	-15.3	1.00 V	235	43.74	14.96
<b>6</b>	<b>7311.00</b>	<b>46.4 AV</b>	<b>54.0</b>	<b>-7.6</b>	<b>1.00 V</b>	<b>235</b>	<b>31.44</b>	<b>14.96</b>
7	7440.00	58.8 PK	74.0	-15.2	1.04 V	137	43.95	14.85
8	7440.00	46.0 AV	54.0	-8.0	1.04 V	137	31.15	14.85

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

#### 4.2.8 TEST RESULTS (MODE 2, WLAN 2.4GHz +BT)

##### BELOW 1GHz DATA :

<b>FREQUENCY RANGE</b>	Below 1GHz	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
------------------------	------------	--------------------------	-----------------

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	117.88	26.8 QP	43.5	-16.7	1.50 H	249	42.13	-15.32
2	139.32	26.3 QP	43.5	-17.2	1.50 H	185	40.20	-13.93
3	255.36	33.8 QP	46.0	-12.2	2.00 H	174	48.08	-14.27
4	324.93	28.7 QP	46.0	-17.3	1.00 H	68	40.43	-11.72
5	400.03	28.8 QP	46.0	-17.2	1.00 H	124	38.73	-9.91
6	613.59	26.2 QP	46.0	-19.8	1.00 H	274	30.71	-4.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	115.43	34.7 QP	43.5	-8.8	1.00 V	339	50.39	-15.66
2	147.32	29.4 QP	43.5	-14.1	1.00 V	271	43.00	-13.62
3	172.32	27.3 QP	43.5	-16.2	1.00 V	242	41.34	-14.00
4	249.33	30.7 QP	46.0	-15.3	1.50 V	138	45.04	-14.34
5	335.31	27.3 QP	46.0	-18.7	1.50 V	178	38.78	-11.48
6	400.08	27.7 QP	46.0	-18.3	2.00 V	304	37.63	-9.91

##### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

**ABOVE 1GHz DATA**

<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz	<b>DETECTOR FUNCTION</b>	Peak (PK) Average (AV)
------------------------	--------------	--------------------------	---------------------------

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4874.00	49.5 PK	74.0	-24.5	1.04 H	355	42.17	7.33
2	4874.00	37.1 AV	54.0	-16.9	1.04 H	355	29.77	7.33
3	4960.00	50.9 PK	74.0	-23.1	1.05 H	327	43.32	7.58
4	4960.00	36.6 AV	54.0	-17.4	1.05 H	327	29.02	7.58
5	7311.00	54.9 PK	74.0	-19.1	1.06 H	201	39.94	14.96
6	7311.00	42.2 AV	54.0	-11.8	1.06 H	201	27.24	14.96
7	7440.00	57.5 PK	74.0	-16.5	1.04 H	141	42.65	14.85
8	7440.00	43.1 AV	54.0	-10.9	1.04 H	141	28.25	14.85

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4874.00	52.1 PK	74.0	-21.9	1.02 V	103	44.77	7.33
2	4874.00	43.9 AV	54.0	-10.1	1.02 V	103	36.57	7.33
3	4960.00	51.4 PK	74.0	-22.6	1.01 V	350	43.82	7.58
4	4960.00	43.4 AV	54.0	-10.6	1.01 V	350	35.82	7.58
5	7311.00	54.7 PK	74.0	-19.3	1.00 V	342	39.74	14.96
6	7311.00	41.8 AV	54.0	-12.2	1.00 V	342	26.84	14.96
7	7440.00	57.9 PK	74.0	-16.1	1.04 V	136	43.05	14.85
8	7440.00	45.2 AV	54.0	-8.8	1.04 V	136	30.35	14.85

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

#### 4.2.9 TEST RESULTS (MODE 1, WLAN 5Hz +BT)

##### BELOW 1GHz DATA :

<b>FREQUENCY RANGE</b>	Below 1GHz	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
------------------------	------------	--------------------------	-----------------

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	118.41	25.3 QP	43.5	-18.2	1.00 H	351	40.65	-15.33
2	138.06	25.1 QP	43.5	-18.4	1.50 H	325	39.12	-13.99
3	167.20	30.3 QP	43.5	-13.3	1.00 H	128	44.10	-13.85
4	246.51	32.1 QP	46.0	-13.9	1.00 H	73	46.66	-14.56
5	272.16	30.8 QP	46.0	-15.2	1.00 H	215	44.16	-13.39
6	398.34	28.0 QP	46.0	-18.0	1.00 H	187	37.93	-9.92
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	116.34	34.7 QP	43.5	-8.8	1.00 V	242	50.16	-15.46
2	146.51	28.3 QP	43.5	-15.2	1.50 V	37	41.86	-13.53
3	249.90	31.6 QP	46.0	-14.4	1.50 V	314	45.88	-14.31
4	261.53	29.1 QP	46.0	-16.9	2.00 V	33	43.04	-13.92
5	400.00	28.5 QP	46.0	-17.5	1.50 V	320	38.42	-9.91
6	960.40	30.2 QP	54.0	-23.8	1.00 V	38	29.20	1.03

##### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

**ABOVE 1GHz DATA**

<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz	<b>DETECTOR FUNCTION</b>	Peak (PK) Average (AV)
------------------------	--------------	--------------------------	---------------------------

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4960.00	50.6 PK	74.0	-23.4	1.05 H	347	43.02	7.58
2	4960.00	36.3 AV	54.0	-17.7	1.05 H	347	28.72	7.58
3	7440.00	58.8 PK	74.0	-15.2	1.03 H	139	43.95	14.85
4	7440.00	44.1 AV	54.0	-9.9	1.03 H	139	29.25	14.85
5	11570.00	55.4 PK	74.0	-18.6	1.19 H	229	38.76	16.64
6	11570.00	43.1 AV	54.0	-10.9	1.19 H	229	26.46	16.64

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4960.00	51.5 PK	74.0	-22.5	1.00 V	346	43.92	7.58
2	4960.00	43.3 AV	54.0	-10.7	1.00 V	346	35.72	7.58
3	7440.00	59.2 PK	74.0	-14.8	1.06 V	121	44.35	14.85
4	7440.00	46.3 AV	54.0	-7.7	1.06 V	121	31.45	14.85
5	11570.00	58.7 PK	74.0	-15.3	1.47 V	73	42.06	16.64
6	11570.00	47.9 AV	54.0	-6.1	1.47 V	73	31.26	16.64

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

## 4.2.10 TEST RESULTS (MODE 2, WLAN 5Hz +BT)

## BELOW 1GHz DATA :

<b>FREQUENCY RANGE</b>	Below 1GHz	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
------------------------	------------	--------------------------	-----------------

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	136.60	25.9 QP	43.5	-17.6	1.00 H	206	39.81	-13.87
2	165.95	32.4 QP	43.5	-11.1	2.00 H	233	46.36	-13.95
3	254.59	33.4 QP	46.0	-12.6	1.00 H	287	47.72	-14.30
4	400.01	29.8 QP	46.0	-16.2	1.00 H	157	39.68	-9.91
5	600.10	27.0 QP	46.0	-19.0	1.50 H	108	32.14	-5.10
6	960.00	29.8 QP	46.0	-16.2	1.50 H	162	28.77	1.03
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	117.80	33.0 QP	43.5	-10.5	1.00 V	32	48.35	-15.33
2	141.76	33.7 QP	43.5	-9.8	1.50 V	323	47.24	-13.56
3	245.98	31.2 QP	46.0	-14.8	1.50 V	294	45.82	-14.61
4	255.36	33.6 QP	46.0	-12.4	1.50 V	313	47.88	-14.27
5	335.10	30.2 QP	46.0	-15.8	1.00 V	231	41.66	-11.50
6	400.79	27.5 QP	46.0	-18.5	1.50 V	166	37.38	-9.91

## REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value





A D T

**ABOVE 1GHz DATA**

<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz	<b>DETECTOR FUNCTION</b>	Peak (PK) Average (AV)
------------------------	--------------	--------------------------	---------------------------

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4960.00	50.5 PK	74.0	-23.5	1.11 H	358	42.92	7.58
2	4960.00	36.3 AV	54.0	-17.7	1.11 H	358	28.72	7.58
3	7440.00	59.1 PK	74.0	-14.9	1.10 H	131	44.25	14.85
4	7440.00	44.1 AV	54.0	-9.9	1.10 H	131	29.25	14.85
5	11570.00	54.9 PK	74.0	-19.1	1.17 H	239	38.26	16.64
6	11570.00	42.6 AV	54.0	-11.4	1.17 H	239	25.96	16.64

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	4960.00	50.5 PK	74.0	-23.5	1.05 V	335	42.92	7.58
2	4960.00	42.3 AV	54.0	-11.7	1.05 V	335	34.72	7.58
3	7440.00	58.7 PK	74.0	-15.3	1.02 V	88	43.85	14.85
4	7440.00	45.6 AV	54.0	-8.4	1.02 V	88	30.75	14.85
5	11570.00	58.9 PK	74.0	-15.1	1.48 V	79	42.26	16.64
6	11570.00	48.2 AV	54.0	-5.8	1.48 V	79	31.56	16.64

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



## 4.2.11 CONDUCTED OUT-BAND EMISSION MEASUREMENT

### 4.2.12 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below 30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 4.2.13 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSP40	100036	Jan. 21, 2013	Jan. 20, 2014

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Jan. 17, 2014

### 4.2.14 TEST PROCEDURE

#### Measurement Procedure - Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.


#### Measurement Procedure –Unwanted Emission Level

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Set span to encompass the spectrum to be examined.
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

#### 4.2.15 DEVIATION FROM TEST STANDARD

No deviation

#### 4.2.16 TEST SETUP



#### 4.2.17 EUT OPERATING CONDITION

Same as Item 4.1.6


#### 4.2.18 TEST RESULTS

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.




A D T

### For WLAN 2.4GHz + BT 802.11n (HT20), ch13 + Bluetooth, ch78

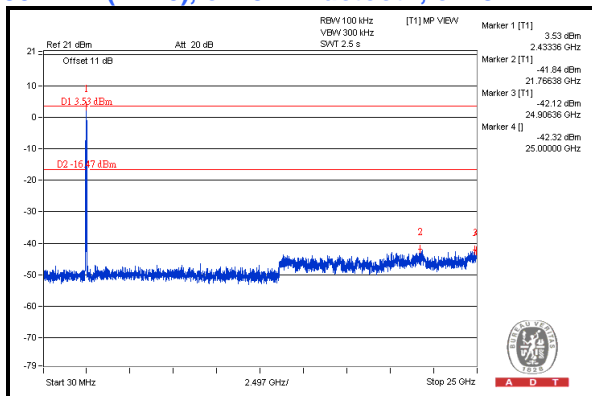

### For WLAN 5GHz + BT 802.11a, ch157 + Bluetooth, ch78

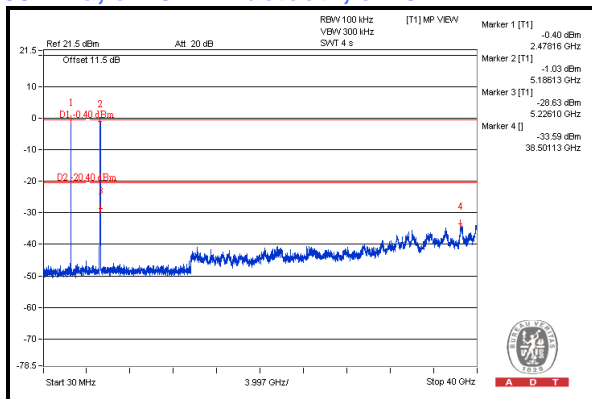



A D T

#### 4. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab:**

Tel: 886-2-26052180

Fax: 886-2-26052943

**Hsin Chu EMC/RF Lab:**

Tel: 886-3-5935343

Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety/Telecom Lab:**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

---END---