

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

Test Report No. : E13DR-060
AGR No : A138A-077
Applicant : Remotesolution Co.,Ltd.
Address : 92, Chogokri, Nammyun, Kimchon city, Kyungbuk, Korea, 740-871
Manufacturer : Remotesolution Co.,Ltd.
Address : 92, Chogokri, Nammyun, Kimchon city, Kyungbuk, Korea, 740-871
Type of Equipment : RF4CE To IR Adaptor
FCC ID. : TX4CRB61A
Model Name : CRB61A
Multiple Model Name : XR8
Serial number : N/A
Total page of Report : 29 pages (including this page)
Date of Incoming : December 16, 2013
Date of issue : December 23, 2013

SUMMARY

The equipment complies with the regulation; **FCC Part 15 Subpart C Section 15.249.**

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.

Prepared by:

Ki-Hong, Nam / Senior Engineer
ONETECH Corp.

Approved by:

Gea-Won, Lee / Managing Director
ONETECH Corp.

CONTENTS**PAGE**

1. VERIFICATION OF COMPLIANCE	5
2. TEST SUMMARY	6
2.1 TEST ITEMS AND RESULTS	6
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....	6
2.3 RELATED SUBMITTAL(S) / GRANT(S)	6
2.4 PURPOSE OF THE TEST	6
2.5 TEST METHODOLOGY.....	6
2.6 TEST FACILITY.....	6
3. GENERAL INFORMATION	7
3.1 PRODUCT DESCRIPTION.....	7
3.2 MODEL DIFFERENCES.....	7
4. EUT MODIFICATIONS.....	7
5. SYSTEM TEST CONFIGURATION	8
5.1 JUSTIFICATION.....	8
5.2 PERIPHERAL EQUIPMENT	8
5.3 MODE OF OPERATION DURING THE TEST	8
5.4 CONFIGURATION OF TEST SYSTEM.....	9
5.5 ANTENNA REQUIREMENT	9
6. PRELIMINARY TEST	10
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	10
6.2 GENERAL RADIATED EMISSIONS TESTS	10
7. RADIATED EMISSION TEST	11
7.1 TEST SET-UP	11
7.2 MEASUREMENT UNCERTAINTY	11
7.3 TEST EQUIPMENT USED.....	11
7.4 FINAL RESULT OF MEASUREMENT	12
7.4.1 Field Strength of the Fundamental Frequency	12
7.4.2 Emissions Radiated Outside of the Specified Frequency Bands	13
8. CONDUCTED EMISSION TEST.....	20
8.1 OPERATING ENVIRONMENT	20

8.2 TEST SET-UP	20
8.3 TEST EQUIPMENT USED.....	20
8.4 TEST DATA FOR LOW CHANNEL.....	21
8.5 TEST DATA FOR MIDDLE CHANNEL	23
8.6 TEST DATA FOR HIGH CHANNEL.....	25
9. 20 DB BANDWIDTH	27
9.1 OPERATING ENVIRONMENT	27
9.2 TEST SET-UP	27
9.3 TEST EQUIPMENT USED.....	27
9.4 TEST DATA FOR BANDWIDTH.....	27

Revision History

Issue Report No.	Issued Date	Revisions	Effect Section
E13DR-060	December 23, 2013	Initial Release	All

1. VERIFICATION OF COMPLIANCE

APPLICANT : Remotesolution Co.,Ltd.
ADDRESS : 92, Chogokri, Nammyun, Kimchon city, Kyungbuk, Korea, 740-871
CONTACT PERSON : Hong Bum, Shin / CEO
TELEPHONE NO : +82-54-420-4500
FCC ID : TX4CRB61A
MODEL NAME : CRB61A
BRAND NAME : N/A
SERIAL NUMBER : N/A
DATE : December 23, 2013

EQUIPMENT CLASS	DXX – Low Power Communications Transmitter
KIND OF EQUIPMENT	RF4CE To IR Adaptor
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2009
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.249
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	No
FINAL TEST WAS CONDUCTED ON	3 m, Semi Anechoic Chamber

- The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.249 (a)	Field Strength of Emission	Met the Limit / PASS
15.249 (c)	Measurement distance	Met the Requirement / PASS
15.249 (d)	Emissions Radiated Outside of the Specified Frequency Band	Met the Limit / PASS
15.249 (e)	Radiated Emissions above 1 000 MHz	Met the Limit / PASS
15.209	Radiated Emission Limits, General Requirement	Met the Limit / PASS
15.207	Conducted Limits	Met the Limit / PASS
15.203	Antenna Requirement	Met the Requirement / PASS

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in section 2.1.

2.5 Test Methodology

Radiated testing was performed according to the procedures in ANSI C63.10: 2009 at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The open area test site is located at 307-51 Daessangnyeong-ri, Chowol-eup, Gwangju-si, Gyeonggi-do and 10 m Semi Anechoic Chamber (SAC) and conducted measurement facilities are located at 301-14, Daessangnyeong-ri, Chowol-eup, Gwangju-si, Gyeonggi-do, 464-862, Korea. The Onetech Corp. has been accredited as a Conformity Assessment Body (CAB) with designation number KR0013 under APEC TEL MAR between the RRA and the FCC.

3. GENERAL INFORMATION

3.1 Product Description

The Remotesolution Co.,Ltd., Model: CRB61A (referred to as the EUT in this report) is an RF4CE To IR Adaptor. Product specification information described herein was obtained from product data sheet or user's manual.

DEVICE TYPE	Portable Device
OPERATING FREQUENCY	2 425 MHz ~ 2 475 MHz
RATED RF OUTPUT POWER	0 dBm
ANTENNA TYPE	Inserted into the main board(Pattern Antenna)
MODULATION	O-QPSK
Tx DATA SPEED	250 kbps
USED RF CHIP	Maker: GreenPeak Technologies, Model Name:GP590
LIST OF EACH OSC. OR CRY. FREQ.(FREQ. >= 1 MHz)	16 MHz
RATED SUPPLY VOLTAGE	DC 5 V

3.2 Model Differences

- The following lists consist of the added model and their differences.

Model Name	Differences	Tested
CRB61A	Basic Model	<input checked="" type="checkbox"/>
XR8	These models are identical to basic model except for the model name only.	<input type="checkbox"/>

Note: 1. Applicant consigns only basic model to test. Therefore this test report just guarantees the units, which have been tested.

2. The Applicant/manufacturer is responsible for the compliance of all variants.

4. EUT MODIFICATIONS

- None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	N/A	XR-8 1BG-0382A	N/A

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested: None

5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting is programmed.

For final testing, the EUT was set at Low Channel (2 425 MHz), Middle Channel (2 450 MHz), and High Channel (2 475 MHz). To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XY” axis.

5.4 Configuration of Test System

Line Conducted Test

: The jig board of the EUT was connected to LISN. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2009 to determine the worse operating conditions.

Radiated Emission Test

: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2009 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 m open area test site.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

According to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The antenna of the EUT is a pattern antenna on the main board in the EUT, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Tests, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
TX Mode	X

6.2 General Radiated Emissions Tests

During Preliminary Tests, the following operating modes were investigated

Operation Mode	The Worse operating condition (Please check one only)
TX Mode	X

7. RADIATED EMISSION TEST

7.1 Test set-up

The radiated emissions measurements were on the 3 m, semi anechoic chamber. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.

The frequency spectrum from up to 25 GHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

Test set-up photos are included in appendix I.

7.2 Measurement uncertainty

Radiated emission electric field intensity, 0.15 MHz ~ 30 MHz : ± 2.61 dB

Radiated emission electric field intensity, 30 MHz ~ 300 MHz : ± 4.43 dB

Radiated emission electric field intensity, 300 MHz ~ 1 000 MHz : ± 3.80 dB

Radiated emission electric field intensity, 1 000 MHz ~ 3 000 MHz: ± 4.40 dB

Measurement uncertainty is calculated in accordance with CISPR 16-4-2. The measurement uncertainty is given with a confidence of 95 % with the coverage factor, $k = 2$.

7.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
□ - ESCI	Rohde & Schwarz	EMI Test Receiver	101012	Nov. 18, 2013(1Y)
■ - ESU	Rohde & Schwarz	EMI Test Receiver	100261	May 27, 2013(1Y)
□ - 8564E	HP	Spectrum Analyzer	3650A00756	May 03, 2013(1Y)
□ - FSP	Rohde & Schwarz	Spectrum Analyzer	100017	Nov. 05, 2013(1Y)
■ - 310N	Sonoma Instrument	AMPLIFIER	312544	May 21, 2013(1Y)
■ - FSV30	Rohde & Schwarz	Signal Analyzer	101372	May 20, 2013(1Y)
■ - SCU-18	Rohde & Schwarz	PRE-AMPLIFIER	10041	Nov. 07, 2013(1Y)
■ - MA240	HD GmbH	Antenna Master	N/A	N/A
■ - HD100	HD GmbH	Position Controller	N/A	N/A
■ - DS420S	HD GmbH	Turn Table	N/A	N/A
■ - HFH2-Z2	Rohde & Schwarz	Loop Antenna	879 285 / 26	Dec. 11, 2012(2Y)
■ - VULB9163	Schwarzbeck	TRILOG Broadband Antenna	9163-255	Apr. 24, 2012(2Y)
■ - BBHA9120D	Schwarzbeck	Horn Antenna	BBHA9120D295	Sep. 05, 2013(2Y)
■ - BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	Jun. 17, 2013(2Y)

All test equipment used is calibrated on a regular basis.

7.4 Final Result of Measurement

7.4.1 Field Strength of the Fundamental Frequency

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

Humidity Level	: <u>44 % R.H.</u>	Temperature: <u>22 °C</u>
Limits apply to	: <u>FCC CFR 47, PART 15, SUBPART C, SECTION 15.249(a)</u>	
Result	: <u>PASSED</u>	

EUT	: RF4CE To IR Adaptor	Date: December 19, 2013
Operating Condition	: TX mode	
Distance	: 3 m	

Channel	Radiated Emissions			Ant	Correction Factors			Total	FCC Limit	
	Carrier Freq. (MHz)	Reading (dB μ V)	Detector Mode	Pol.	Antenna (dB/m)	Cable (dB)	Pre-Amp (dB)	Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
Low	2 425.00	100.61	Peak	H	27.20	7.10	43.10	91.81	113.98	22.17
		96.94	Average	H				88.14	93.98	5.84
		98.74	Peak	V				89.94	113.98	24.04
		95.37	Average	V				86.57	93.98	7.41
Middle	2 450.00	100.70	Peak	H	27.30	7.10	43.10	92.00	113.98	21.98
		97.12	Average	H				88.42	93.98	5.56
		98.53	Peak	V				89.83	113.98	24.15
		94.78	Average	V				86.08	93.98	7.90
High	2 475.00	100.37	Peak	H	27.30	7.10	43.10	91.67	113.98	22.31
		96.74	Average	H				88.04	93.98	5.94
		97.80	Peak	V				89.10	113.98	24.88
		94.89	Average	V				86.19	93.98	7.79

*Remark: To get a maximum emission level from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes, but the worst plane data were recorded in the report.

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Total (dB}\mu\text{V/m)}$$

$$\text{Total} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Pre-amplifier gain.}$$



Tested by: Tae-Ho, Kim / Project Engineer

7.4.2 Emissions Radiated Outside of the Specified Frequency Bands

7.4.2.1 Test Data for Harmonic

Humidity Level	: <u>44 % R.H.</u>	Temperature: <u>22 °C</u>
Limits apply to	: <u>FCC CFR 47, PART 15, SUBPART C, SECTION 15.249(a)</u>	
Result	: <u>PASSED</u>	

EUT : RF4CE To IR Adaptor Date: December 19, 2013
 Operating Condition : TX mode
 Distance : 3 m

Channel	Frequency (MHz)	Reading (dB μ V)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Pre-Amp (dB)	Total (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)
Low	4 850.00*	57.51	Peak	H	31.20	9.50	42.40	55.81	73.98	18.17
		51.59	Average	H				49.89	53.98	4.09
		53.72	Peak	V				52.02	73.98	21.96
		46.77	Average	V				45.07	53.98	8.91
Other frequencies were not found up to 25 GHz.										
Middle	4 900.00*	56.49	Peak	H	31.20	9.80	42.40	55.09	73.98	18.89
		51.13	Average	H				49.73	53.98	4.25
		52.95	Peak	V				51.55	73.98	22.43
		47.24	Average	V				45.84	53.98	8.14
Other frequencies were not found up to 25 GHz.										
High	4 950.00*	57.01	Peak	H	31.30	9.90	42.30	55.91	73.98	18.07
		50.89	Average	H				49.79	53.98	4.19
		51.78	Peak	V				50.68	73.98	23.30
		46.95	Average	V				45.85	53.98	8.13
Other frequencies were not found up to 25 GHz.										

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical, "*" Frequency fall in restricted band

Margin (dB) = Limit (dB μ V/m) – Total (dB μ V/m)

Total = Reading + Antenna Factor + Cable Loss – Pre-amplifier gain.

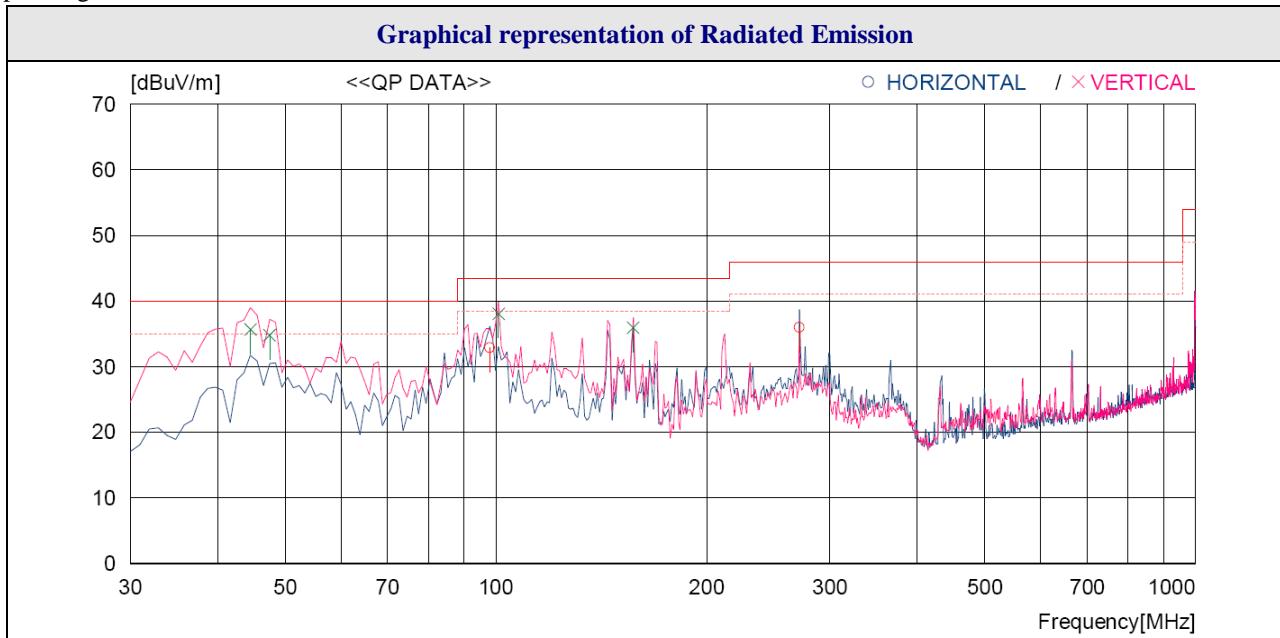


Tested by: Tae-Ho, Kim / Project Engineer

7.4.2.2 Test Data for Frequency range: 30 MHz ~ 1 000 MHz

Humidity Level : (44 ~ 45) % R.H. Temperature: (22 ~ 23) °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.249 (d)
 Result : PASSED

EUT : RF4CE To IR Adaptor Date: December 19, 2013
 Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)
 Operating condition : Low Channel



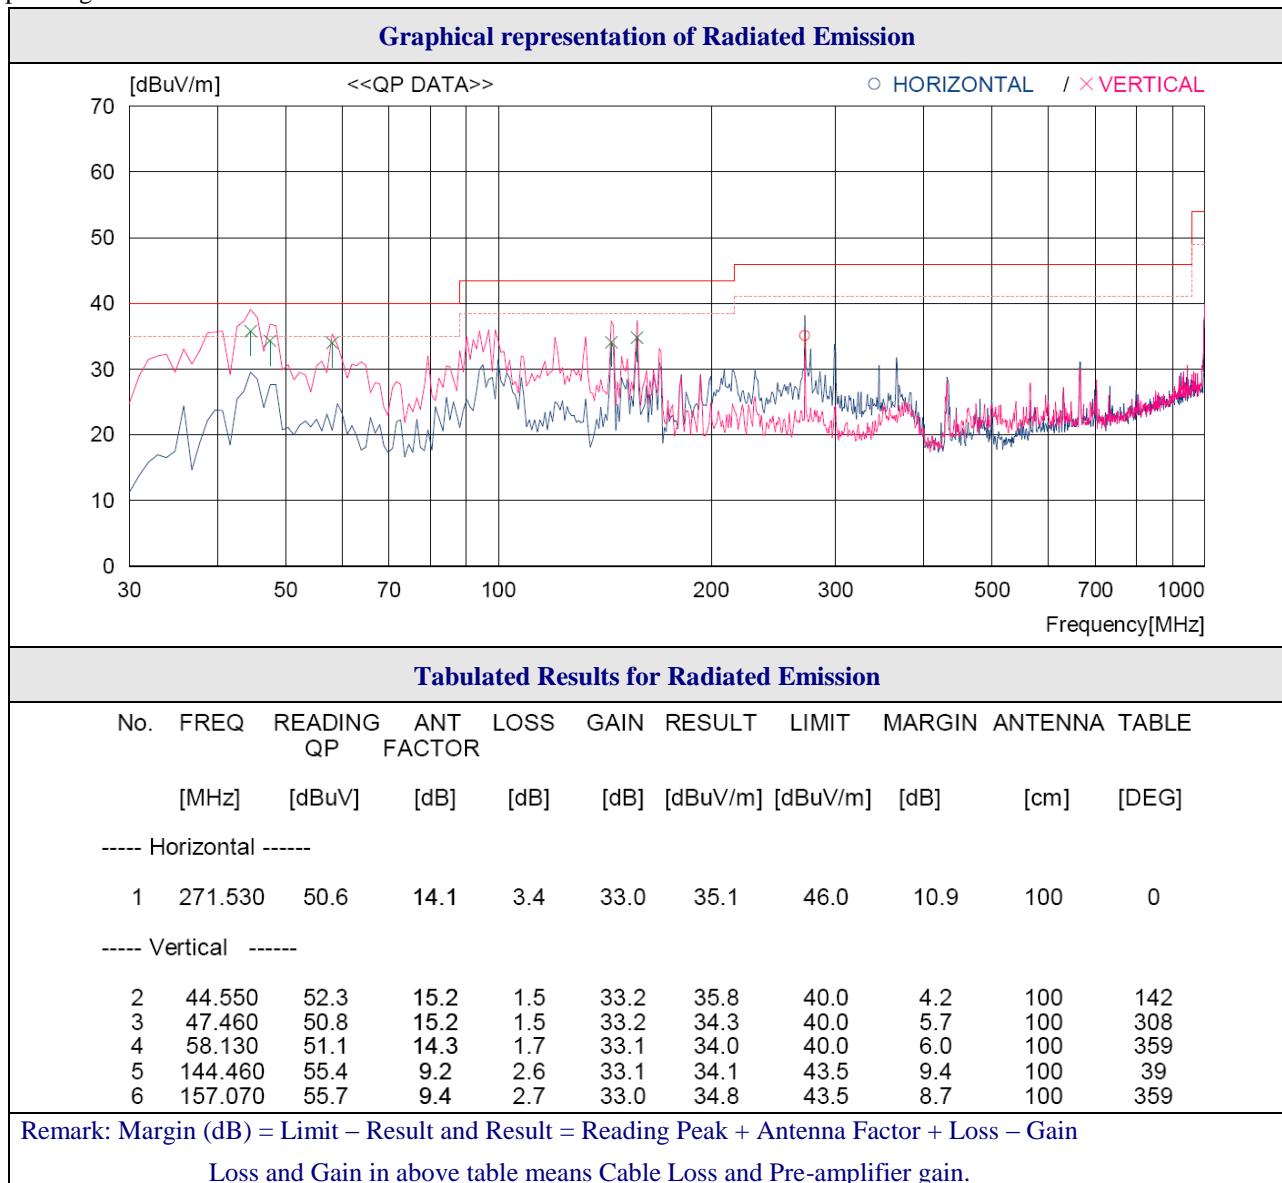
Tabulated Results for Radiated Emission										
No.	FREQ	READING	ANT	LOSS	GAIN	RESULT	LIMIT	MARGIN	ANTENNA	TABLE
	QP	FACTOR	[dB]	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[DEG]
----- Horizontal -----										
1	97.900	50.7	13.2	2.1	33.1	32.9	43.5	10.6	200	358
2	271.530	51.5	14.1	3.4	33.0	36.0	46.0	10.0	100	359
----- Vertical -----										
3	44.550	52.2	15.2	1.5	33.2	35.7	40.0	4.3	100	135
4	47.460	51.3	15.2	1.5	33.2	34.8	40.0	5.2	100	0
5	100.810	55.4	13.6	2.2	33.1	38.1	43.5	5.4	100	0
6	157.070	56.8	9.4	2.7	33.0	35.9	43.5	7.6	100	0

Remark: Margin (dB) = Limit – Result and Result = Reading Peak + Antenna Factor + Loss – Gain

Loss and Gain in above table means Cable Loss and Pre-amplifier gain.

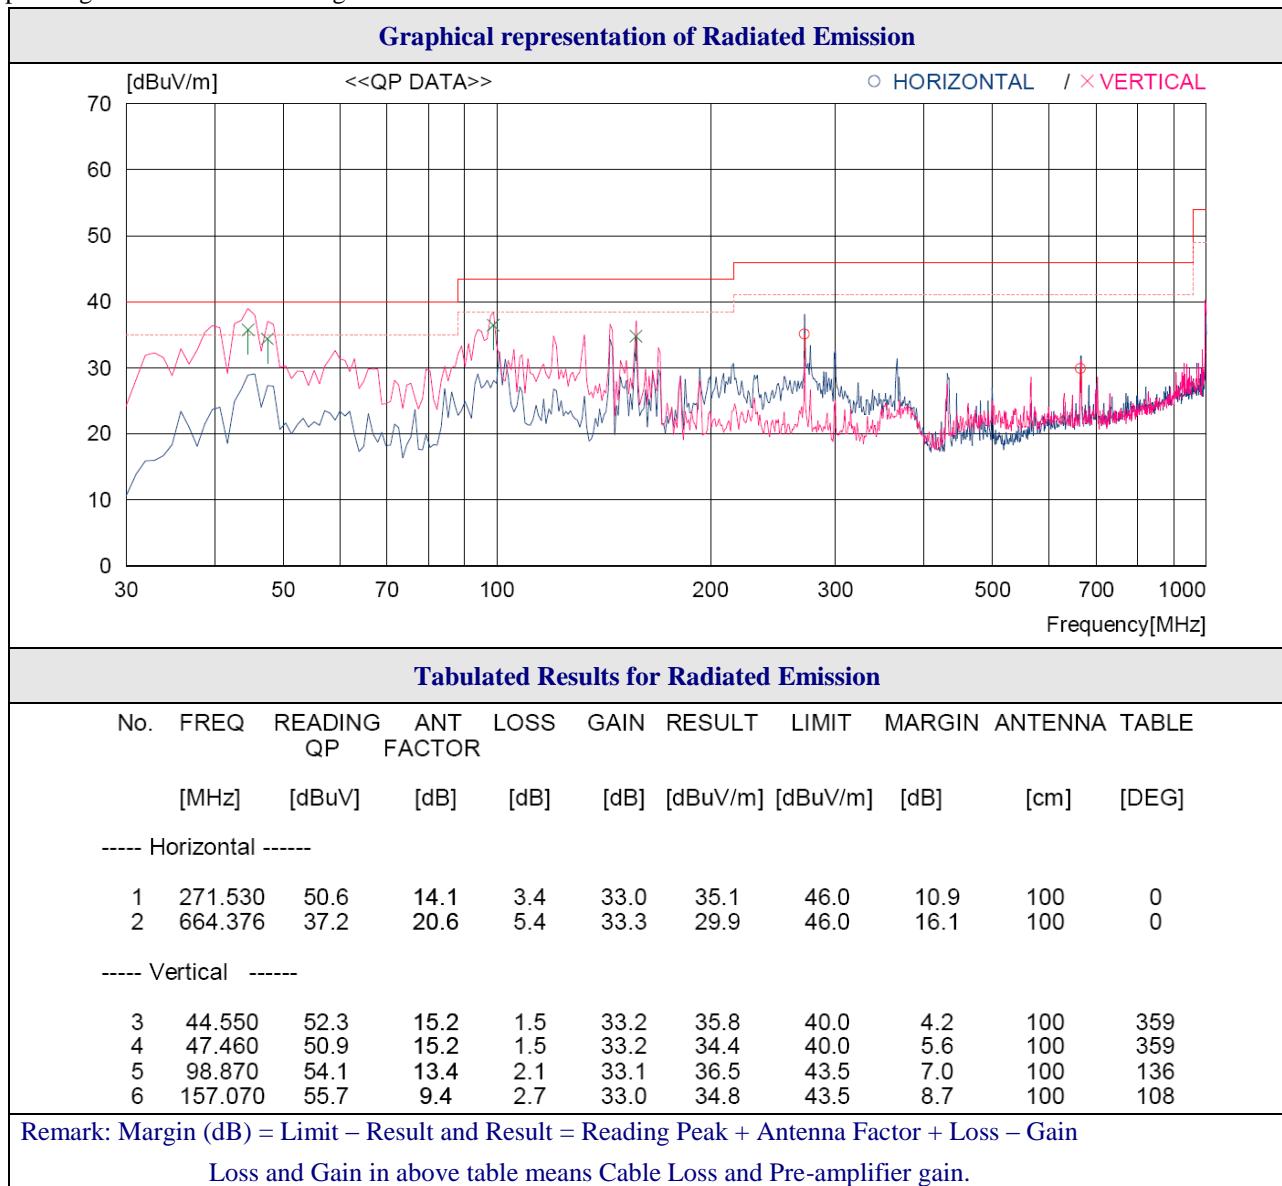
Tested by: Tae-Ho, Kim / Project Engineer

Operating condition : Middle Channel



Tested by: Tae-Ho, Kim / Project Engineer

Operating condition : High Channel



Tested by: Tae-Ho, Kim / Project Engineer

7.4.2.3 Test Data for Below 30 MHz

Humidity Level : (44 ~ 45) % R.H. Temperature: (22 ~ 23) °C
Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
Frequency range : 9 kHz ~ 30 MHz
Measurement distance : 3 m
Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.249 (d)
Result : PASSED

EUT : RF4CE To IR Adaptor Date: December 19, 2013
Detector : CISPR Quasi-Peak (Resolution Bandwidth: 9 kHz)

Frequency (MHz)	Reading (dB μ V)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dB μ V/m)	Limits (dB μ V/m)	Margin (dB)
It was not observed any emissions from the EUT.									



Tested by: Tae-Ho, Kim / Project Engineer

7.4.2.4 Test Data above 1 GHz except for harmonic

- . Test Date : December 19, 2013
- . Humidity Level : (44 ~ 45) % R.H.
- . Temperature : (22 ~ 23) °C
- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- . Frequency range : 1 GHz ~ 25 GHz
- . Measurement distance : 3 m
- . Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.249 (d)
- Result : PASSED

Frequency (MHz)	Reading (dB μ V)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dB μ V/m)	Limits (dB μ V/m)	Margin (dB)
It was not observed any emissions from the EUT.									



Tested by: Tae-Ho, Kim / Project Engineer

7.4.2.5 Band Edge

- Test Date : December 19, 2013
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 1 MHz for Peak Mode, 10 Hz for Average Mode
- Measurement distance : 3 m
- Operating Condition : Low / High Channel
- Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.249 (d)
- Result : PASSED

Frequency (MHz)	Reading (dB μ V)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Pre-Amp (dB)	Total (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)
Test Data for Low Channel									
2 326.32	44.72	Peak	H	27.10	7.00	43.10	35.72	74.00	38.28
2 326.32	28.90	Average	H				19.90	54.00	34.10
2 328.16	51.36	Peak	V				42.36	74.00	31.64
2 328.16	30.71	Average	V				21.71	54.00	32.29
Test Data for High Channel									
2 483.50	53.51	Peak	H	27.40	7.10	43.10	44.91	74.00	29.09
2 483.50	36.14	Average	H				27.54	54.00	26.46
2 483.50	50.33	Peak	V				41.73	74.00	32.27
2 483.50	39.52	Average	V				30.92	54.00	23.08

Remark. Margin (dB) = Limit (dB μ V/m) – Total (dB μ V/m)

Total = Reading + Antenna Factor + Cable Loss – Pre-amplifier gain.



Tested by: Tae-Ho, Kim / Project Engineer

8. CONDUCTED EMISSION TEST

8.1 Operating environment

Temperature : (21 ~ 22) °C
Relative humidity : (45 ~ 46) % R.H.

8.2 Test set-up

The EUT was placed on a wooden table, 0.8 m height above the floor. The EUT was connected to adaptor and power of adaptor was fed to the EUT through a $50 \Omega / 50 \mu\text{H} + 5 \Omega$ Artificial Mains Network (AMN). The ground plane was electrically bonded to the reference ground system and all power lines were filtered from ambient.

8.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.(Interval)
□ - ESCI	Rohde & Schwarz	Test Receiver	101012	Nov. 18, 2013 (1Y)
■ - ESHS10	Rohde & Schwarz	Test Receiver	834467/007	Jul. 02, 2013 (1Y)
■ - NSLK 8126	Schwarzbeck	AMN	8126-404	May. 29, 2013 (1Y)
□ - NSLK 8128	Schwarzbeck	AMN	8128-216	Jun. 07, 2013 (1Y)
■ - 3825/2	EMCO	AMN	9109-1867	May 20, 2013 (1Y)
□ - 3825/2	EMCO	AMN	9109-1869	May 20, 2013 (1Y)
□ - N/A	KNORR-BREMSE	Artificial Hand	12844	N/A

All test equipment used is calibrated on a regular basis.

8.4 Test data for Low Channel

Humidity Level : (45 ~ 46) % R.H. Temperature: (21 ~ 22) °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART B, SECTION 15.207(a)
 Result : PASSED

EUT : RF4CE To IR Adaptor Date: December 19, 2013
 Detector : CISPR Quasi-Peak (6 dB Bandwidth: 9 kHz)

Frequency (MHz)	Line	Quasi-Peak (dB μ V)		Margin (dB)
		Emission level	Q.P Limits	
0.67	H	42.52	56.00	13.48
1.31	N	40.38	56.00	15.62
1.32	H	41.36	56.00	14.64
3.90	N	40.38	56.00	15.62
15.02	N	45.00	60.00	15.00
15.43	H	47.73	60.00	12.27
Frequency (MHz)	Line	Average (dB μ V)		Margin (dB)
		Emission level	Limits	
0.67	H	39.26	46.00	6.74
1.31	N	33.75	46.00	12.25
15.02	N	37.26	50.00	12.74
15.43	H	38.47	50.00	11.53

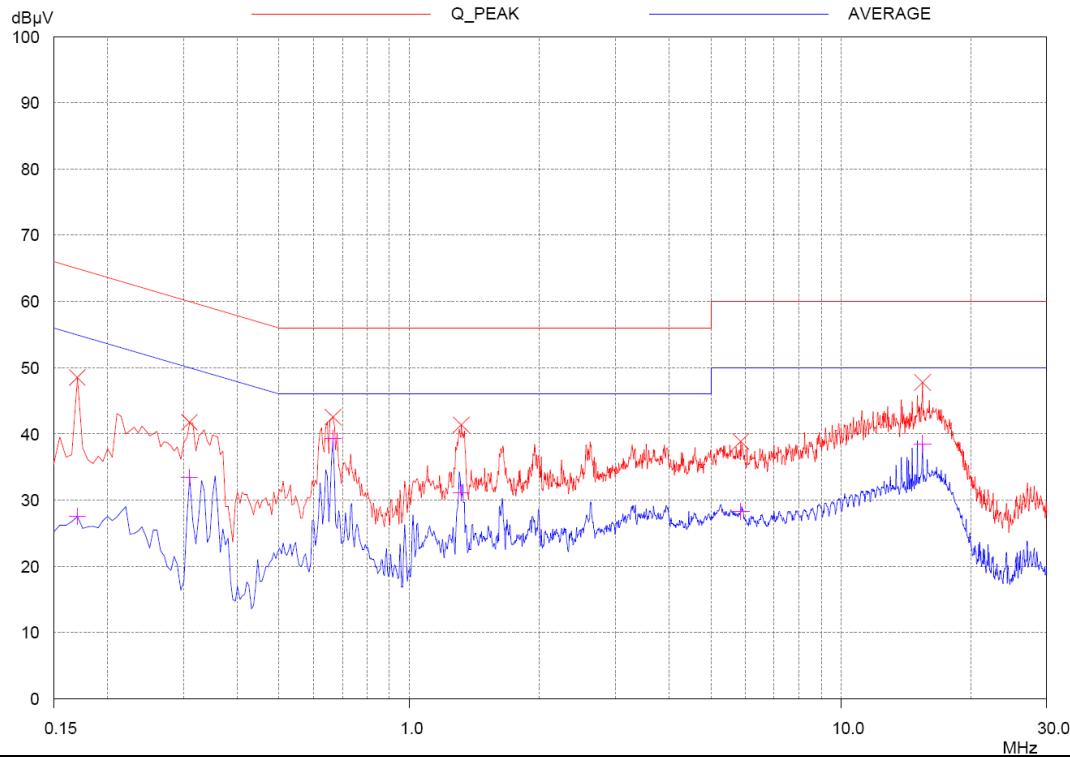
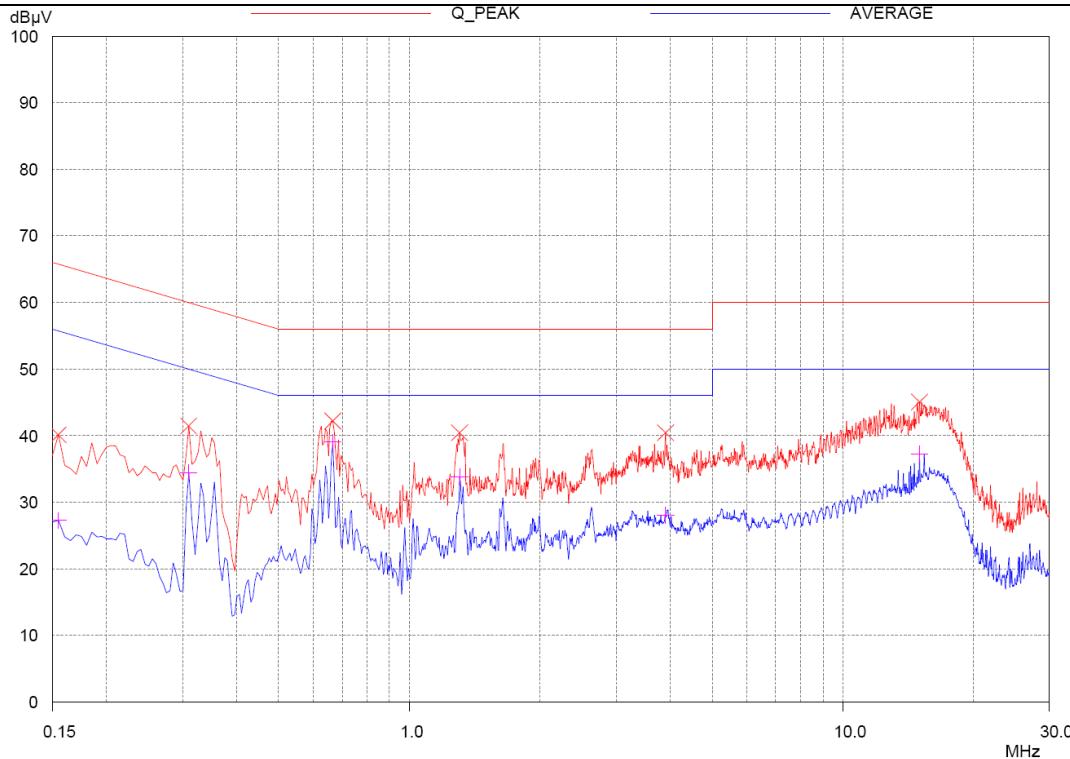
Line Conducted Emissions Tabulated Data

Remark: "H": Hot Line, "N": Neutral Line.

See next page for an overview sweep performed with quasi-peak and average detector.



Tested by: Tae-Ho, Kim / Project Engineer

Graphical representation of Conducted Emission**HOT LINE****NEUTRAL LINE**

It should not be reproduced except in full, without the written approval of ONETECH Corp.

EMC-003 (Rev.2)

HEAD OFFICE : 301-14 Daessangnyeong-ri, Chowol-eup, Gwangju-si, Gyeonggi-do 464-862 Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

EMC Testing Div. : 307-51 Daessangnyeong-ri, Chowol-eup, Gwangju-si, Gyeonggi-do 464-862 Korea (TEL: 82-31-765-8289, FAX: 82-31-766-2904)

8.5 Test data for Middle Channel

Humidity Level : (45 ~ 46) % R.H. Temperature: (21 ~ 22) °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART B, SECTION 15.207(a)
 Result : PASSED

EUT : RF4CE To IR Adaptor Date: December 19, 2013
 Detector : CISPR Quasi-Peak (6 dB Bandwidth: 9 kHz)

Frequency (MHz)	Line	Quasi-Peak (dB μ V)		Margin (dB)
		Emission level	Q.P Limits	
0.67	H	41.58	56.00	14.42
0.68	N	40.81	56.00	15.19
1.34	H	40.64	56.00	15.36
3.37	H	40.63	56.00	15.37
15.04	H	45.46	60.00	14.54
15.45	N	46.31	60.00	13.69

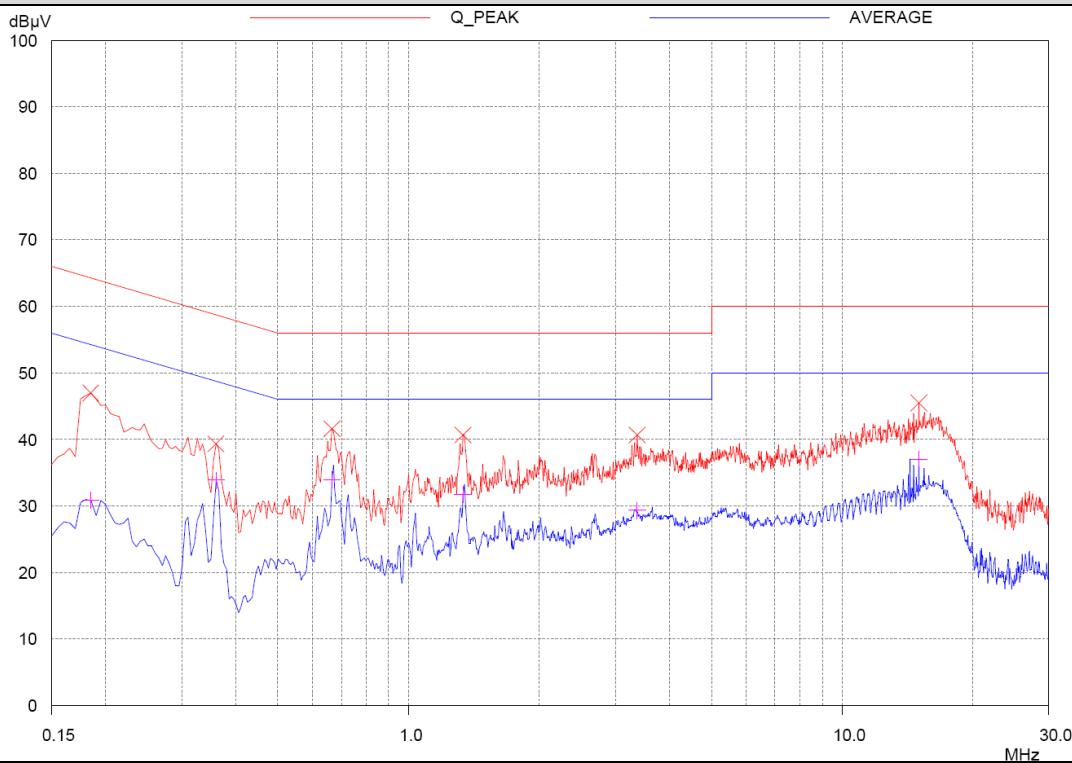
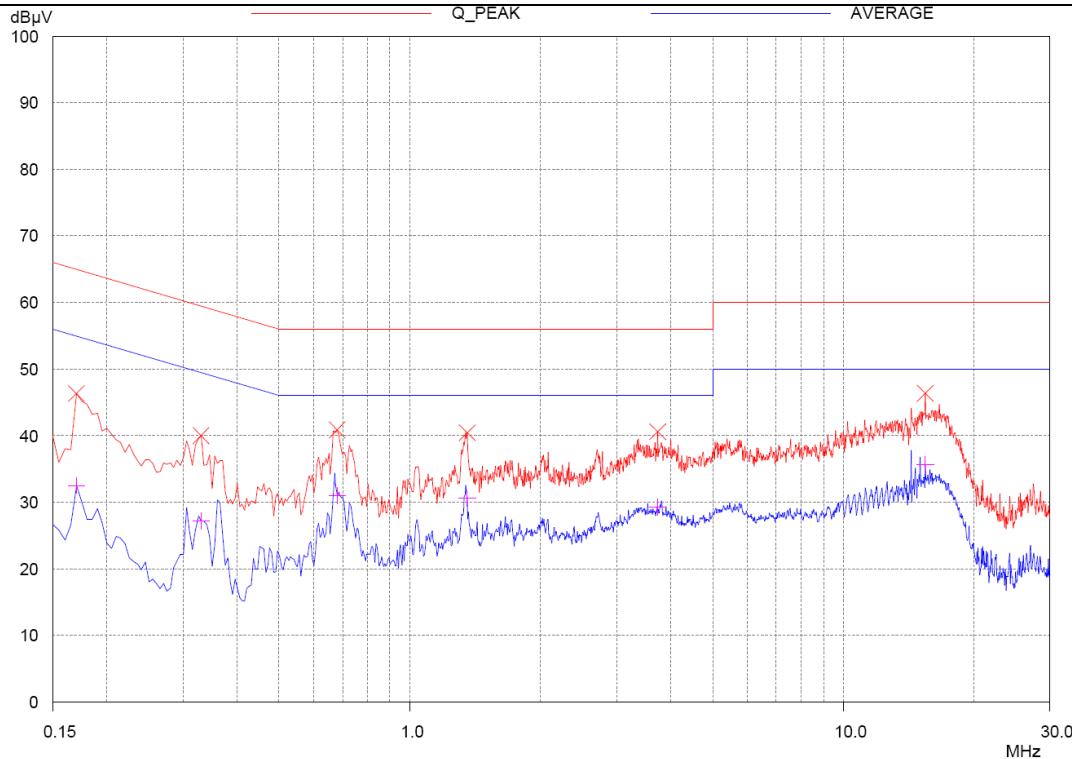
Frequency (MHz)	Line	Average (dB μ V)		Margin (dB)
		Emission level	Limits	
0.67	H	33.88	46.00	12.12
1.34	H	31.72	46.00	14.28
15.04	H	36.93	50.00	13.07
15.45	N	35.62	50.00	14.38

Line Conducted Emissions Tabulated Data

Remark: "H": Hot Line, "N": Neutral Line.

See next page for an overview sweep performed with quasi-peak and average detector.


 Tested by: Tae-Ho, Kim / Project Engineer

Graphical representation of Conducted Emission**HOT LINE****NEUTRAL LINE**

8.6 Test data for High Channel

Humidity Level : (45 ~ 46) % R.H. Temperature: (21 ~ 22) °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART B, SECTION 15.207(a)
 Result : PASSED

EUT : RF4CE To IR Adaptor Date: December 19, 2013
 Detector : CISPR Quasi-Peak (6 dB Bandwidth: 9 kHz)

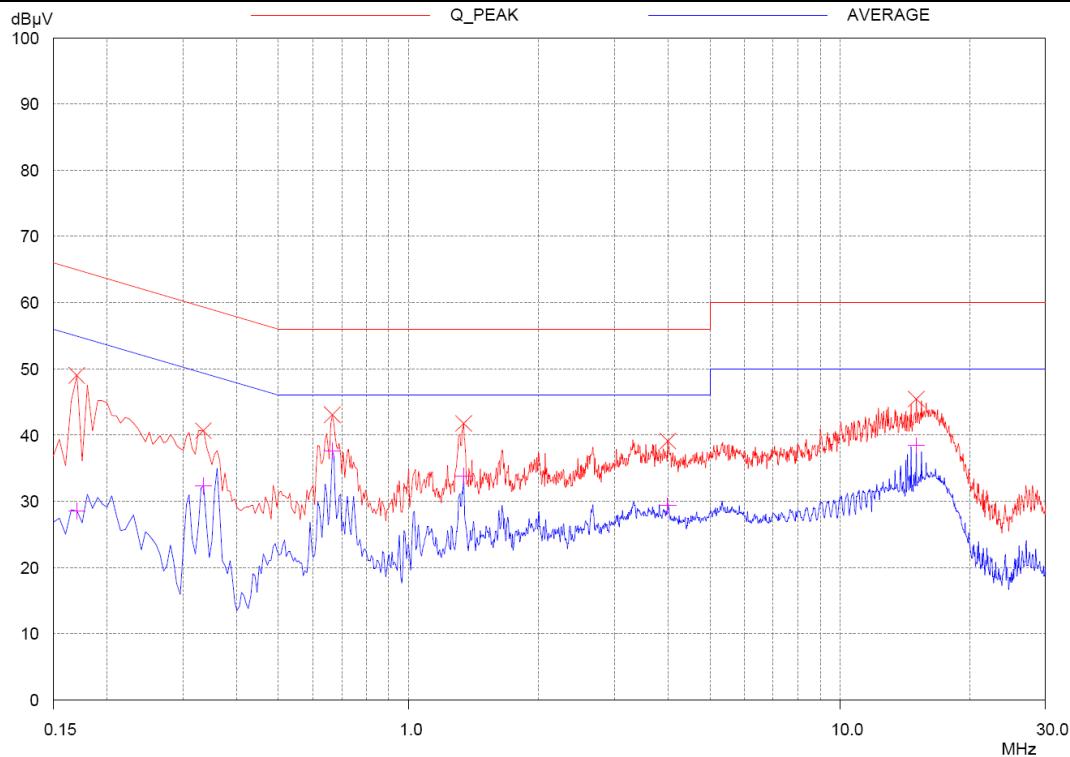
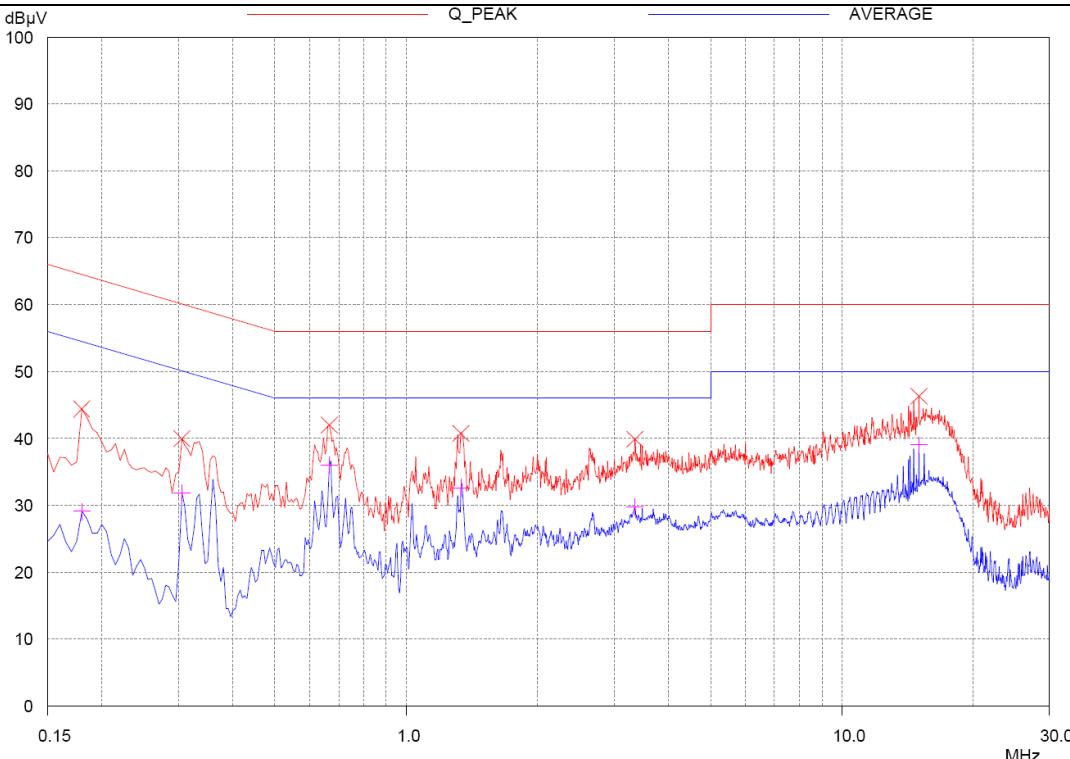
Frequency (MHz)	Line	Quasi-Peak (dB μ V)		Margin (dB)
		Emission level	Q.P Limits	
0.17	H	48.99	64.96	15.97
0.67	H	43.02	56.00	12.98
1.34	H	41.74	56.00	14.26
3.35	N	39.85	56.00	16.15
15.03	H	45.42	60.00	14.58
15.04	N	46.28	60.00	13.72
Frequency (MHz)	Line	Average (dB μ V)		Margin (dB)
		Emission level	Limits	
0.67	H	37.55	46.00	8.45
1.34	H	33.75	46.00	12.25
15.03	H	38.36	50.00	11.64
15.04	N	39.01	50.00	10.99

Line Conducted Emissions Tabulated Data

Remark: "H": Hot Line, "N": Neutral Line.

See next page for an overview sweep performed with quasi-peak and average detector.


 Tested by: Tae-Ho, Kim / Project Engineer

Graphical representation of Conducted Emission**HOT LINE****NEUTRAL LINE**

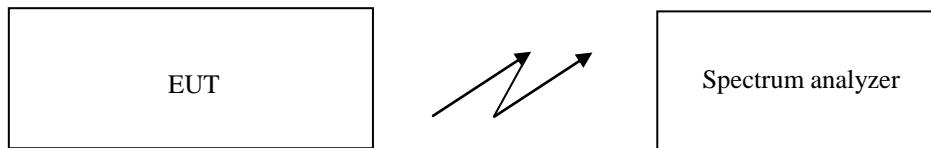
9. 20 dB BANDWIDTH

9.1 Operating environment

Temperature : 23 °C
 Relative humidity : 42 % R.H.

9.2 Test set-up

The output signal of EUT was received by the spectrum analyzer. The resolution bandwidth is set to 10 kHz, and peak detection was used. The 20 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 20 dB.



9.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
■ - FSP	R/S	Spectrum Analyzer	100017	Nov. 05, 2013 (1Y)

9.4 Test data for Bandwidth

- Test Date : December 19, 2013
- Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.215(c)

Channel	Operating Freq. (MHz)	20 dB Bandwidth (MHz)	Result
Low	2 425.00	2.6194	Met the requirement / PASS
Middle	2 450.00	2.5904	
High	2 475.00	2.5832	

Remark: See next page for 20 dB Bandwidth test data.

The 20 dB bandwidth is within the assigned frequency band from 2 400 MHz to 2 483.5 MHz.

Tested by: Tae-Ho, Kim / Project Engineer

