



<b>RADIO REPORT</b> <b>FCC 47 CFR Part 15C</b> <b>ISED Canada RSS-247</b> <b>Digital transmission systems operating within the 2400 – 2483.5 MHz band</b>	
<b>Report Reference No</b>	G0M-1705-6514-TFC247BL-GLM400C-V02
<b>Testing Laboratory</b>	Eurofins Product Service GmbH
<b>Address</b>	Storkower Str. 38c 15526 Reichenwalde Germany
<b>Accreditation</b>	 <p>A2LA Accredited Testing Laboratory, Certificate No.: 1983.01 FCC Test Firm Designation Number: DE0008 IC Testing Laboratory site: 3470A-2</p>
<b>Applicant</b>	Robert Bosch Tool Corporation
<b>Address</b>	1800W. Central Road 60056 Mount Prospect, IL USA
<b>Test Specification</b>	According to FCC/ISED rules
<b>Standard</b>	47 CFR Part 15C RSS-247, Issue 2, 2017-02
<b>Non-Standard Test Method</b>	None
<b>Test Scope</b>	Full compliance test
<b>Equipment under Test (EUT):</b>	
<b>Product Description</b>	Laser Rangefinder
<b>Model(s)</b>	GLM400C
<b>Additional Model(s)</b>	None
<b>Brand Name(s)</b>	BOSCH
<b>Hardware Version(s)</b>	Main PCBA 3.1 (BOM 3.2), Long-Range PCBA 3.3
<b>Software Version(s)</b>	CPU 1.0.0, MCU 1.0.0, Bluetooth 1.2.0
<b>FCC-ID</b>	TXTGLM400C
<b>IC</b>	909H-GLM400C
<b>Test Result</b>	<b>PASSED</b>

<b>Possible test case verdicts:</b>		
required by standard but not tested	N/T	
not required by standard	N/R	
not applicable to EUT	N/A	
test object does meet the requirement	P(PASS)	
test object does not meet the requirement	F(FAIL)	
<b>Testing:</b>		
Test Lab Temperature	20 - 23 °C	
Test Lab Humidity	32 – 38 %	
Date of receipt of test item	2017-11-13	
<b>Report:</b>		
Compiled by	Sebastian Suckow	
Tested by (+ signature) (Responsible for Test)	Sebastian Suckow	
Approved by (+ signature) (Deputy Head of Lab)	Toralf Jahn	
Date of Issue	2018-01-31	
Total number of pages	94	
<b>General Remarks:</b>		
<p>The test results presented in this report relate only to the object tested.</p> <p>The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.</p> <p>This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.</p>		
<b>Additional Comments:</b>		

**VERSION HISTORY**

Version History			
Version	Issue Date	Remarks	Revised By
01	2018-01-10	Initial Release	
02	2018-01-31	EUT pictures updated	S. Suckow

**ABBREVIATIONS AND ACRONYMS**

Acronyms	
Acronym	Description
EUT	Equipment Under Test
FCC	Federal Communications Commission
ISED	Innovation, Science and Economic Development Canada
RBW	Resolution bandwidth
RMS	Root mean square
VBW	Video bandwidth
V <sub>NOM</sub>	Nominal supply voltage


## REPORT INDEX

<b>1</b>	<b>Equipment (Test Item) Under Test.....</b>	<b>6</b>
1.1	Photos – Equipment External.....	7
1.2	Photos – Equipment Internal.....	8
1.3	Photos – Test Setup.....	9
1.4	Support Equipment.....	10
1.5	Test Modes.....	11
1.6	Test Frequencies.....	12
1.7	Sample emission level calculation.....	13
<b>2</b>	<b>Result Summary.....</b>	<b>14</b>
<b>3</b>	<b>Test Conditions and Results.....</b>	<b>15</b>
3.1	Test Conditions and Results - Occupied bandwidth.....	15
3.2	Test Conditions and Results - 6 dB bandwidth.....	19
3.3	Test Conditions and Results - Maximum peak conducted output power.....	23
3.4	Test Conditions and Results - Power spectral density.....	25
3.5	Test Conditions and Results - Band-edge compliance.....	30
3.6	Test Conditions and Results - Conducted spurious emissions.....	33
3.7	Test Conditions and Results - Transmitter radiated emissions.....	38
3.8	Test Conditions and Results - Receiver radiated emissions.....	41
ANNEX A	Transmitter spurious emissions.....	44
ANNEX B	Receiver spurious emissions.....	84



## 1 Equipment (Test Item) Under Test

Description	Laser Rangefinder	
Model	GLM400C	
Additional Model(s)	None	
Brand Name(s)	BOSCH	
Serial Number(s)	None	
Hardware Version(s)	Main PCBA 3.1 (BOM 3.2), Long-Range PCBA 3.3	
Software Version(s)	CPU 1.0.0, MCU 1.0.0, Bluetooth 1.2.0	
PMN	GLM400C	
HVIN	GLM400C	
FVIN	N/A	
HMN	N/A	
FCC-ID	TXTGLM400C	
IC	909H-GLM400C	
Equipment type	End Product	
Radio type	Transceiver	
Assigned frequency bands	2400 - 2483.5 MHz	
Radio technology	Bluetooth LE	
Modulation	GFSK	
Number of antenna ports	1	
Antenna	Type	PCB antenna
	Model	Inverted F antenna (TI reference design SMRU120C)
	Manufacturer	N/A (PCB by ITEQ Corp.)
	Gain	3.3 dBi
Supply Voltage	V <sub>NOM</sub>	4.5 VDC
Operating Temperature	T <sub>NOM</sub>	25 °C
Manufacturer	Robert Bosch Power Tools GmbH	
	70538 Stuttgart Germany	

1.1 Photos – Equipment External

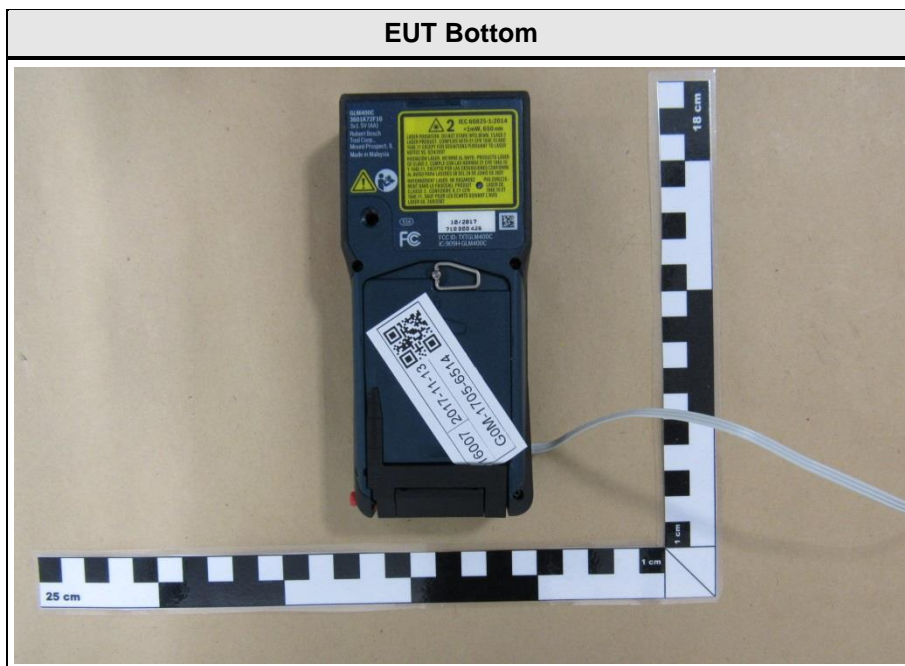


1.2 Photos – Equipment Internal

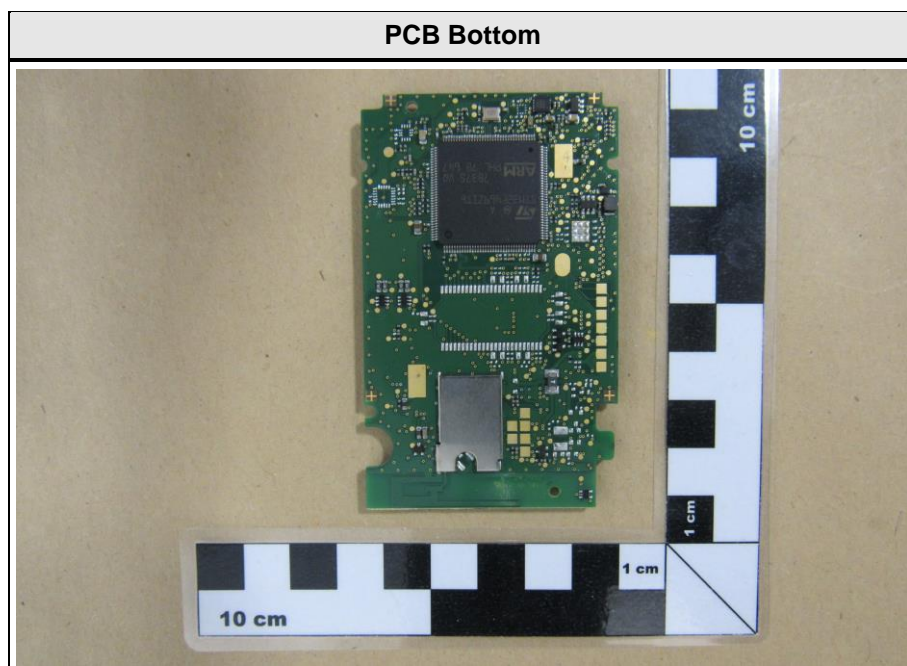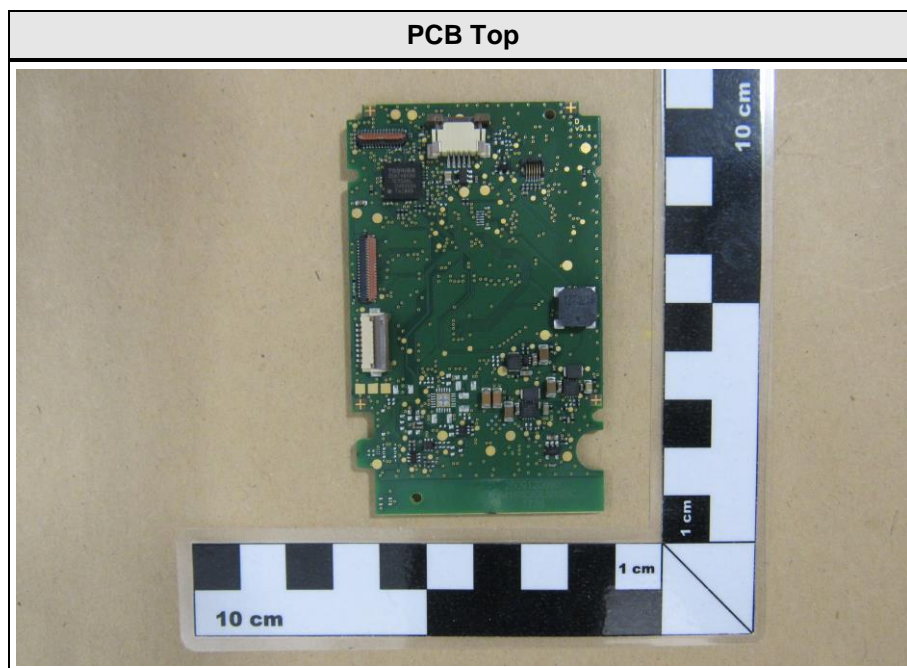



### 1.3 Photos – Test Setup

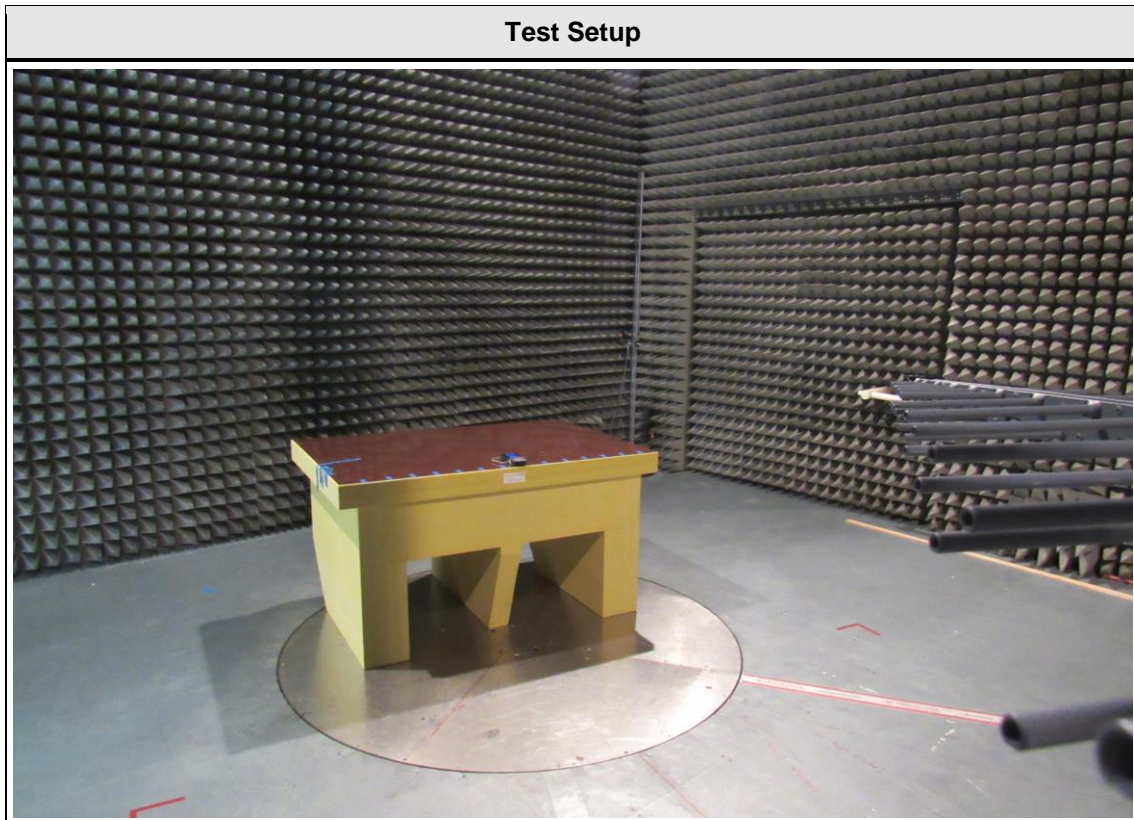

#### 1.4 Support Equipment

Product Type	Device	Manufacturer	Model	Comment
None				
Description:				
AE	Auxillary Equipment			
SIM	Simulator			
CBL	Connecting Cable			
Comment:				

## 1.5 Test Modes

Mode	Description
GFSK	Mode = Transmit Modulation = GFSK Spreading = None Duty cycle = 50%
Receive	Mode = Receive
Comment:	

## 1.6 Test Frequencies

Designator	Mode	Channel	Frequency [MHz]
F1	Tx / Rx	0	2402
F2	Tx / Rx	19	2440
F3	Tx / Rx	39	2480

### 1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dBµV. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dBµV/m). The FCC limits are given in units of µV/m. The following formula is used to convert the units of µV/m to dBµV/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 \cdot \log(\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

Reading + AF	= Net Reading	:	Net reading	- FCC limit	= Margin
+21.5 dBµV	+ 26 dB = 47.5 dBµV/m	:	47.5 dBµV/m	- 57.0 dBµV/m	= -9.5 dB

## 2 Result Summary

FCC 47 CFR Part 15C, ISED RSS-247				
Product Standard Reference	Requirement	Reference Method	Result	Remarks
RSS-Gen 6.6	Occupied Bandwidth	ANSI C63.10	N/R	Informational only
FCC § 15.247(a)(2) ISED RSS-247 § 5.2	6 dB Bandwidth	ANSI C63.10	PASS	
FCC § 15.247(b)(3) ISED RSS-247 § 5.4	Maximum peak conducted power	ANSI C63.10	PASS	
FCC § 15.247(e) ISED RSS-247 § 5.2	Power spectral density	ANSI C63.10	PASS	
FCC § 15.207 ISED RSS-247 § 3.1	AC power line conducted emissions	ANSI C63.10	N/R	Not powered (directly or indirectly) via AC-Mains
FCC § 15.247(d) ISED RSS-247 § 5.5	Band edge compliance	ANSI C63.10	PASS	
FCC § 15.247(d) ISED RSS-247 § 5.5	Conducted spurious emissions	ANSI C63.10	PASS	
FCC § 15.247(d) FCC § 15.209 ISED RSS-GEN § 8.9	Transmitter radiated spurious emissions	ANSI C63.10	PASS	
ISED RSS-247 § 3.1	Receiver radiated spurious emissions	ANSI C63.10	PASS	
Comment:				

Possible Test Case Verdicts	
PASS	Test object does meet the requirements
FAIL	Test object does not meet the requirements
N/T	Required by standard but not tested
N/R	Not required by standard for the test object

### 3 Test Conditions and Results

#### 3.1 Test Conditions and Results - Occupied bandwidth


##### 3.1.1 Information

Test Information	
Reference	I SED RSS-Gen 6.6
Measurement Method	ANSI C63.10 6.9.3
Operator	Sebastian Suckow
Date	2017-12-12

##### 3.1.2 Limits

Limits
None (Informational only)

##### 3.1.3 Setup

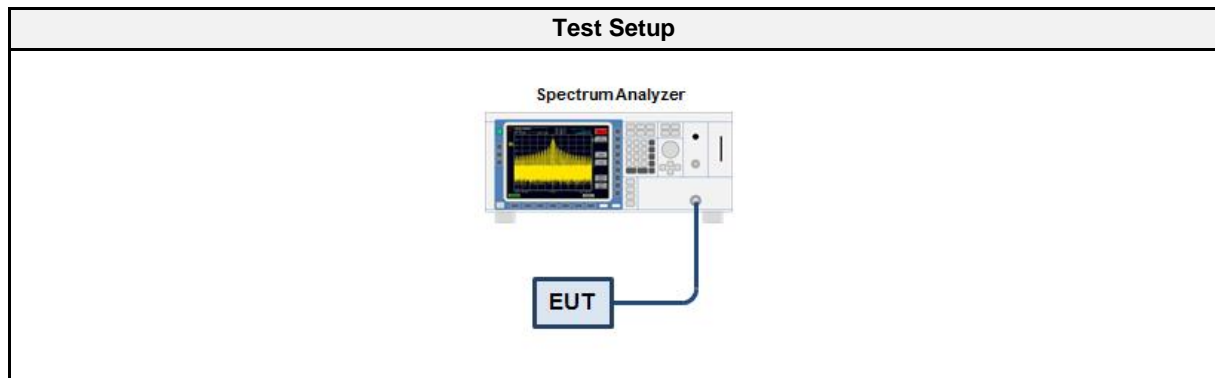

##### 3.1.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01003	2017-07	2018-07

##### 3.1.5 Procedure


Test Procedure
<ol style="list-style-type: none"> <li>1. EUT transmitter is activated in test mode under normal conditions</li> <li>2. The spectrum analyzer is set to peak detection and maximum hold with a span twice the emission spectrum</li> <li>3. The resolution bandwidth is set to 1 % of the bandwidth</li> <li>4. The occupied bandwidth is measured with the build-in analyzer function</li> </ol>

##### 3.1.6 Results

Test Results		
Mode	Frequency [MHz]	Bandwidth [MHz]
GFSK	2402	1.065
GFSK	2440	1.045
GFSK	2480	1.040

### Occupied Bandwidth

Project Number: G0M-1705-6514  
 Applicant: Robert Bosch Tool Corporation  
 Model Description: Laser Rangefinder  
 Model: GLM400C  
 Test Sample ID: 16009  
 Reference Standards: FCC 15.247, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 6.9.3  
 Operational Mode: GFSK, Channel: 0, 2402 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: S. Suckow  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2017-12-12  
 Occupied Bandwidth [MHz]: 1.065

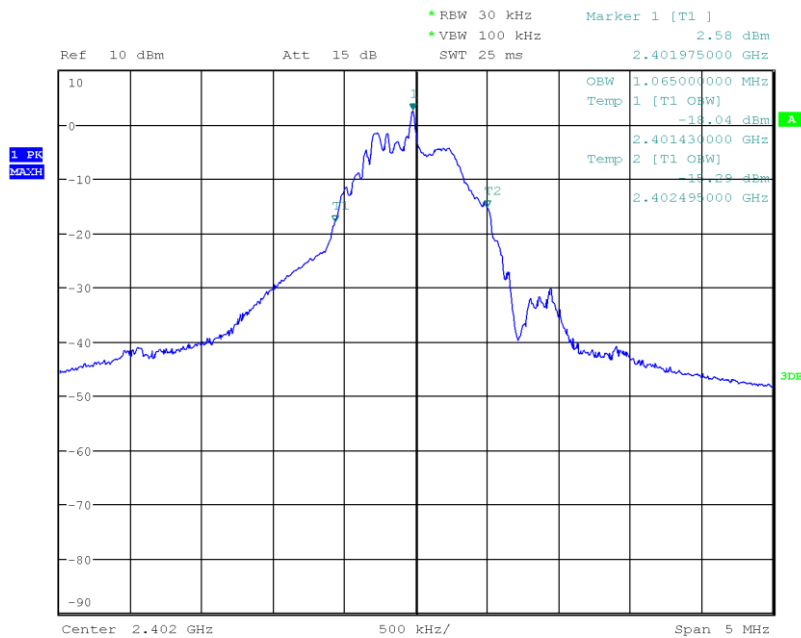


Date: 12.DEC.2017 17:08:50



## Occupied Bandwidth


Project Number: G0M-1705-6514  
 Applicant: Robert Bosch Tool Corporation  
 Model Description: Laser Rangefinder  
 Model: GLM400C  
 Test Sample ID: 16009  
 Reference Standards: FCC 15.247, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 6.9.3  
 Operational Mode: GFSK, Channel: 19, 2440 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: S. Suckow  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2017-12-12  
 Occupied Bandwidth [MHz]: 1.045

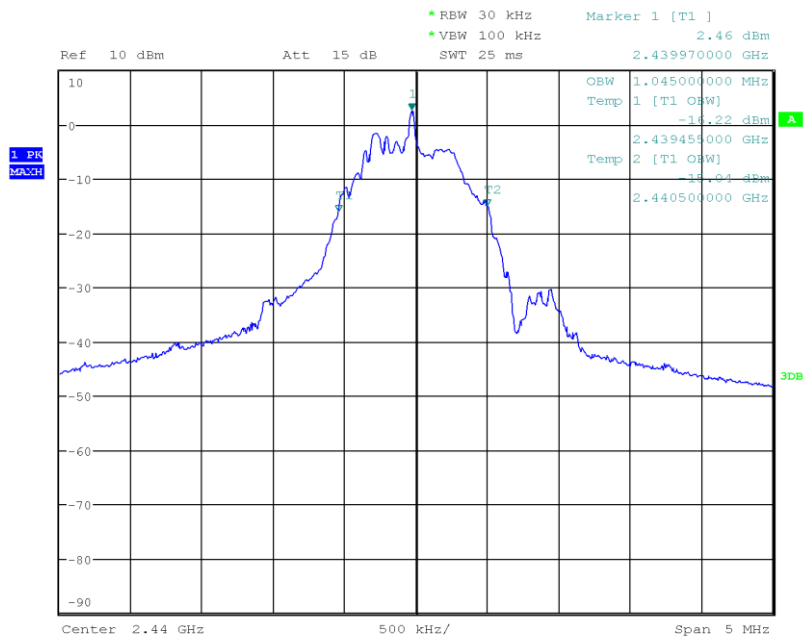

Date: 12.DEC.2017 17:07:41

### Occupied Bandwidth

Project Number: G0M-1705-6514  
 Applicant: Robert Bosch Tool Corporation  
 Model Description: Laser Rangefinder  
 Model: GLM400C  
 Test Sample ID: 16009  
 Reference Standards: FCC 15.247, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 6.9.3  
 Operational Mode: GFSK, Channel: 39, 2480 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: S. Suckow  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2017-12-12  
 Occupied Bandwidth [MHz]: 1.040

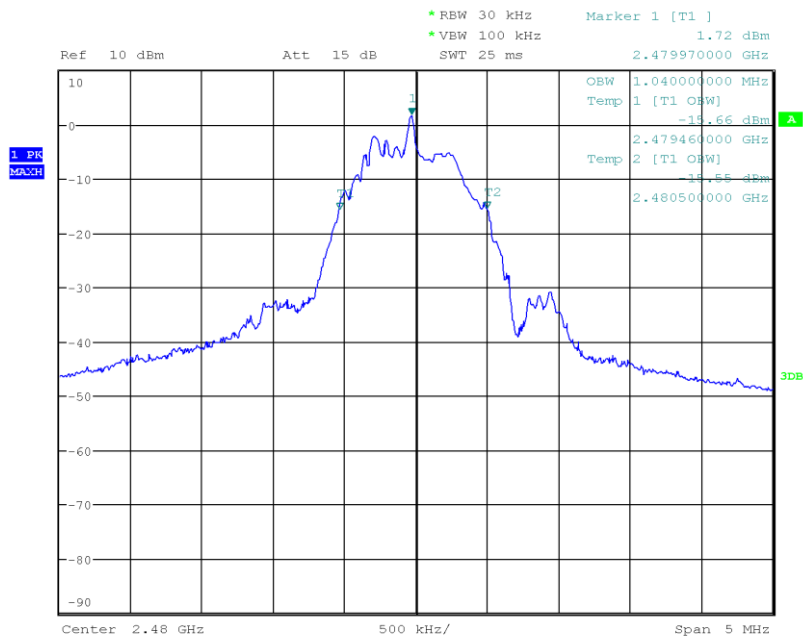

Date: 12.DEC.2017 17:10:06

### 3.2 Test Conditions and Results - 6 dB bandwidth


#### 3.2.1 Information

Test Information	
Reference	FCC 15.247(a)(2) / ISED RSS-247 5.2
Measurement Method	ANSI C63.10 11.8
Operator	Sebastian Suckow
Date	2017-12-12

#### 3.2.2 Limits

Limits
≥ 500kHz

#### 3.2.3 Setup

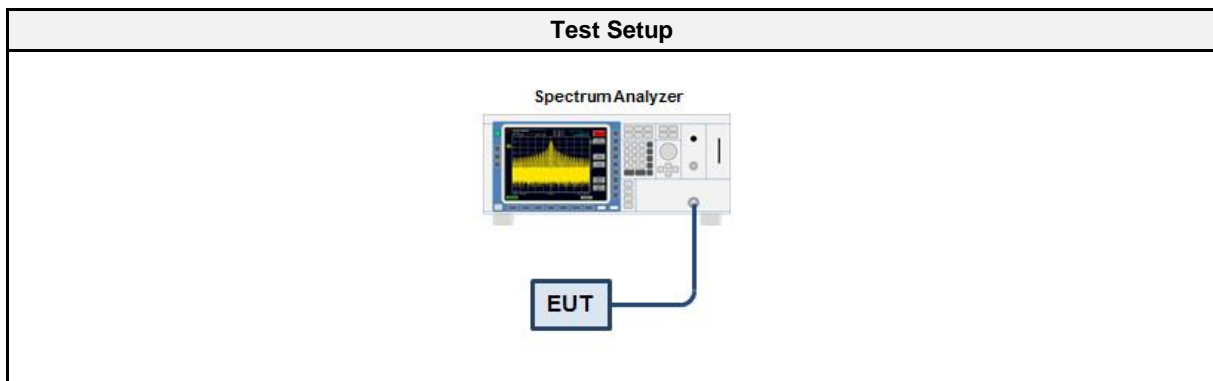

#### 3.2.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01003	2017-07	2018-07

#### 3.2.5 Procedure


Test Procedure
<ol style="list-style-type: none"> <li>1. EUT set to test mode</li> <li>2. Span set to at least twice the emission spectrum</li> <li>3. Detector set to peak and max hold and RBW is set to 100 kHz</li> <li>4. Envelope peak value of emission spectrum is selected</li> <li>5. Marker on envelope of spectrum is set to level of -6 dB to the left of the peak</li> <li>6. Marker on envelope of spectrum is set to level of -6 dB to the right of the peak</li> <li>7. 6 dB Bandwidth is determined by marker frequency separation</li> </ol>

#### 3.2.6 Results

Test Results				
Mode	Frequency [MHz]	Bandwidth [kHz]	Limit [kHz]	Verdict
GFSK	2402	685	500	PASS
GFSK	2440	690	500	PASS
GFSK	2480	695	500	PASS

### DTS (6 dB) Bandwidth


Project Number: G0M-1705-6514  
 Applicant: Robert Bosch Tool Corporation  
 Model Description: Laser Rangefinder  
 Model: GLM400C  
 Test Sample ID: 16009  
 Reference Standards: FCC 15.247, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: GFSK, Channel: 0, 2402 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: S. Suckow  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2017-12-12  
 Lower Frequency [MHz]: 2401.630  
 Upper Frequency [MHz]: 2402.315  
 6 dB Bandwidth [kHz]: 685

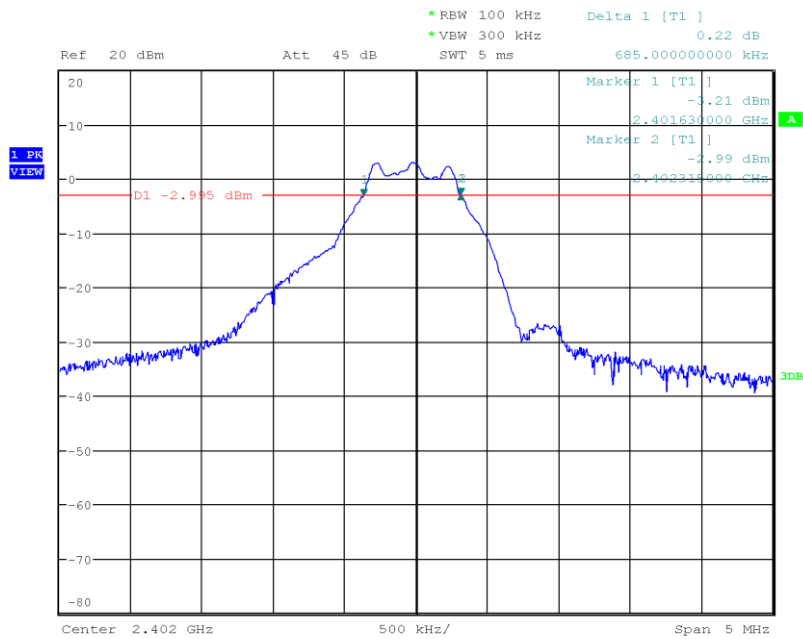

Date: 12.DEC.2017 16:41:43

### DTS (6 dB) Bandwidth


Project Number: G0M-1705-6514  
 Applicant: Robert Bosch Tool Corporation  
 Model Description: Laser Rangefinder  
 Model: GLM400C  
 Test Sample ID: 16009  
 Reference Standards: FCC 15.247, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: GFSK, Channel: 19, 2440 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: S. Suckow  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2017-12-12  
 Lower Frequency [MHz]: 2439.625  
 Upper Frequency [MHz]: 2440.315  
 6 dB Bandwidth [kHz]: 690

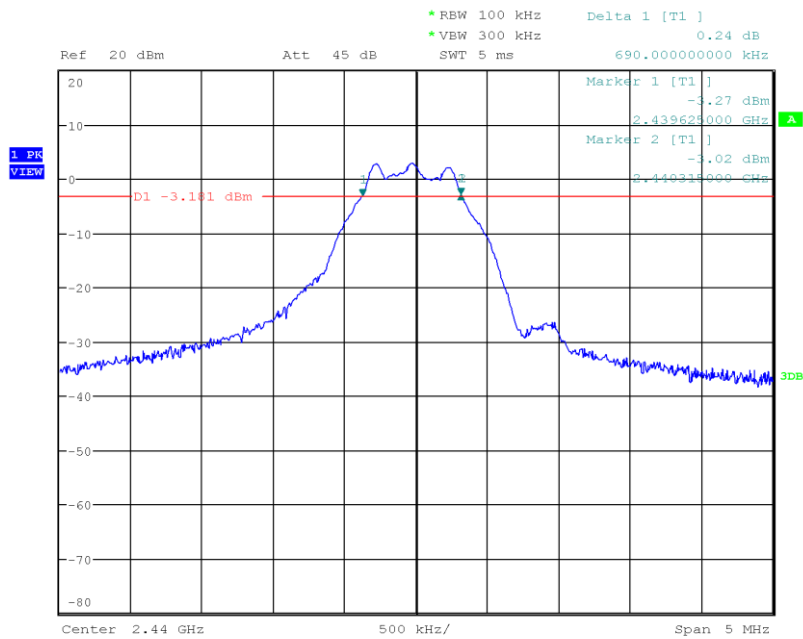

Date: 12.DEC.2017 16:44:42

### DTS (6 dB) Bandwidth

Project Number: G0M-1705-6514  
 Applicant: Robert Bosch Tool Corporation  
 Model Description: Laser Rangefinder  
 Model: GLM400C  
 Test Sample ID: 16009  
 Reference Standards: FCC 15.247, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.8.1 Option 1  
 Operational Mode: GFSK, Channel: 39, 2480 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: S. Suckow  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2017-12-12  
 Lower Frequency [MHz]: 2479.620  
 Upper Frequency [MHz]: 2480.315  
 6 dB Bandwidth [kHz]: 695

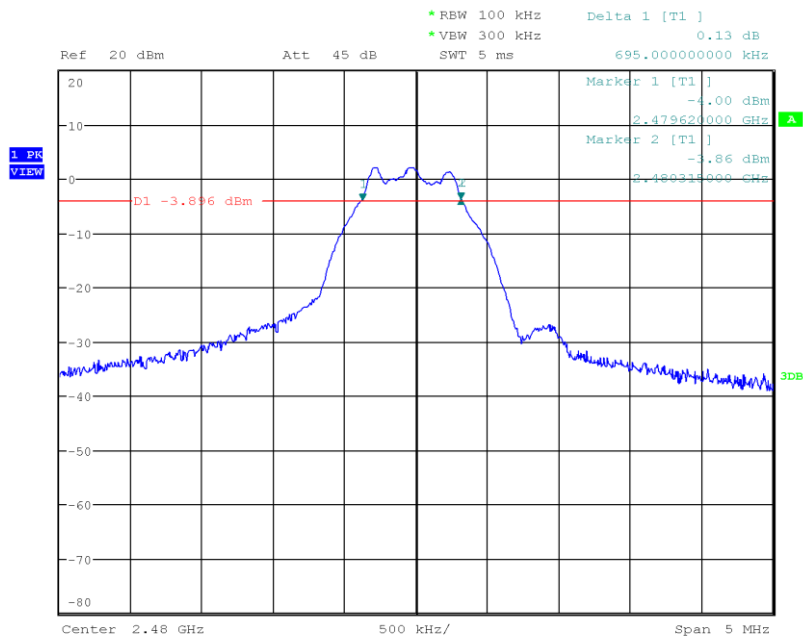

Date: 12.DEC.2017 16:45:50

### 3.3 Test Conditions and Results - Maximum peak conducted output power


#### 3.3.1 Information

Test Information	
Reference	FCC 15.247(b)(1) / ISED RSS-247 5.4
Measurement Method	ANSI C63.10 11.9.1
Operator	Sebastian Suckow
Date	2017-12-12

#### 3.3.2 Limits

Limits
1 W (30 dBm)
The conducted output power limit specified above is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in the table, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 3.3.3 Setup

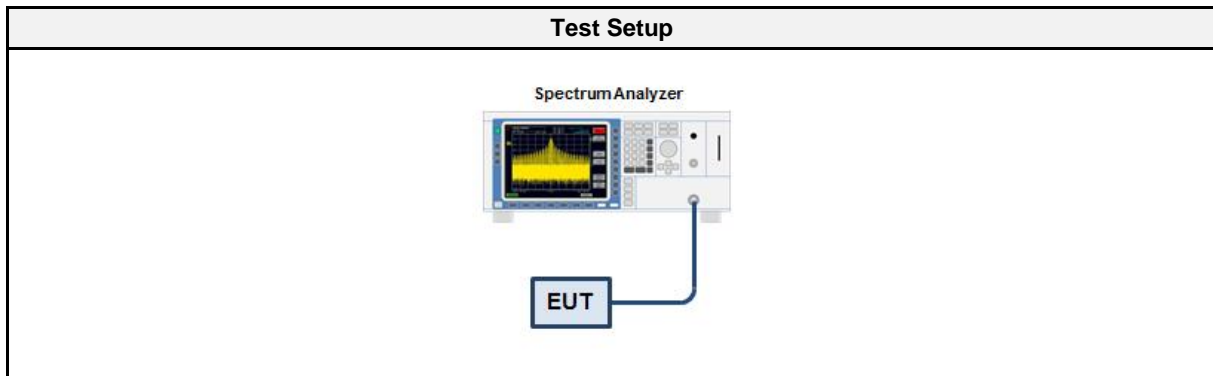

#### 3.3.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01003	2017-07	2018-07

#### 3.3.5 Procedure

Test Procedure
<ol style="list-style-type: none"> <li>1. EUT set to test hopping mode (Communication tester is used if needed)</li> <li>2. Analyzer resolution bandwidth is set <math>\geq</math> DTS bandwidth</li> <li>3. Detector set to peak and max hold</li> <li>4. Sweep time is set to auto</li> <li>5. After the trace has stabilized a marker is set to peak of envelope</li> </ol>

## 3.3.6 Results

Test Results				
Channel [MHz]	Power [dBm]	Power [W]	Limit [W]	Verdict
2402	5.719	0.0037	1.0	PASS
2440	5.641	0.0037	1.0	PASS
2480	5.201	0.0033	1.0	PASS



### 3.4 Test Conditions and Results - Power spectral density


#### 3.4.1 Information

Test Information	
Reference	FCC 15.247(e) / ISED RSS-247 5.2
Measurement Method	ANSI C63.10 11.10.2, 14.3.2
Operator	Sebastian Suckow
Date	2017-12-12

#### 3.4.2 Limits

Limits
8 dBm / 3 kHz

#### 3.4.3 Setup

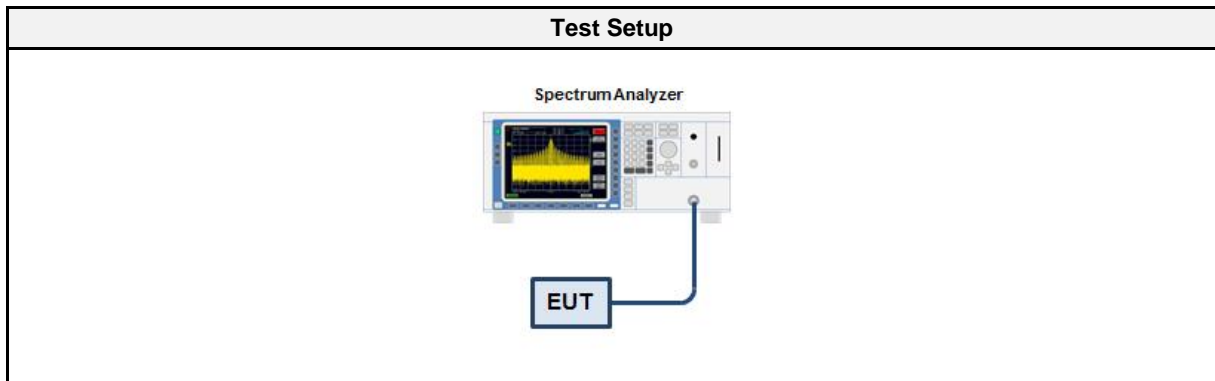

#### 3.4.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01003	2017-07	2018-07

#### 3.4.5 Procedure

Test Procedure
<ol style="list-style-type: none"> <li>1. EUT set to test mode</li> <li>2. The analyzer is set to DTS channel center frequency with a span of 1.5 times the DTS bandwidth</li> <li>3. The RBW is set to 100 kHz with VBW ≥ RBW and the detector is set to peak with max hold</li> <li>4. After the trace has stabilized a marker is set to the envelope maximum</li> <li>5. If the power spectral density is above the limit the RBW is reduced (not lower than 3 kHz) and the measurement is repeated</li> <li>6. If the EUT has more than one transmit chain the procedure is repeated for each transmit chain</li> </ol>

## 3.4.6 Results


Test Results			
Channel [MHz]	PSD [dBm/RBW]	Limit [dBm/3kHz]	Verdict
2402	3.990	8.0	PASS
2440	3.819	8.0	PASS
2480	3.160	8.0	PASS
RBW = 100 kHz			





### Peak Power Spectral Density

Project Number: G0M-1705-6514  
 Applicant: Robert Bosch Tool Corporation  
 Model Description: Laser Rangefinder  
 Model: GLM400C  
 Test Sample ID: 16009  
 Reference Standards: FCC 15.247, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.10.2  
 Operational Mode: GFSK, Channel: 39, 2480 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: S. Suckow  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2017-12-12  
 Peak Frequency [MHz]: 2479.970  
 Spectral Density [dBm/RBW]: 3.160  
 Resolution Bandwidth [kHz]: 100 kHz

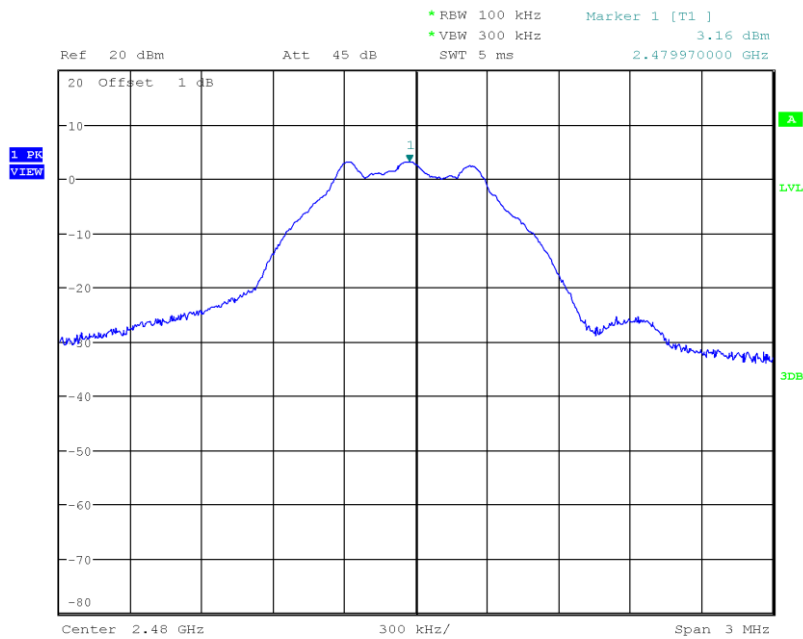

Date: 12.DEC.2017 17:17:39

### 3.5 Test Conditions and Results - Band-edge compliance


#### 3.5.1 Information

Test Information	
Reference	FCC 15.247(d) / ISED RSS-247 5.5
Measurement Method	ANSI C63.10 11.13
Operator	Sebastian Suckow
Date	2017-12-12

#### 3.5.2 Limits

Limits	
Power Measurement	Out-of-band attenuation [dB]
Peak	20
RMS	30

#### 3.5.3 Setup

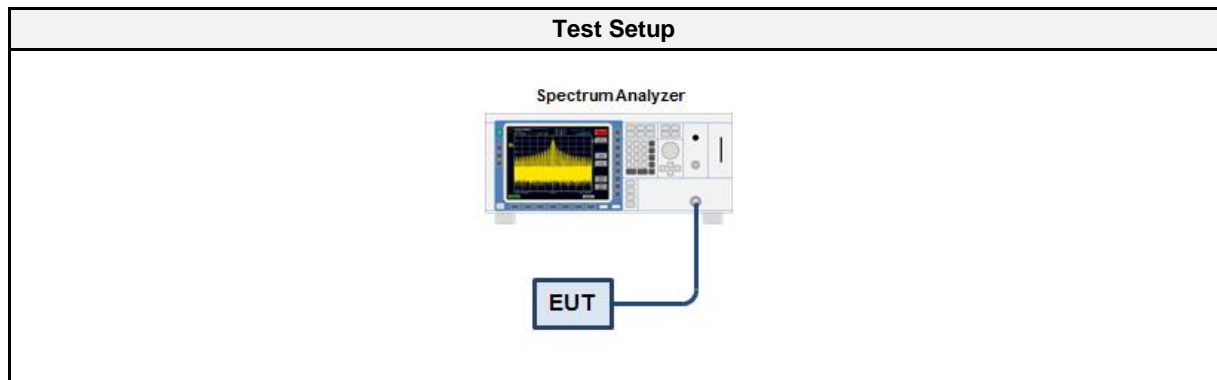

#### 3.5.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01003	2017-07	2018-07

#### 3.5.5 Procedure


Test Procedure
<ol style="list-style-type: none"> <li>1. EUT set to test mode (Communication tester is used if needed)</li> <li>2. Span set around lower band edge and detector is set to peak and max hold</li> <li>3. Resolution bandwidth is set to 100 kHz</li> <li>4. Markers are set to peak emission levels within frequency band and outside frequency band</li> <li>5. Band edge attenuation is determined from level difference</li> </ol>

#### 3.5.6 Results

Test Results				
Mode	Channel [MHz]	Out-of-band Attenuation [dB]	Limit [dB]	Verdict
GFSK	2402	-35.78	-20	PASS
GFSK	2480	-40.81	-20	PASS

### Band-edge Compliance


Project Number: G0M-1705-6514  
 Applicant: Robert Bosch Tool Corporation  
 Model Description: Laser Rangefinder  
 Model: GLM400C  
 Test Sample ID: 16009  
 Reference Standards: FCC 15.247, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 7.8.6, 6.10.4  
 Operational Mode: Channel: 0, 2402 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: S. Suckow  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2017-12-12  
 Band-edge: Lower  
 In-band Frequency [MHz]: 2401.984  
 Max. in-band Level [dBm/100 kHz]: 3.92  
 Out-of-band Frequency [MHz]: 2399.712  
 Max. out-of-band Level [dBm/100 kHz]: -31.858  
 Attenuation [dB]: -35.78

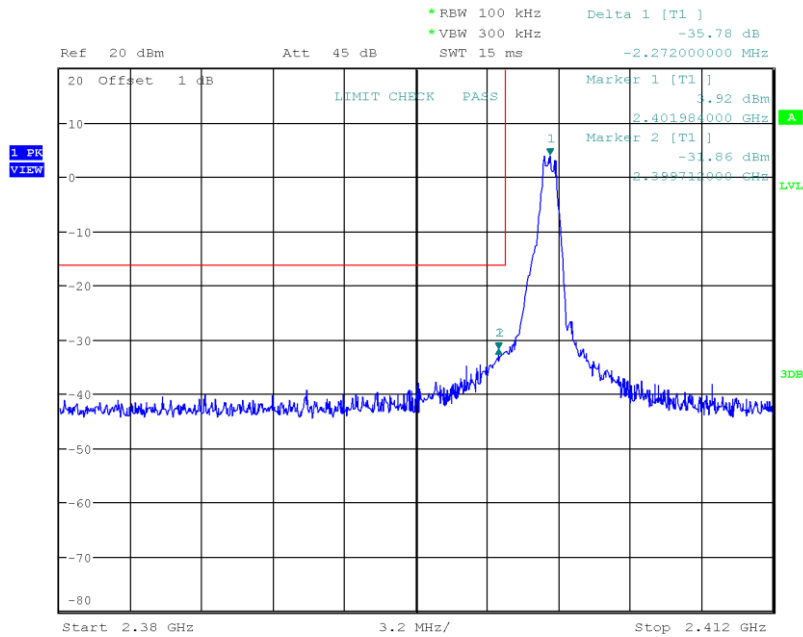

Date: 12.DEC.2017 16:52:01

### Band-edge Compliance

Project Number: G0M-1705-6514  
 Applicant: Robert Bosch Tool Corporation  
 Model Description: Laser Rangefinder  
 Model: GLM400C  
 Test Sample ID: 16009  
 Reference Standards: FCC 15.247, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 7.8.6, 6.10.4  
 Operational Mode: Channel: 78, 2480 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: S. Suckow  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2017-12-12  
 Band-edge: Upper  
 In-band Frequency [MHz]: 2479.975  
 Max. in-band Level [dBm/100 kHz]: 3.101  
 Out-of-band Frequency [MHz]: 2484.035  
 Max. out-of-band Level [dBm/100 kHz]: -37.71  
 Attenuation [dB]: -40.81

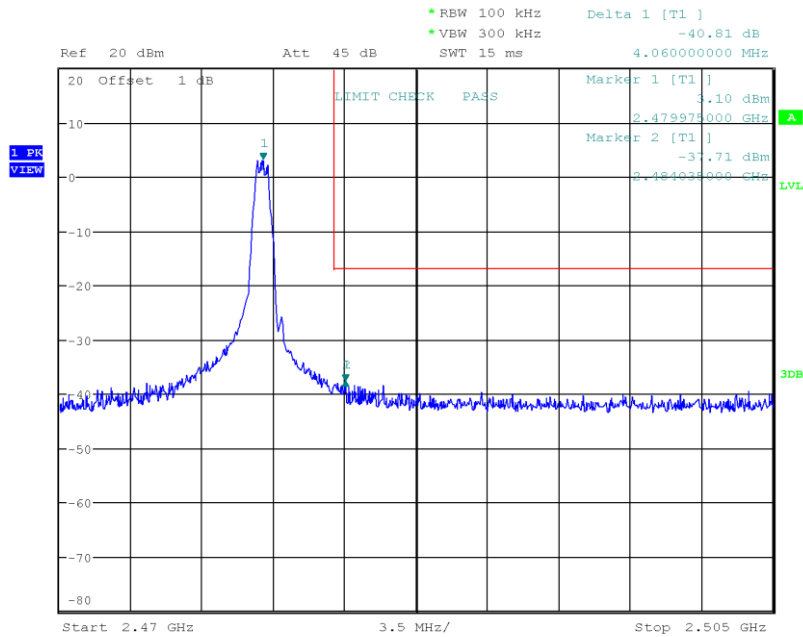

Date: 12.DEC.2017 16:53:45



### 3.6 Test Conditions and Results - Conducted spurious emissions


#### 3.6.1 Information

Test Information	
Reference	FCC 15.247(d) / ISED RSS-247 5.5
Measurement Method	ANSI C63.10 11.11
Operator	Sebastian Suckow
Date	2017-12-12

#### 3.6.2 Limits

Limits	
Power Measurement	Out-of-band attenuation [dB]
Peak	20
RMS	30

#### 3.6.3 Setup

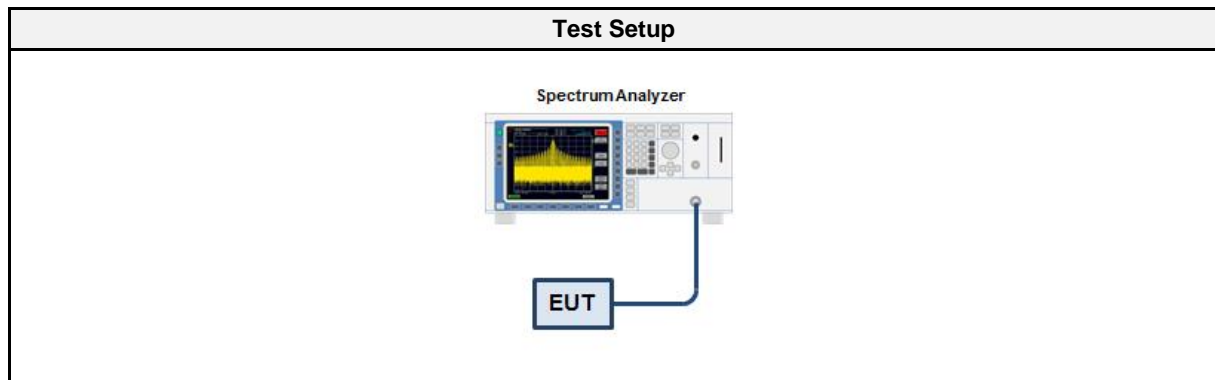

#### 3.6.4 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSU 26	EF01003	2017-07	2018-07

#### 3.6.5 Procedure


Test Procedure
<ol style="list-style-type: none"> <li>1. EUT set to test mode (Communication tester is used if needed)</li> <li>2. Span set around lower band edge and detector is set to peak and max hold</li> <li>3. Resolution bandwidth is set to 100 kHz</li> <li>4. Markers are set to peak emission levels within frequency band and outside frequency band</li> <li>5. Band edge attenuation is determined from level difference</li> </ol>

## 3.6.6 Results

Test Results		
Mode	Channel [MHz]	Verdict
GFSK	2402	PASS
GFSK	2440	PASS
GFSK	2480	PASS

### Conducted Spurious Emissions


Project Number: G0M-1705-6514  
 Applicant: Robert Bosch Tool Corporation  
 Model Description: Laser Rangefinder  
 Model: GLM400C  
 Test Sample ID: 16009  
 Reference Standards: FCC 15.247, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.11  
 Operational Mode: GFSK, Channel: 0, 2402 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: S. Suckow  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2017-12-12  
 Max. in-band Frequency [MHz]: 2402.0  
 Max. in-band Level [dBm/100 kHz]: 3.9  
 Out-of-band Limit [dBm/100 kHz]: -16.1

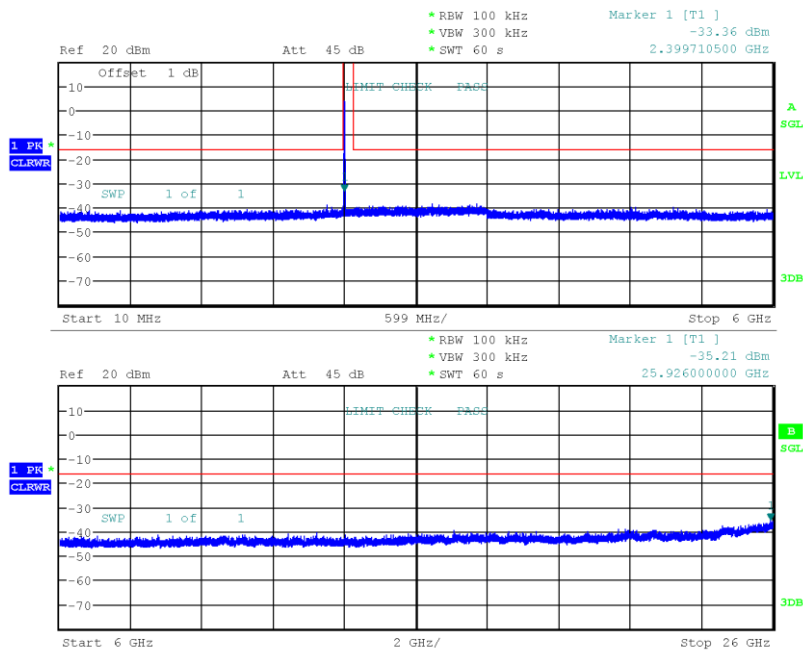

Date: 12.DEC.2017 17:02:13

### Conducted Spurious Emissions


Project Number: G0M-1705-6514  
 Applicant: Robert Bosch Tool Corporation  
 Model Description: Laser Rangefinder  
 Model: GLM400C  
 Test Sample ID: 16009  
 Reference Standards: FCC 15.247, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.11  
 Operational Mode: GFSK, Channel: 19, 2440 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: S. Suckow  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2017-12-12  
 Max. in-band Frequency [MHz]: 2440.0  
 Max. in-band Level [dBm/100 kHz]: 3.8  
 Out-of-band Limit [dBm/100 kHz]: -16.2

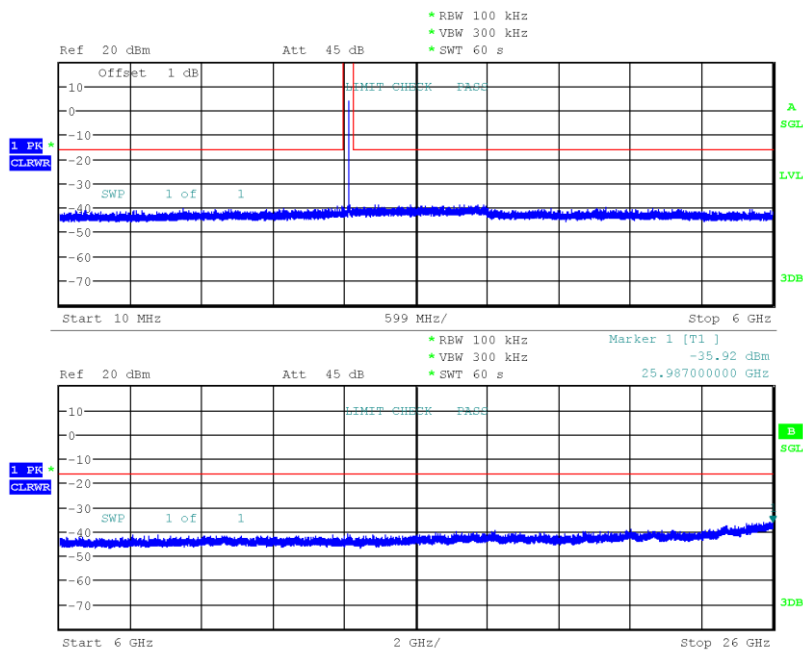

Date: 12.DEC.2017 17:05:31

### Conducted Spurious Emissions

Project Number: G0M-1705-6514  
 Applicant: Robert Bosch Tool Corporation  
 Model Description: Laser Rangefinder  
 Model: GLM400C  
 Test Sample ID: 16009  
 Reference Standards: FCC 15.247, RSS-247  
 Reference Method: ANSI C63.10:2013, Section 11.11  
 Operational Mode: GFSK, Channel: 39, 2480 MHz  
 Operating Conditions: Tnom/Vnom  
 Operator: S. Suckow  
 Test Site: Eurofins Product Service GmbH  
 Test Date: 2017-12-12  
 Max. in-band Frequency [MHz]: 2480.0  
 Max. in-band Level [dBm/100 kHz]: 3.1  
 Out-of-band Limit [dBm/100 kHz]: -16.9

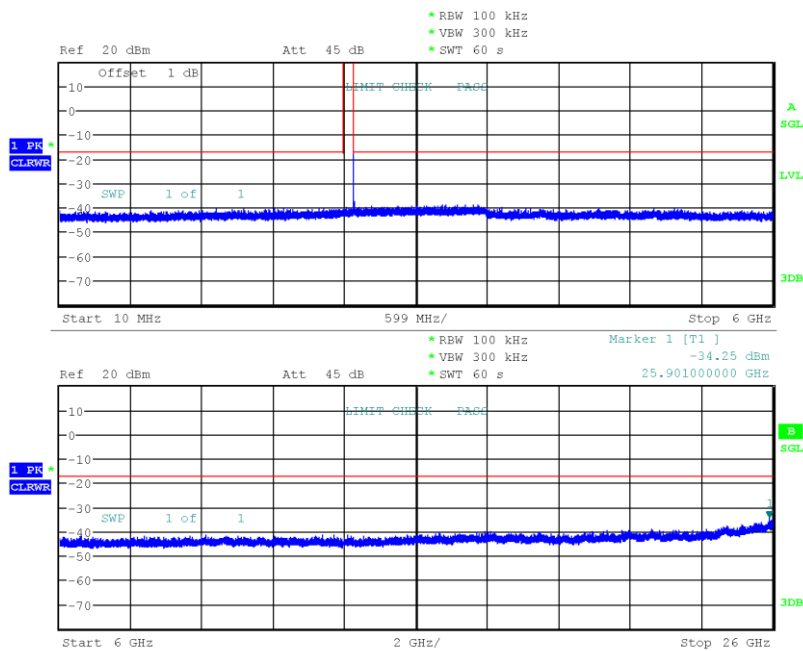

Date: 12.DEC.2017 16:58:55

### 3.7 Test Conditions and Results - Transmitter radiated emissions


#### 3.7.1 Information


Test Information	
Reference	FCC 15.247(d) / ISED RSS-GEN 8.9
Measurement Method	ANSI C63.10 6.4, 6.5, 6.6, 11.12
Operator	Sebastian Suckow
Date	2017-11-13 – 2017-12-13

#### 3.7.2 Limits

Limits			
Frequency [MHz]	Detector	Field strength [dB $\mu$ V/m]	Measurement distance [m]
0.009 - 0.09	Average	2400/F[kHz]	300
0.09 - 0.110	Quasi-Peak	2400/F[kHz]	300
0.110 - 0.490	Average	2400/F[kHz]	300
0.490 - 1.705	Quasi-Peak	24000/F[kHz]	30
1.705 - 30.0	Quasi-Peak	30	30
30 - 88	Quasi-Peak	100	3
88 - 216	Quasi-Peak	150	3
216 - 960	Quasi-Peak	200	3
960 - 1000	Quasi-Peak	500	3
>1000	Average	500	3

#### 3.7.3 Setup

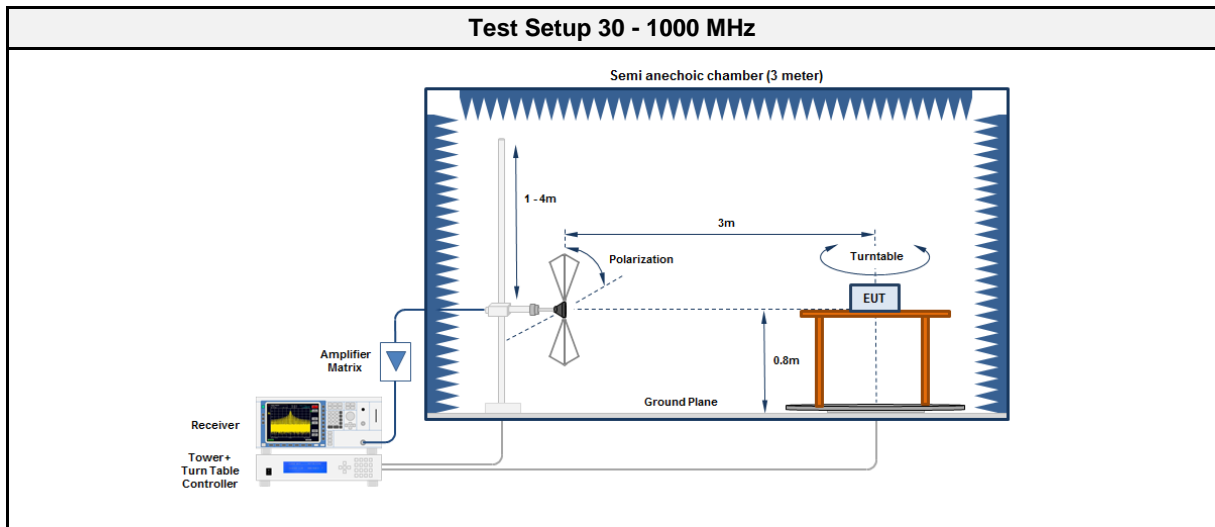

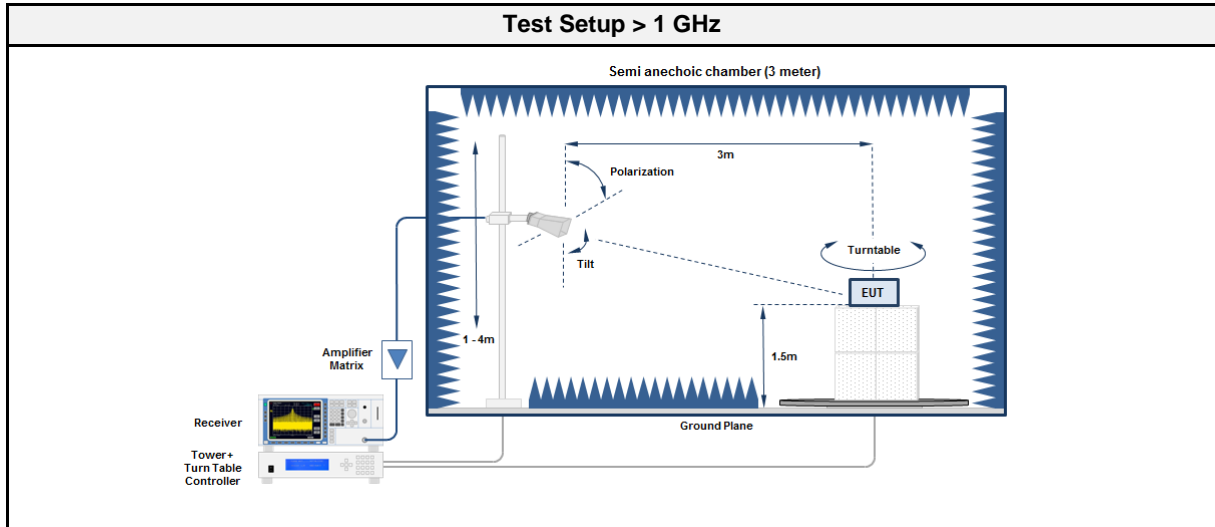

### 3.7.4 Equipment

Test Equipment 30 - 1000 MHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	-	-
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2017-08	2018-08
Antenna	R&S	HK 116	EF00203	2016-06	2018-06
Antenna	R&S	HL 223	EF00187	2016-05	2019-05

Test Equipment > 1 GHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	-	-
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2017-08	2018-08
Antenna	R&S	BBHA 9120D	EF00018	2016-09	2019-09
Antenna	Amplifier Research	AT4560	EF01152	2017-10	2018-10

### 3.7.5 Procedure

Test Procedure 30 - 1000 MHz
<ol style="list-style-type: none"> <li>EUT is placed on a non conducting support at the center of a turn table 0.8 m above the ground</li> <li>EUT set to test mode</li> <li>The receiver is set to peak detection with max hold</li> <li>The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m</li> <li>All significant emissions are measured again using the corresponding final detector</li> </ol>

Test Procedure > 1 GHz
<ol style="list-style-type: none"> <li>EUT is placed on a non conducting support at the center of a turn table 1.5 m above the ground</li> <li>EUT set to test mode</li> <li>The receiver is set to peak detection with max hold</li> <li>The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m</li> <li>All significant emissions are measured again using the corresponding final detector</li> </ol>

## 3.7.6 Results

Test Results						
Channel [MHz]	Emission [MHz]	Level [dB $\mu$ V/m]	Det.	Pol.	Limit [dB $\mu$ V/m]	Margin [dB]
2402	269.7	41.70	pk	hor	46.00	-04.27
2440	266.9	39.50	pk	hor	46.00	-06.49
2440	4880	52.44	pk	hor	74.00	-21.56
2440	4880	50.24	RMS	hor	54.00	-03.76
2440	4880	53.76	pk	ver	74.00	-20.24
2440	4880	51.68	RMS	ver	54.00	-02.32
2440	7320	49.77	pk	ver	74.00	-24.23
2480	270.3	41.20	pk	hor	46.00	-04.77
2480	2483.6	53.28	pk	hor	74.00	-20.72
2480	2483.6	44.57	RMS	hor	54.00	-09.43
2480	2483.6	70.08	pk	ver	74.00	-03.92
2480	2483.6	44.16	RMS	ver	54.00	-09.84
2480	2500	57.18	pk	hor	74.00	-16.82
2480	2500	50.19	pk	ver	74.00	-23.81
2480	4960	48.85	pk	hor	74.00	-25.15
2480	4960	51.53	pk	ver	74.00	-22.47



### 3.8 Test Conditions and Results - Receiver radiated emissions


#### 3.8.1 Information


Test Information	
Reference	ISED RSS-247 3.1
Measurement Method	ANSI C63.10 6.5, 6.6, 11.12
Operator	Sebastian Suckow
Date	2017-11-13 – 2017-12-13

#### 3.8.2 Limits

Limits			
Frequency [MHz]	Detector	Field strength [dB $\mu$ V/m]	Measurement distance [m]
30 - 88	Quasi-Peak	100	3
88 - 216	Quasi-Peak	150	3
216 - 960	Quasi-Peak	200	3
960 - 1000	Quasi-Peak	500	3
>1000	Average	500	3

#### 3.8.3 Setup

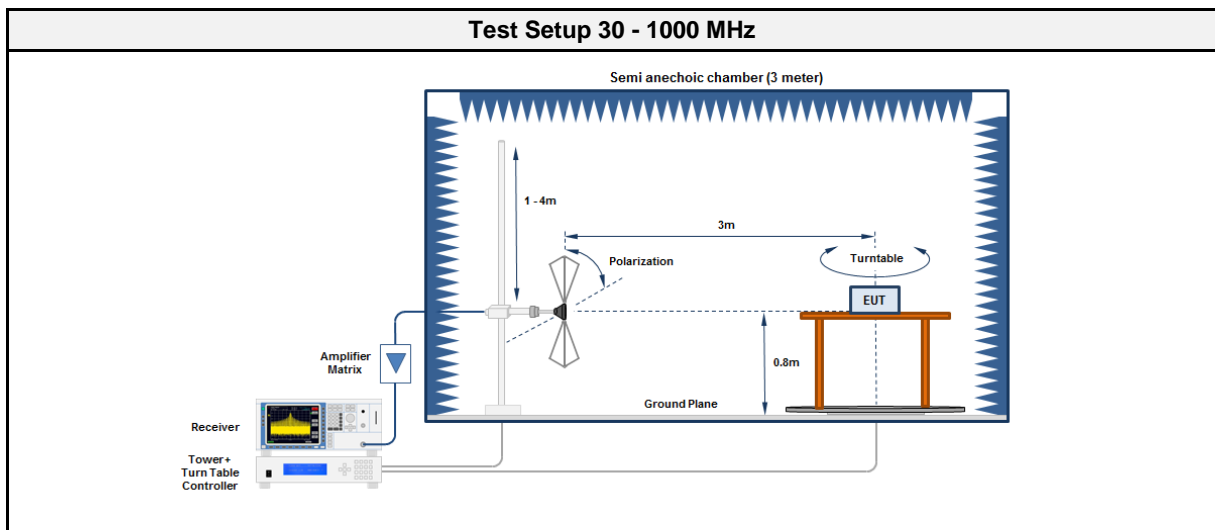

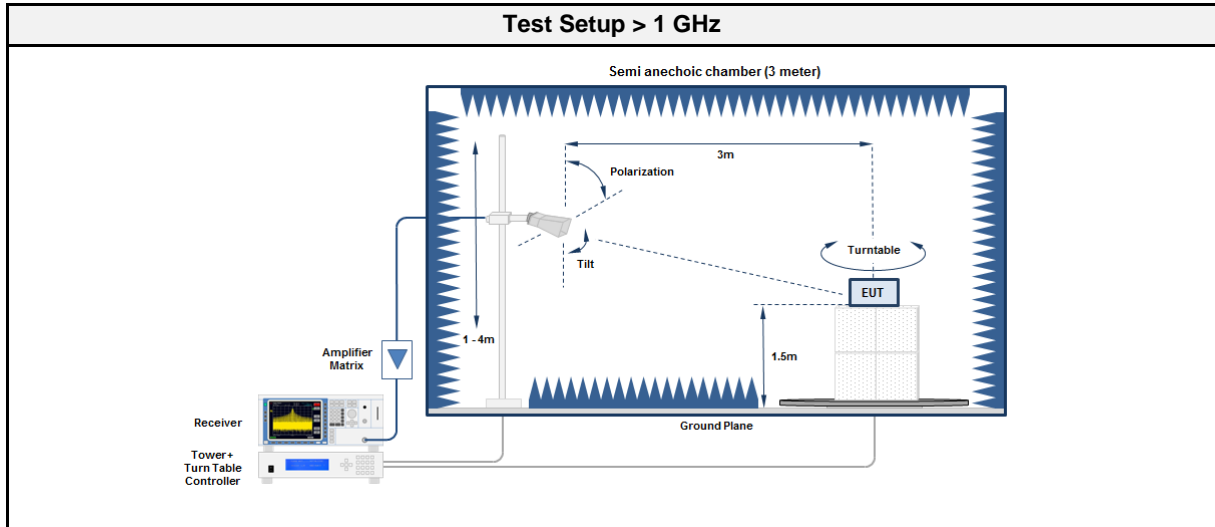

### 3.8.4 Equipment

Test Equipment 30 - 1000 MHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	-	-
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2017-08	2018-08
Antenna	R&S	HK 116	EF00203	2016-06	2018-06
Antenna	R&S	HL 223	EF00187	2016-05	2019-05

Test Equipment > 1 GHz					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic Chamber	Frankonia	AC1	EF00062	-	-
Measurement Receiver	Agilent	N9038A-526/WXP	EF01070	2017-08	2018-08
Antenna	R&S	BBHA 9120D	EF00018	2016-09	2019-09

### 3.8.5 Procedure

Test Procedure 30 - 1000 MHz
<ol style="list-style-type: none"> <li>EUT is placed on a non conducting support at the center of a turn table 0.8 m above the ground</li> <li>EUT set to test mode</li> <li>The receiver is set to peak detection with max hold</li> <li>The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m</li> <li>All significant emissions are measured again using the corresponding final detector</li> </ol>

Test Procedure > 1 GHz
<ol style="list-style-type: none"> <li>EUT is placed on a non conducting support at the center of a turn table 1.5 m above the ground</li> <li>EUT set to test mode</li> <li>The receiver is set to peak detection with max hold</li> <li>The EUT is rotated through 360° and the height of the antenna is varied from 1 m to 4 m</li> <li>All significant emissions are measured again using the corresponding final detector</li> </ol>

## 3.8.6 Results

Test Results						
Channel [MHz]	Emission [MHz]	Level [dB $\mu$ V/m]	Det.	Pol.	Limit [dB $\mu$ V/m]	Margin [dB]
2440	898.3485	44.20	pk	hor	46.00	-01.77


## ANNEX A Transmitter spurious emissions

### Spurious emissions according to FCC 15.247

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Suckow  
 Test Conditions: Tnom: 21°C, Vnom: 4.5 VDC  
 Antenna: Rohde & Schwarz HK 116, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; BT LE 2402 MHz  
 Test Date: 2017-12-13  
 Note:

Index 1

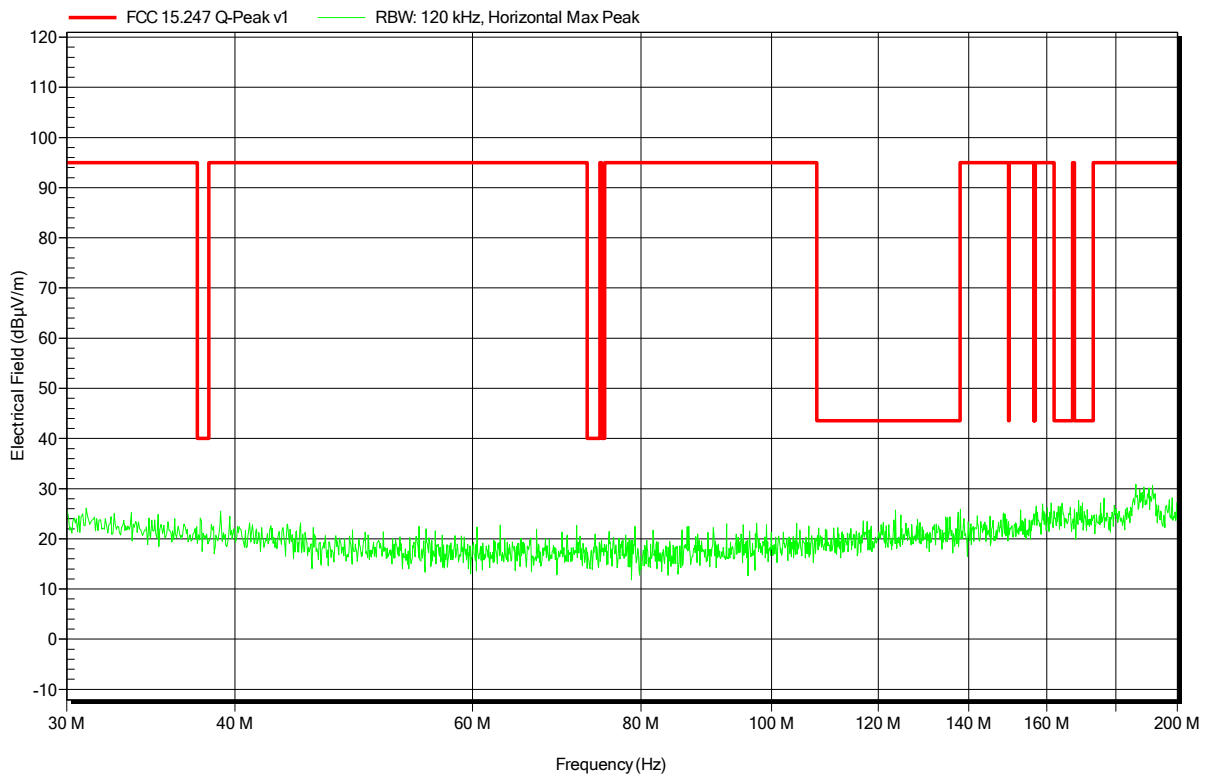


### Spurious emissions according to FCC 15.247

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Suckow  
 Test Conditions: Tnom: 21°C, Vnom: 4.5 VDC  
 Antenna: Rohde & Schwarz HK 116, Vertical  
 Measurement distance: 3 m  
 Mode: TX; BT LE 2402 MHz  
 Test Date: 2017-12-13  
 Note:

Index 2

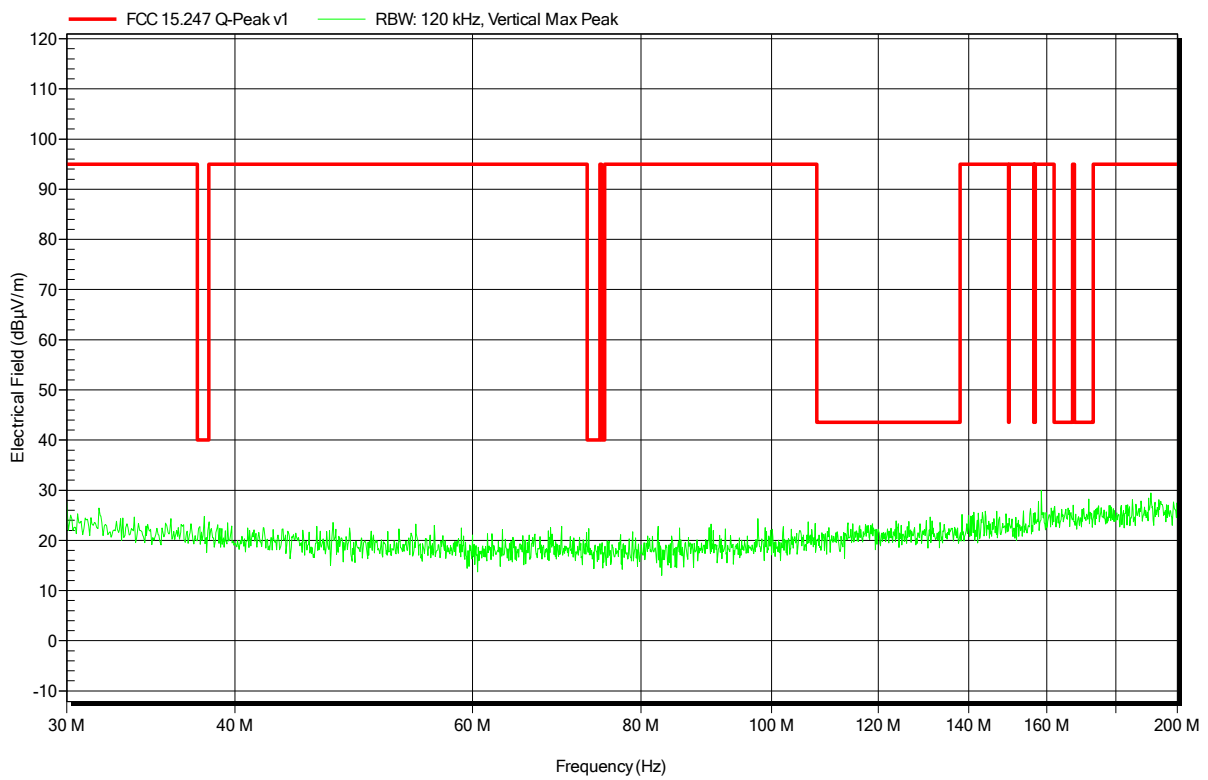


**Spurious emissions according to FCC 15.247**

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Suckow  
 Test Conditions: Tnom: 21°C, Vnom: 4.5 VDC  
 Antenna: Rohde & Schwarz HL 223, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; BT LE 2402 MHz  
 Test Date: 2017-12-13  
 Note:

Index 12

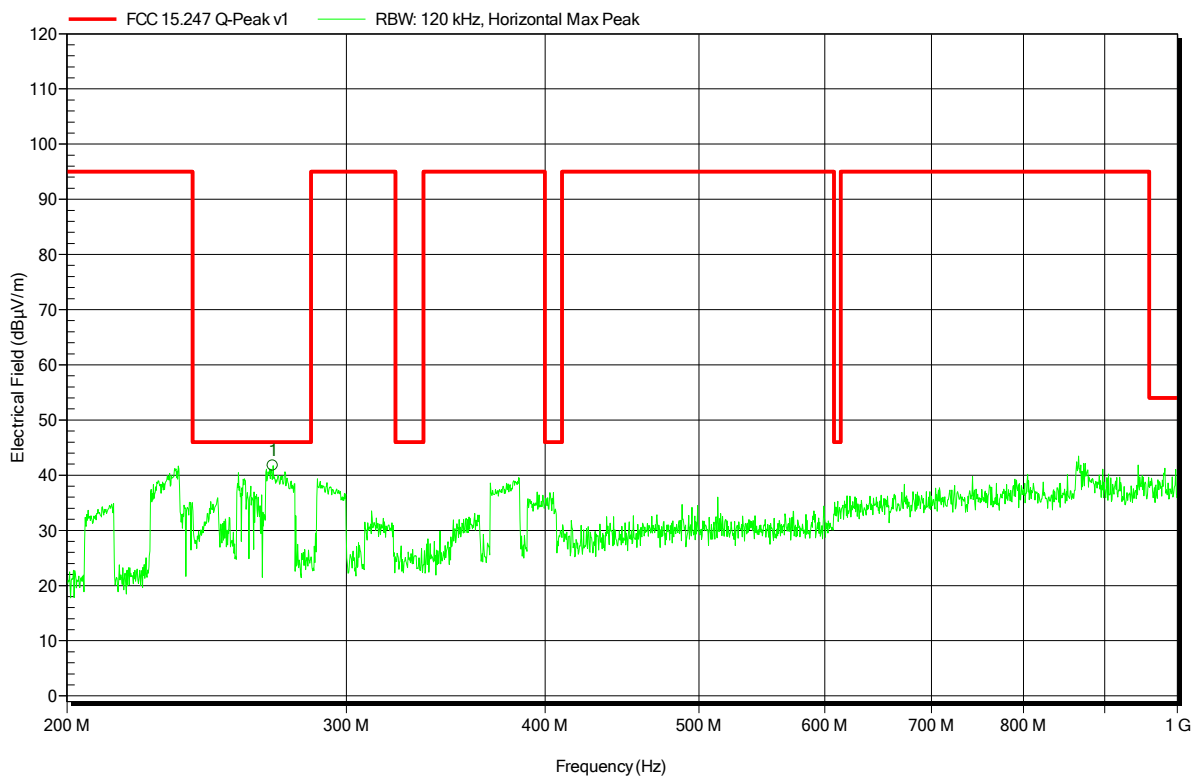


Frequency	Peak	Peak Limit	Peak Difference	Status
269.7 MHz	41.7 dBµV/m	46 dBµV/m	-4.27 dB	Pass

### Spurious emissions according to FCC 15.247

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Suckow  
 Test Conditions: Tnom: 21°C, Vnom: 4.5 VDC  
 Antenna: Rohde & Schwarz HL 223, Vertical  
 Measurement distance: 3 m  
 Mode: TX; BT LE 2402 MHz  
 Test Date: 2017-12-13  
 Note:

Index 11

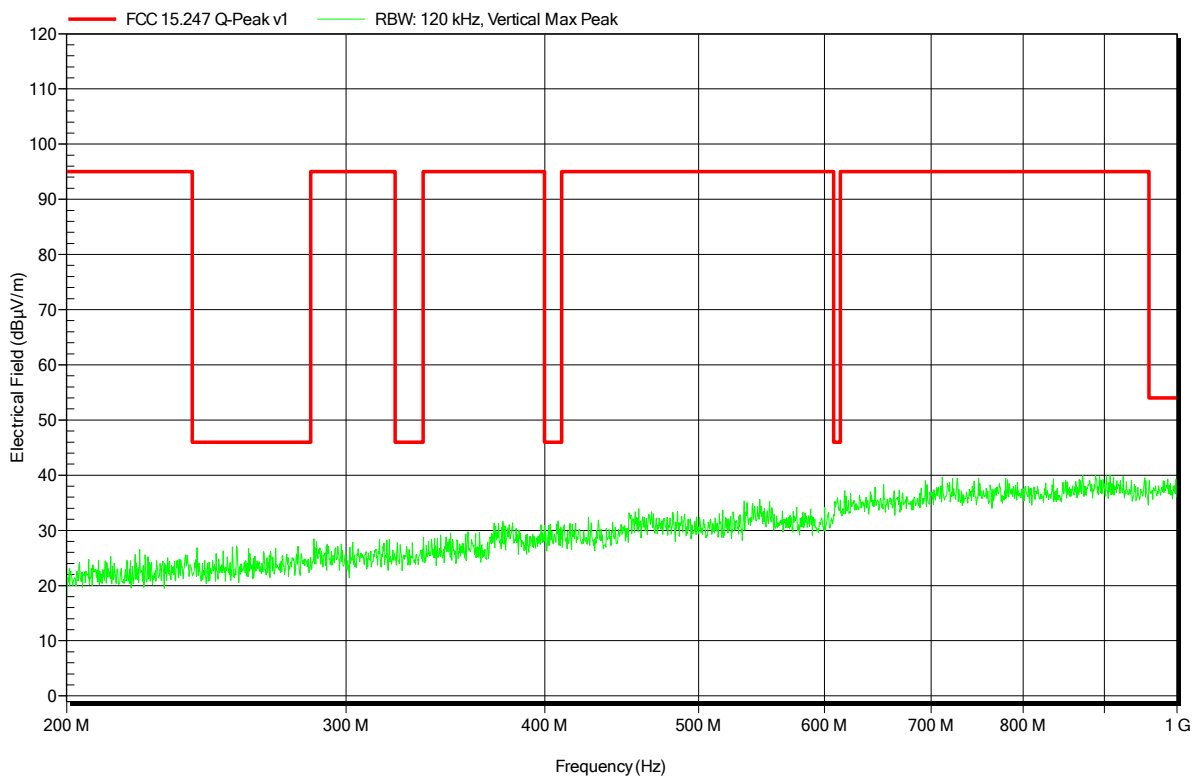


### Spurious emissions according to FCC 15.247

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Sebastian Suckow  
 Test Conditions: Tnom: 22°C, Vnom: 4.5 VDC  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BT LE 2402 MHz  
 Test Date: 2017-11-13  
 Note:

Index 10

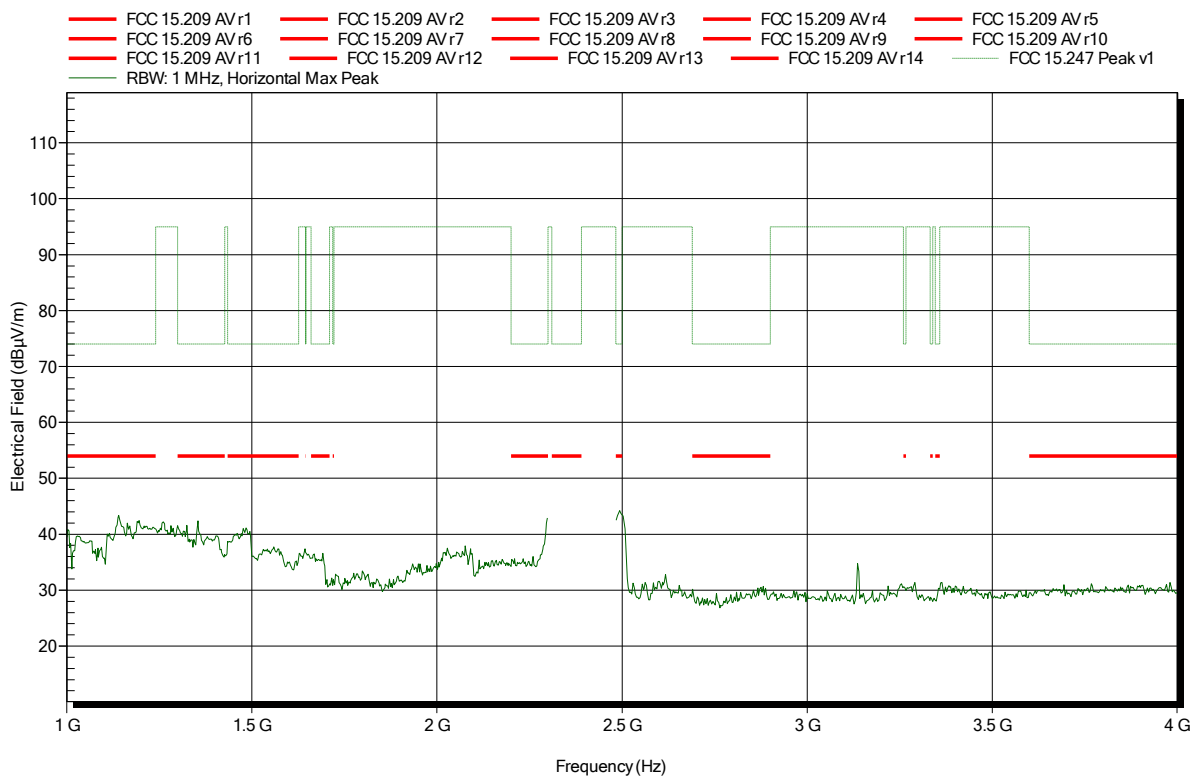




### Spurious emissions according to FCC 15.247

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Sebastian Suckow  
 Test Conditions: Tnom: 22°C, Vnom: 4.5 VDC  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BT LE 2402 MHz  
 Test Date: 2017-11-13  
 Note:

Index 5

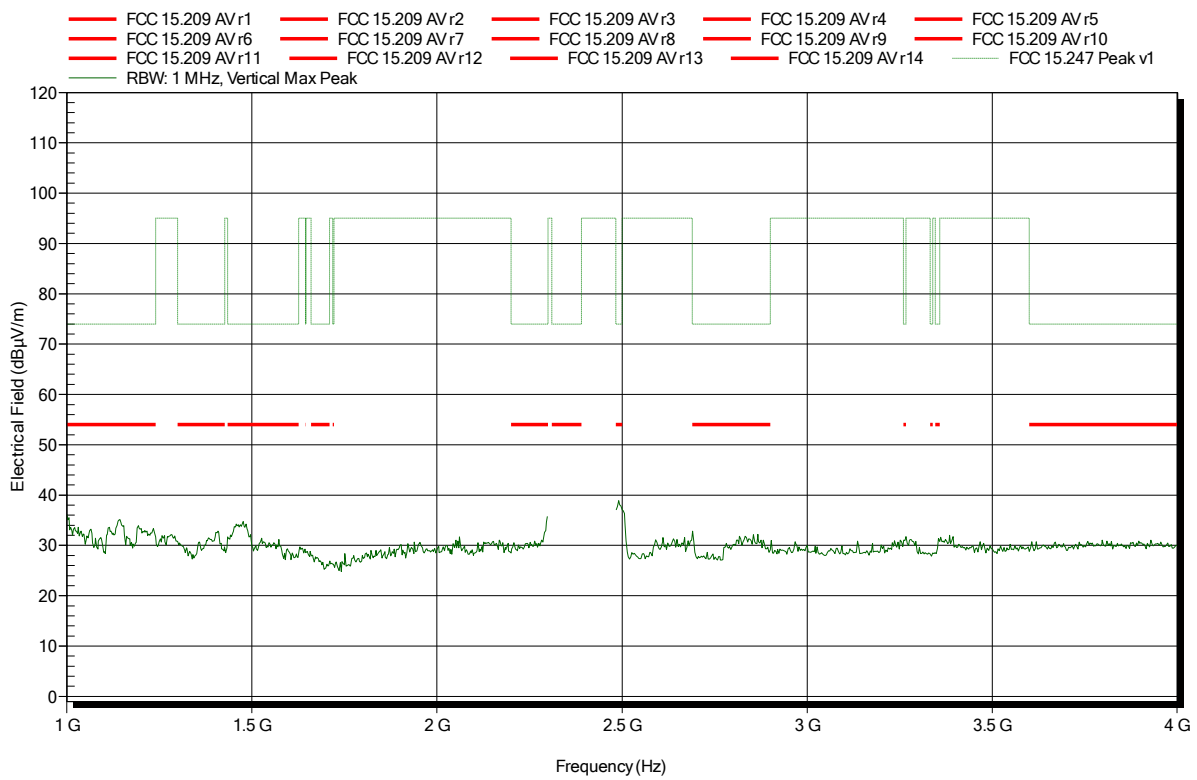


**Spurious emissions according to FCC 15.247**

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Sebastian Suckow  
 Test Conditions: Tnom: 22°C, Vnom: 4.5 VDC  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BT LE 2402 MHz  
 Test Date: 2017-11-13  
 Note: lower bandedge

Index 11

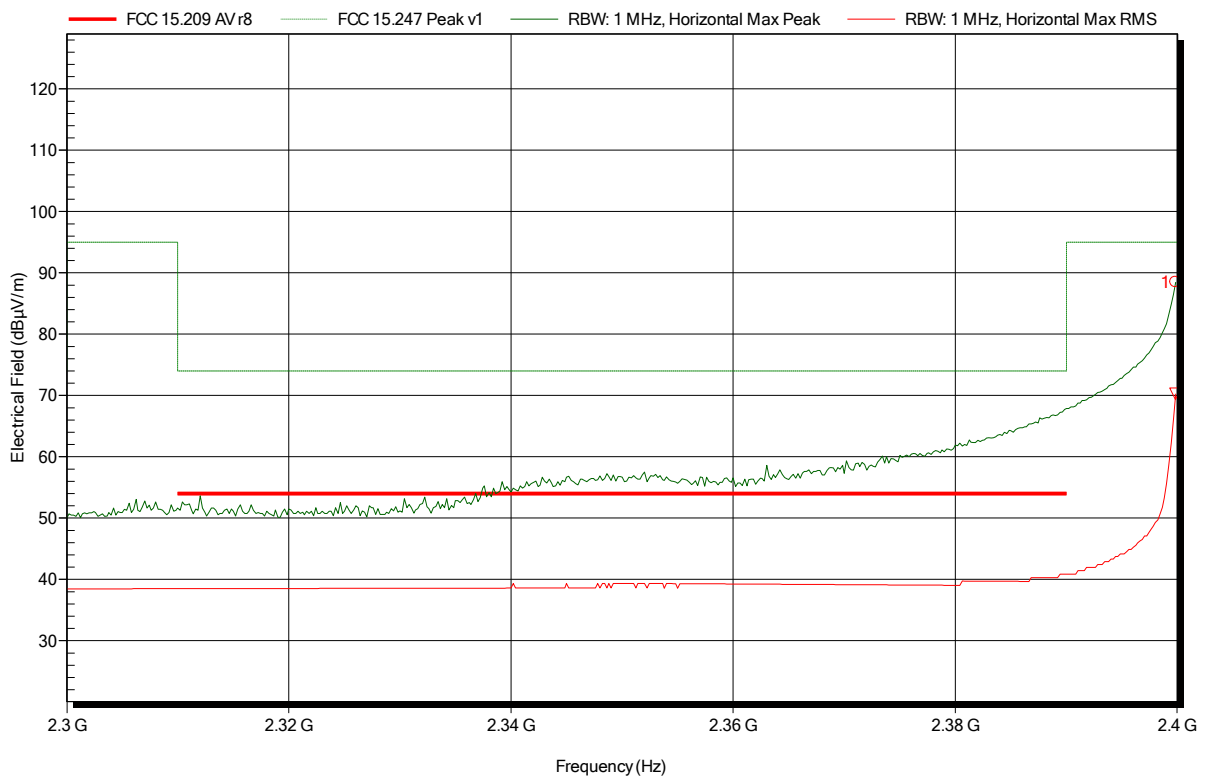

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.3998 GHz	88.49 dBµV/m	95 dBµV/m	-6.51 dB	Pass


Frequency	RMS
2.3998 GHz	70.28 dBµV/m

**Spurious emissions according to FCC 15.247**

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Sebastian Suckow  
 Test Conditions: Tnom: 22°C, Vnom: 4.5 VDC  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BT LE 2402 MHz  
 Test Date: 2017-11-13  
 Note: lower bandedge

Index 12

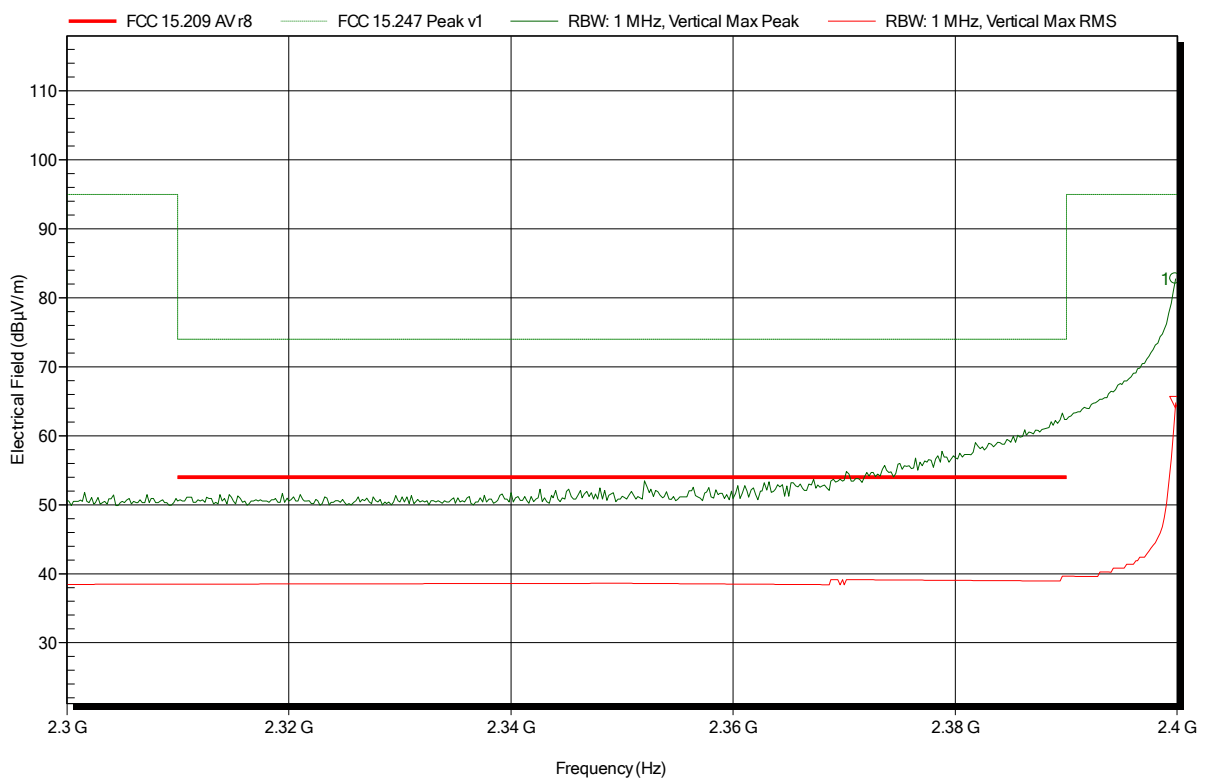


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.3998 GHz	82.79 dBµV/m	95 dBµV/m	-12.21 dB	Pass
Frequency	RMS			
2.3998 GHz	64.85 dBµV/m			

### Spurious emissions according to FCC 15.247

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Sebastian Suckow  
 Test Conditions: Tnom: 22°C, Vnom: 4.5 VDC  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BT LE 2402 MHz  
 Test Date: 2017-11-13  
 Note:

Index 9

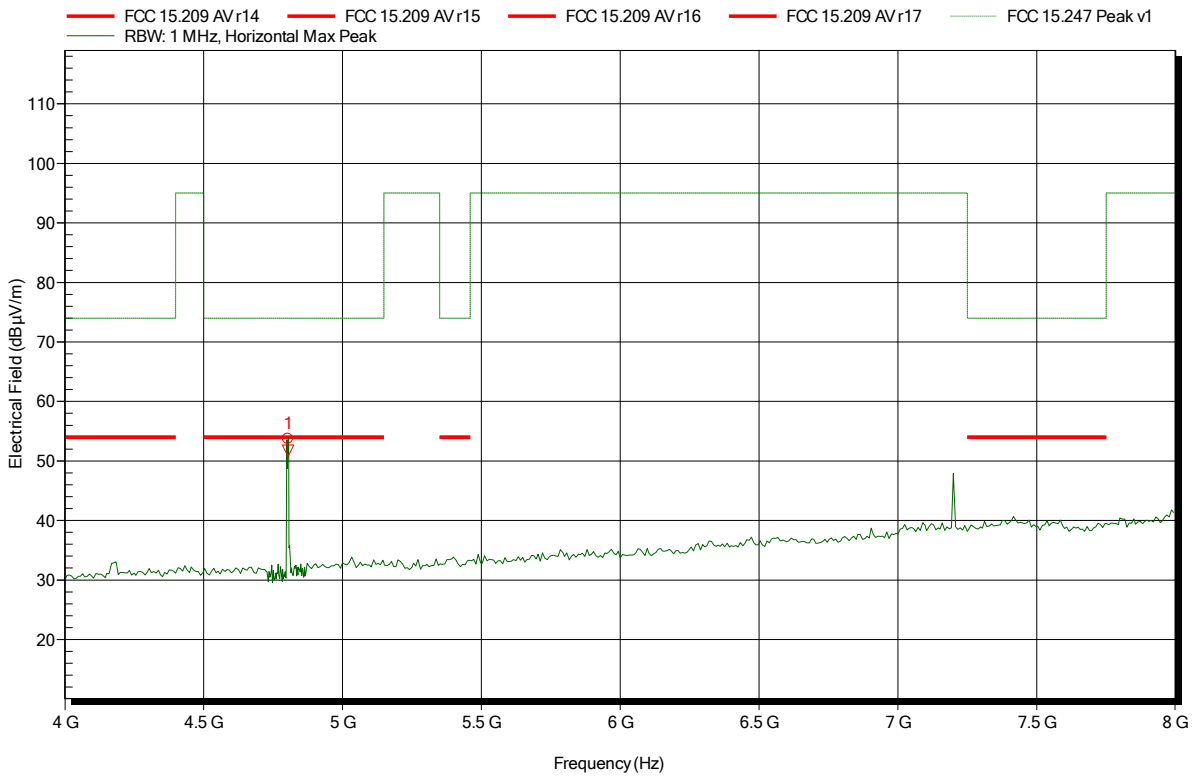


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.804 GHz	53.69 dBµV/m	74 dBµV/m	-20.31 dB	Pass
Frequency	RMS	RMS Limit	RMS Difference	RMS Status
4.804 GHz	51.73 dBµV/m	54 dBµV/m	-2.27 dB	Pass

### Spurious emissions according to FCC 15.247

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Sebastian Suckow  
 Test Conditions: Tnom: 22°C, Vnom: 4.5 VDC  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BT LE 2402 MHz  
 Test Date: 2017-11-13  
 Note:

Index 6

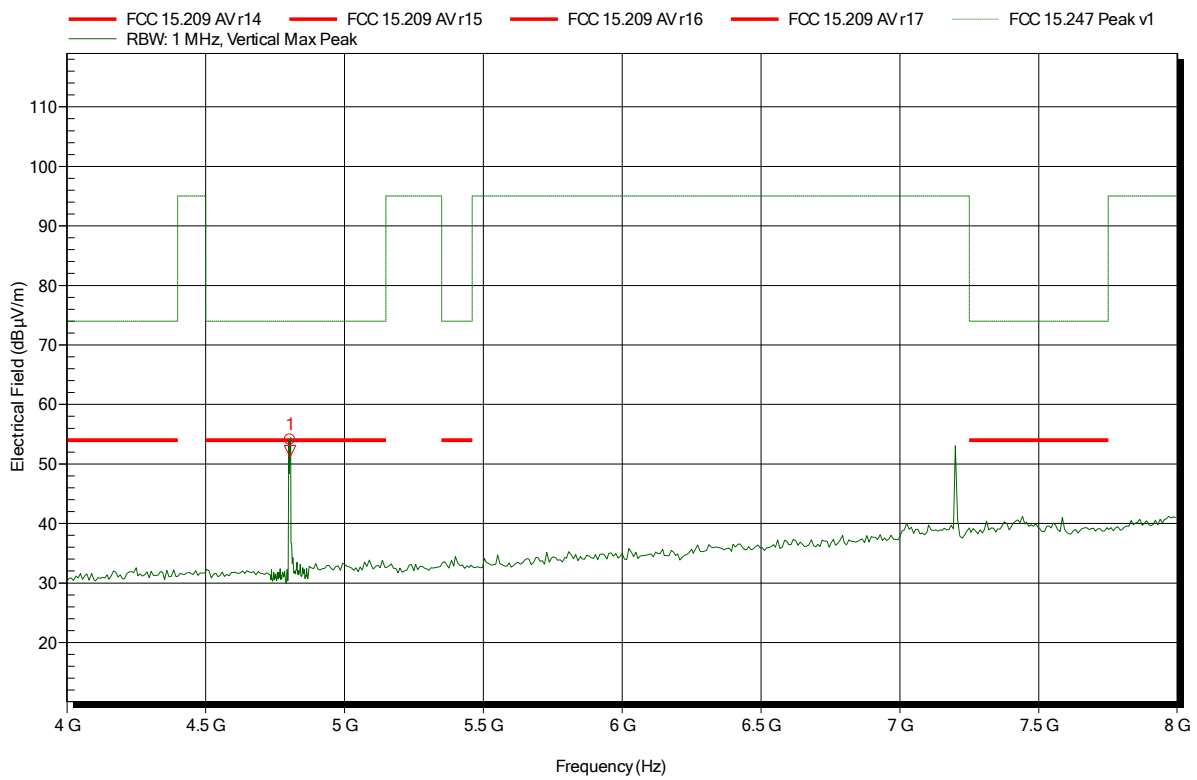


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.805 GHz	54.09 dBµV/m	74 dBµV/m	-19.91 dB	Pass
Frequency	RMS	RMS Limit	RMS Difference	RMS Status
4.805 GHz	52.16 dBµV/m	54 dBµV/m	-1.84 dB	Pass

### Spurious emissions according to FCC 15.247

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Sebastian Suckow  
 Test Conditions: Tnom: 22°C, Vnom: 4.5 VDC  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BT LE 2402 MHz  
 Test Date: 2017-11-13  
 Note:

Index 8

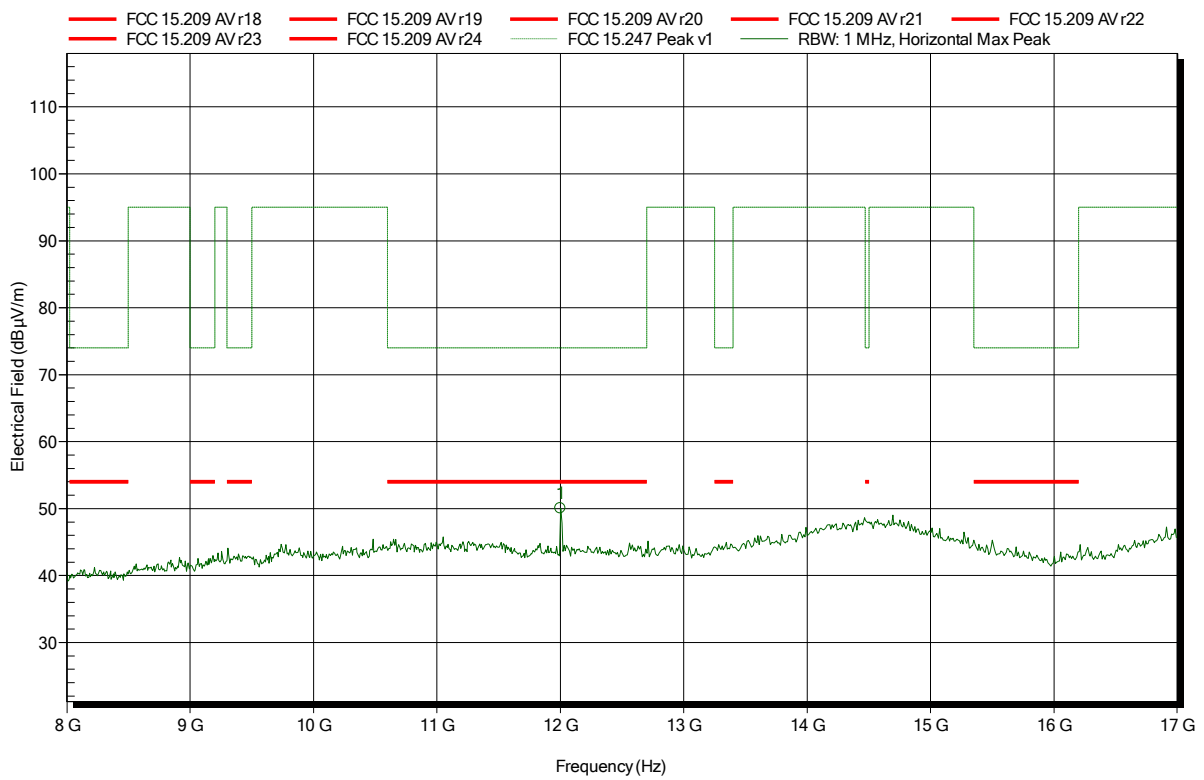


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
12 GHz	50.05 dBµV/m	74 dBµV/m	-23.95 dB	Pass

**Spurious emissions according to FCC 15.247**

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Sebastian Suckow  
 Test Conditions: Tnom: 22°C, Vnom: 4.5 VDC  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BT LE 2402 MHz  
 Test Date: 2017-11-13  
 Note:

Index 7

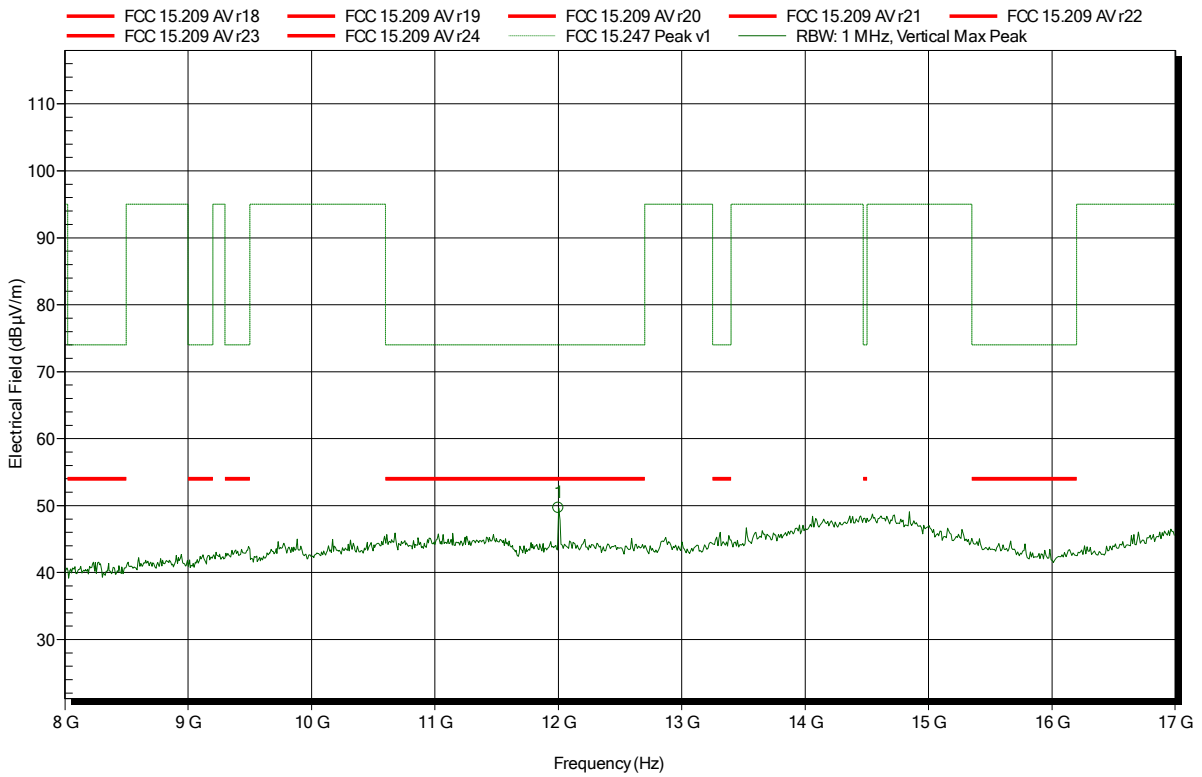


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
12 GHz	49.65 dBµV/m	74 dBµV/m	-24.35 dB	Pass

### Spurious emissions according to FCC 15.247

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Sebastian Suckow  
 Test Conditions: Tnom: 22°C, Vnom: 4.5 VDC  
 Antenna: Amplifier Research AT 4560, Horizontal  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BT LE 2402 MHz  
 Test Date: 2017-11-23  
 Note:

Index 35

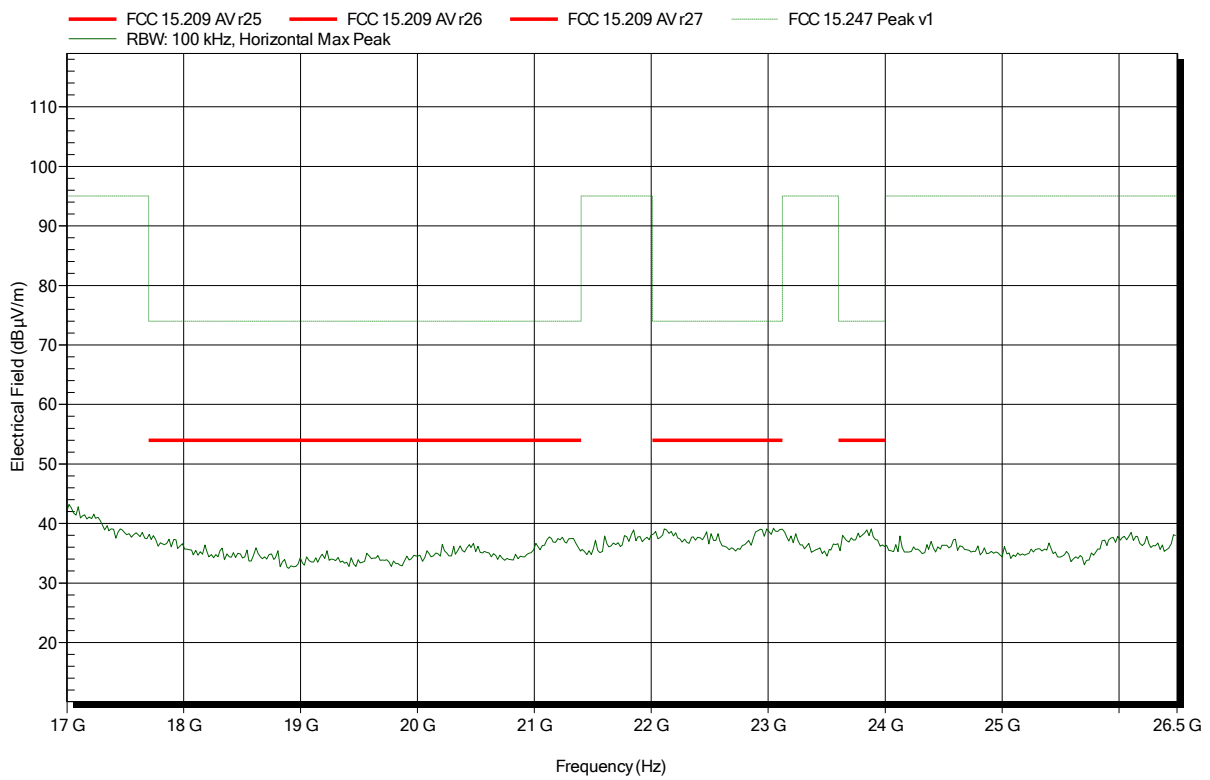




### Spurious emissions according to FCC 15.247

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Sebastian Suckow  
 Test Conditions: Tnom: 22°C, Vnom: 4.5 VDC  
 Antenna: Amplifier Research AT 4560, Vertical  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BT LE 2402 MHz  
 Test Date: 2017-11-23  
 Note:

Index 36

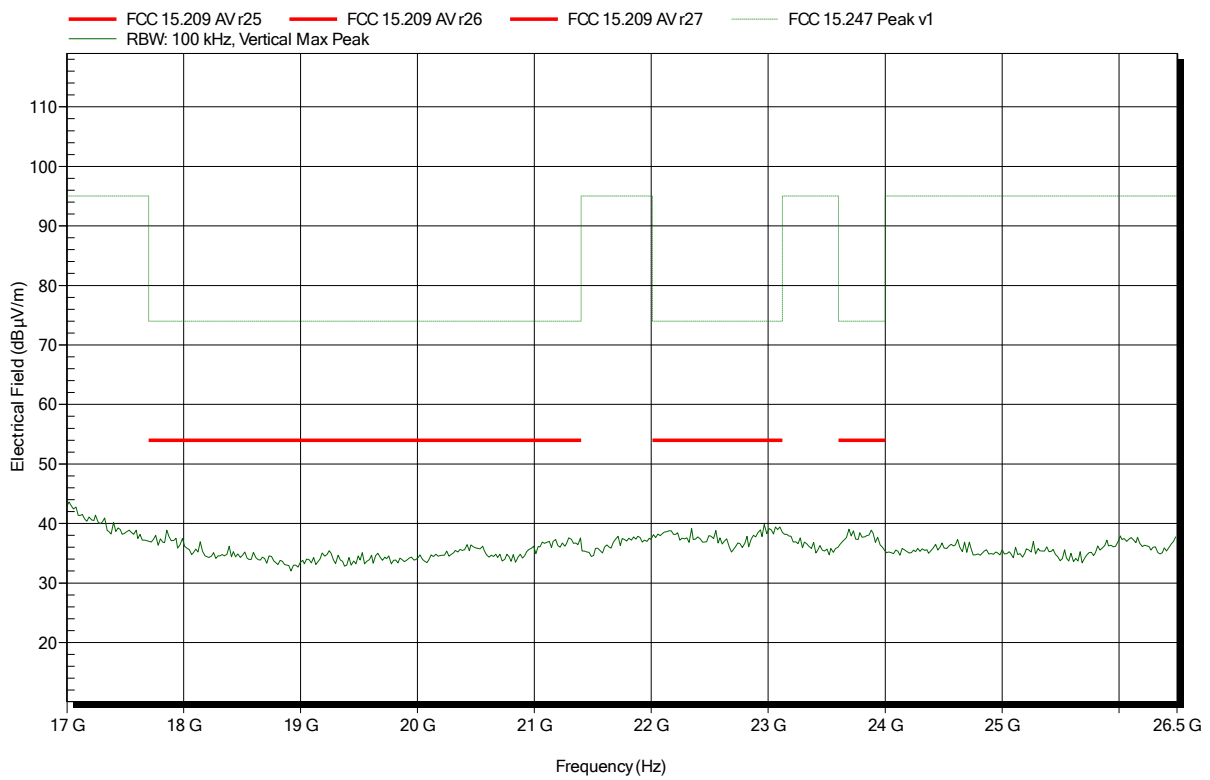


### Spurious emissions according to FCC 15.247

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Suckow  
 Test Conditions: Tnom: 21°C, Vnom: 4.5 VDC  
 Antenna: Rohde & Schwarz HK 116, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; BT LE 2440 MHz  
 Test Date: 2017-12-13  
 Note:

Index 4

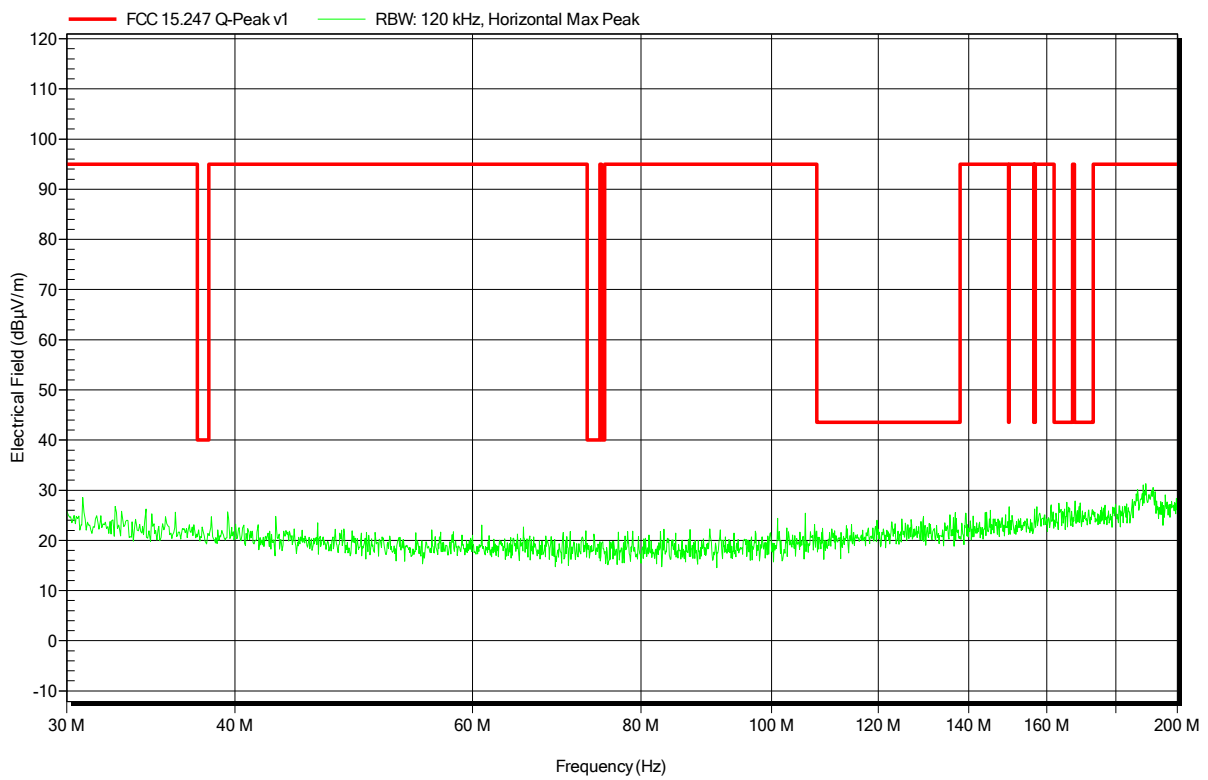


### Spurious emissions according to FCC 15.247

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Suckow  
 Test Conditions: Tnom: 21°C, Vnom: 4.5 VDC  
 Antenna: Rohde & Schwarz HK 116, Vertical  
 Measurement distance: 3 m  
 Mode: TX; BT LE 2440 MHz  
 Test Date: 2017-12-13  
 Note:

Index 3

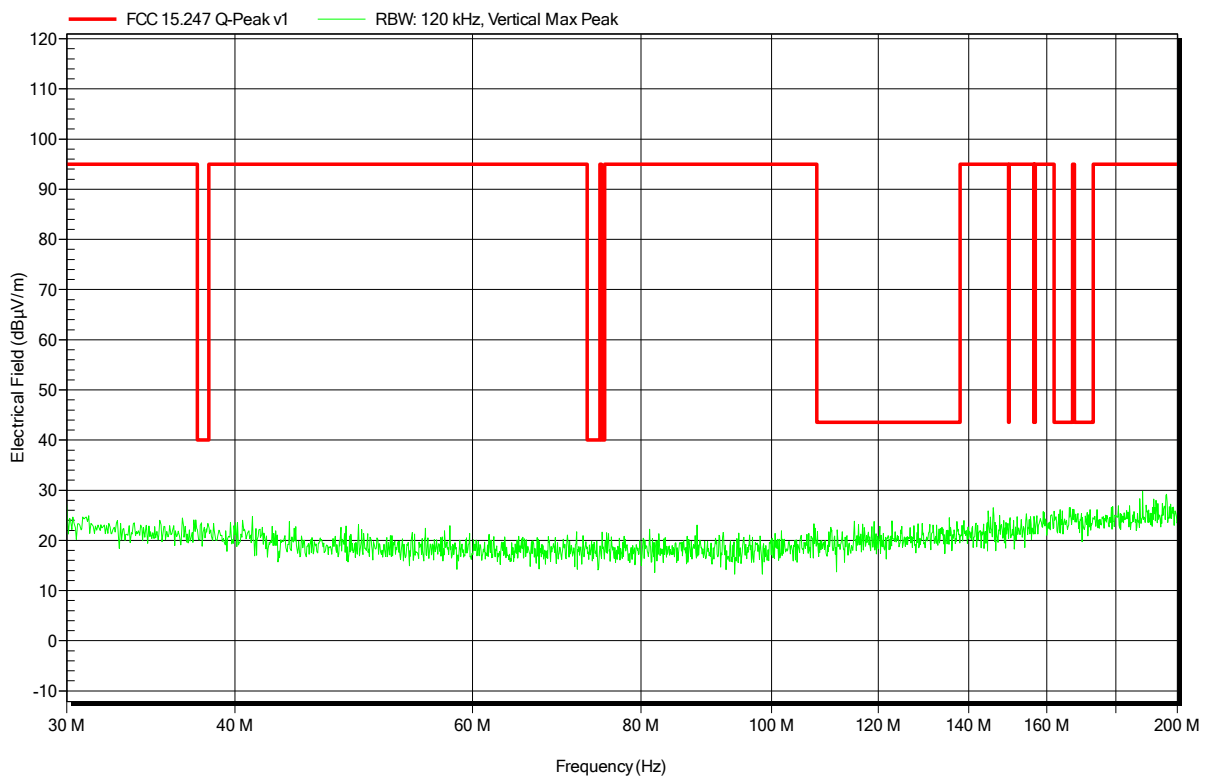


### Spurious emissions according to FCC 15.247

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Suckow  
 Test Conditions: Tnom: 21°C, Vnom: 4.5 VDC  
 Antenna: Rohde & Schwarz HL 223, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; BT LE 2440 MHz  
 Test Date: 2017-12-13  
 Note:

Index 13

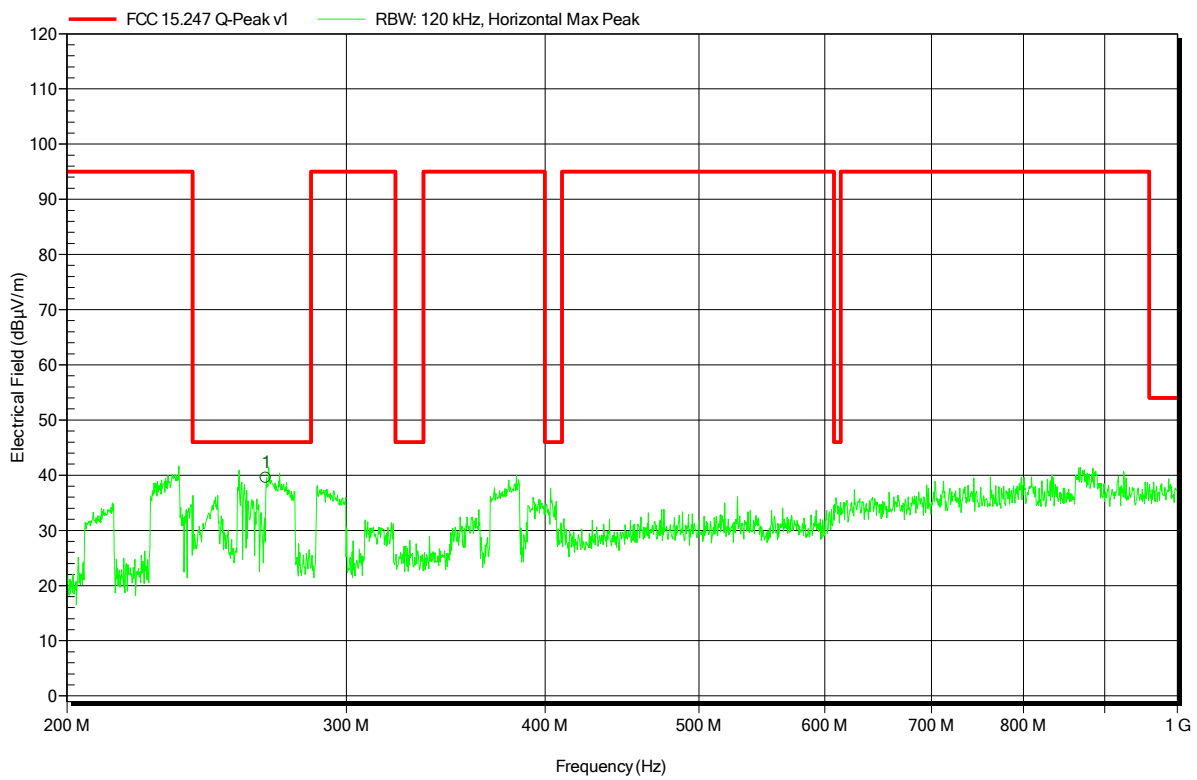


Frequency	Peak	Peak Limit	Peak Difference	Status
266.9 MHz	39.5 dBµV/m	46 dBµV/m	-6.49 dB	Pass

### Spurious emissions according to FCC 15.247

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Suckow  
 Test Conditions: Tnom: 21°C, Vnom: 4.5 VDC  
 Antenna: Rohde & Schwarz HL 223, Vertical  
 Measurement distance: 3 m  
 Mode: TX; BT LE 2440 MHz  
 Test Date: 2017-12-13  
 Note:

Index 14

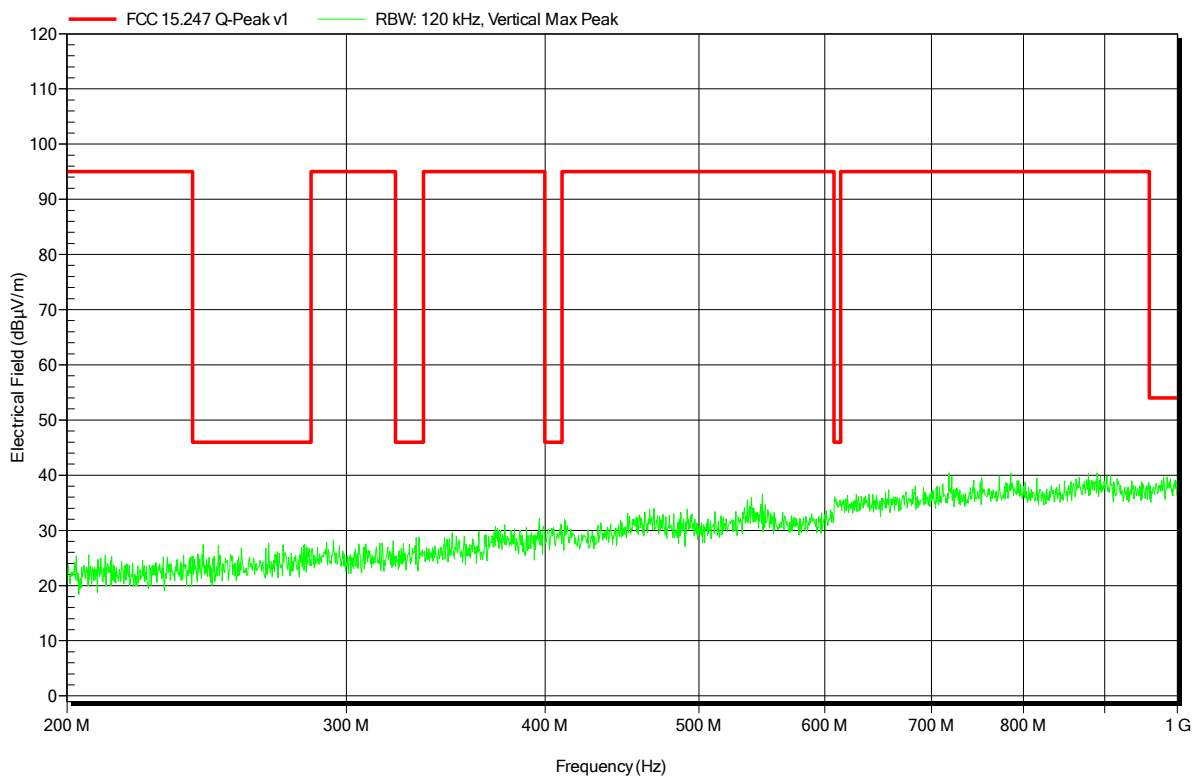


### Spurious emissions according to FCC 15.247

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Sebastian Suckow  
 Test Conditions: Tnom: 22°C, Vnom: 4.5 VDC  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BT LE 2440 MHz  
 Test Date: 2017-11-13  
 Note:

Index 18

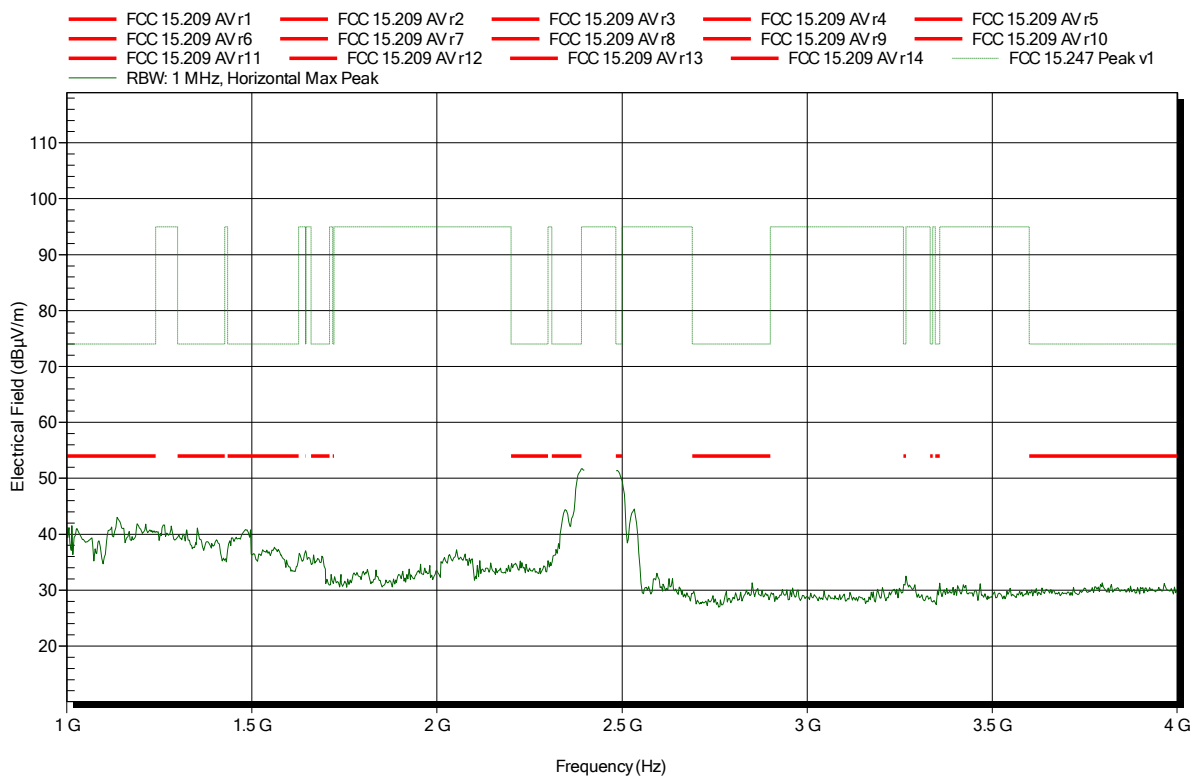


### Spurious emissions according to FCC 15.247

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Sebastian Suckow  
 Test Conditions: Tnom: 22°C, Vnom: 4.5 VDC  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BT LE 2440 MHz  
 Test Date: 2017-11-13  
 Note:

Index 13

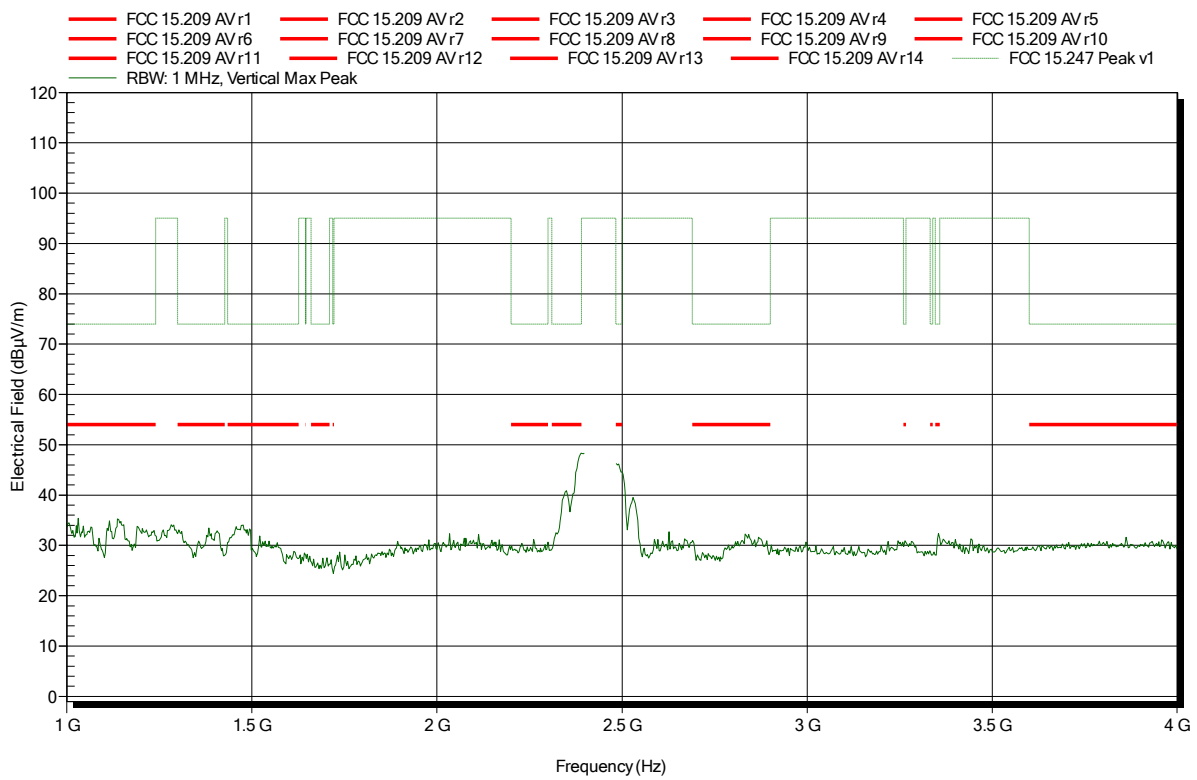


### Spurious emissions according to FCC 15.247

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Sebastian Suckow  
 Test Conditions: Tnom: 22°C, Vnom: 4.5 VDC  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BT LE 2440 MHz  
 Test Date: 2017-11-13  
 Note:

Index 17

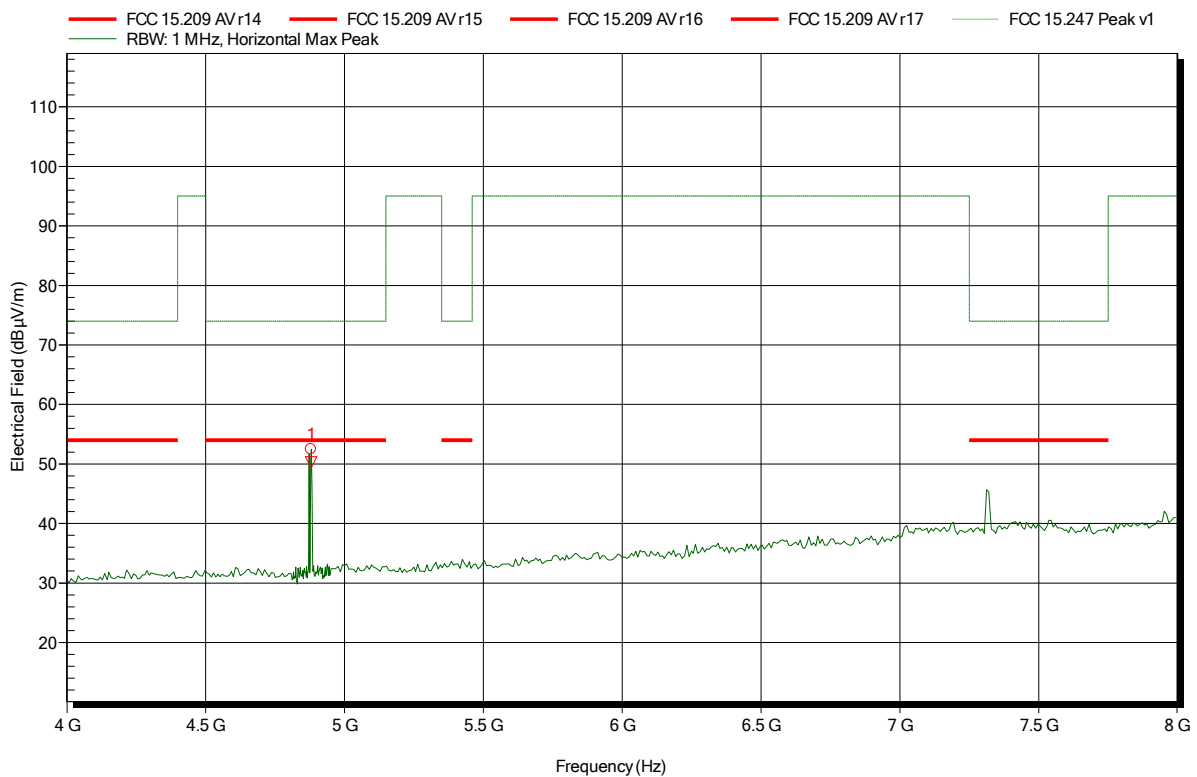

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.88 GHz	52.44 dBµV/m	74 dBµV/m	-21.56 dB	Pass
Frequency	RMS	RMS Limit	RMS Difference	RMS Status
4.88 GHz	50.24 dBµV/m	54 dBµV/m	-3.76 dB	Pass




### Spurious emissions according to FCC 15.247

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Sebastian Suckow  
 Test Conditions: Tnom: 22°C, Vnom: 4.5 VDC  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BT LE 2440 MHz  
 Test Date: 2017-11-13  
 Note:

Index 14

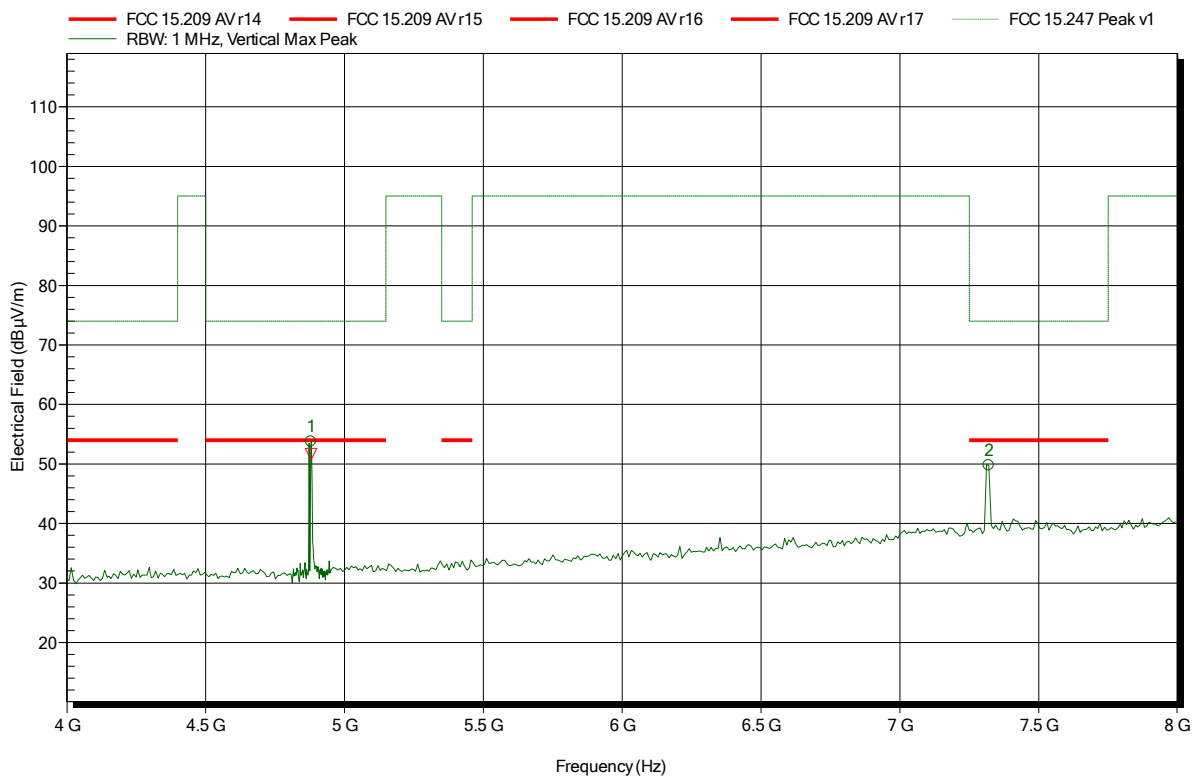

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.88 GHz	53.76 dBµV/m	74 dBµV/m	-20.24 dB	Pass
7.32 GHz	49.77 dBµV/m	74 dBµV/m	-24.23 dB	Pass


Frequency	RMS	RMS Limit	RMS Difference	RMS Status
4.88 GHz	51.68 dBµV/m	54 dBµV/m	-2.32 dB	Pass
7.32 GHz				

### Spurious emissions according to FCC 15.247

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Sebastian Suckow  
 Test Conditions: Tnom: 22°C, Vnom: 4.5 VDC  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BT LE 2440 MHz  
 Test Date: 2017-11-13  
 Note:

Index 16

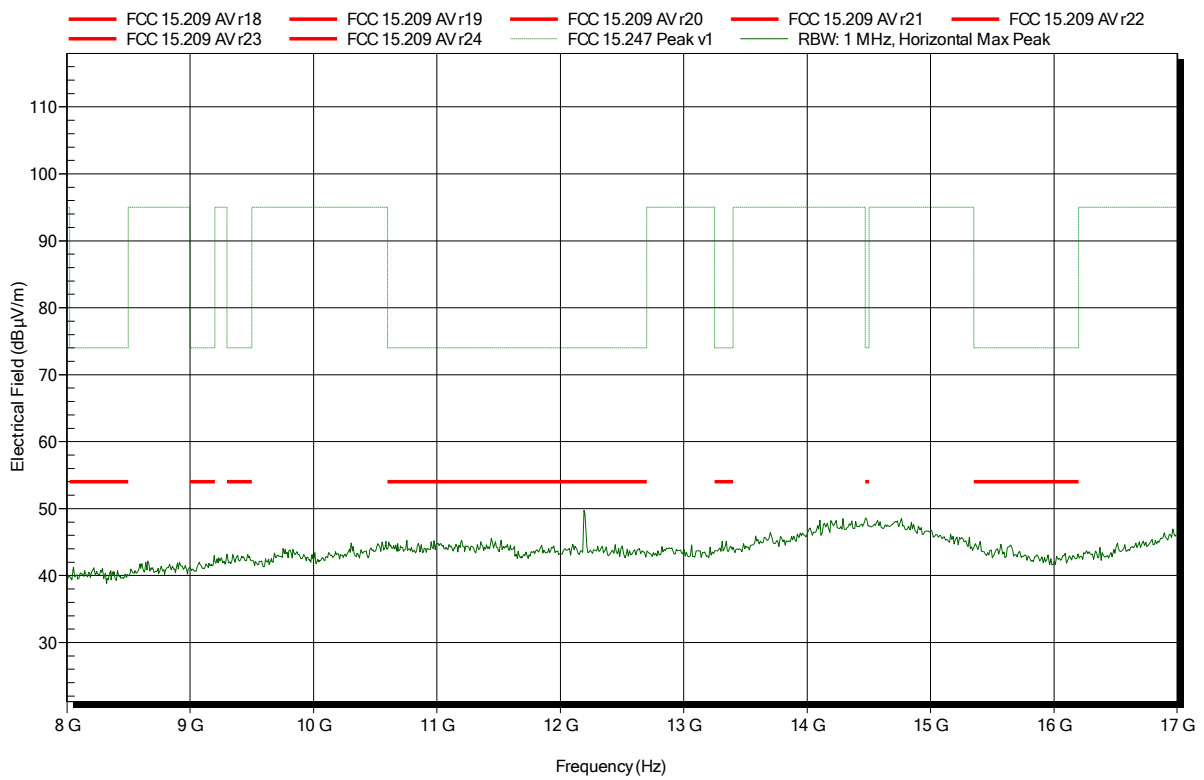


**Spurious emissions according to FCC 15.247**

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Sebastian Suckow  
 Test Conditions: Tnom: 22°C, Vnom: 4.5 VDC  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BT LE 2440 MHz  
 Test Date: 2017-11-13  
 Note:

Index 15

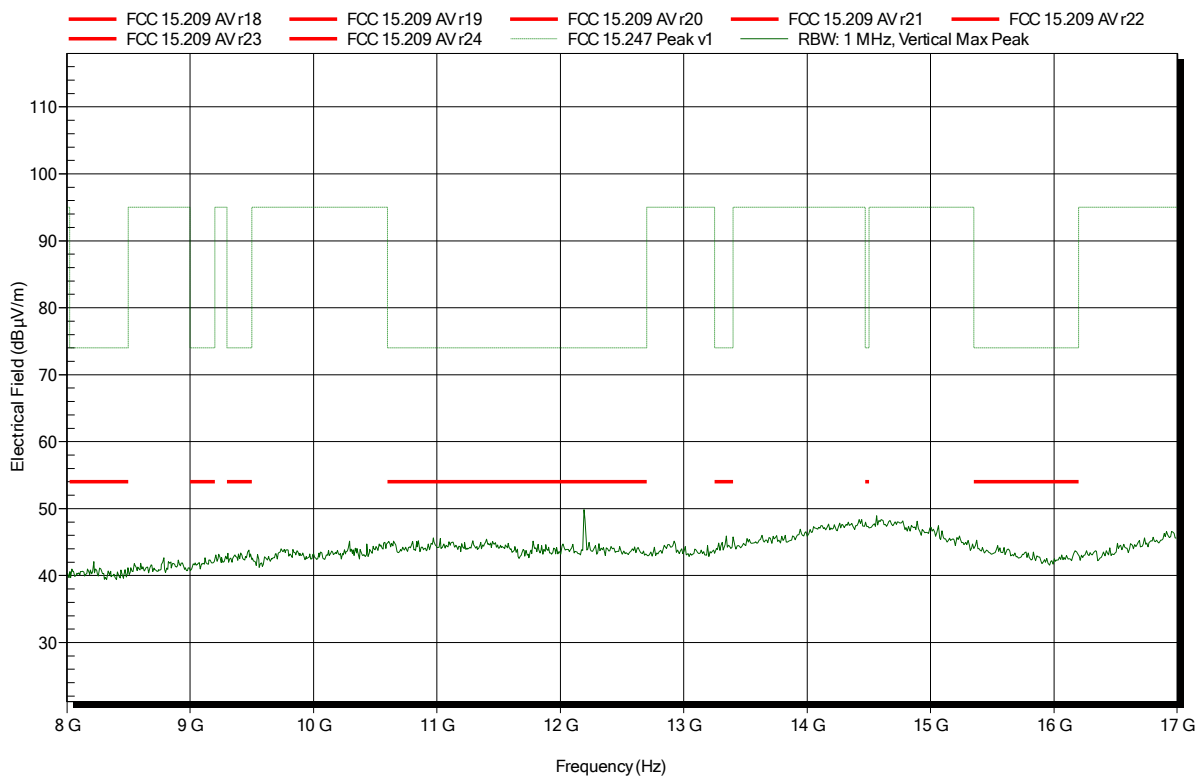


**Spurious emissions according to FCC 15.247**

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Sebastian Suckow  
 Test Conditions: Tnom: 22°C, Vnom: 4.5 VDC  
 Antenna: Amplifier Research AT 4560, Horizontal  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BT LE 2440 MHz  
 Test Date: 2017-11-23  
 Note:

Index 34

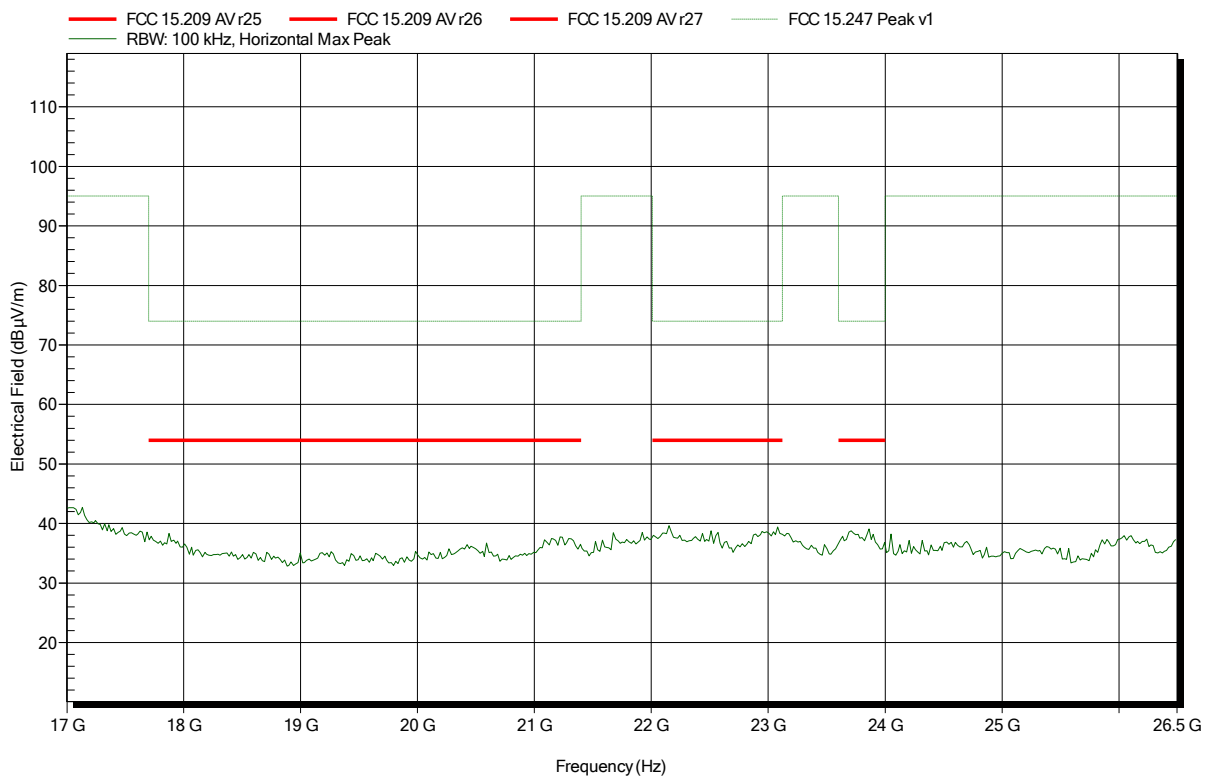


**Spurious emissions according to FCC 15.247**

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Sebastian Suckow  
 Test Conditions: Tnom: 22°C, Vnom: 4.5 VDC  
 Antenna: Amplifier Research AT 4560, Vertical  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BT LE 2440 MHz  
 Test Date: 2017-11-23  
 Note:

Index 33

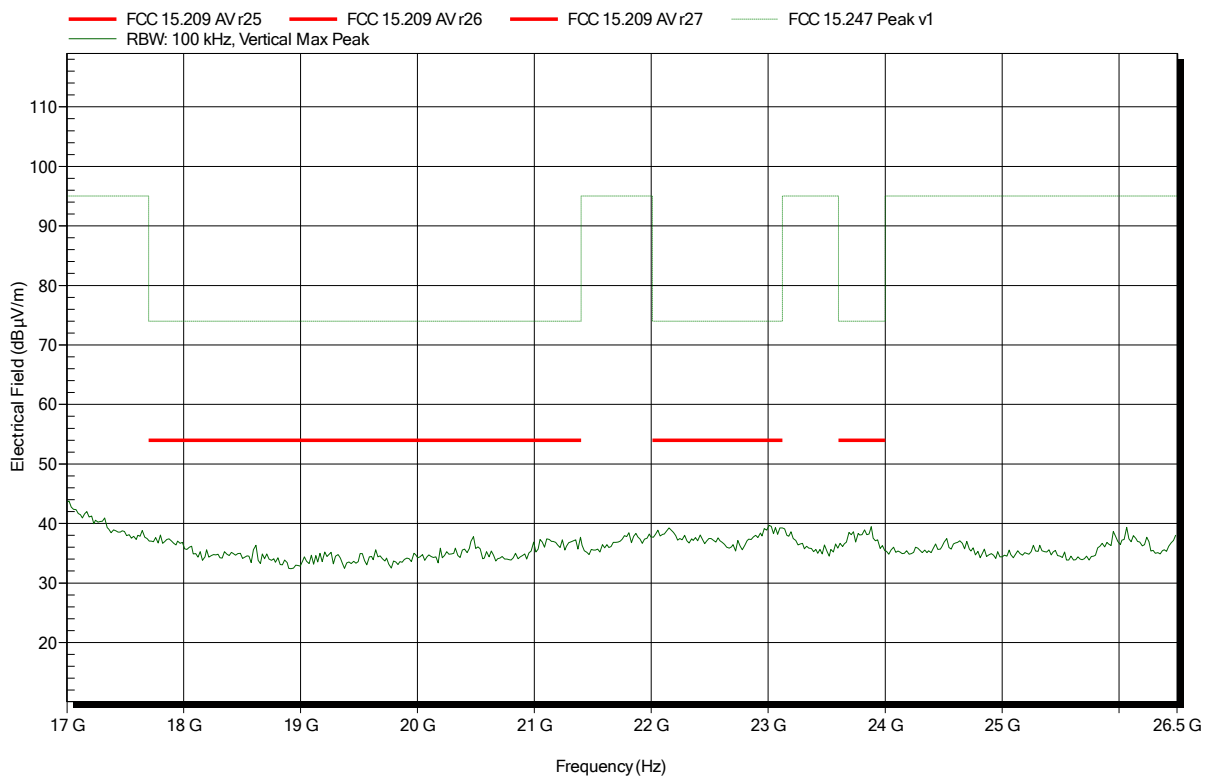


### Spurious emissions according to FCC 15.247

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Suckow  
 Test Conditions: Tnom: 21°C, Vnom: 4.5 VDC  
 Antenna: Rohde & Schwarz HK 116, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; BT LE 2480 MHz  
 Test Date: 2017-12-13  
 Note:

Index 5

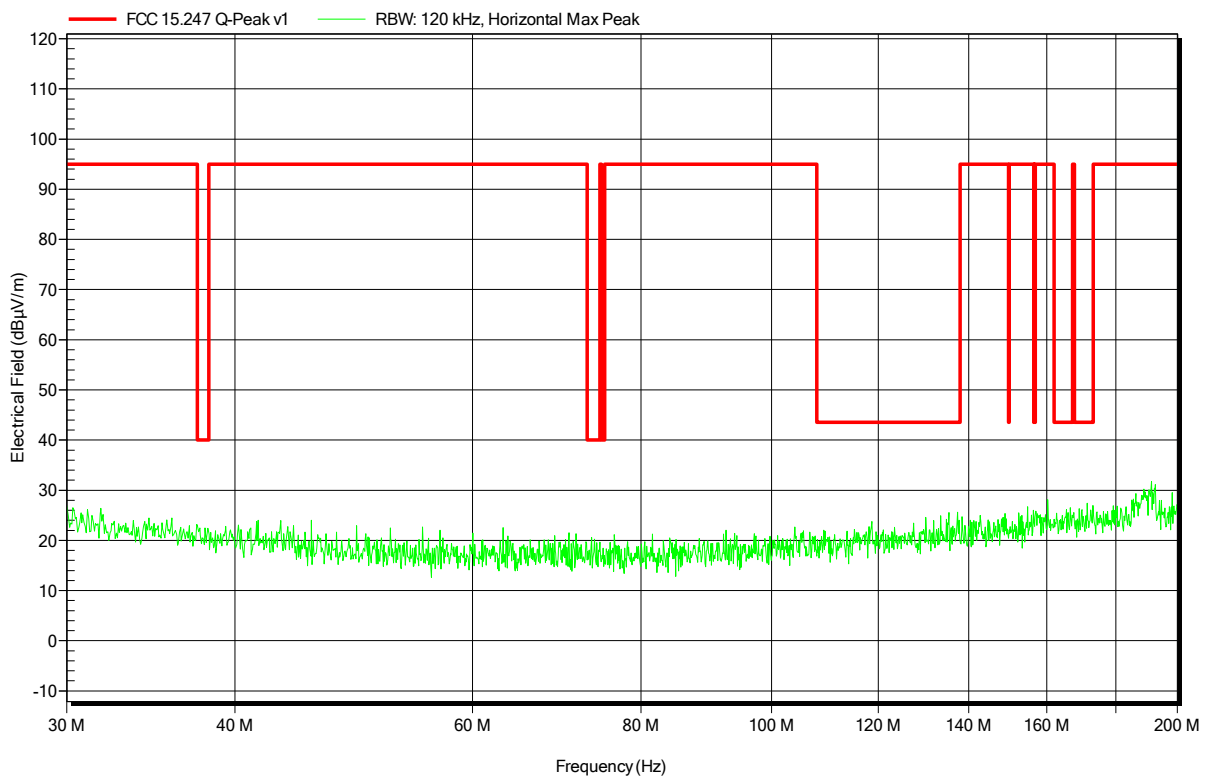


**Spurious emissions according to FCC 15.247**

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Suckow  
 Test Conditions: Tnom: 21°C, Vnom: 4.5 VDC  
 Antenna: Rohde & Schwarz HK 116, Vertical  
 Measurement distance: 3 m  
 Mode: TX; BT LE 2480 MHz  
 Test Date: 2017-12-13  
 Note:

Index 6

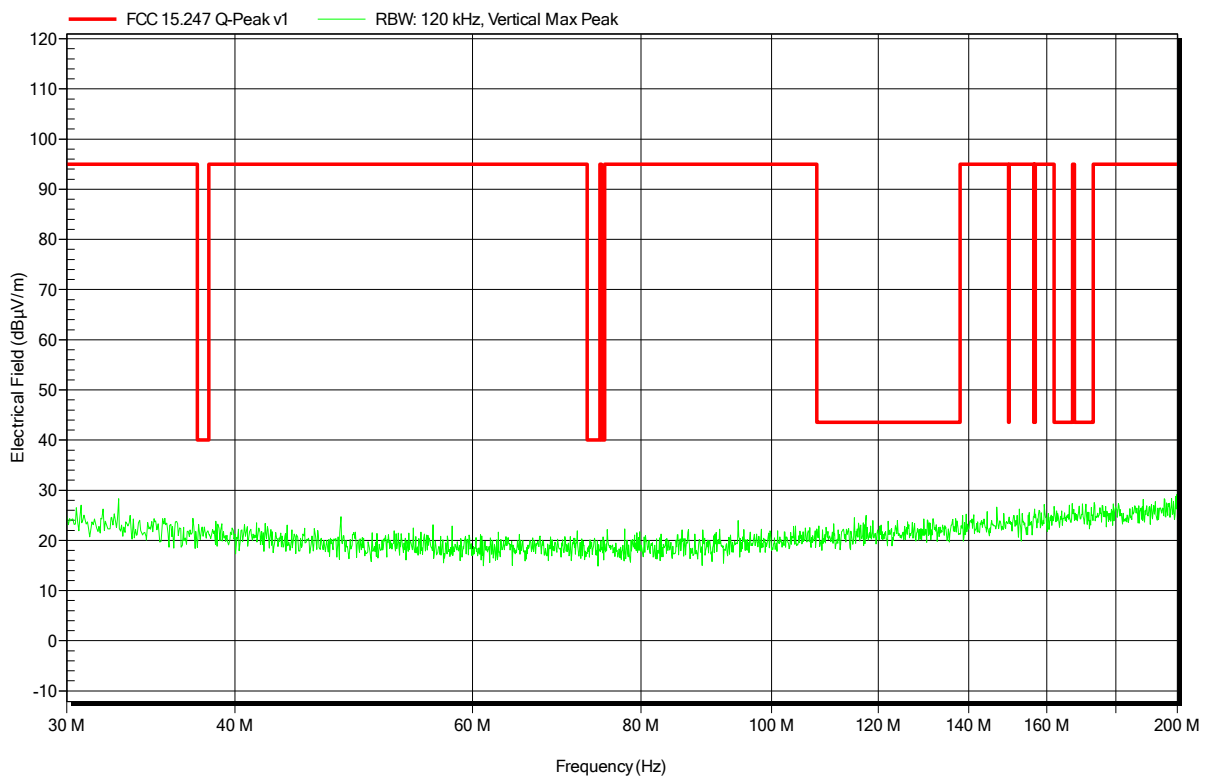


**Spurious emissions according to FCC 15.247**

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Suckow  
 Test Conditions: Tnom: 21°C, Vnom: 4.5 VDC  
 Antenna: Rohde & Schwarz HL 223, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; BT LE 2480 MHz  
 Test Date: 2017-12-13  
 Note:

Index 17

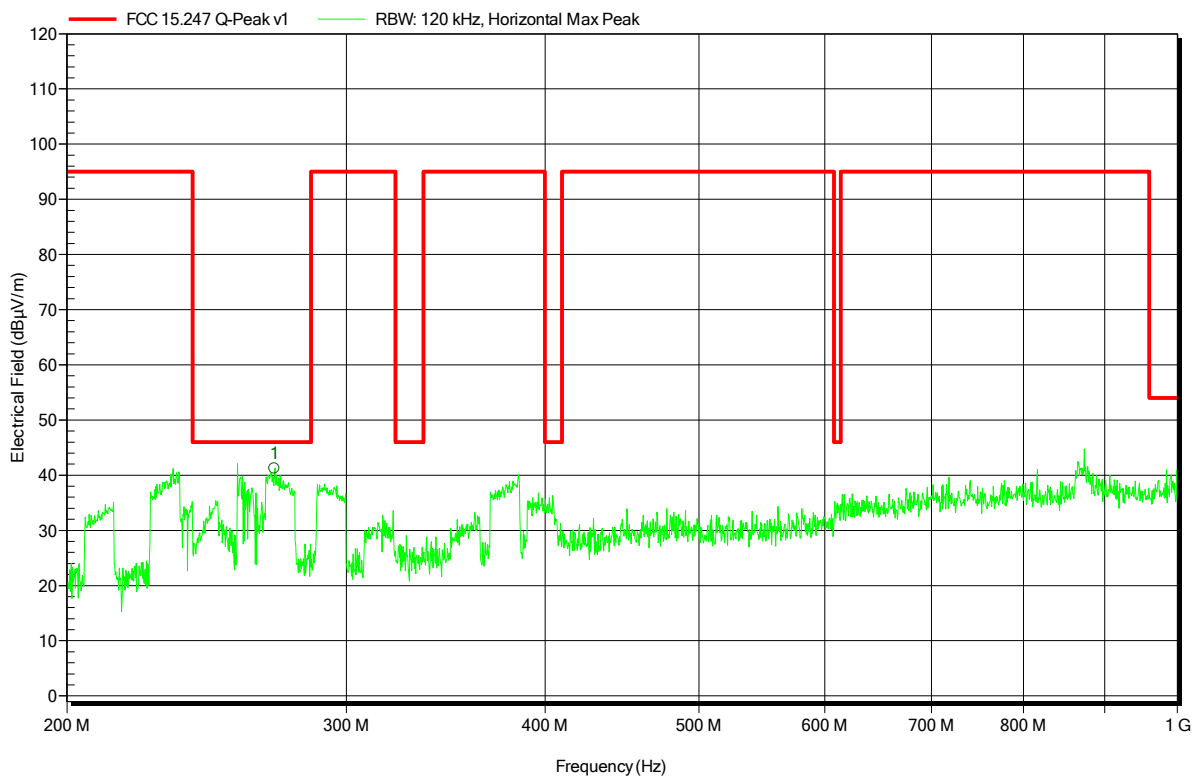

Frequency	Peak	Peak Limit	Peak Difference	Status
270.3 MHz	41.2 dBµV/m	46 dBµV/m	-4.77 dB	Pass




### Spurious emissions according to FCC 15.247

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Suckow  
 Test Conditions: Tnom: 21°C, Vnom: 4.5 VDC  
 Antenna: Rohde & Schwarz HL 223, Vertical  
 Measurement distance: 3 m  
 Mode: TX; BT LE 2480 MHz  
 Test Date: 2017-12-13  
 Note:

Index 16

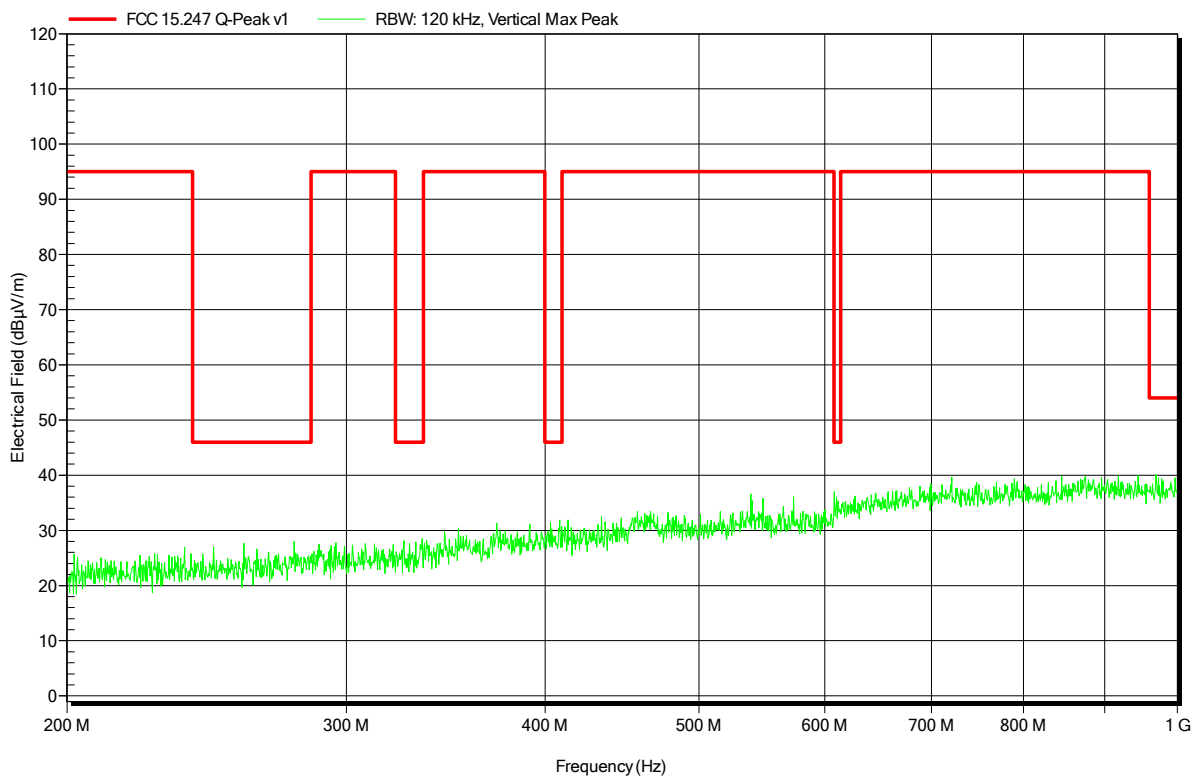


### Spurious emissions according to FCC 15.247

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Sebastian Suckow  
 Test Conditions: Tnom: 22°C, Vnom: 4.5 VDC  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BT LE 2480 MHz  
 Test Date: 2017-11-13  
 Note:

Index 19

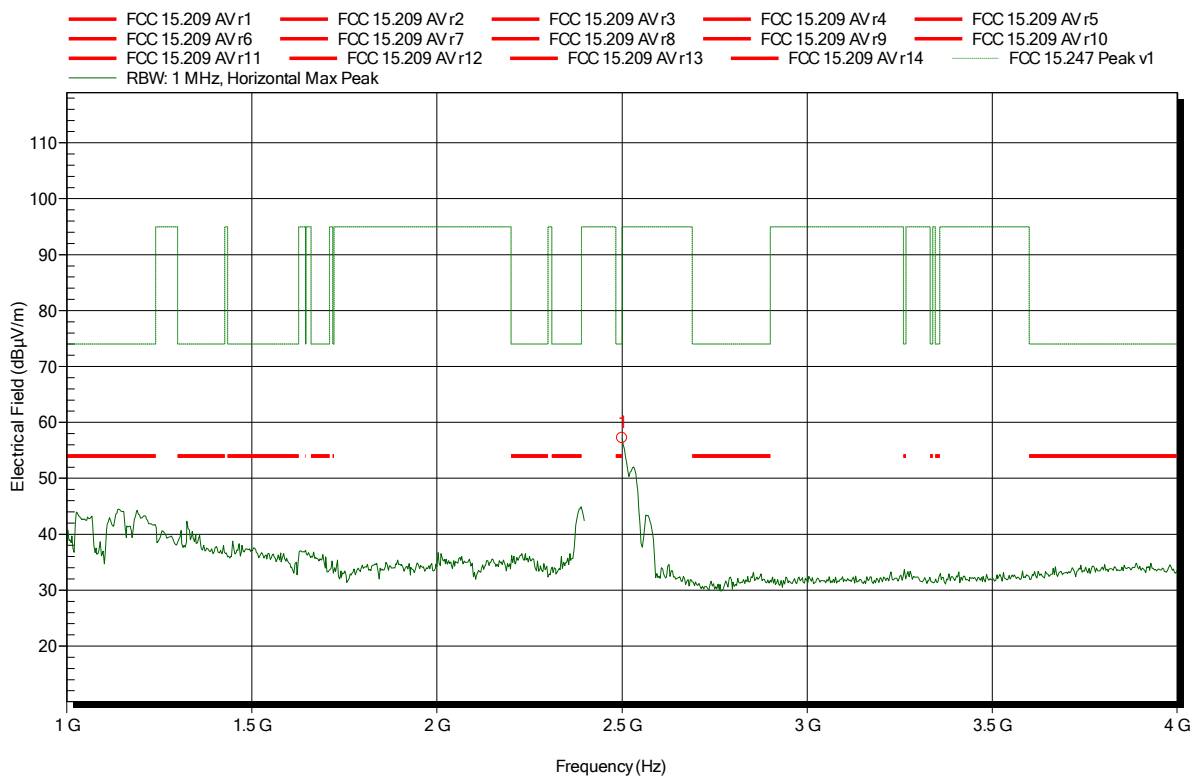


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.5 GHz	57.18 dBµV/m	74 dBµV/m	-16.82 dB	Pass

### Spurious emissions according to FCC 15.247

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Sebastian Suckow  
 Test Conditions: Tnom: 22°C, Vnom: 4.5 VDC  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BT LE 2480 MHz  
 Test Date: 2017-11-13  
 Note:

Index 24

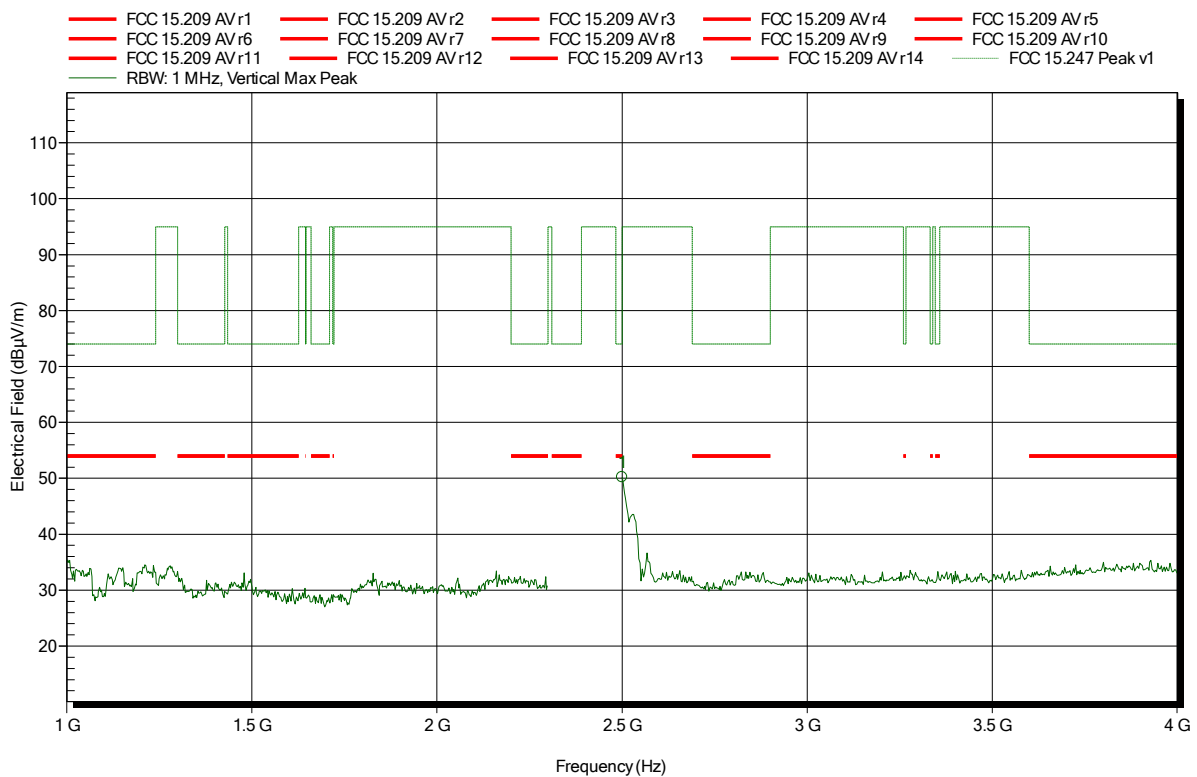


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.5 GHz	50.19 dBµV/m	74 dBµV/m	-23.81 dB	Pass

### Spurious emissions according to FCC 15.247

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Sebastian Suckow  
 Test Conditions: Tnom: 22°C, Vnom: 4.5 VDC  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BT LE 2480 MHz  
 Test Date: 2017-11-23  
 Note: upper bandedge

Index 30

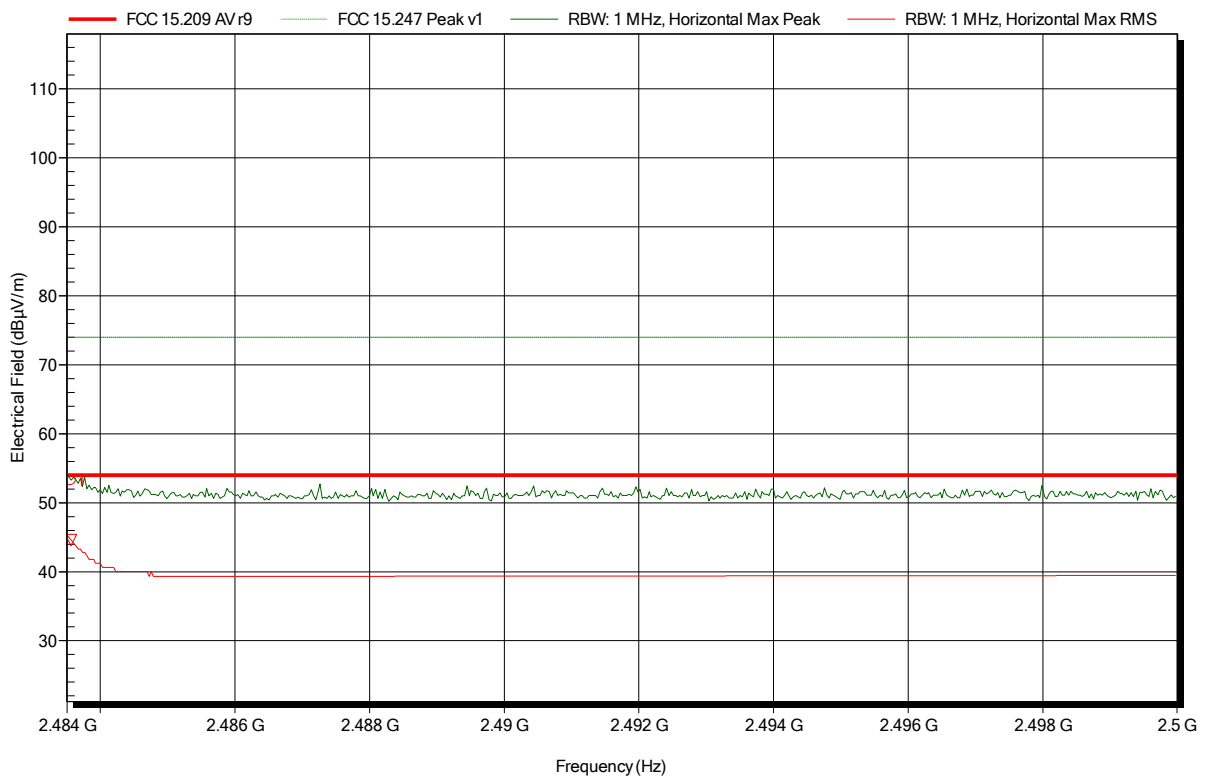


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.4836 GHz	53.28 dBµV/m	74 dBµV/m	-20.72 dB	Pass
Frequency	RMS	RMS Limit	RMS Difference	RMS Status
2.4836 GHz	44.57 dBµV/m	54 dBµV/m	-9.43 dB	Pass

**Spurious emissions according to FCC 15.247**

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Sebastian Suckow  
 Test Conditions: Tnom: 22°C, Vnom: 4.5 VDC  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BT LE 2480 MHz  
 Test Date: 2017-11-13  
 Note: upper bandedge

Index 25

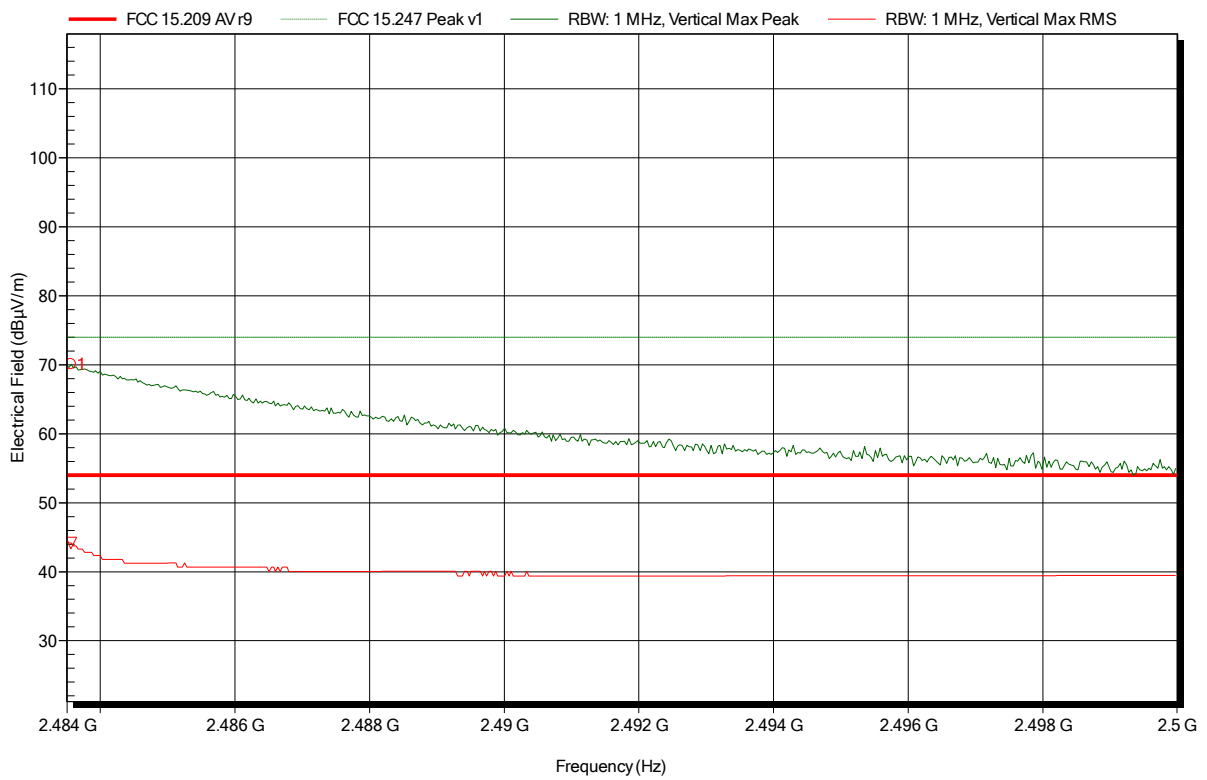


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.4836 GHz	70.08 dBµV/m	74 dBµV/m	-3.92 dB	Pass
Frequency	RMS	RMS Limit	RMS Difference	RMS Status
2.4836 GHz	44.16 dBµV/m	54 dBµV/m	-9.84 dB	Pass

### Spurious emissions according to FCC 15.247

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Sebastian Suckow  
 Test Conditions: Tnom: 22°C, Vnom: 4.5 VDC  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BT LE 2480 MHz  
 Test Date: 2017-11-13  
 Note:

Index 20

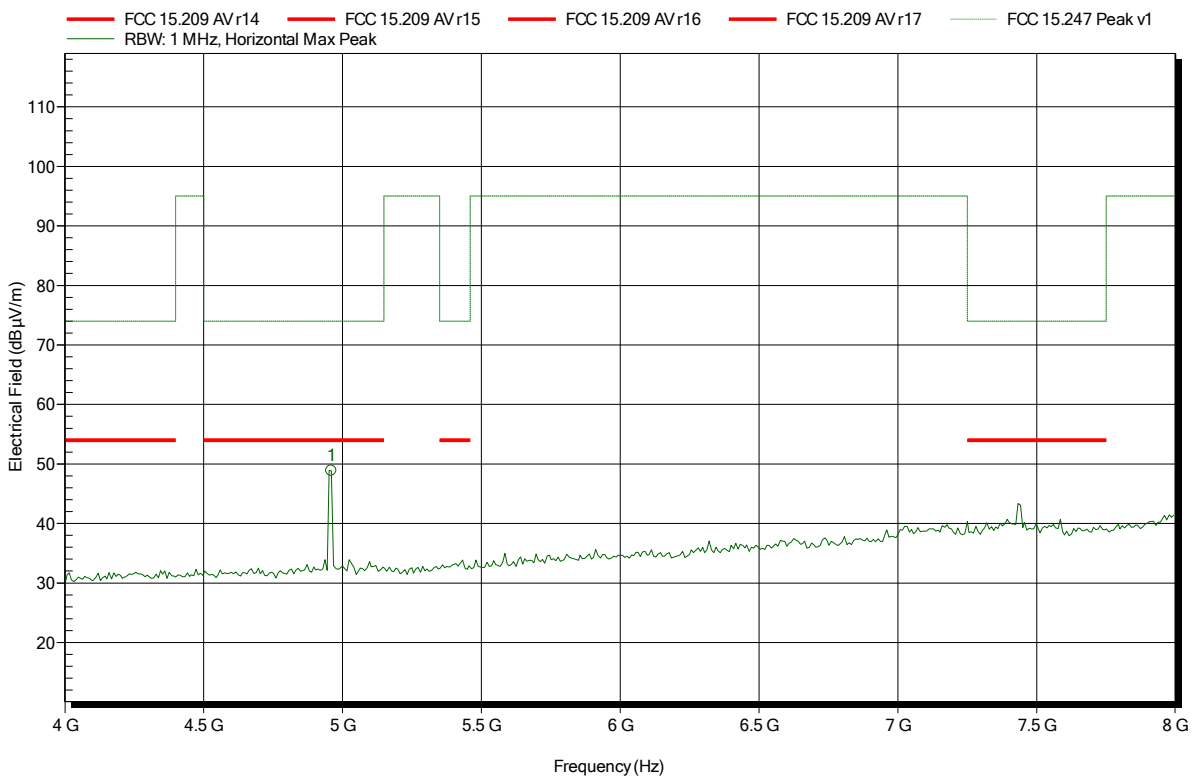


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.96 GHz	48.85 dBµV/m	74 dBµV/m	-25.15 dB	Pass

### Spurious emissions according to FCC 15.247

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Sebastian Suckow  
 Test Conditions: Tnom: 22°C, Vnom: 4.5 VDC  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BT LE 2480 MHz  
 Test Date: 2017-11-13  
 Note:

Index 23

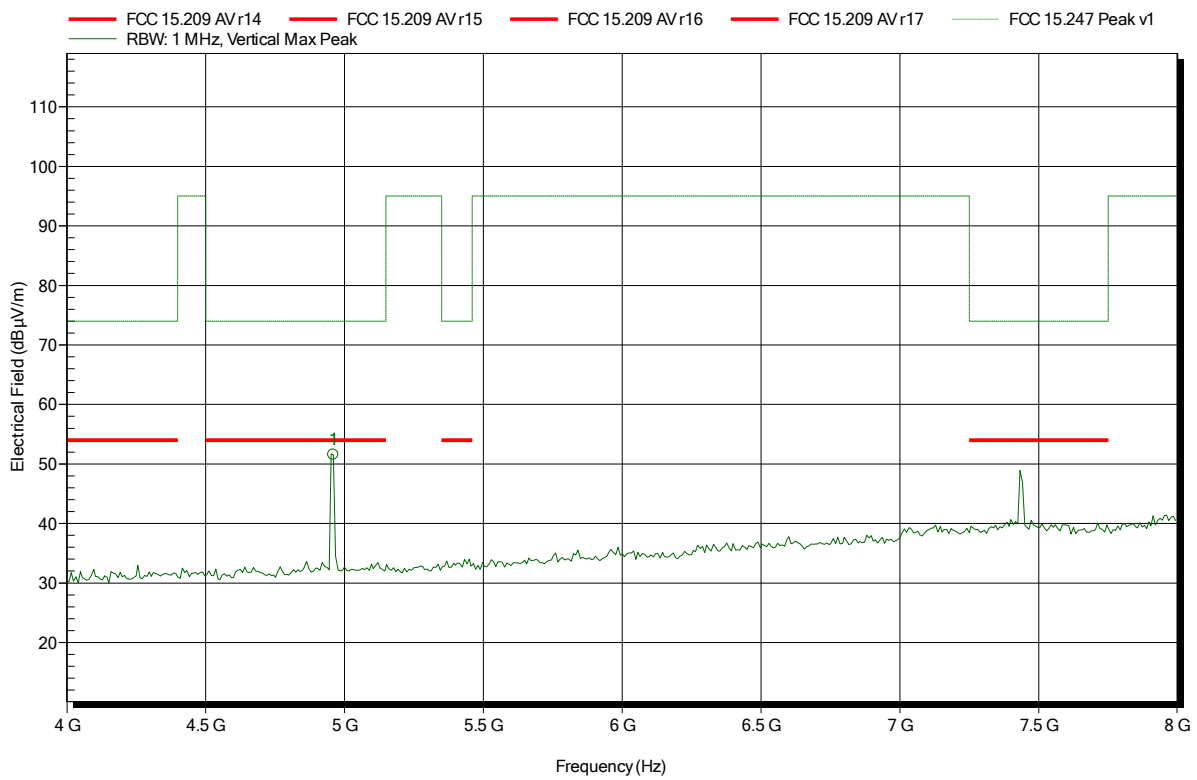


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
4.96 GHz	51.53 dBµV/m	74 dBµV/m	-22.47 dB	Pass

### Spurious emissions according to FCC 15.247

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Sebastian Suckow  
 Test Conditions: Tnom: 22°C, Vnom: 4.5 VDC  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BT LE 2480 MHz  
 Test Date: 2017-11-13  
 Note:

Index 21

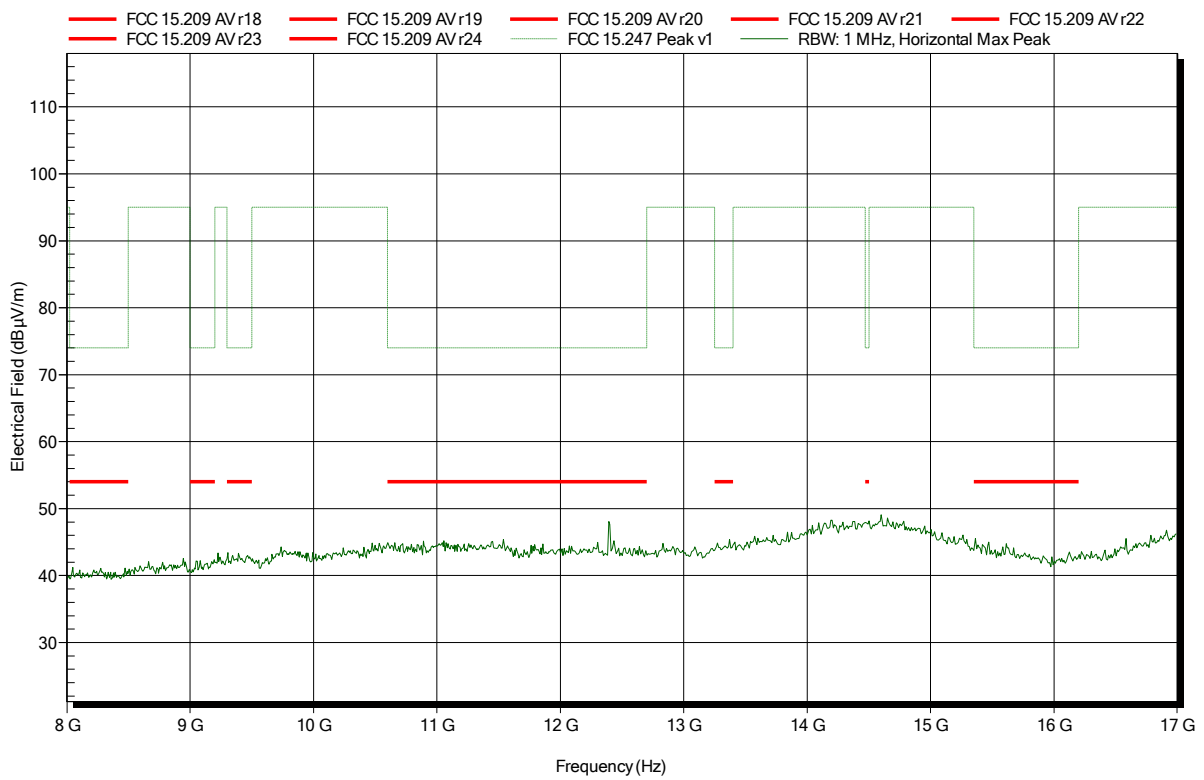




### Spurious emissions according to FCC 15.247

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Sebastian Suckow  
 Test Conditions: Tnom: 22°C, Vnom: 4.5 VDC  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BT LE 2480 MHz  
 Test Date: 2017-11-13  
 Note:

Index 22

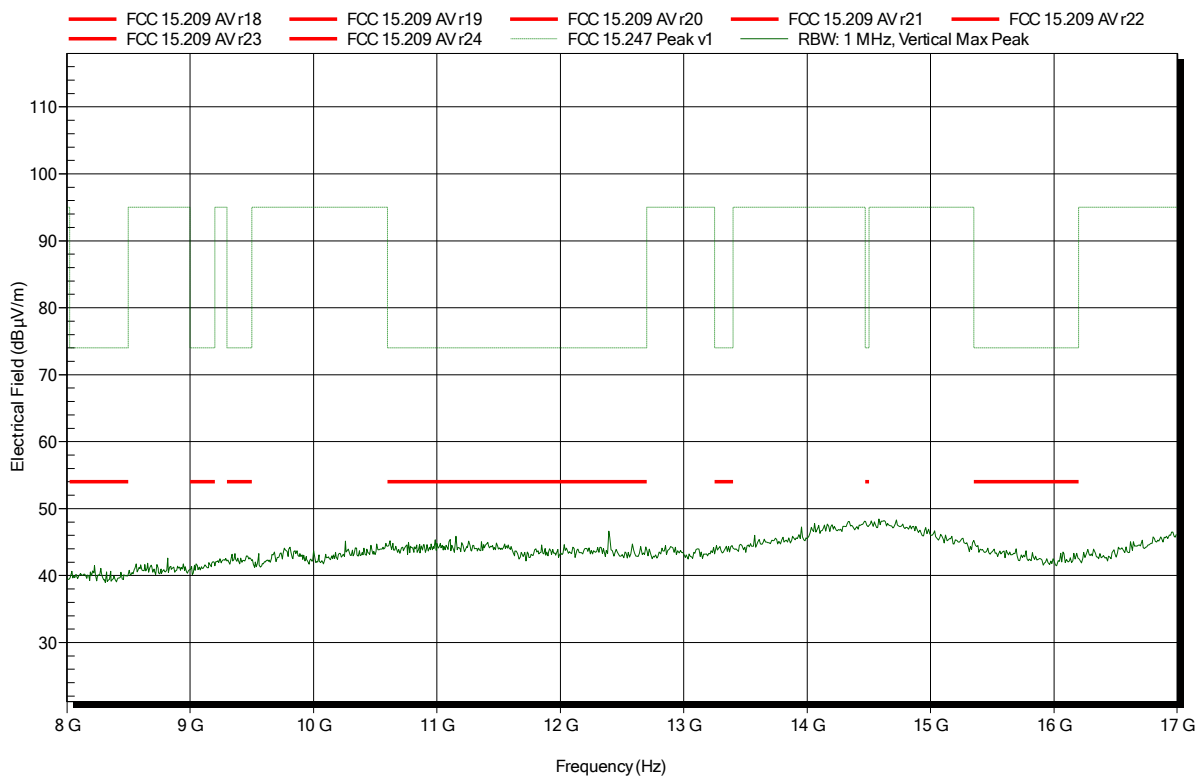


### Spurious emissions according to FCC 15.247

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Sebastian Suckow  
 Test Conditions: Tnom: 22°C, Vnom: 4.5 VDC  
 Antenna: Amplifier Research AT 4560, Horizontal  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BT LE 2480 MHz  
 Test Date: 2017-11-23  
 Note:

Index 31

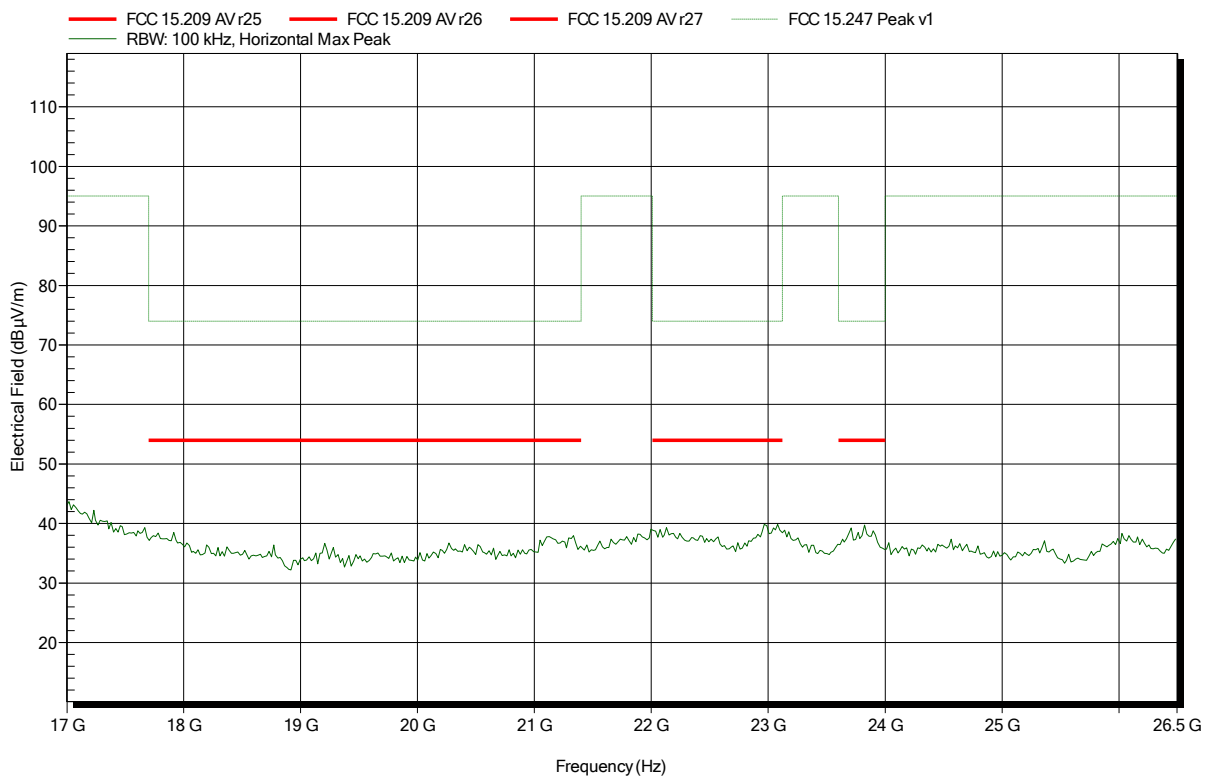


### Spurious emissions according to FCC 15.247

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Sebastian Suckow  
 Test Conditions: Tnom: 22°C, Vnom: 4.5 VDC  
 Antenna: Amplifier Research AT 4560, Vertical  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BT LE 2480 MHz  
 Test Date: 2017-11-23  
 Note:

Index 32

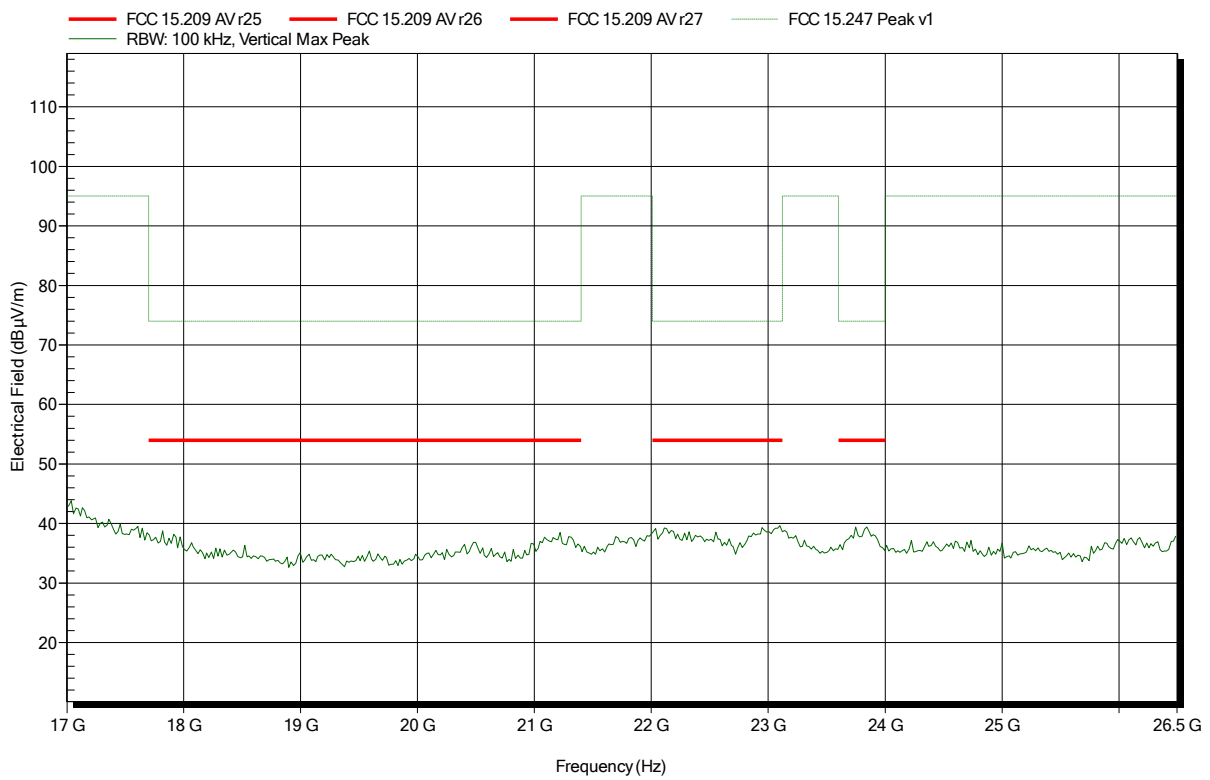


## ANNEX B Receiver spurious emissions

### Spurious emissions according to RSS-Gen Issue 4

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Suckow  
 Test Conditions: Tnom: 21°C, Vnom: 4.5 VDC  
 Antenna: Rohde & Schwarz HK 116, Horizontal  
 Measurement distance: 3 m  
 Mode: RX; BT LE 2440 MHz  
 Test Date: 2017-12-13  
 Note:

Index 8

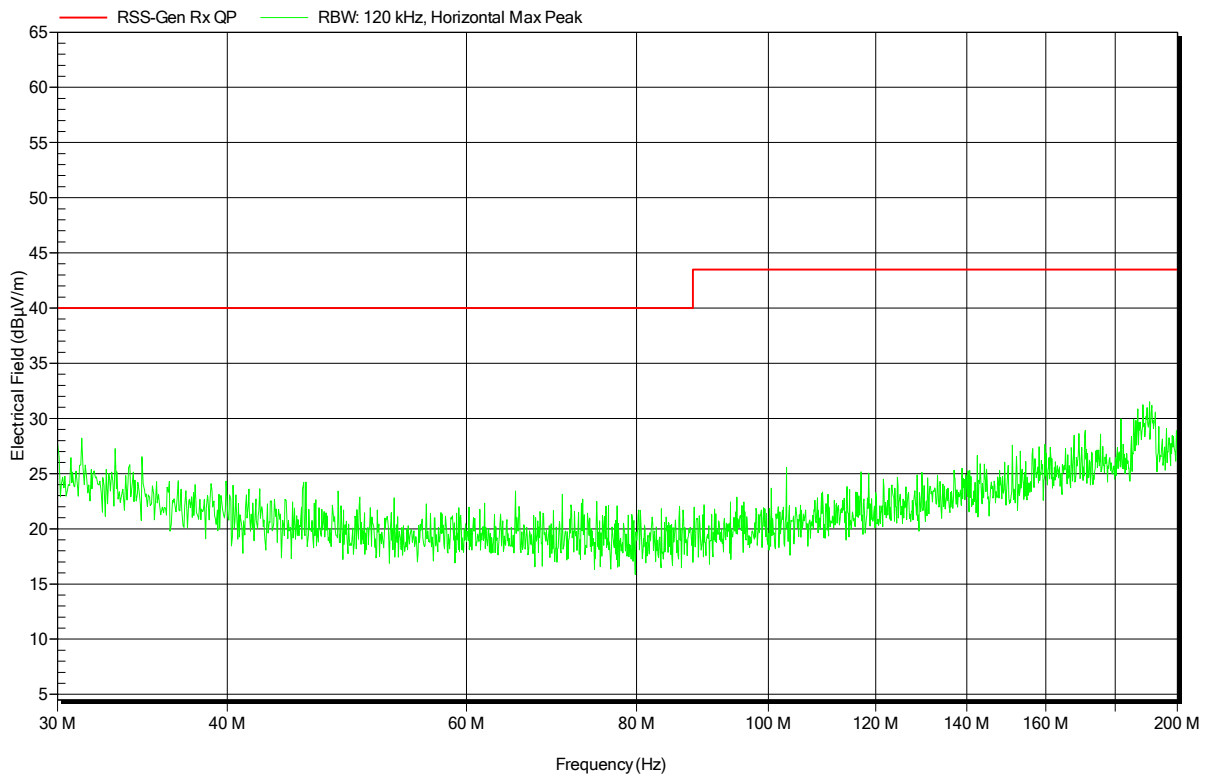


### Spurious emissions according to RSS-Gen Issue 4

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Suckow  
 Test Conditions: Tnom: 21°C, Vnom: 4.5 VDC  
 Antenna: Rohde & Schwarz HK 116, Vertical  
 Measurement distance: 3 m  
 Mode: RX; BT LE 2440 MHz  
 Test Date: 2017-12-13  
 Note:

Index 7

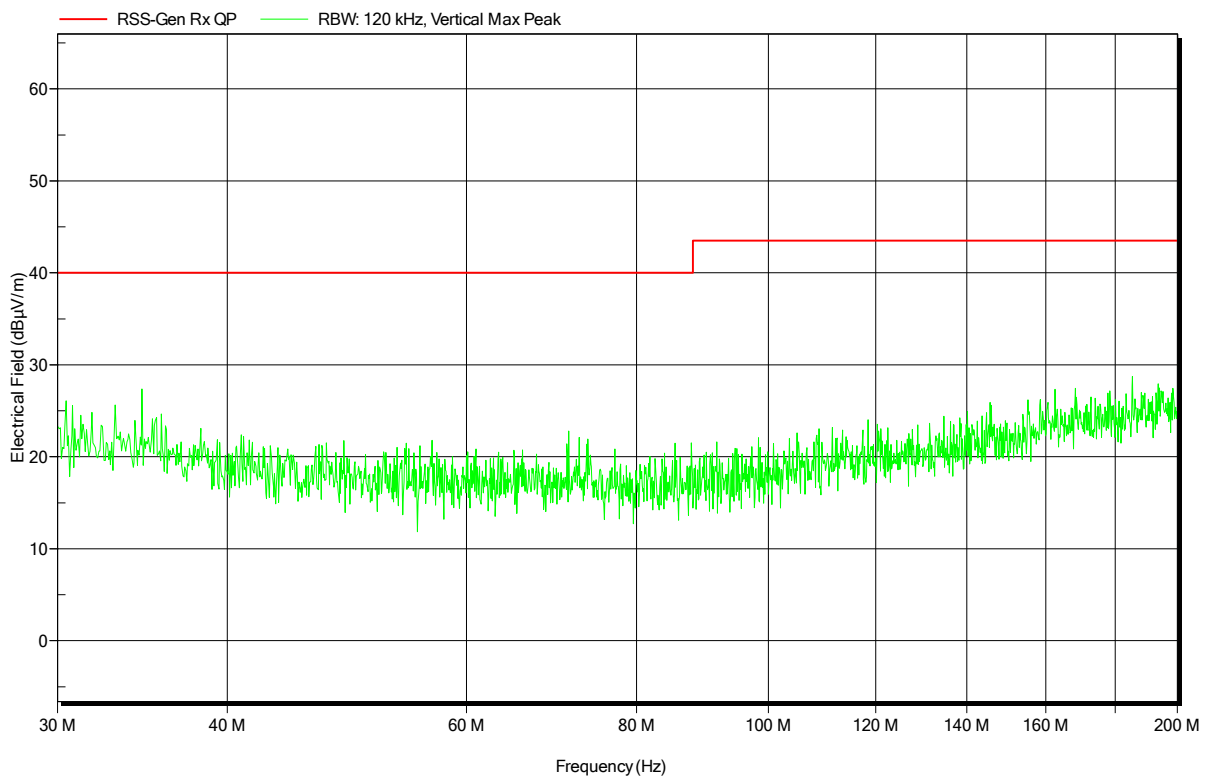


**Spurious emissions according to RSS-Gen Issue 4**

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Suckow  
 Test Conditions: Tnom: 21°C, Vnom: 4.5 VDC  
 Antenna: Rohde & Schwarz HL 223, Horizontal  
 Measurement distance: 3 m  
 Mode: RX; BT LE 2440 MHz  
 Test Date: 2017-12-13  
 Note:

Index 9

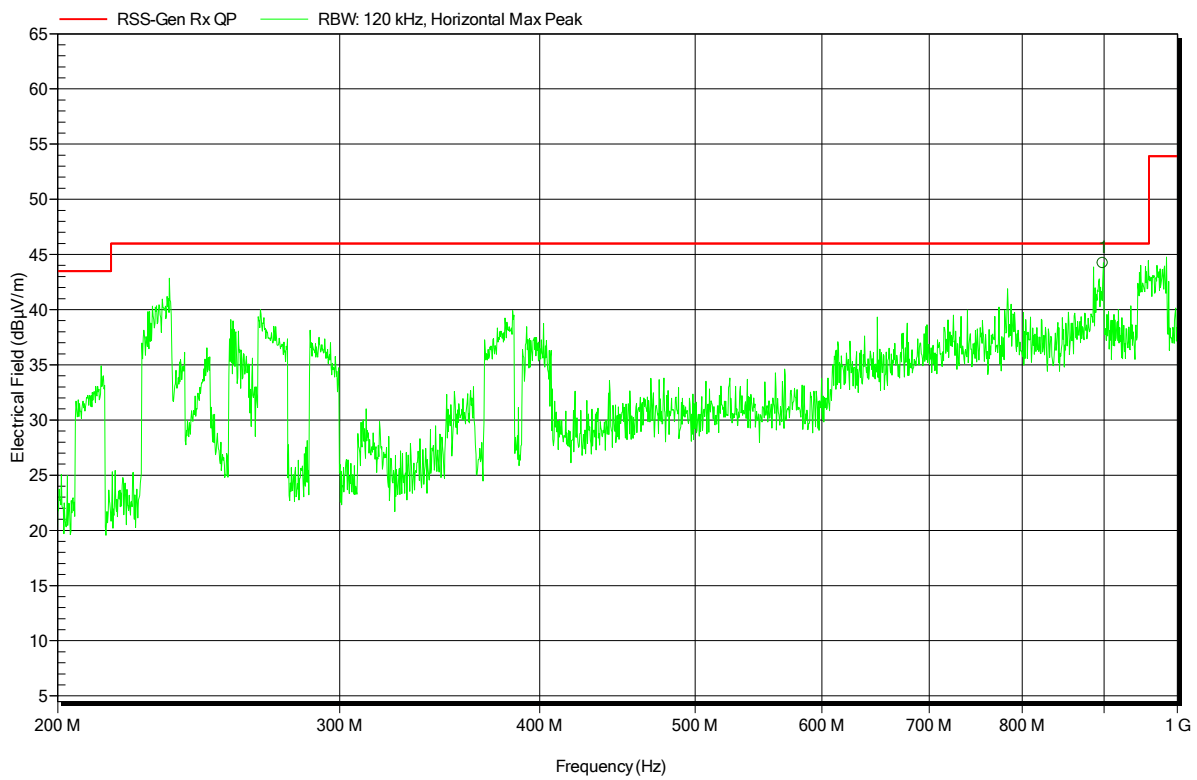


Frequency	Peak	Peak Limit	Peak Difference	Status
898.3485 MHz	44.2 dBµV/m	46 dBµV/m	-1.77 dB	Pass

### Spurious emissions according to RSS-Gen Issue 4

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Suckow  
 Test Conditions: Tnom: 21°C, Vnom: 4.5 VDC  
 Antenna: Rohde & Schwarz HL 223, Vertical  
 Measurement distance: 3 m  
 Mode: RX; BT LE 2440 MHz  
 Test Date: 2017-12-13  
 Note:

Index 10

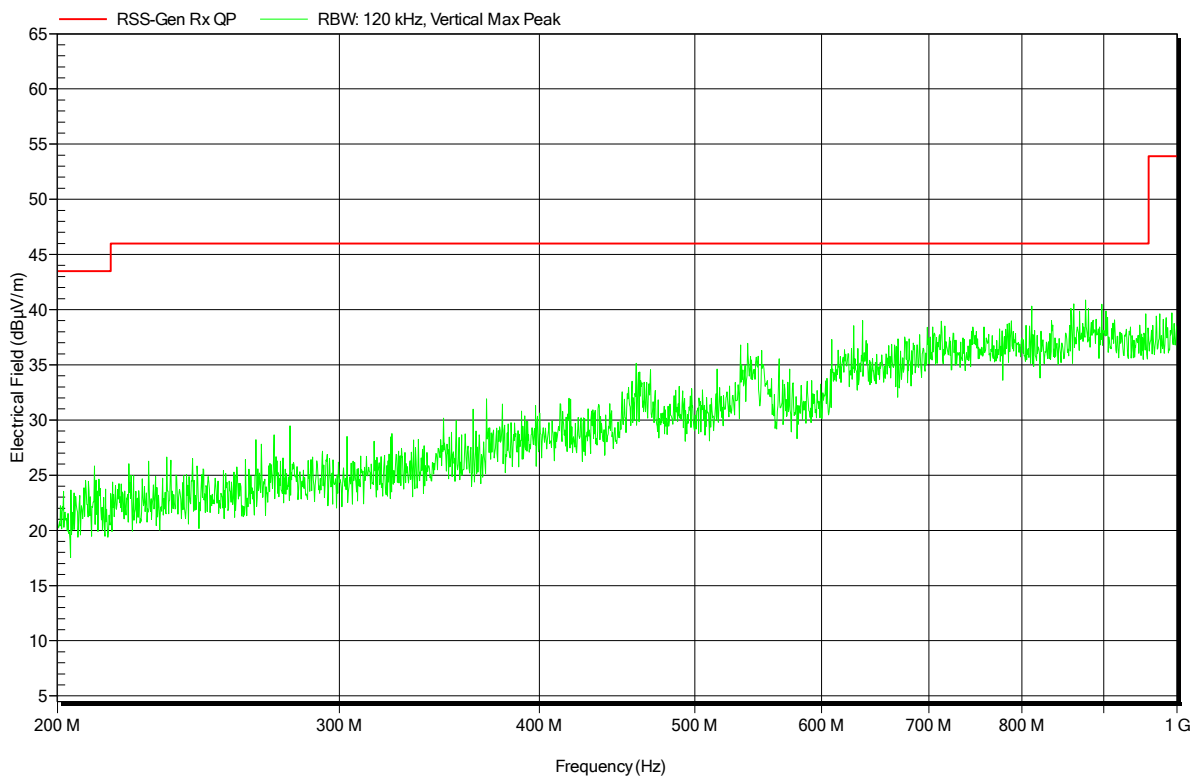






### Spurious emissions according to RSS-Gen Issue 4

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Sebastian Suckow  
 Test Conditions: Tnom: 22°C, Vnom: 4.5 VDC  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 3 m  
 Mode: RX; BT LE 2440 MHz  
 Test Date: 2017-11-23  
 Note:

Index 41

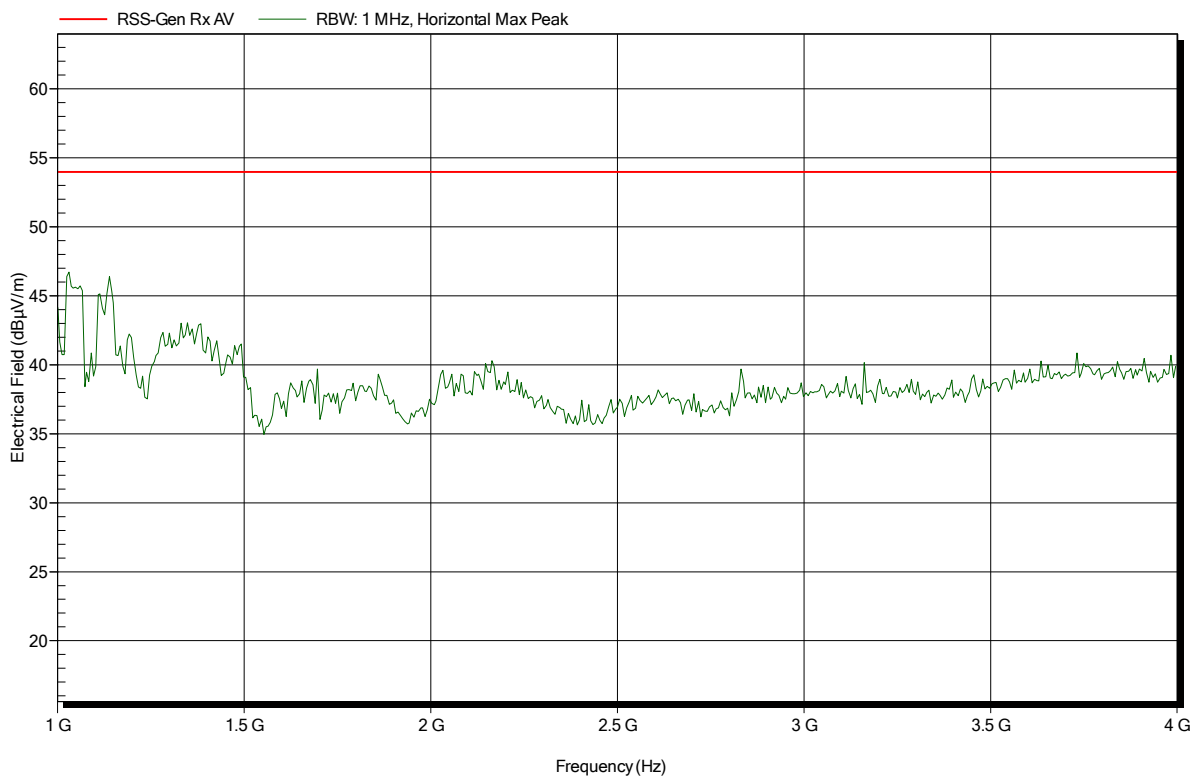


### Spurious emissions according to RSS-Gen Issue 4

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Sebastian Suckow  
 Test Conditions: Tnom: 22°C, Vnom: 4.5 VDC  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 3 m  
 Mode: RX; BT LE 2440 MHz  
 Test Date: 2017-11-23  
 Note:

Index 40

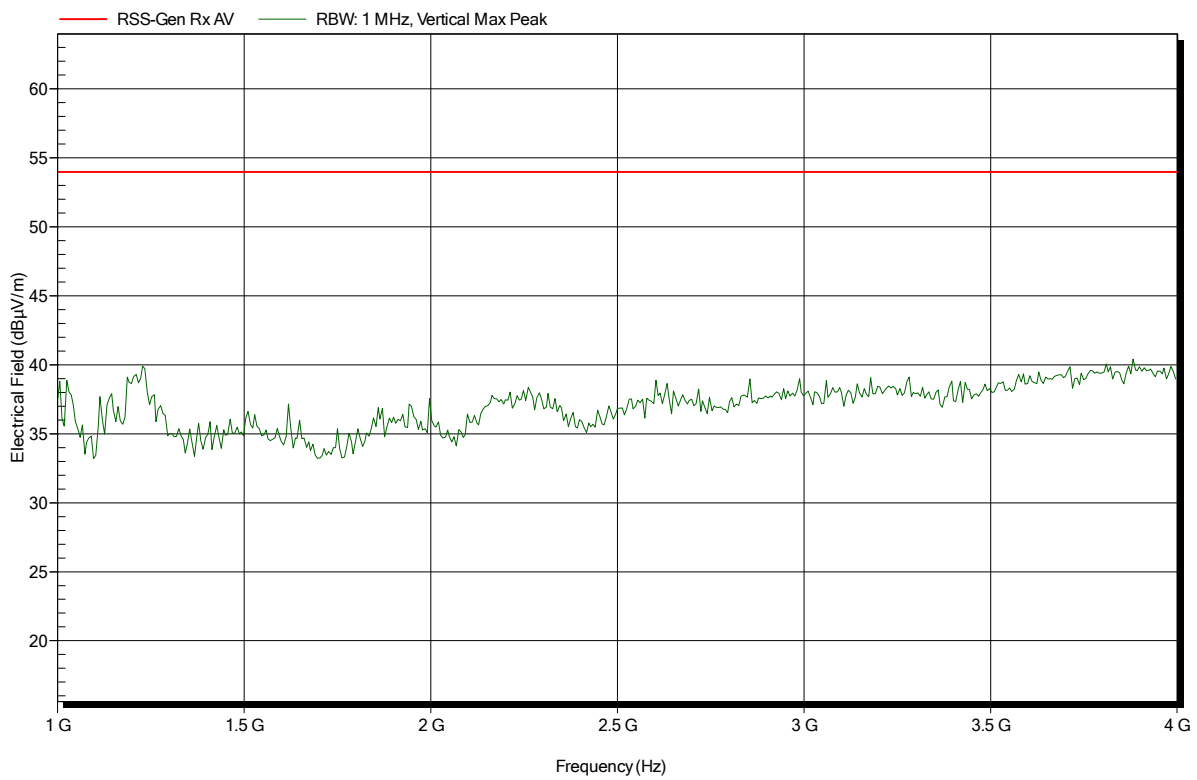


### Spurious emissions according to RSS-Gen Issue 4

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Sebastian Suckow  
 Test Conditions: Tnom: 22°C, Vnom: 4.5 VDC  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 3 m  
 Mode: RX; BT LE 2440 MHz  
 Test Date: 2017-11-23  
 Note:

Index 42

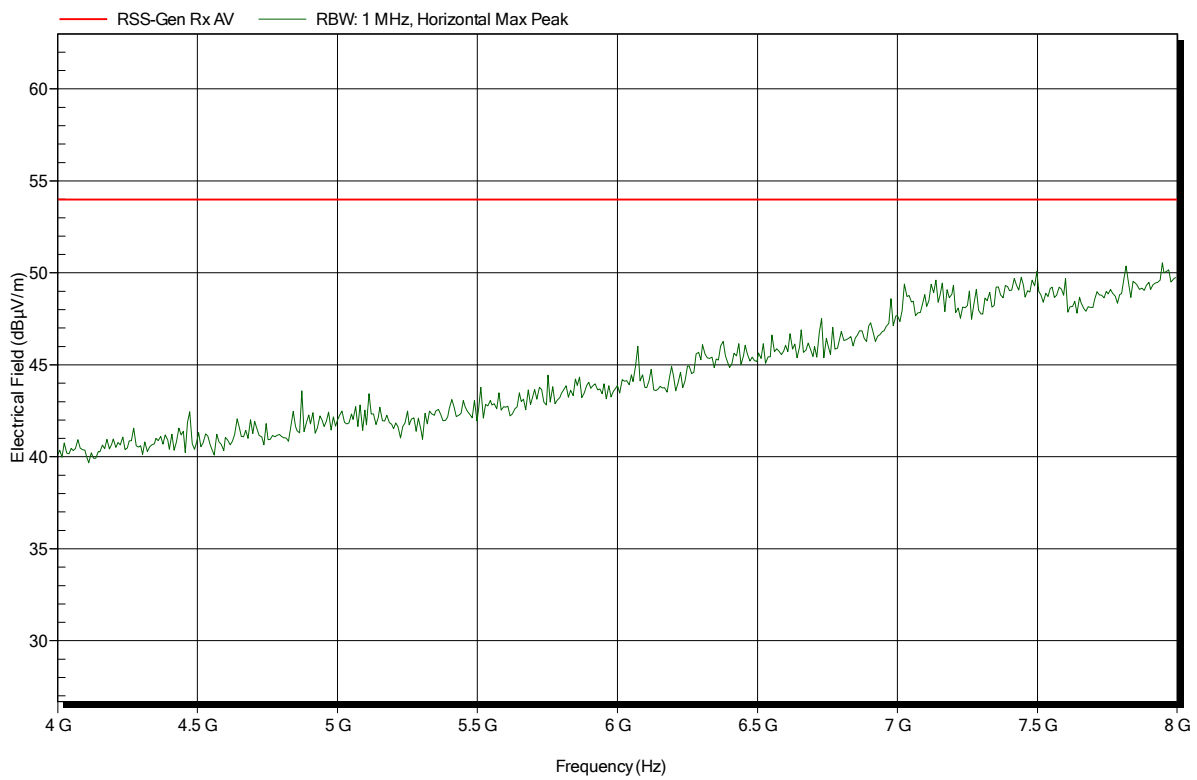


### Spurious emissions according to RSS-Gen Issue 4

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Sebastian Suckow  
 Test Conditions: Tnom: 22°C, Vnom: 4.5 VDC  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 3 m  
 Mode: RX; BT LE 2440 MHz  
 Test Date: 2017-11-23  
 Note:

Index 39

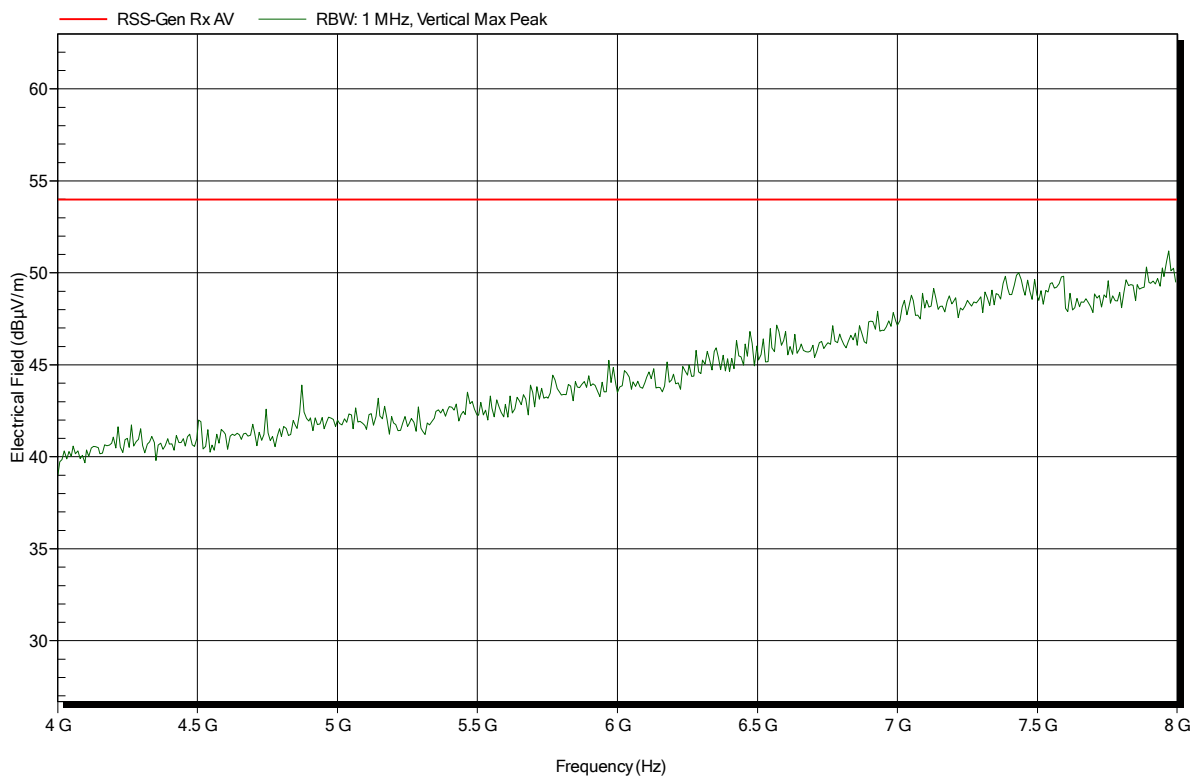


### Spurious emissions according to RSS-Gen Issue 4

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Sebastian Suckow  
 Test Conditions: Tnom: 22°C, Vnom: 4.5 VDC  
 Antenna: Schwarzbeck BBHA 9120D, Horizontal  
 Measurement distance: 1 m converted to 3m  
 Mode: RX; BT LE 2440 MHz  
 Test Date: 2017-11-23  
 Note:

Index 37

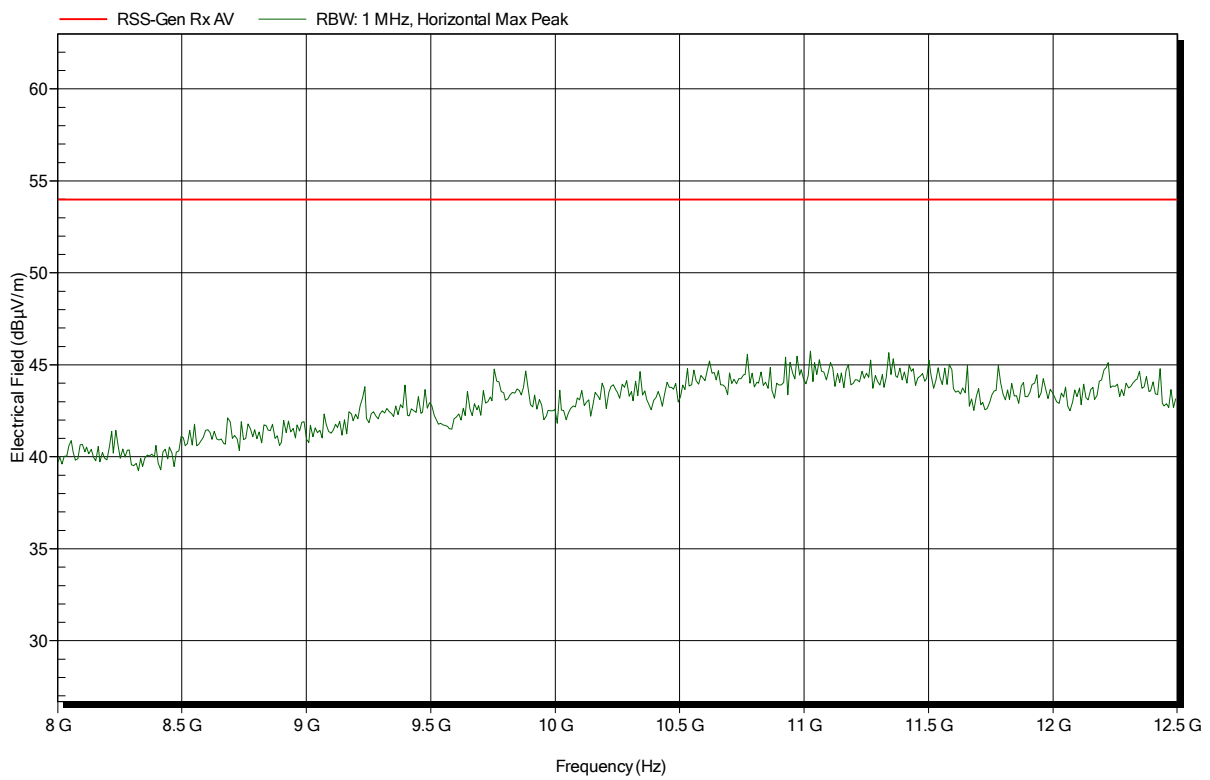

### Spurious emissions according to RSS-Gen Issue 4

Project number: G0M-1705-6514

Applicant: Robert Bosch Tool Corporation  
 EUT Name: Laser Rangefinder  
 Model: GLM400C  
 Test Site: Eurofins Product Service GmbH  
 Operator: Sebastian Suckow  
 Test Conditions: Tnom: 22°C, Vnom: 4.5 VDC  
 Antenna: Schwarzbeck BBHA 9120D, Vertical  
 Measurement distance: 1 m converted to 3m  
 Mode: RX; BT LE 2440 MHz  
 Test Date: 2017-11-23  
 Note:

Index 38

