



**CFR 47 FCC PART 15 SUBPART C  
ISED RSS-247 ISSUE 2**

**CERTIFICATION TEST REPORT**

*For*

**Jobsite Radio with Bluetooth**

**MODEL NUMBER: GPB18V-5C**

**FCC ID: TXTGPB18V-5C**

**IC: 909H-GPB18V5C**

**REPORT NUMBER: 4789481163-1**

**ISSUE DATE: July 31, 2020**

*Prepared for*

**Robert Bosch Tool Corporation  
1800 West Central Road, Mount Prospect, IL, USA**

*Prepared by*

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch**

**Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China**

**Tel: +86 769 22038881**

**Fax: +86 769 33244054**

**Website: [www.ul.com](http://www.ul.com)**



Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V0	07/31/2020	Initial Issue	



Summary of Test Results			
Clause	Test Items	FCC/ISED Rules	Test Results
1	20dB Bandwidth and 99% Occupied Bandwidth	FCC 15.247 (a) (1) RSS-247 Clause 5.1 (a) RSS-Gen Clause 6.7	Pass
2	Conducted Output Power	FCC 15.247 (b) (1) RSS-247 Clause 5.1 (b)	Pass
3	Carrier Hopping Channel Separation	FCC 15.247 (a) (1) RSS-247 Clause 5.1 (b)	Pass
4	Number of Hopping Frequency	15.247 (a) (1) III RSS-247 Clause 5.1 (d)	Pass
5	Time of Occupancy (Dwell Time)	15.247 (a) (1) III RSS-247 Clause 5.1 (d)	Pass
6	Conducted Bandedge	FCC 15.247 (d) RSS-247 Clause 5.5	Pass
7	Radiated Bandedge and Spurious	FCC 15.247 (d) FCC 15.209 FCC 15.205 RSS-247 Clause 5.5 RSS-GEN Clause 8.9 RSS-GEN Clause 8.10	Pass
8	Conducted Emission Test for AC Power Port	FCC 15.207 RSS-GEN Clause 8.8	Pass
9	Antenna Requirement	FCC 15.203 RSS-GEN Clause 6.8	Pass
<p>Note:</p> <p>1. This test report is only published to and used by the applicant, and it is not for evidence purpose in China.</p> <p>2. The measurement result for the sample received is &lt;Pass&gt; according to &lt; CFR 47 FCC PART 15 SUBPART C &gt;&lt; ISED RSS-247 &gt; when &lt;Accuracy Method&gt; decision rule is applied.</p>			

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS</b> .....	<b>6</b>
<b>2. TEST METHODOLOGY</b> .....	<b>7</b>
<b>3. FACILITIES AND ACCREDITATION</b> .....	<b>7</b>
<b>4. CALIBRATION AND UNCERTAINTY</b> .....	<b>8</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i> .....	8
4.2. <i>MEASUREMENT UNCERTAINTY</i> .....	8
<b>5. EQUIPMENT UNDER TEST</b> .....	<b>9</b>
5.1. <i>DESCRIPTION OF EUT</i> .....	9
5.2. <i>MAXIMUM PEAK OUTPUT POWER</i> .....	9
5.3. <i>PACKET TYPE CONFIGURATION</i> .....	9
5.4. <i>CHANNEL LIST</i> .....	10
5.5. <i>TEST CHANNEL CONFIGURATION</i> .....	10
5.6. <i>WORST-CASE CONFIGURATIONS</i> .....	10
5.7. <i>THE WORSE CASE POWER SETTING PARAMETER</i> .....	11
5.8. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i> .....	11
5.9. <i>DESCRIPTION OF TEST SETUP</i> .....	12
<b>6. MEASURING INSTRUMENT AND SOFTWARE USED</b> .....	<b>13</b>
<b>7. ANTENNA PORT TEST RESULTS</b> .....	<b>15</b>
7.1. <i>ON TIME AND DUTY CYCLE</i> .....	15
7.2. <i>20 dB BANDWIDTH AND 99% OCCUPIED BANDWIDTH</i> .....	16
7.3. <i>CONDUCTED OUTPUT POWER</i> .....	18
7.4. <i>CARRIER FREQUENCY SEPARATION</i> .....	19
7.5. <i>NUMBER OF HOPPING FREQUENCIES</i> .....	21
7.6. <i>TIME OF OCCUPANCY (DWELL TIME)</i> .....	23
7.7. <i>CONDUCTED BANDEDGE AND SPURIOUS EMISSION</i> .....	25
<b>8. RADIATED TEST RESULTS</b> .....	<b>27</b>
8.1. <i>RESTRICTED BANDEDGE</i> .....	33
8.1.1. <i>GFSK MODE</i> .....	33
8.1.2. <i>8DPSK MODE</i> .....	37
8.2. <i>SPURIOUS EMISSIONS (1GHz ~ 3GHz)</i> .....	41
8.2.1. <i>GFSK MODE</i> .....	41
8.2.2. <i>8DPSK MODE</i> .....	47
8.3. <i>SPURIOUS EMISSIONS (3GHz ~ 18GHz)</i> .....	53



8.3.1.	GFSK MODE .....	53
8.3.2.	8DPSK MODE .....	59
8.4.	SPURIOUS EMISSIONS (18GHz ~ 26GHz) .....	65
8.4.1.	GFSK MODE .....	65
8.5.	SPURIOUS EMISSIONS (30MHz ~ 1 GHz) .....	67
8.5.1.	GFSK MODE .....	67
8.6.	SPURIOUS EMISSIONS BELOW 30MHz .....	69
8.6.1.	GFSK MODE .....	69
<b>9.</b>	<b>AC POWER LINE CONDUCTED EMISSIONS .....</b>	<b>72</b>
9.1.1.	GFSK MODE .....	73
<b>10.</b>	<b>ANTENNA REQUIREMENTS .....</b>	<b>75</b>
	<i>Appendix A: 20dB Emission Bandwidth .....</i>	<i>76</i>
	Test Result .....	76
	Test Graphs .....	77
	<i>Appendix B: Occupied Channel Bandwidth .....</i>	<i>80</i>
	Test Result .....	80
	Test Graphs .....	81
	<i>Appendix C: Maximum conducted output power .....</i>	<i>84</i>
	Test Result .....	84
	<i>Appendix D: Carrier frequency separation .....</i>	<i>85</i>
	Test Result .....	85
	Test Graphs .....	86
	<i>Appendix E: Time of occupancy .....</i>	<i>87</i>
	Test Result .....	87
	Test Graphs .....	88
	<i>Appendix F: Number of hopping channels .....</i>	<i>93</i>
	Test Result .....	93
	Test Graphs .....	94
	<i>Appendix G: Band edge measurements .....</i>	<i>95</i>
	Test Result .....	95
	Test Graphs .....	96
	<i>Appendix H: Conducted Spurious Emission .....</i>	<i>100</i>
	Test Result .....	100
	Test Graphs .....	101
	<i>Appendix I: Duty Cycle .....</i>	<i>110</i>
	Test Result .....	110
	Test Graphs .....	111



# 1. ATTESTATION OF TEST RESULTS

## Applicant Information

Company Name: Robert Bosch Tool Corporation  
Address: 1800 West Central Road, Mount Prospect, IL, USA

## Manufacturer Information

Company Name: Da Chang Industries Co., Ltd  
Address: JinBei Road, Chang Ping Town, Dong Guan City, GuangDong Province Dong Guan China

## EUT Information

EUT Name: Jobsite Radio with Bluetooth  
Model: GPB18V-5C  
Brand: BOSCH  
Sample Received Date: July 16, 2020  
Sample Status: Normal  
Sample ID: 3196884  
Date of Tested: July 16~24, 2020

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	PASS
ISED RSS-247 Issue 2	PASS
ISED RSS-GEN Issue 5	PASS

Prepared By:

Kebo Zhang  
Project Engineer

Checked By:

Shawn Wen  
Laboratory Leader

Approved By:

Stephen Guo  
Laboratory Manager



## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB 558074 D01 15.247 Meas Guidance v05r02, 414788 D01 Radiated Test Site v01r01, CFR 47 FCC Part 2, CFR 47 FCC Part 15, ANSI C63.10-2013, ISED RSS-247 Issue 2 and ISED RSS-GEN Issue 5.

## 3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p><b>A2LA (Certificate No.: 4102.01)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p><b>FCC (FCC Designation No.: CN1187)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p><b>ISED (Company No.: 21320)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320.</p> <p><b>VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B , the VCCI registration No. is C-20012 and T-20011</p>
---------------------------	--

Note 1: All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China

Note 2: The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3: For below 30MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30MHz had been correlated to measurements performed on an OFS.



## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62dB
Radiated Emission (Included Fundamental Emission) (9kHz ~ 30MHz)	2.2dB
Radiated Emission (Included Fundamental Emission) (30MHz ~ 1GHz)	4.00dB
Radiated Emission (Included Fundamental Emission) (1GHz to 26GHz)	5.78dB (1GHz ~ 18GHz)
	5.23dB (18GHz ~ 26GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	





## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

EUT Name	Jobsite Radio with Bluetooth		
Model	GPB18V-5C		
Technology	Bluetooth – BR & EDR		
Transmit Frequency Range	2402 MHz ~ 2480 MHz		
Mode	Basic Rate	Enhanced Data Rate	
Modulation	GFSK	π/4-DQPSK	8DPSK
Packet Type (Maximum Payload):	DH5	2DH5	3DH5
Data Rate	1Mbps	2Mbps	3Mbps
Ratings	Input: 120V ~ 60Hz 12A Output: 120V ~ 60Hz 10A		
Supply Voltage	AC120V,60Hz		

### 5.2. MAXIMUM PEAK OUTPUT POWER

Bluetooth Mode	Frequency (MHz)	Channel Number	Maximum Peak Output Power (dBm)	Maximum EIRP (dBm)
GFSK	2402-2480	0-78[79]	6.67	8.67
8DPSK	2402-2480	0-78[79]	5.23	7.23

### 5.3. PACKET TYPE CONFIGURATION

Bluetooth Mode	Packet Type	Setting (Packet Length)
GFSK	DH1	27
	DH3	183
	DH5	339
π/4-DQPSK	2-DH1	54
	2-DH3	367
	2-DH5	679
8DPSK	3-DH1	83
	3-DH3	552
	3-DH5	1021

#### 5.4. CHANNEL LIST

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	20	2422	40	2442	60	2462
01	2403	21	2423	41	2443	61	2463
02	2404	22	2424	42	2444	62	2464
03	2405	23	2425	43	2445	63	2465
04	2406	24	2426	44	2446	64	2466
05	2407	25	2427	45	2447	65	2467
06	2408	26	2428	46	2448	66	2468
07	2409	27	2429	47	2449	67	2469
08	2410	28	2430	48	2450	68	2470
09	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	/	/

#### 5.5. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel	Frequency
GFSK-DH5	CH 0(Low Channel), CH 39(MID Channel), CH 78(High Channel)	2402MHz, 2441MHz, 2480MHz
8DPSK-3DH5	CH 0(Low Channel), CH 39(MID Channel), CH 78(High Channel)	2402MHz, 2441MHz, 2480MHz
GFSK-DH5	Hopping	2402MHz ~ 2480MHz
8DPSK-3DH5	Hopping	2402MHz ~ 2480MHz

#### 5.6. WORST-CASE CONFIGURATIONS

Bluetooth Mode	Modulation Technology	Modulation Type	Data Rate	Packet Type
BR	FHSS	GFSK	1Mbit/s	DH5
EDR	FHSS	8DPSK	3Mbit/s	3-DH5

Note: Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates. Only GFSK and 8DPSK test data were report in this report.

**5.7. THE WORSE CASE POWER SETTING PARAMETER**

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band				
Test Software		Bluetooth test 3		
Modulation Type	Transmit Antenna Number	Test Software Setting Value		
		CH 00	CH 39	CH 78
GFSK	1	Default	Default	Default
8DPSK	1	Default	Default	Default

**5.8. DESCRIPTION OF AVAILABLE ANTENNAS**

Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)
1	2402-2480	PCB Antenna	2.0

Modulation	Transmit and Receive Mode	Description
GFSK	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.
8DPSK	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.

Note: 1. The value of the antenna gain was declared by customer.

## 5.9. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remarks
1	PC	Dell	Vostro 3902	8KNDDDB2
2	USB TO UART	/	/	/
3	Mobile Phone	HUAWEI	ALP-AL00	/
4	Dummy load	/	/	5 Vdc,2.1 A
5	Lamp	/	/	500W
6	Lamp	/	/	500W
7	Lamp	/	/	500W
8	Lamp	/	/	100W

### I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	/	/	1.0	/
2	AUX	/	/	1.0	/


### ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
/	/		/	/

### TEST SETUP

The EUT can work in engineering mode with a software through a Laptop.

### SETUP DIAGRAM FOR TESTS

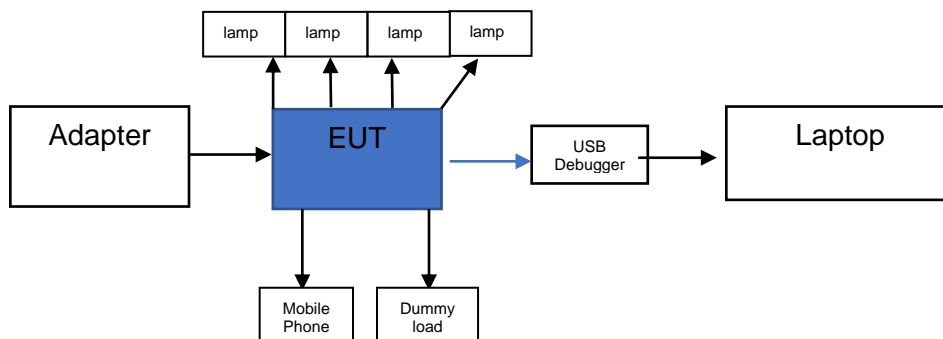

## 6. MEASURING INSTRUMENT AND SOFTWARE USED

Conducted Emissions						
Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	EMI Test Receiver	R&S	ESR3	101961	Dec.05,2019	Dec.05,2020
<input checked="" type="checkbox"/>	Two-Line V-Network	R&S	ENV216	101983	Dec.05,2019	Dec.05,2020
Software						
Used	Description	Manufacturer	Name	Version		
<input checked="" type="checkbox"/>	Test Software for Conducted disturbance	Farad	EZ-EMC	Ver. UL-3A1		
Radiated Emissions						
Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Dec.06,2019	Dec.06,2020
<input checked="" type="checkbox"/>	Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	Sep.17, 2018	Sep.17, 2021
<input checked="" type="checkbox"/>	Preamplifier	HP	8447D	2944A09099	Dec.05,2019	Dec.05,2020
<input checked="" type="checkbox"/>	EMI Measurement Receiver	R&S	ESR26	101377	Dec.05,2019	Dec.05,2020
<input checked="" type="checkbox"/>	Horn Antenna	TDK	HRN-0118	130939	Sep.17, 2018	Sep.17, 2021
<input checked="" type="checkbox"/>	High Gain Horn Antenna	Schwarzbeck	BBHA-9170	691	Aug.11, 2018	Aug.11, 2021
<input checked="" type="checkbox"/>	Preamplifier	TDK	PA-02-0118	TRS-305-00066	Dec.05,2019	Dec.05,2020
<input checked="" type="checkbox"/>	Preamplifier	TDK	PA-02-2	TRS-307-00003	Dec.05,2019	Dec.05,2020
<input checked="" type="checkbox"/>	Loop antenna	Schwarzbeck	1519B	00008	Jan.07, 2019	Jan.07, 2022
<input checked="" type="checkbox"/>	Preamplifier	TDK	PA-02-001-3000	TRS-302-00050	Dec.5, 2019	Dec.5, 2020
<input checked="" type="checkbox"/>	Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	4	Dec.05,2019	Dec.05,2020
<input checked="" type="checkbox"/>	High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	Dec.05,2019	Dec.05,2020
Software						
Used	Description	Manufacturer	Name	Version		
<input checked="" type="checkbox"/>	Test Software for Radiated disturbance	Farad	EZ-EMC	Ver. UL-3A1		



Other instruments						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	Spectrum Analyzer	Keysight	N9030A	MY55410512	Dec.06,2019	Dec.06,2020
<input checked="" type="checkbox"/>	Spectrum Analyzer	Keysight	N9020A	MY49100060	Dec.06,2019	Dec.06,2020
<input checked="" type="checkbox"/>	Power Meter	Keysight	N1911A	MY55416024	Dec.06,2019	Dec.06,2020
<input checked="" type="checkbox"/>	Power Sensor	Keysight	U2021XA	MY5100022	Dec.06,2019	Dec.06,2020

## 7. ANTENNA PORT TEST RESULTS

### 7.1. ON TIME AND DUTY CYCLE


#### LIMITS

None; for reporting purposes only.

#### PROCEDURE

Refer to ANSI C63.10-2013 Zero – Span Spectrum Analyzer method.

#### TEST SETUP



#### TEST ENVIRONMENT

Temperature	25.6°C	Relative Humidity	59.2%
Atmosphere Pressure	101kPa	Test Voltage	AC120V,60Hz

#### RESULTS

Please refer to appendix I.

## 7.2. 20 dB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

### LIMITS

CFR 47FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (a) (1) RSS-247 Clause 5.1 (a)	20 dB Bandwidth	None; for reporting purposes only.	2400-2483.5
ISED RSS-Gen Clause 6.7	99% Occupied Bandwidth	None; for reporting purposes only.	2400-2483.5

### TEST PROCEDURE


Refer to ANSI C63.10-2013 clause 6.9.2.

Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	For 20dB Bandwidth: 1% to 5% of the 20dB bandwidth For 99% Occupied Bandwidth: 1% to 5% of the occupied bandwidth
VBW	For 20dB Bandwidth: approximately 3×RBW For 99% Occupied Bandwidth: ≥ 3×RBW
Span	Approximately 2 to 3 times the 20dB bandwidth
Trace	Max hold
Sweep	Auto couple

a) Use the occupied bandwidth function of the instrument, allow the trace to stabilize and report the measured 99% occupied bandwidth and 20dB Bandwidth.

### TEST SETUP







**TEST ENVIRONMENT**

Temperature	25.6°C	Relative Humidity	59.2%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V, 60Hz

**RESULTS**

Please refer to appendix A and B.

### 7.3. CONDUCTED OUTPUT POWER

**LIMITS**


CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (b) (1) ISED RSS-247 Clause 5.4 (b)	Peak Conducted Output Power	Hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel: 1 watt or 30dBm; Hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel: 125 mW or 21dBm	2400-2483.5

**TEST PROCEDURE**

Refer to ANSI C63.10-2013 clause 7.8.5.

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth). Measure peak emission level, the indicated level is the peak output power, after any corrections for external attenuators and cables.

**TEST SETUP**



**TEST ENVIRONMENT**

Temperature	25.6°C	Relative Humidity	59.2%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V, 60Hz

**RESULTS**

Please refer to appendix C.

## 7.4. CARRIER FREQUENCY SEPARATION

### LIMITS

CFR 47 FCC Part15 (15.247), Subpart C ISSED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (a) (1) ISED RSS-247 Clause 5.1 (b)	Carrier Frequency Separation	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel.	2400-2483.5

### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 7.8.2.


Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Span	wide enough to capture the peaks of two adjacent channels
Detector	Peak
RBW	Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
VBW	$\geq$ RBW
Trace	Max hold
Sweep time	Auto couple

Allow the trace to stabilize and use the marker-delta function to determine the separation between the peaks of the adjacent channels.

Compliance of an EUT with the appropriate regulatory limit shall be determined.

### TEST SETUP





**TEST ENVIRONMENT**

Temperature	25.6°C	Relative Humidity	59.2%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V, 60Hz

**RESULTS**

Please refer to Appendix D.

## 7.5. NUMBER OF HOPPING FREQUENCIES

### LIMITS

CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 2		
Section	Test Item	Limit
CFR 47 15.247 (a) (1) III ISED RSS-247 Clause 5.1 (d)	Number of Hopping Frequency	at least 15 hopping channels

### TEST PROCEDURE


Refer to ANSI C63.10-2013 clause 7.8.3.

Connect the EUT to the spectrum Analyzer and use the following settings:

Detector	Peak
RBW	To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20dB bandwidth, whichever is smaller.
VBW	$\geq$ RBW
Span	The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
Trace	Max hold
Sweep time	Auto couple

Set EUT to transmit maximum output power and switch on frequency hopping function. then set enough count time (larger than 5000 times) to get all the hopping frequency channel displayed on the screen of spectrum analyzer, count the quantity of peaks to get the number of hopping channels.

### TEST SETUP





**TEST ENVIRONMENT**

Temperature	25.6°C	Relative Humidity	59.2%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V, 60Hz

**RESULTS**

Please refer to appendix F.



## 7.6. TIME OF OCCUPANCY (DWELL TIME)

### LIMITS

CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 2		
Section	Test Item	Limit
CFR 47 15.247 (a) (1) III ISED RSS-247 Clause 5.1 (d)	Time of Occupancy (Dwell Time)	The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed.

### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 7.8.4.

Connect the EUT to the spectrum Analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	1 MHz
VBW	≥RBW
Span	Zero span, centered on a hopping channel
Trace	Max hold
Sweep time	As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel

Use the marker-delta function to determine the transmit time per hop (Burst Width). If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

For FHSS Mode (79 Channel):

DH1 Dwell Time:  $\text{Burst Width} * (1600/2) * 31.6 / (\text{channel number})$

DH3 Dwell Time:  $\text{Burst Width} * (1600/4) * 31.6 / (\text{channel number})$

DH5 Dwell Time:  $\text{Burst Width} * (1600/6) * 31.6 / (\text{channel number})$

For AFHSS Mode (20 Channel):


DH1 Dwell Time:  $\text{Burst Width} * (800/2) * 8 / (\text{channel number})$

DH3 Dwell Time:  $\text{Burst Width} * (800/4) * 8 / (\text{channel number})$

DH5 Dwell Time:  $\text{Burst Width} * (800/6) * 8 / (\text{channel number})$



**TEST SETUP**

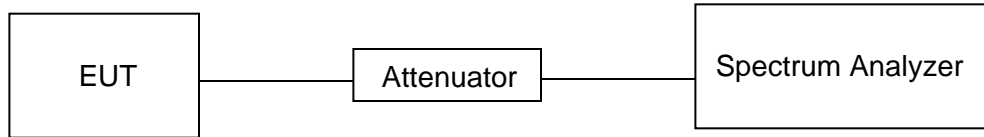

**TEST ENVIRONMENT**

Temperature	25.6°C	Relative Humidity	59.2%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V, 60Hz

**RESULTS**

Please refer to appendix E.





## 7.7. CONDUCTED BANDEdge AND SPURIOUS EMISSION

### LIMITS

CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 2		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d) ISED RSS-247 5.5	Conducted Spurious Emission	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

### TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 7.8.6 and 7.8.8.

Connect the EUT to the spectrum analyser and use the following settings for reference level measurement:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.


Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span}/\text{RBW}$
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements.



**TEST SETUP**



**TEST ENVIRONMENT**

Temperature	25.6°C	Relative Humidity	59.2%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V, 60Hz

**RESULTS**

Please refer to appendix G & H.

## 8. RADIATED TEST RESULTS

### LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Please refer to ISED RSS-GEN Clause 8.9 and Clause 8.10.

Radiation Disturbance Test Limit for FCC (Class B) (9kHz-1GHz)

Emissions radiated outside of the specified frequency bands above 30MHz		
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
		Quasi-Peak
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54
Above 1000	500	Peak
		Average
		74
		54

FCC Emissions radiated outside of the specified frequency bands below 30MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

ISED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) (µA/m)	Measurement distance (m)
9 - 490 kHz <sup>Note 1</sup>	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

**Note 1:** The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.



ISED Restricted bands please refer to ISED RSS-GEN Clause 8.10

**Table 7 – Restricted frequency bands<sup>Note 1</sup>**

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

**Note 1:** Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

FCC Restricted bands of operation refer to FCC §15.205 (a):


MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

Note: <sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup>Above 38.6c

**TEST SETUP AND PROCEDURE**

Below 30MHz

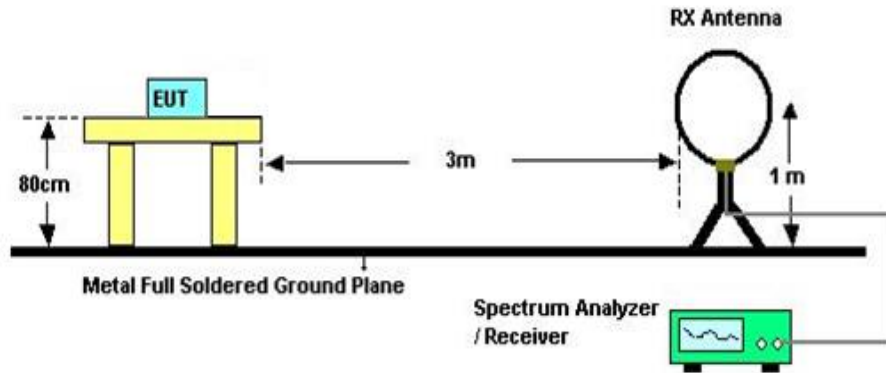


The setting of the spectrum analyser

RBW	200Hz (From 9kHz to 0.15MHz)/ 9kHz (From 0.15MHz to 30MHz)
VBW	200Hz (From 9kHz to 0.15MHz)/ 9kHz (From 0.15MHz to 30MHz)
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.

Below 1G and above 30MHz

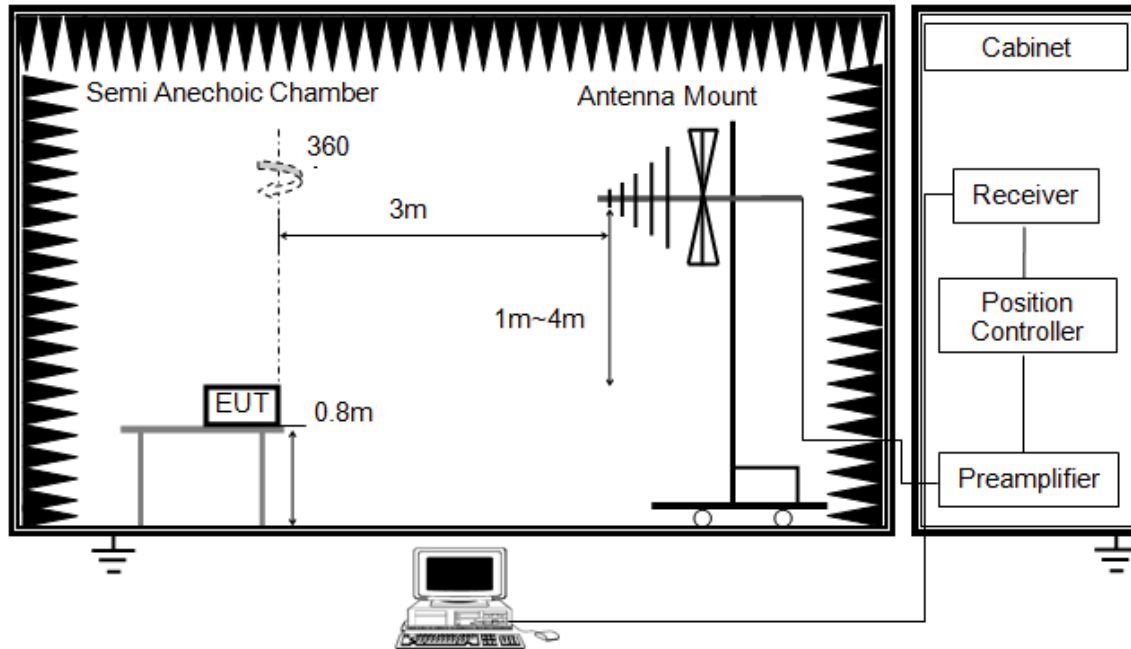

The setting of the spectrum analyser

RBW	120kHz
VBW	300kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

Above 1G




The setting of the spectrum analyser

RBW	1MHz
VBW	PEAK: 3MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (1.5 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.1.ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

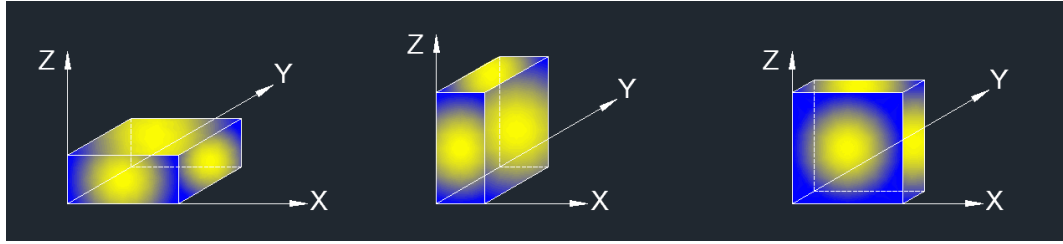

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

### TEST ENVIRONMENT


Temperature	23.5°C	Relative Humidity	58%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V, 60Hz



## 8.1. RESTRICTED BANDEDGE

### 8.1.1. GFSK MODE

#### RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

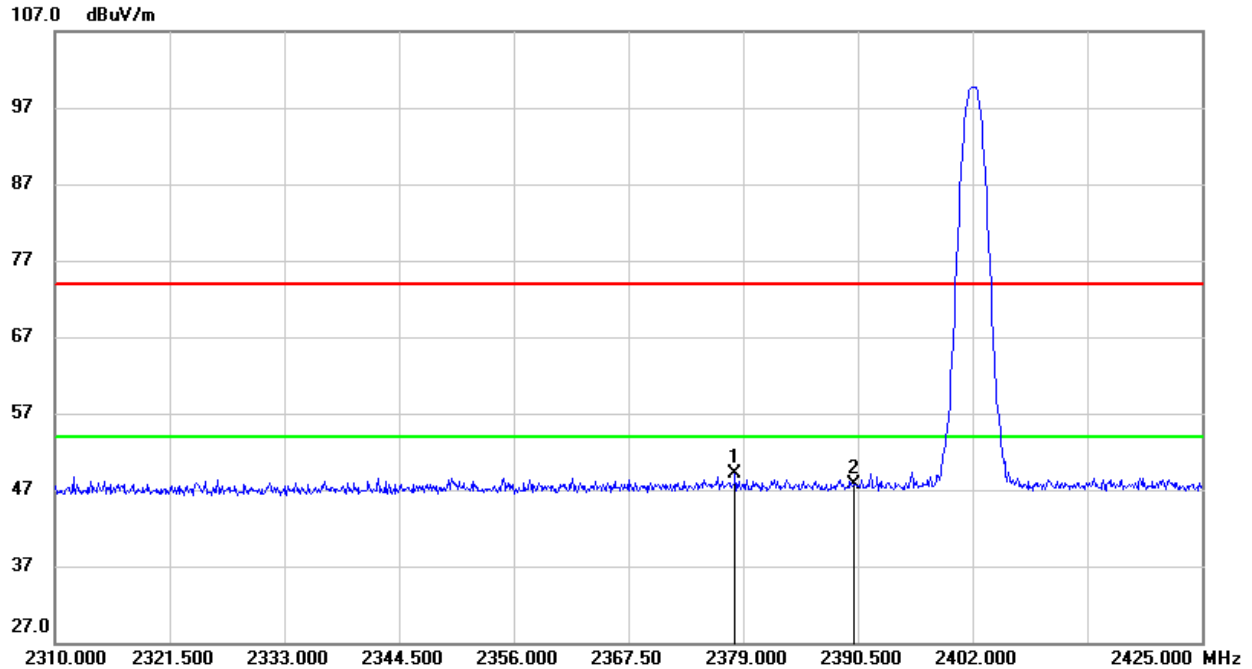


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2378.195	16.12	32.91	49.03	74.00	-24.97	peak
2	2390.000	14.70	32.94	47.64	74.00	-26.36	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.


4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

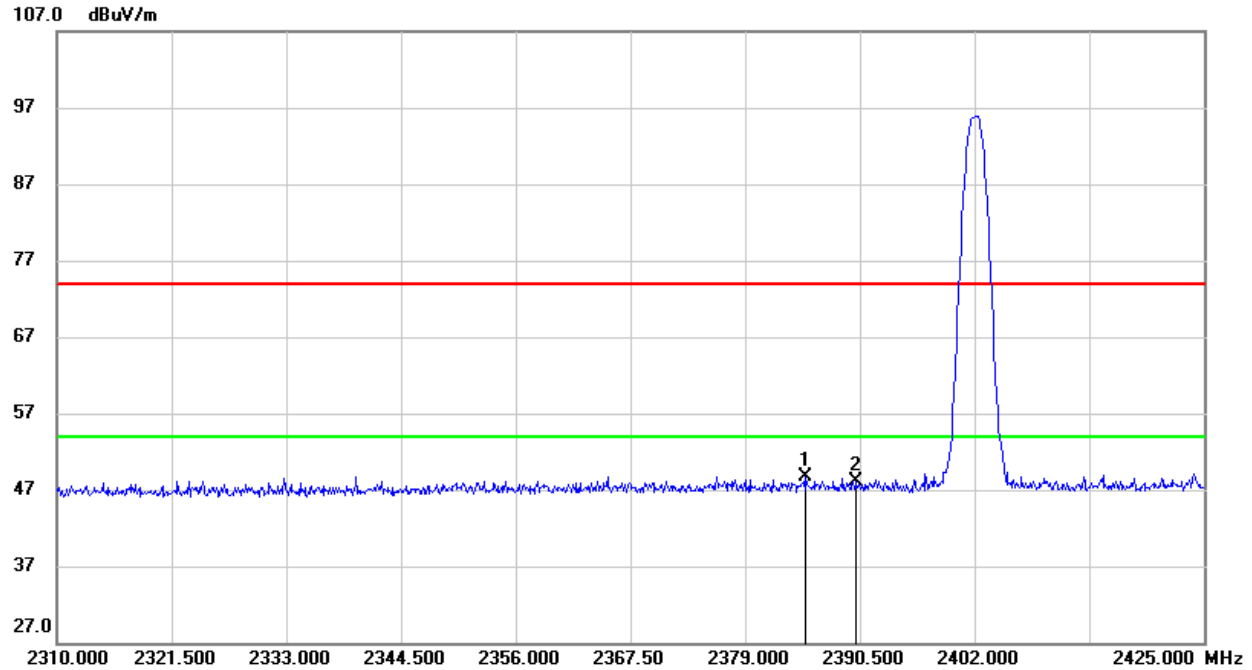**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.095	15.79	32.93	48.72	74.00	-25.28	peak
2	2390.000	15.21	32.94	48.15	74.00	-25.85	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**

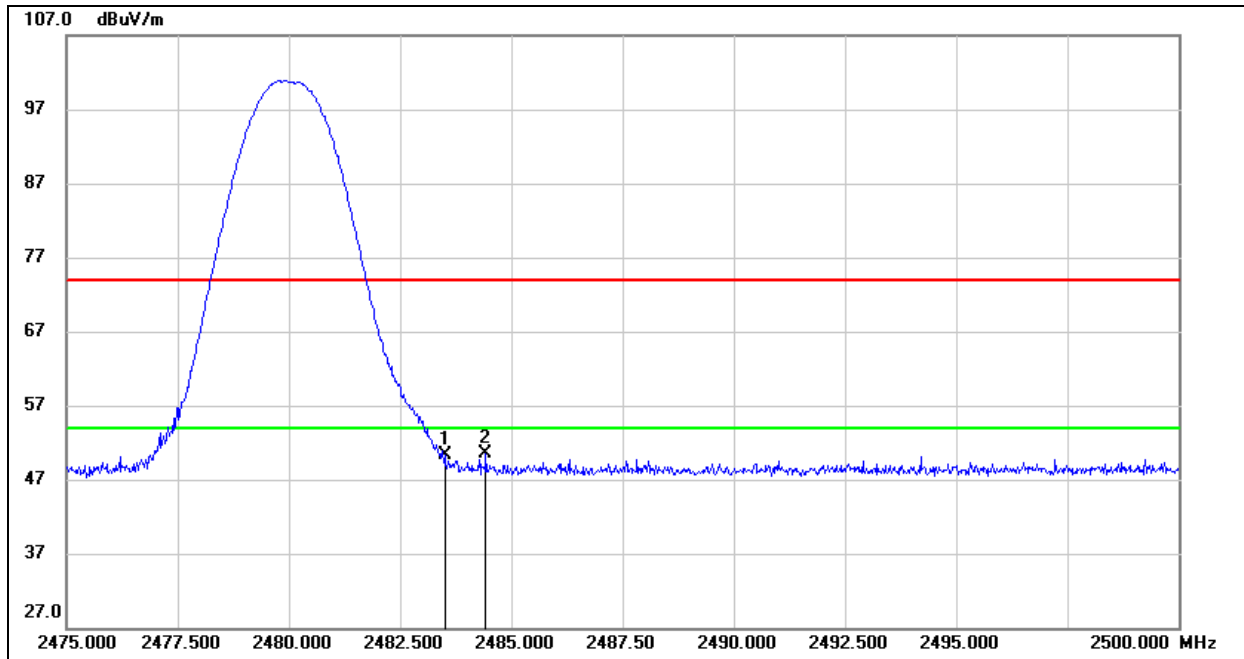

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	16.67	33.58	50.25	74.00	-23.75	peak
2	2484.425	16.87	33.59	50.46	74.00	-23.54	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)**

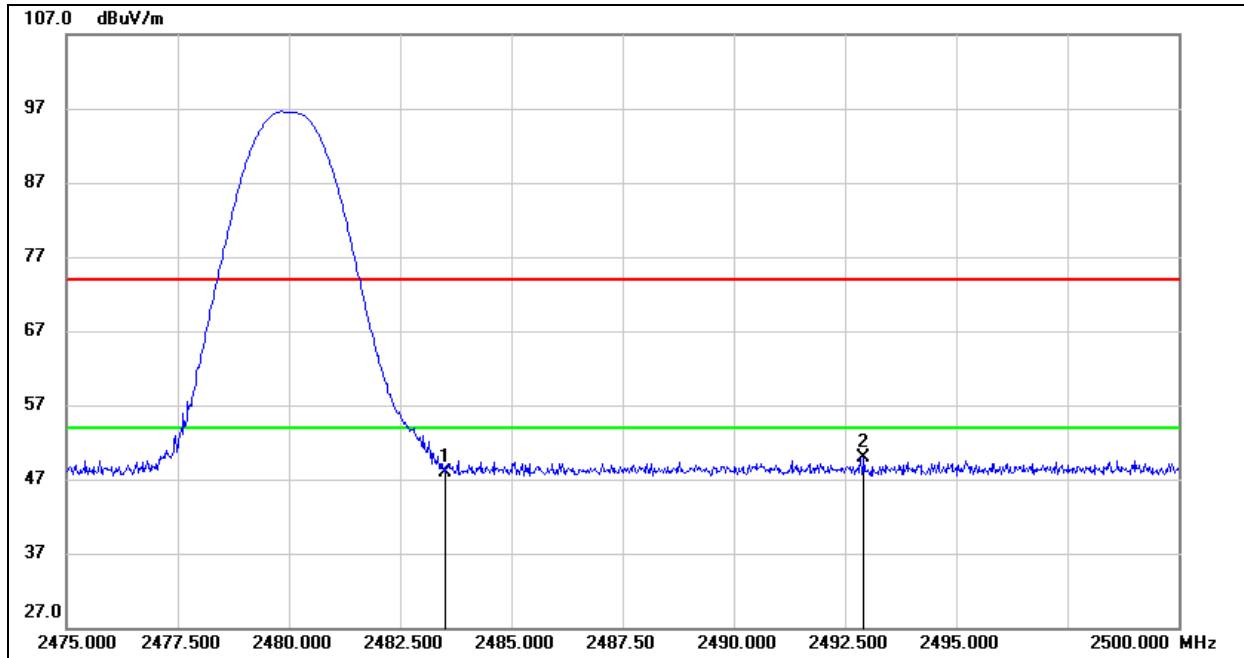


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	14.32	33.58	47.90	74.00	-26.10	peak
2	2492.925	16.29	33.65	49.94	74.00	-24.06	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

### 8.1.2. 8DPSK MODE


#### RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

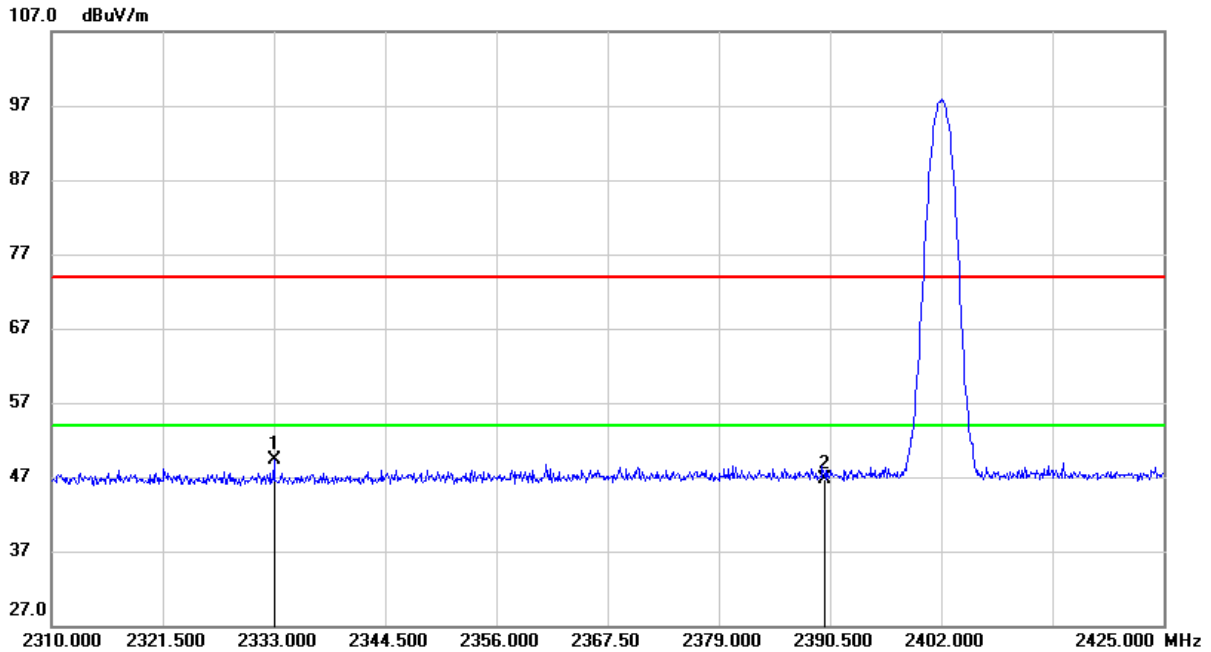

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2333.000	16.64	32.75	49.39	74.00	-24.61	peak
2	2390.000	13.84	32.94	46.78	74.00	-27.22	peak


- Note:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)**

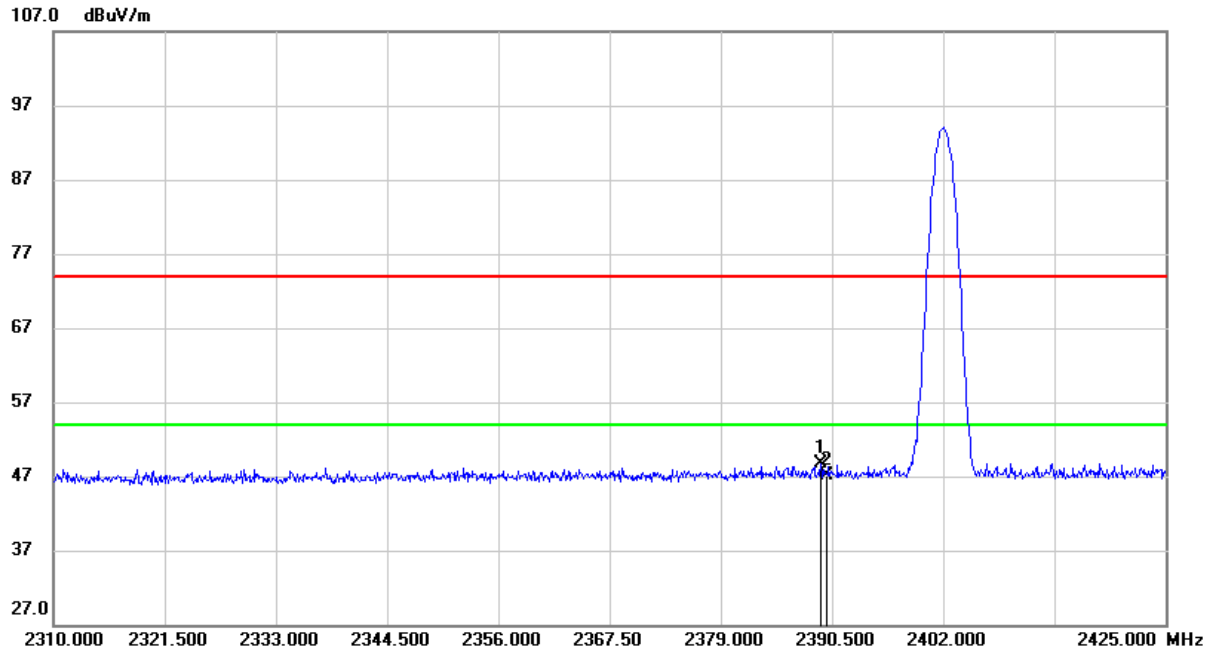

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.350	15.76	32.94	48.70	74.00	-25.30	peak
2	2390.000	14.12	32.94	47.06	74.00	-26.94	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

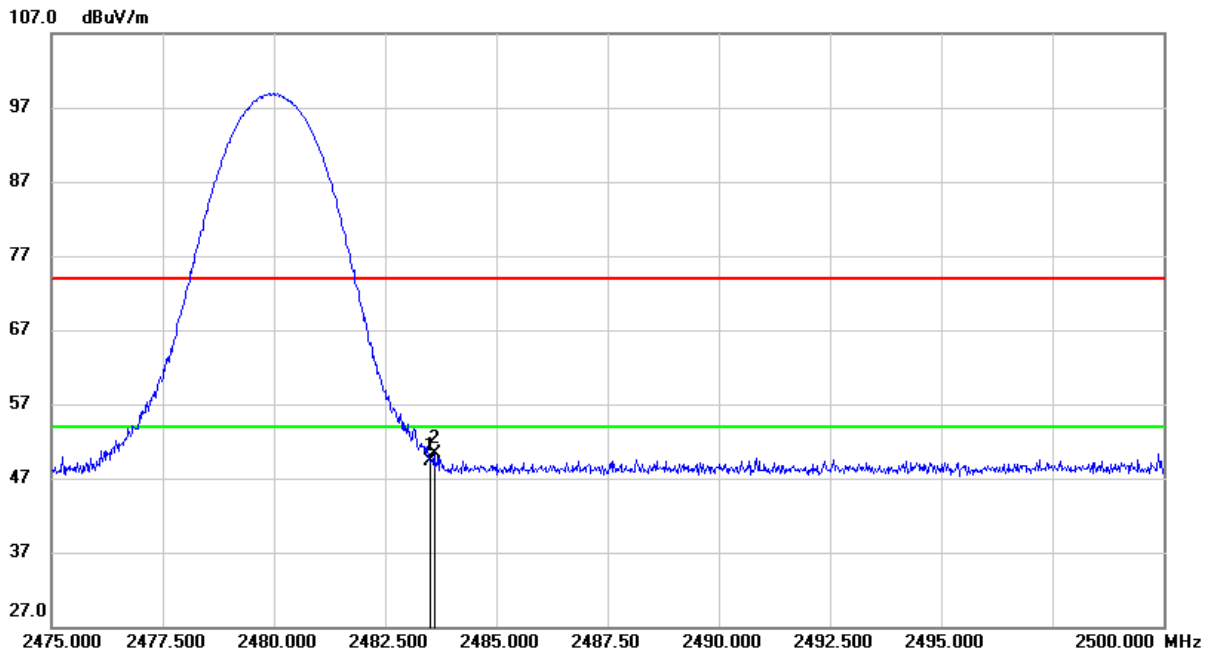**RESTRICTED BANDEGE (HIGH CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	15.76	33.58	49.34	74.00	-24.66	peak
2	2483.600	16.75	33.58	50.33	74.00	-23.67	peak

Note: 1. Measurement = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)**

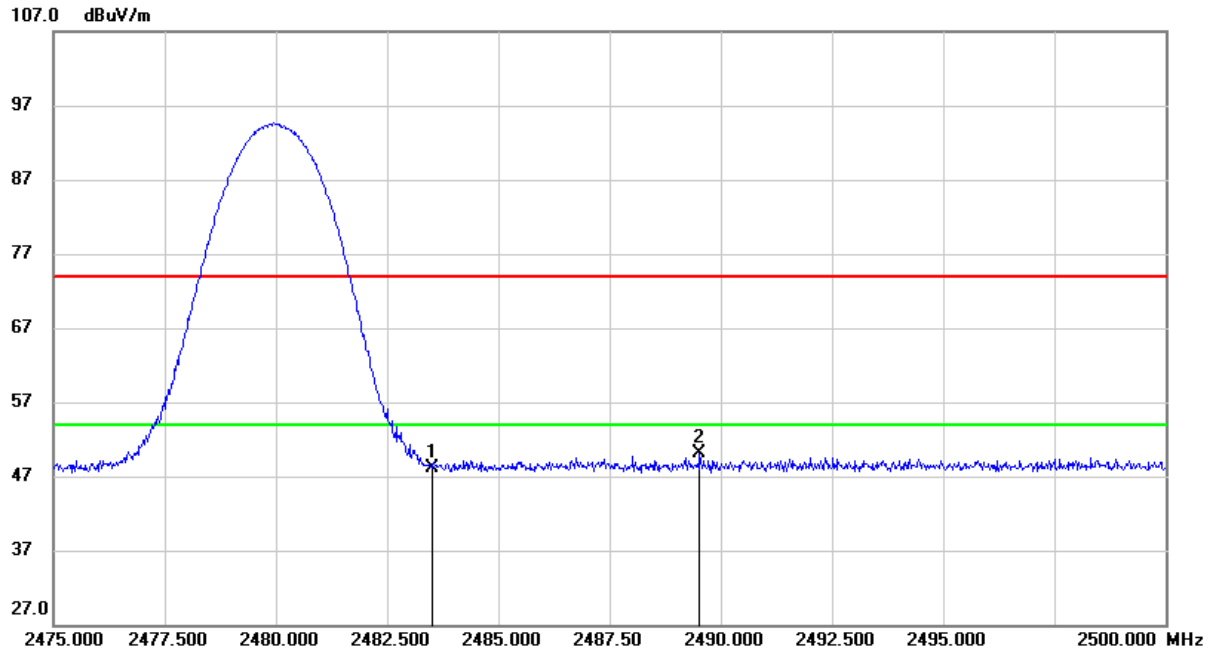

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	14.44	33.58	48.02	74.00	-25.98	peak
2	2489.525	16.41	33.62	50.03	74.00	-23.97	peak


Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.



## 8.2. SPURIOUS EMISSIONS (1GHz ~ 3GHz)

### 8.2.1. GFSK MODE

#### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

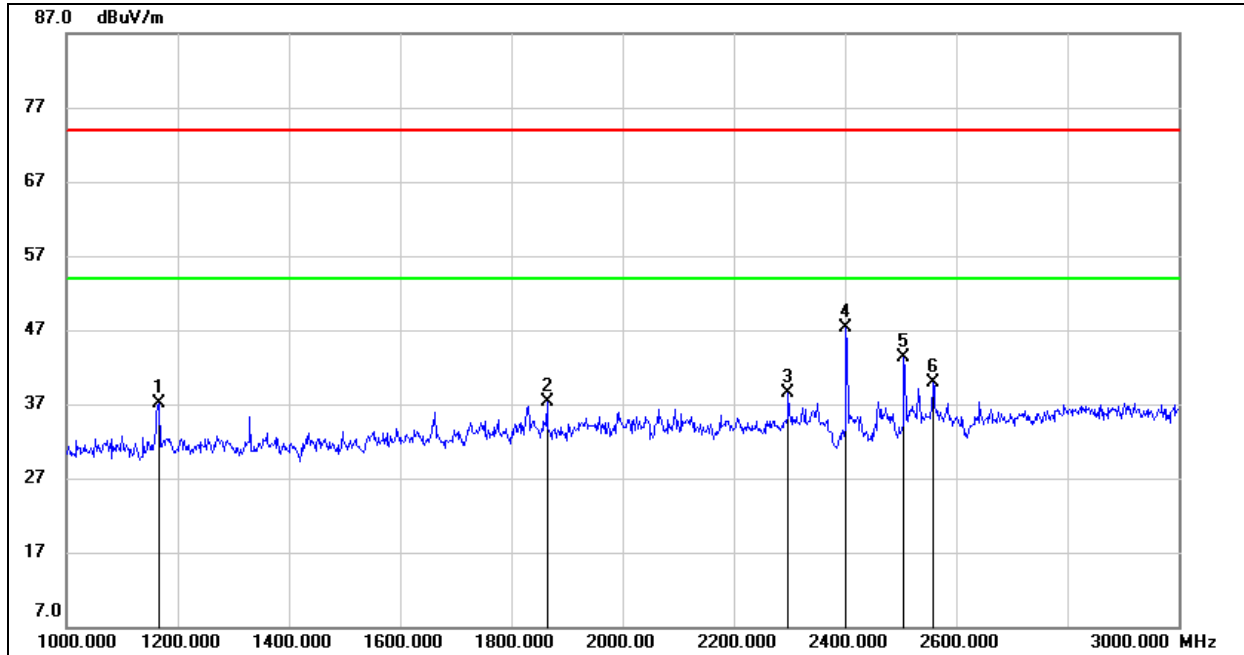

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1166.000	50.01	-12.96	37.05	74.00	-36.95	peak
2	1864.000	47.25	-9.95	37.30	74.00	-36.70	peak
3	2298.000	46.62	-8.19	38.43	74.00	-35.57	peak
4	2402.000	55.23	-7.85	47.38	/	/	fundamental
5	2506.000	50.57	-7.20	43.37	74.00	-30.63	peak
6	2558.000	47.37	-7.47	39.90	74.00	-34.10	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

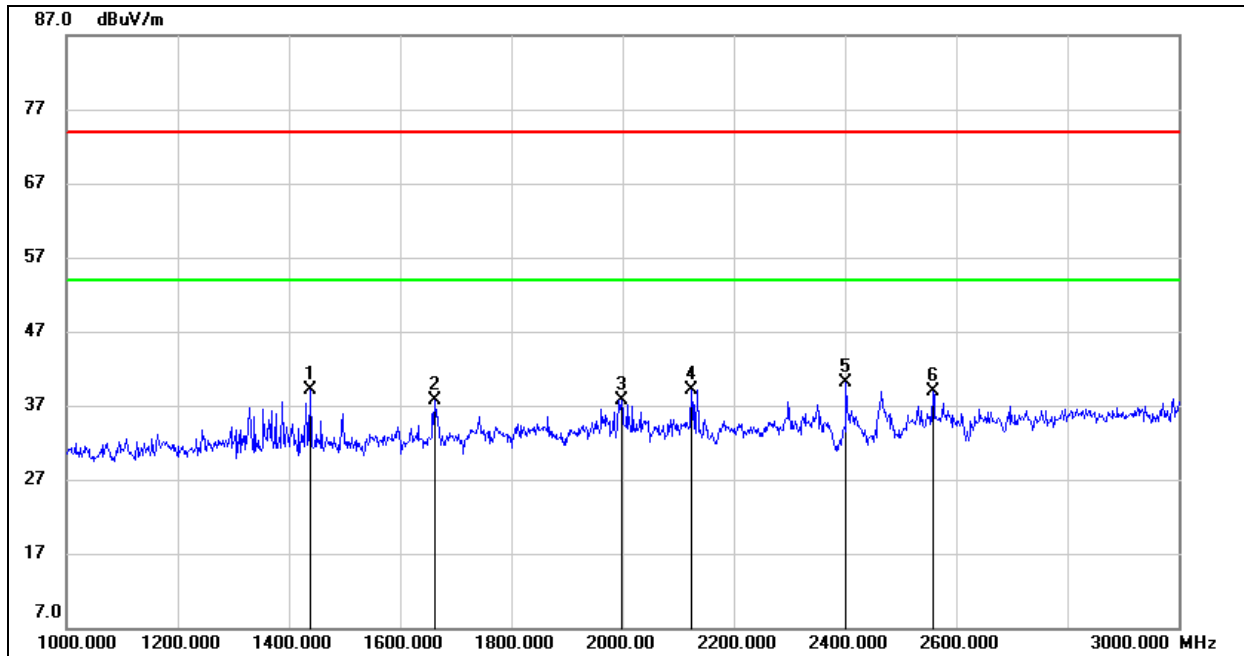**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1438.000	51.48	-12.32	39.16	74.00	-34.84	peak
2	1662.000	48.71	-11.09	37.62	74.00	-36.38	peak
3	1998.000	47.49	-9.83	37.66	74.00	-36.34	peak
4	2124.000	48.24	-9.04	39.20	74.00	-34.80	peak
5	2402.000	47.86	-7.85	40.01	/	/	fundamental
6	2558.000	46.47	-7.47	39.00	74.00	-35.00	peak

Note: 1. Measurement = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

### HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

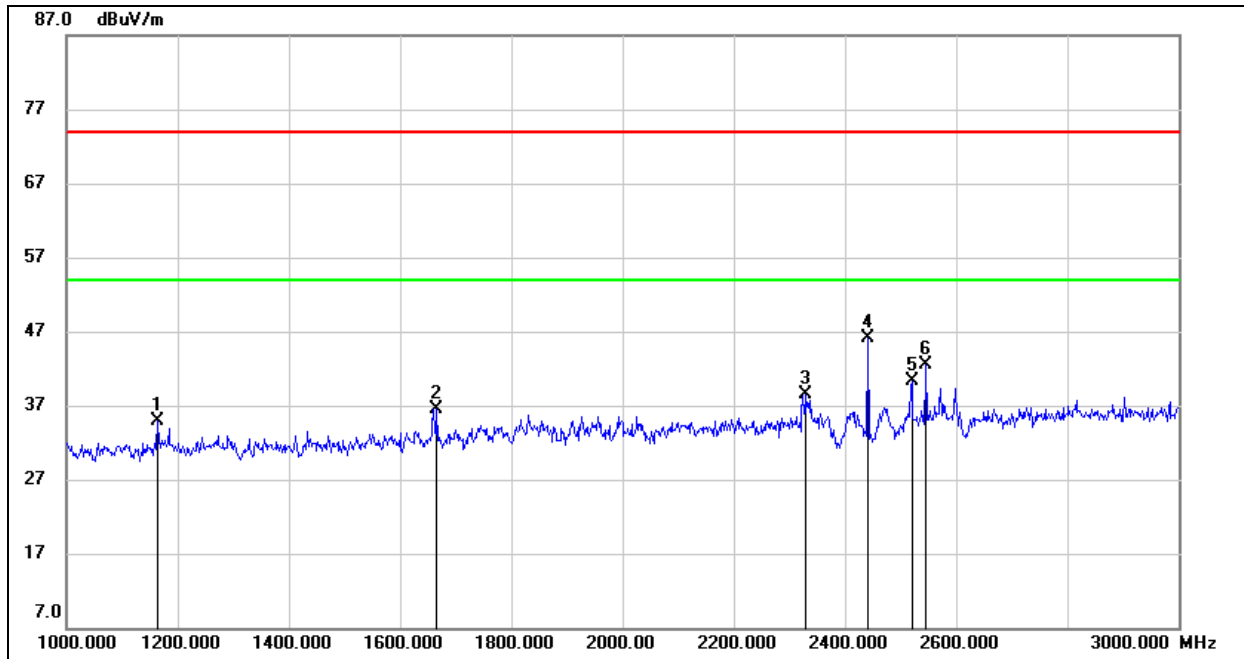

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1164.000	47.83	-12.97	34.86	74.00	-39.14	peak
2	1666.000	47.65	-11.07	36.58	74.00	-37.42	peak
3	2328.000	46.59	-8.10	38.49	74.00	-35.51	peak
4	2441.000	53.73	-7.58	46.15	/	/	fundamental
5	2520.000	47.61	-7.27	40.34	74.00	-33.66	peak
6	2546.000	49.99	-7.41	42.58	74.00	-31.42	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

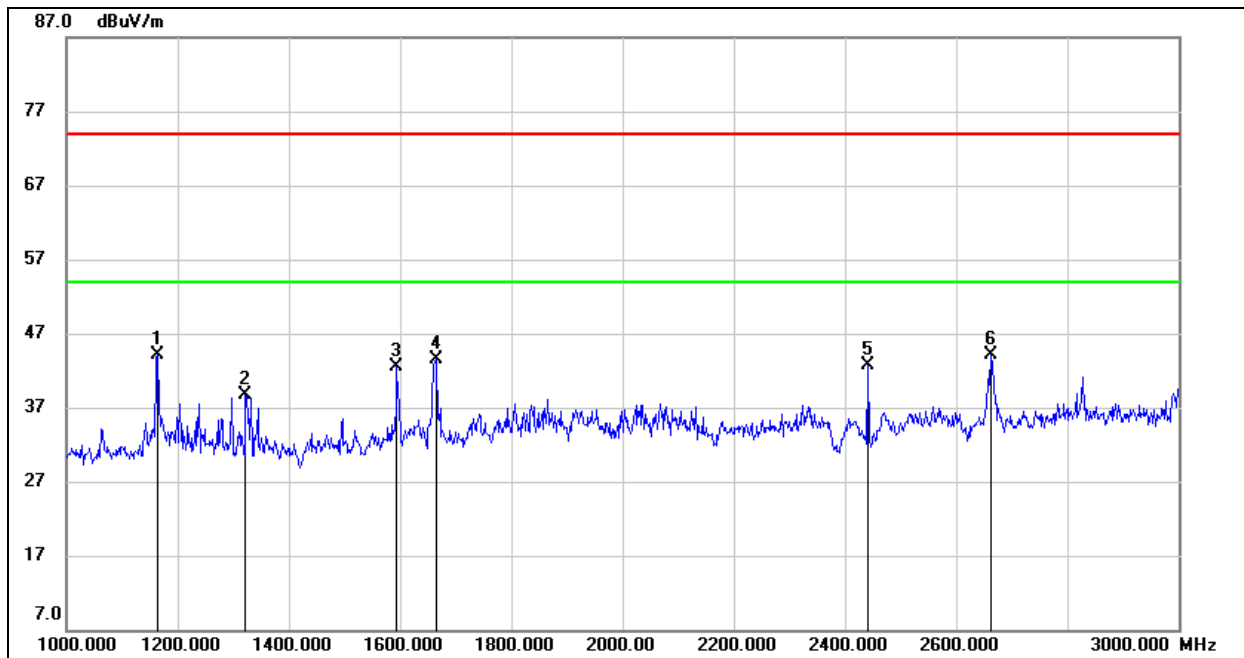**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1164.000	57.16	-12.97	44.19	74.00	-29.81	peak
2	1322.000	51.10	-12.35	38.75	74.00	-35.25	peak
3	1594.000	54.02	-11.45	42.57	74.00	-31.43	peak
4	1664.000	54.64	-11.09	43.55	74.00	-30.45	peak
5	2441.000	50.22	-7.58	42.64	/	/	fundamental
6	2662.000	51.45	-7.35	44.10	74.00	-29.90	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

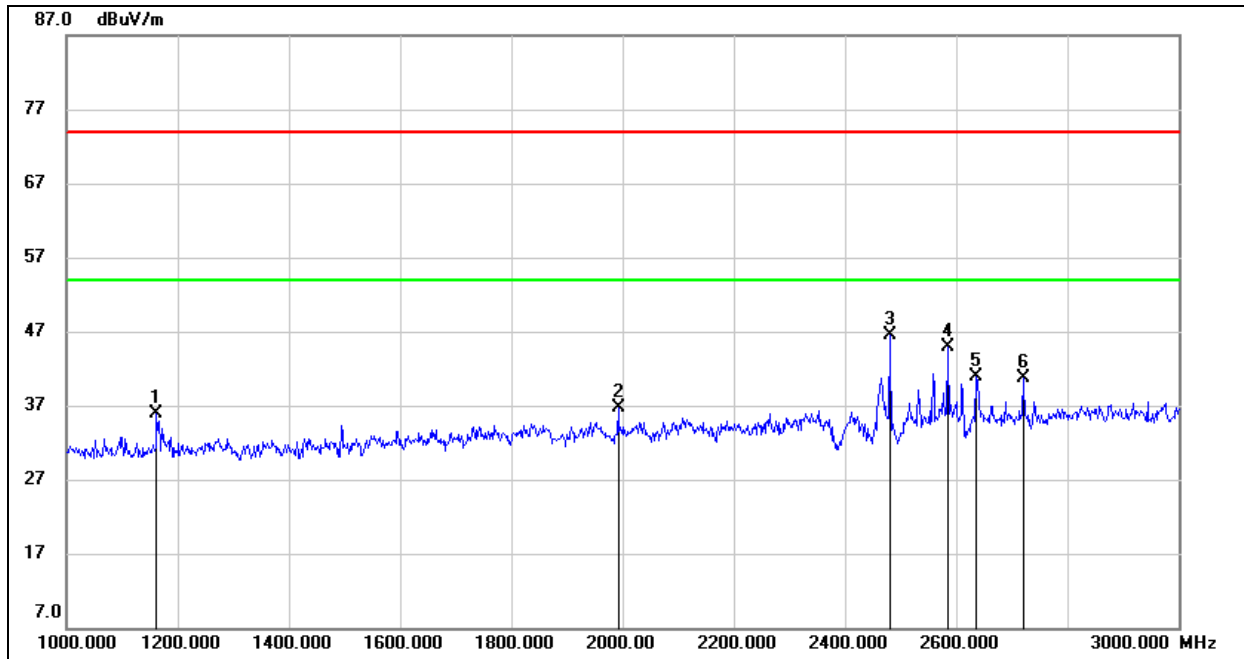**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1162.000	48.93	-13.00	35.93	74.00	-38.07	peak
2	1992.000	46.51	-9.83	36.68	74.00	-37.32	peak
3	2480.000	53.80	-7.31	46.49	/	/	fundamental
4	2584.000	52.61	-7.62	44.99	74.00	-29.01	peak
5	2636.000	48.36	-7.49	40.87	74.00	-33.13	peak
6	2720.000	47.56	-6.92	40.64	74.00	-33.36	peak

Note: 1. Measurement = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

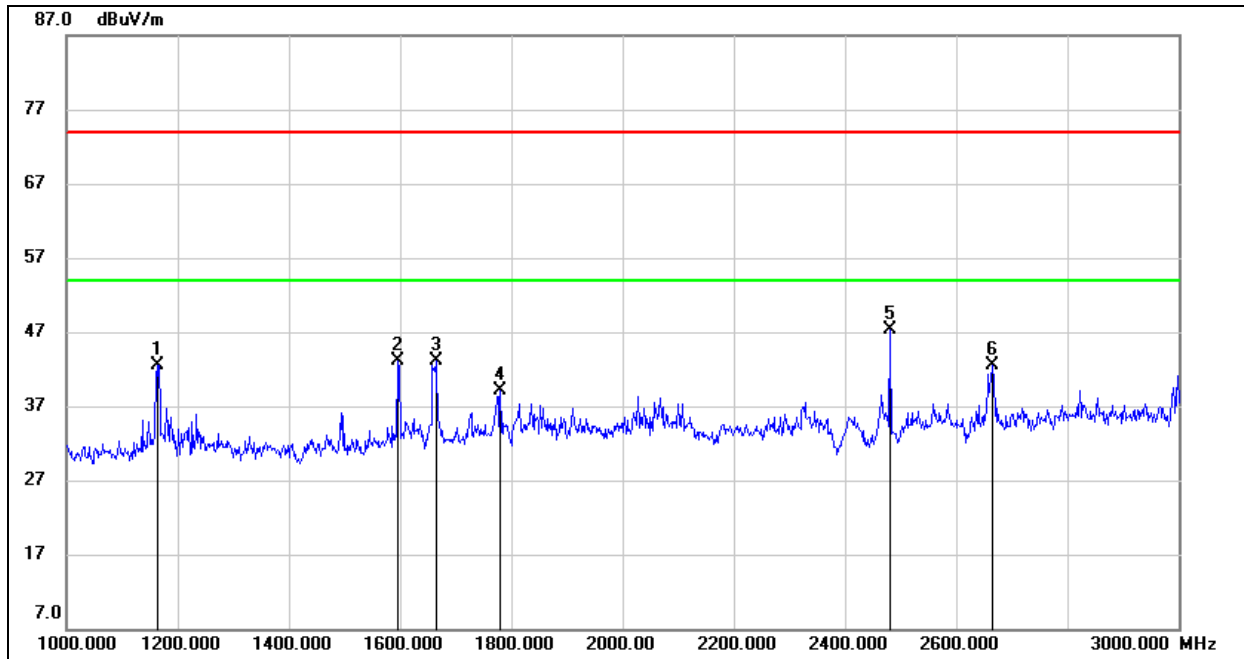


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1164.000	55.48	-12.97	42.51	74.00	-31.49	peak
2	1596.000	54.48	-11.44	43.04	74.00	-30.96	peak
3	1664.000	54.29	-11.09	43.20	74.00	-30.80	peak
4	1780.000	49.25	-10.12	39.13	74.00	-34.87	peak
5	2480.000	54.62	-7.31	47.31	/	/	fundamental
6	2666.000	49.73	-7.32	42.41	74.00	-31.59	peak

- Note:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
  5. Proper operation of the transmitter prior to adding the filter to the measurement chain.


### 8.2.2. 8DPSK MODE

#### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

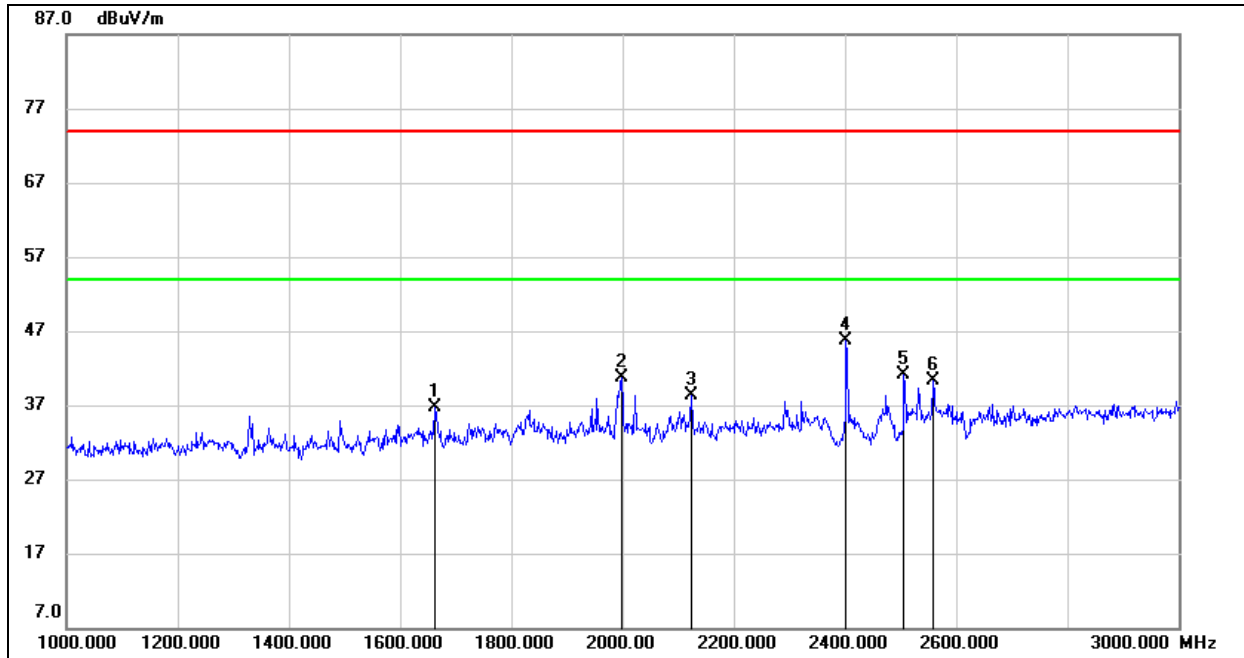

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1662.000	47.74	-11.09	36.65	74.00	-37.35	peak
2	1998.000	50.44	-9.83	40.61	74.00	-33.39	peak
3	2124.000	47.42	-9.04	38.38	74.00	-35.62	peak
4	2402.000	53.63	-7.85	45.78	/	/	fundamental
5	2506.000	48.28	-7.20	41.08	74.00	-32.92	peak
6	2558.000	47.76	-7.47	40.29	74.00	-33.71	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

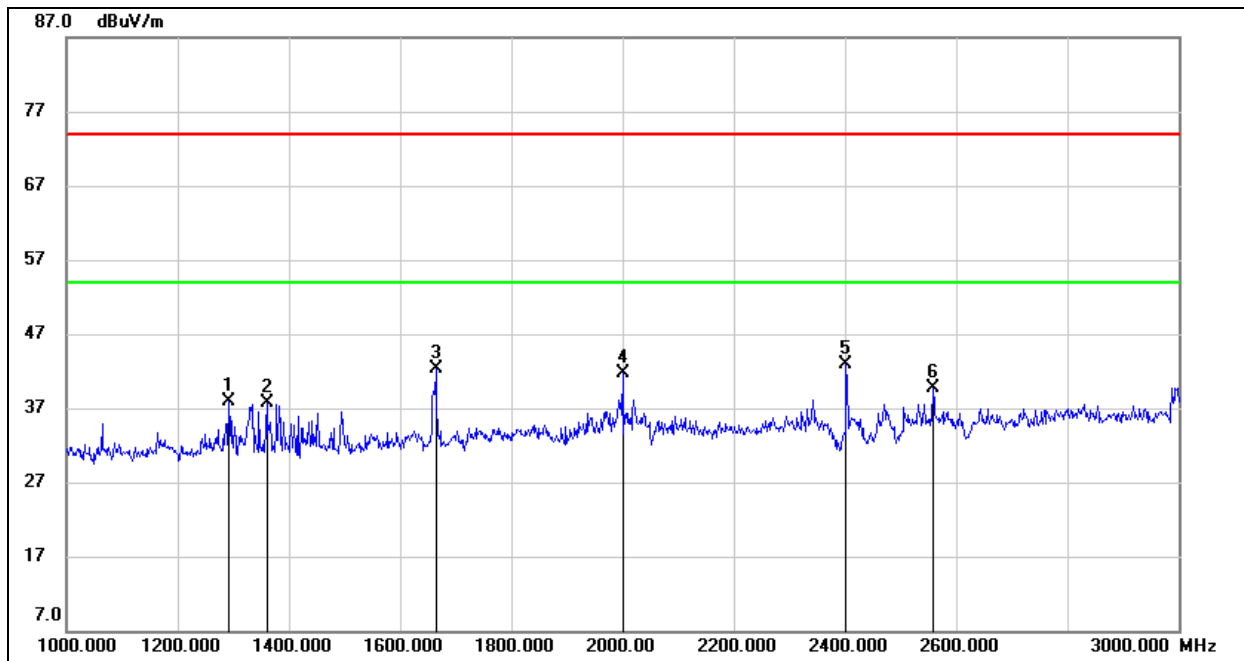**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1292.000	50.17	-12.36	37.81	74.00	-36.19	peak
2	1360.000	50.11	-12.36	37.75	74.00	-36.25	peak
3	1664.000	53.47	-11.09	42.38	74.00	-31.62	peak
4	2000.000	51.53	-9.82	41.71	74.00	-32.29	peak
5	2402.000	50.76	-7.85	42.91	/	/	fundamental
6	2558.000	47.14	-7.47	39.67	74.00	-34.33	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.




### HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

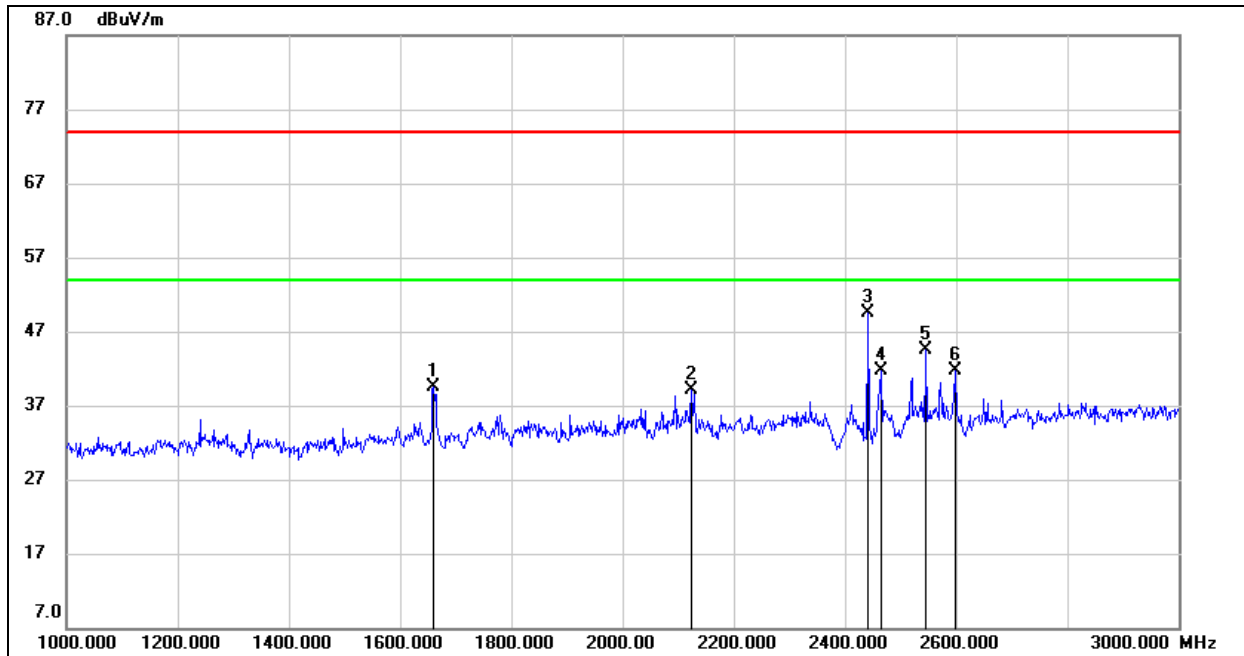

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1660.000	50.58	-11.10	39.48	74.00	-34.52	peak
2	2124.000	48.21	-9.04	39.17	74.00	-34.83	peak
3	2441.000	57.10	-7.58	49.52	/	/	fundamental
4	2464.000	49.18	-7.41	41.77	74.00	-32.23	peak
5	2546.000	51.99	-7.41	44.58	74.00	-29.42	peak
6	2598.000	49.42	-7.69	41.73	74.00	-32.27	peak

- Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.  
 5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

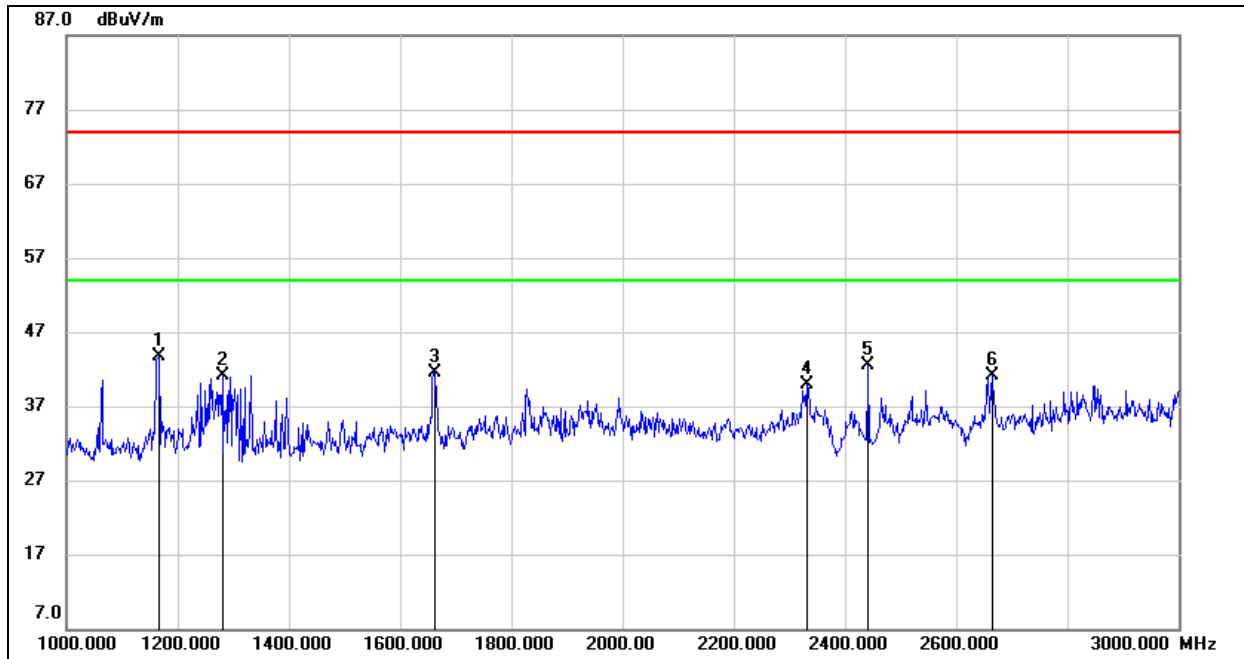**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1166.000	56.58	-12.96	43.62	74.00	-30.38	peak
2	1280.000	53.52	-12.41	41.11	74.00	-32.89	peak
3	1662.000	52.65	-11.09	41.56	74.00	-32.44	peak
4	2332.000	48.05	-8.08	39.97	74.00	-34.03	peak
5	2441.000	50.10	-7.58	42.52	/	/	fundamental
6	2664.000	48.51	-7.34	41.17	74.00	-32.83	peak

Note: 1. Measurement = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

### HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

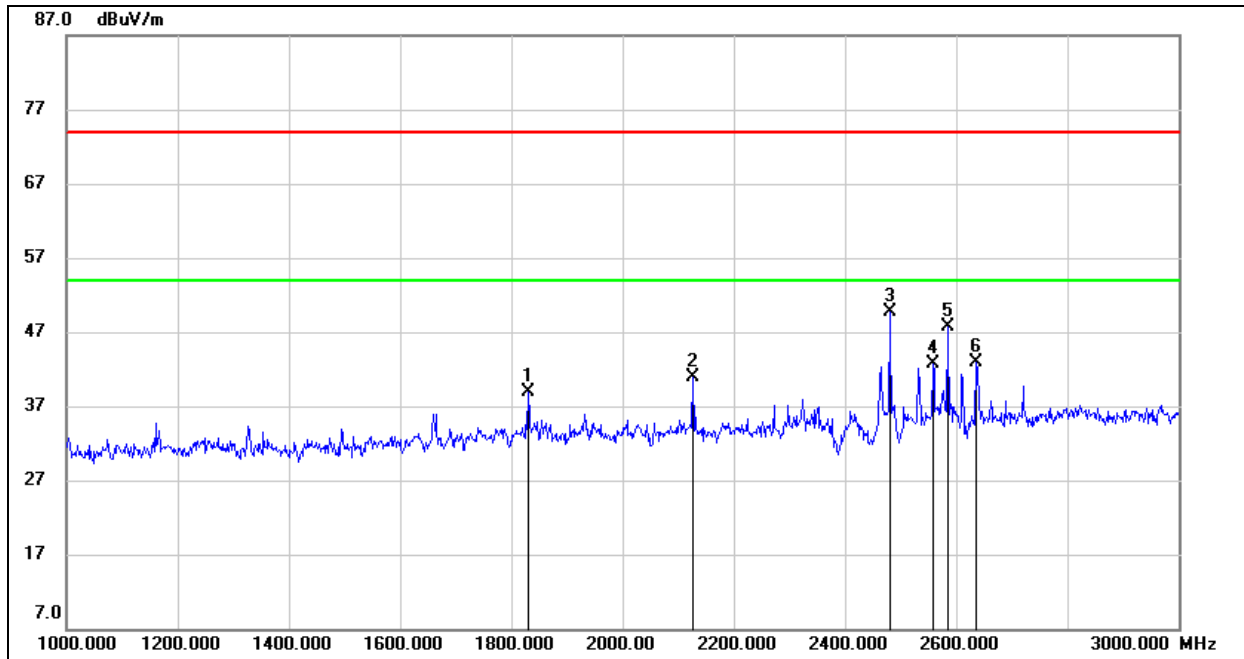

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1830.000	48.85	-9.93	38.92	74.00	-35.08	peak
2	2126.000	49.94	-9.02	40.92	74.00	-33.08	peak
3	2480.000	57.11	-7.31	49.80	/	/	fundamental
4	2558.000	50.18	-7.47	42.71	74.00	-31.29	peak
5	2584.000	55.38	-7.62	47.76	74.00	-26.24	peak
6	2636.000	50.30	-7.49	42.81	74.00	-31.19	peak

Note: 1. Measurement = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

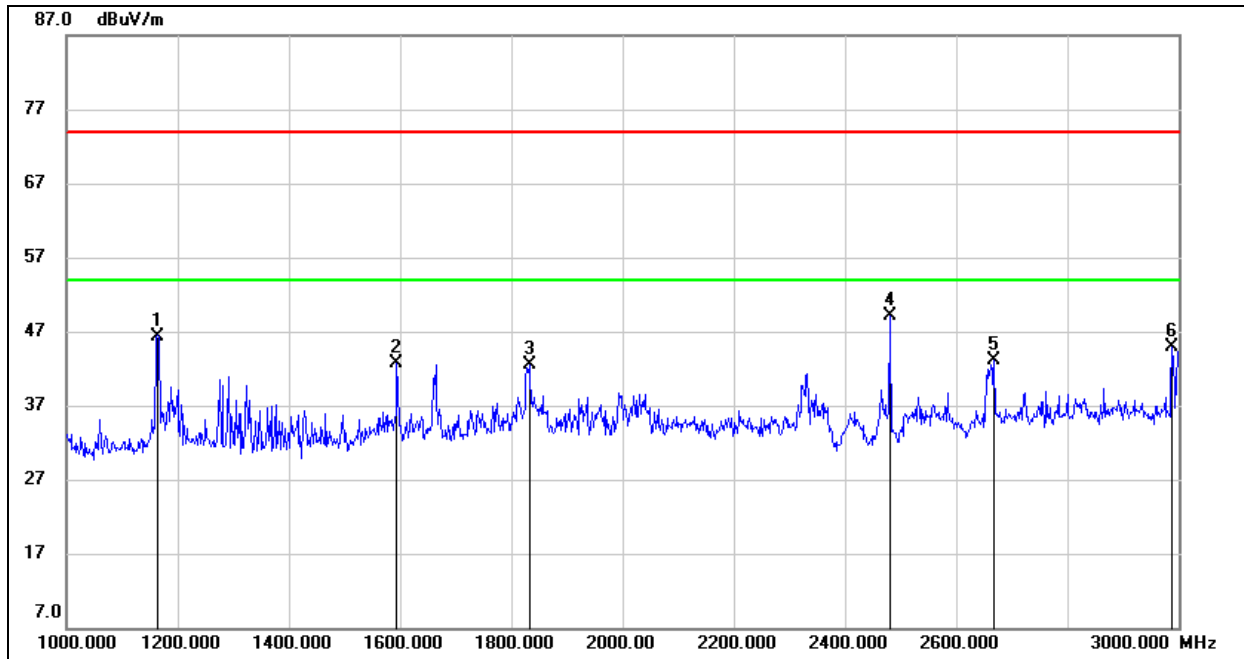


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1164.000	59.37	-12.97	46.40	74.00	-27.60	peak
2	1594.000	54.06	-11.45	42.61	74.00	-31.39	peak
3	1832.000	52.47	-9.93	42.54	74.00	-31.46	peak
4	2480.000	56.41	-7.31	49.10	/	/	fundamental
5	2668.000	50.50	-7.32	43.18	74.00	-30.82	peak
6	2988.000	50.19	-5.33	44.86	74.00	-29.14	peak

- Note:
1. Measurement = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
  5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

### 8.3. SPURIOUS EMISSIONS (3GHz ~ 18GHz)

#### 8.3.1. GFSK MODE

##### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

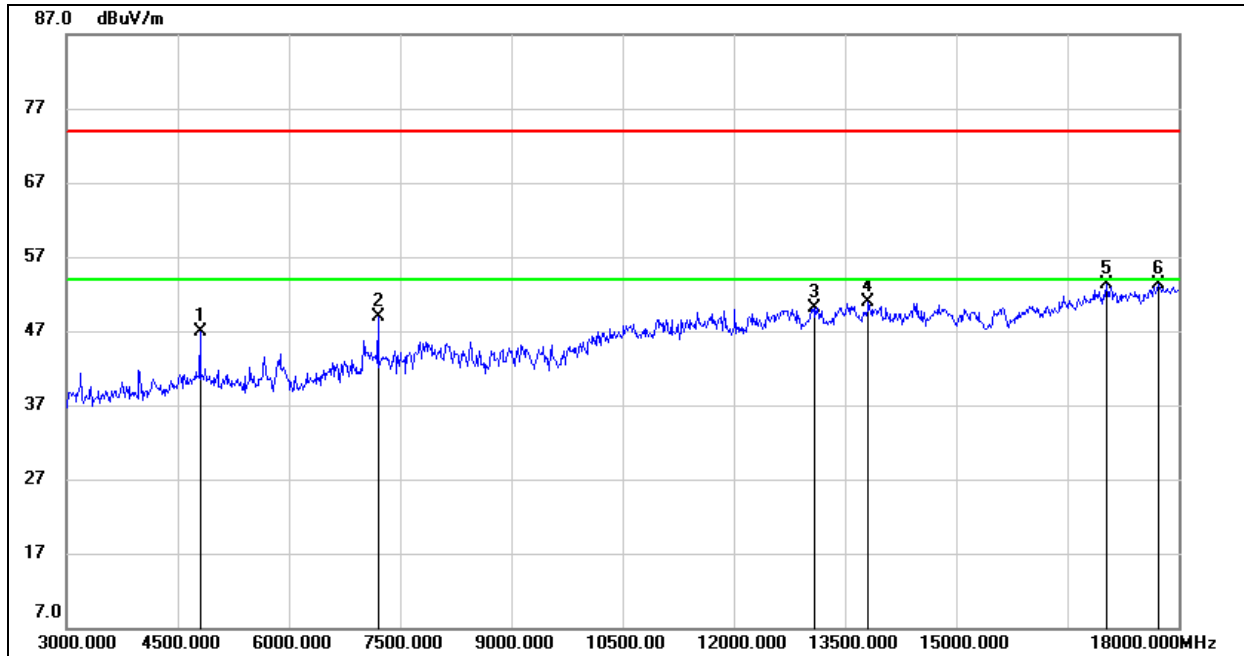

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	46.45	0.46	46.91	74.00	-27.09	peak
2	7200.000	42.99	5.82	48.81	74.00	-25.19	peak
3	13080.000	35.01	15.16	50.17	74.00	-23.83	peak
4	13815.000	33.95	16.97	50.92	74.00	-23.08	peak
5	17025.000	32.86	20.46	53.32	74.00	-20.68	peak
6	17730.000	30.57	22.70	53.27	74.00	-20.73	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Peak: Peak detector.

4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.

5. For the transmitting duration, please refer to clause 7.1.


6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

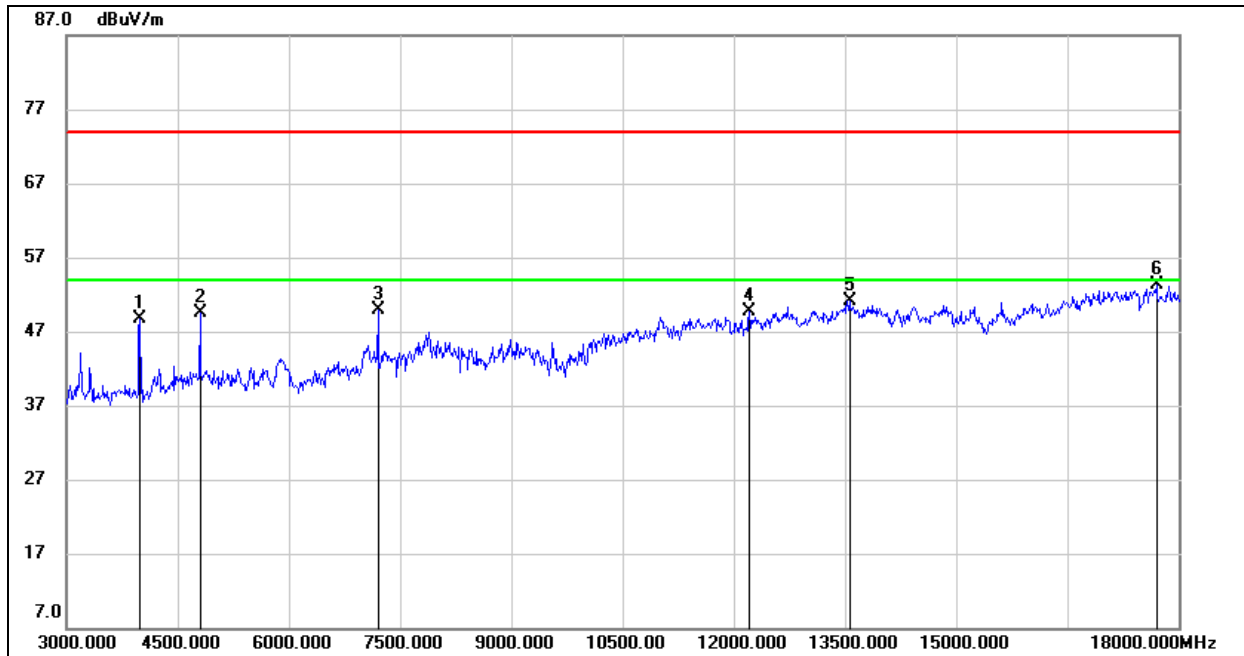**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**


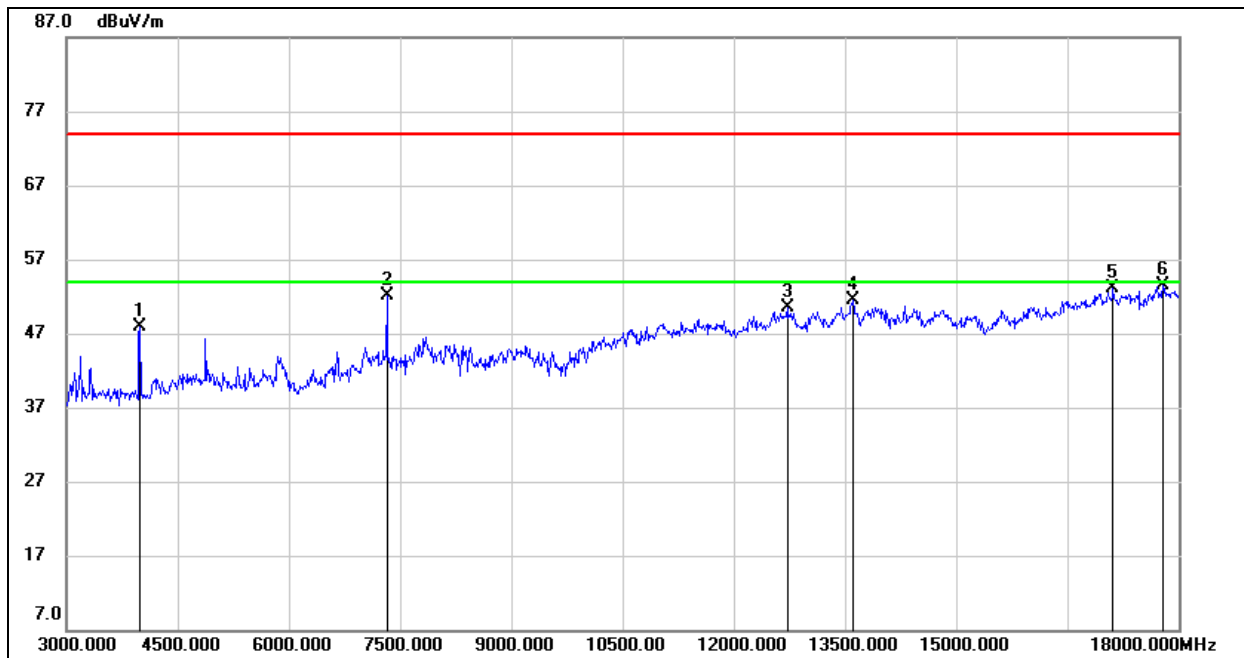
No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3990.000	51.69	-2.89	48.80	74.00	-25.20	peak
2	4800.000	49.02	0.46	49.48	74.00	-24.52	peak
3	7200.000	44.11	5.82	49.93	74.00	-24.07	peak
4	12210.000	35.97	13.75	49.72	74.00	-24.28	peak
5	13560.000	35.18	15.93	51.11	74.00	-22.89	peak
6	17700.000	30.88	22.43	53.31	74.00	-20.69	peak

- Note:
1. Peak Result = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. AVG:  $VBW=1/T_{on}$ , where:  $T_{on}$  is the transmitting duration.
  5. For the transmitting duration, please refer to clause 7.1.
  6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
  7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

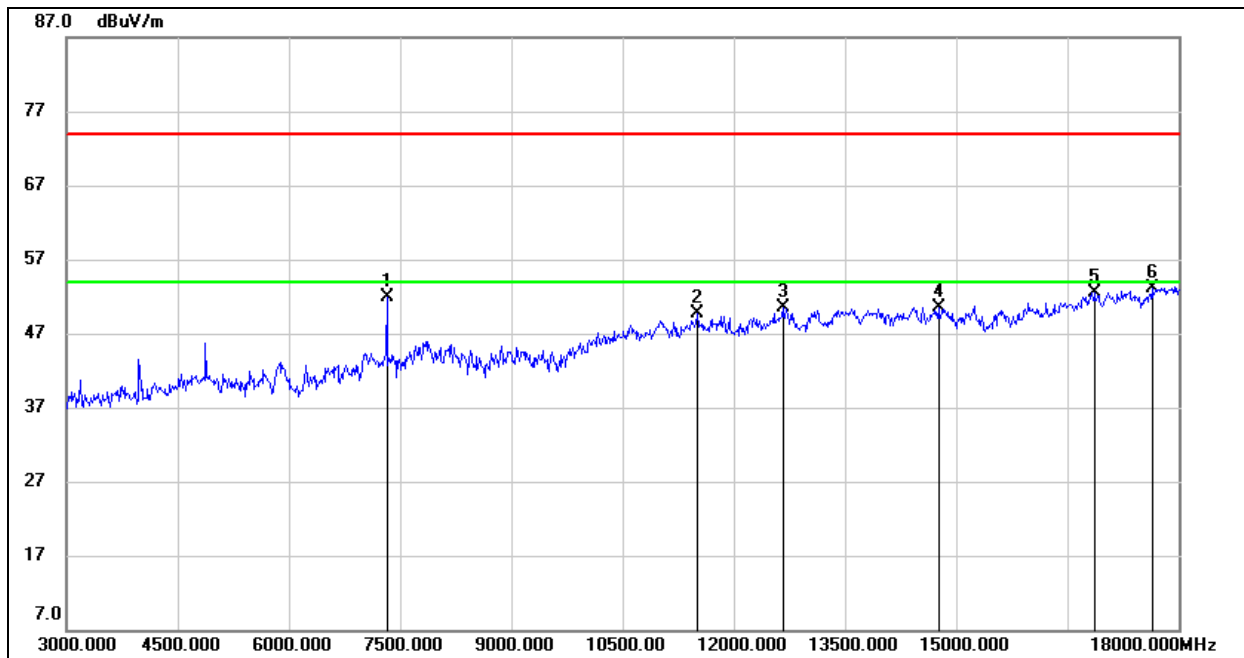**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7320.000	45.76	6.14	51.90	74.00	-22.10	peak
2	11505.000	36.30	13.42	49.72	74.00	-24.28	peak
3	12660.000	36.25	14.18	50.43	74.00	-23.57	peak
4	14760.000	34.52	15.97	50.49	74.00	-23.51	peak
5	16860.000	32.60	19.95	52.55	74.00	-21.45	peak
6	17640.000	31.11	22.05	53.16	74.00	-20.84	peak


- Note:
1. Peak Result = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.
  5. For the transmitting duration, please refer to clause 7.1.
  6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
  7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3990.000	50.75	-2.89	47.86	74.00	-26.14	peak
2	7320.000	46.03	6.14	52.17	74.00	-21.83	peak
3	12720.000	36.01	14.57	50.58	74.00	-23.42	peak
4	13605.000	35.41	16.02	51.43	74.00	-22.57	peak
5	17115.000	32.40	20.68	53.08	74.00	-20.92	peak
6	17790.000	30.25	23.22	53.47	74.00	-20.53	peak


- Note:
1. Peak Result = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. AVG:  $VBW=1/T_{on}$ , where:  $T_{on}$  is the transmitting duration.
  5. For the transmitting duration, please refer to clause 7.1.
  6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
  7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

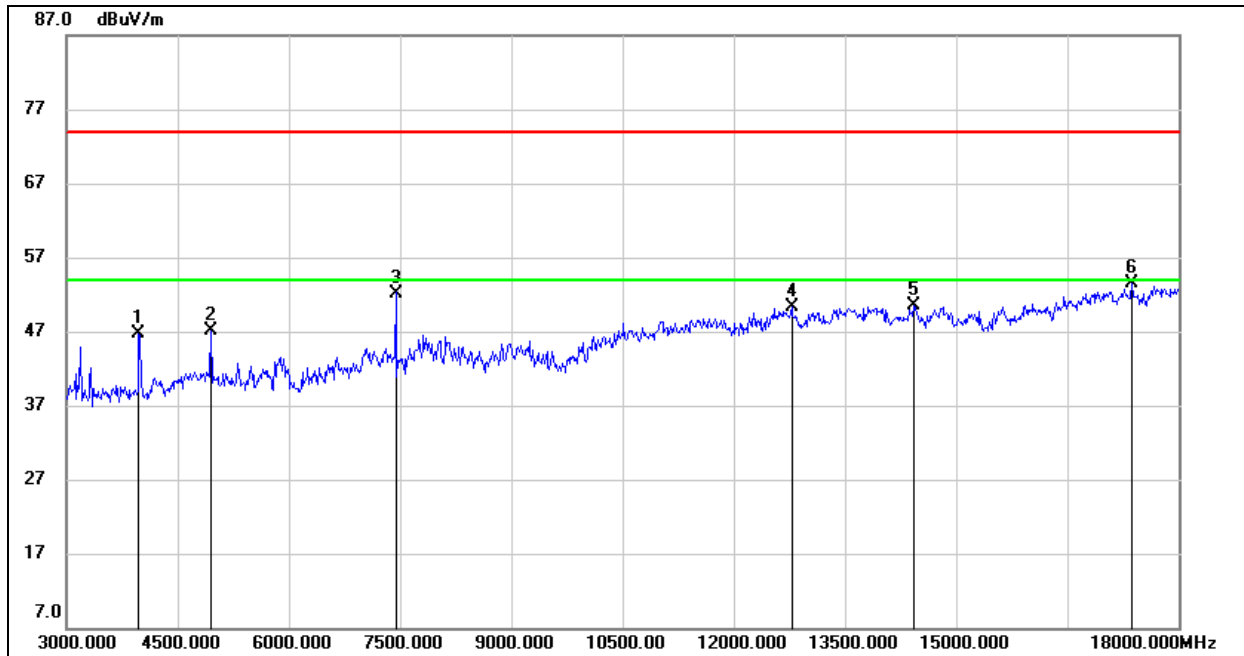

**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3975.000	49.62	-2.90	46.72	74.00	-27.28	peak
2	4950.000	46.04	1.13	47.17	74.00	-26.83	peak
3	7440.000	45.88	6.32	52.20	74.00	-21.80	peak
4	12780.000	34.86	15.38	50.24	74.00	-23.76	peak
5	14430.000	34.15	16.35	50.50	74.00	-23.50	peak
6	17370.000	31.92	21.52	53.44	74.00	-20.56	peak

- Note:
1. Peak Result = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. AVG:  $VBW=1/T_{on}$ , where:  $T_{on}$  is the transmitting duration.
  5. For the transmitting duration, please refer to clause 7.1.
  6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
  7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

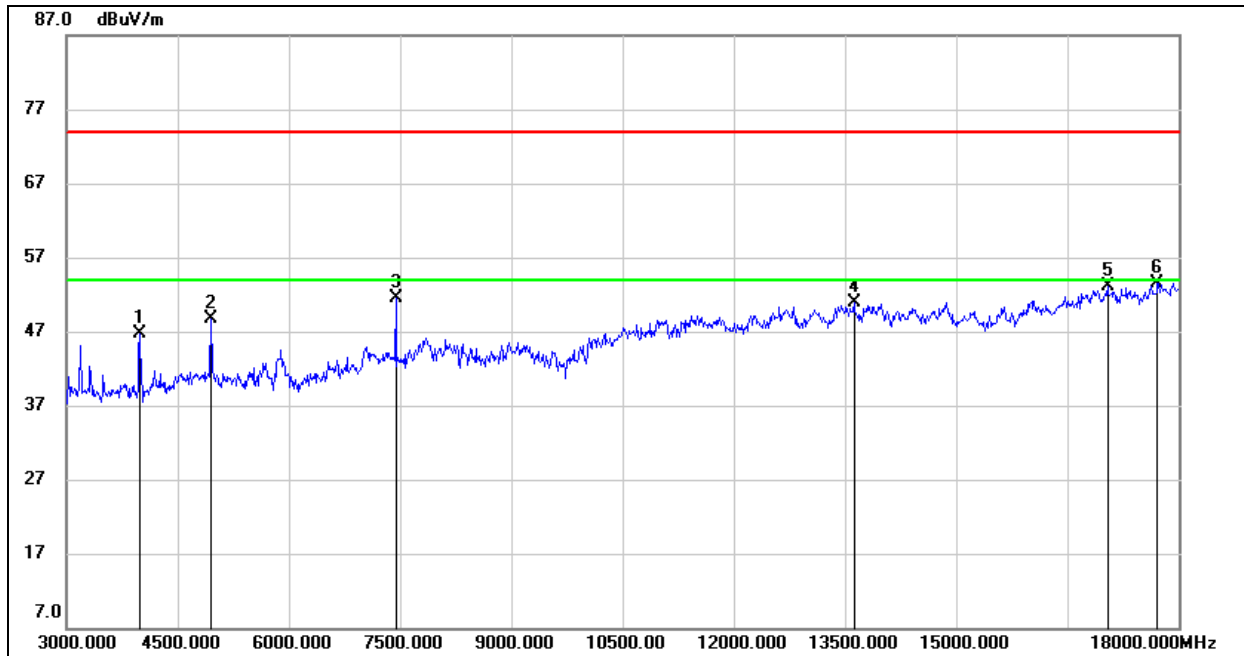
**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3990.000	49.59	-2.89	46.70	74.00	-27.30	peak
2	4950.000	47.49	1.13	48.62	74.00	-25.38	peak
3	7440.000	45.17	6.32	51.49	74.00	-22.51	peak
4	13620.000	34.88	15.99	50.87	74.00	-23.13	peak
5	17040.000	32.56	20.49	53.05	74.00	-20.95	peak
6	17715.000	30.97	22.56	53.53	74.00	-20.47	peak

- Note:
1. Peak Result = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. AVG:  $VBW=1/T_{on}$ , where:  $T_{on}$  is the transmitting duration.
  5. For the transmitting duration, please refer to clause 7.1.
  6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
  7. Proper operation of the transmitter prior to adding the filter to the measurement chain.


### 8.3.2. 8DPSK MODE

#### HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

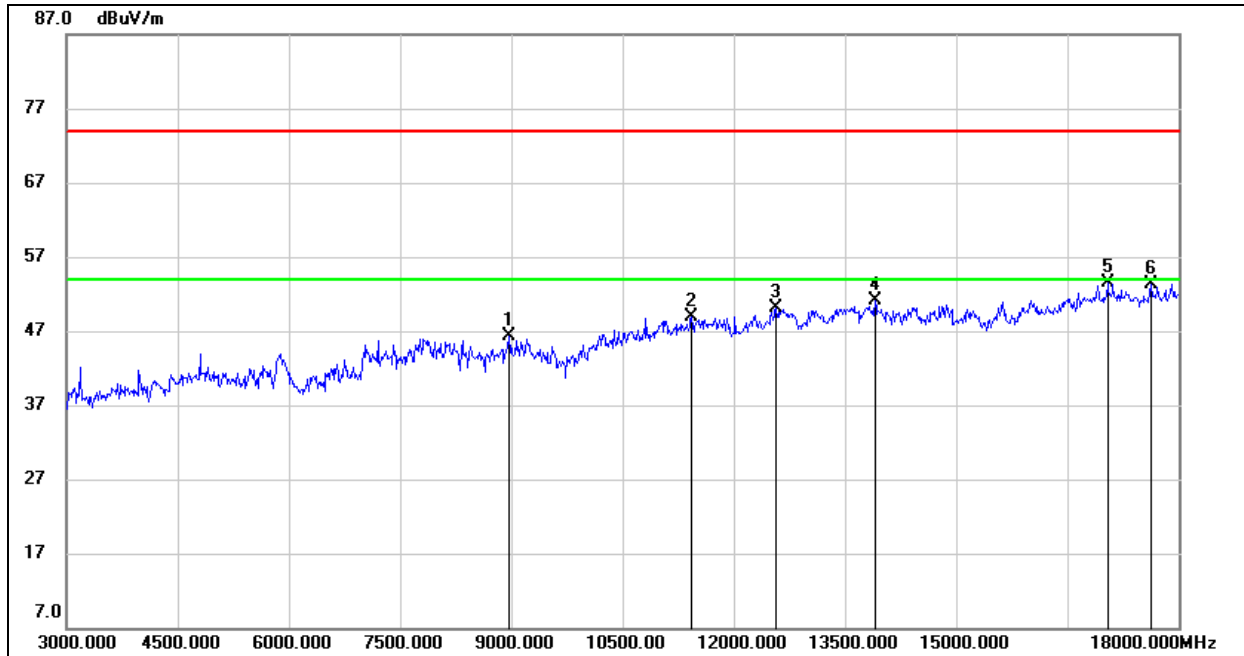


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8970.000	37.22	9.00	46.22	74.00	-27.78	peak
2	11430.000	36.10	12.85	48.95	74.00	-25.05	peak
3	12570.000	35.85	14.17	50.02	74.00	-23.98	peak
4	13905.000	34.81	16.20	51.01	74.00	-22.99	peak
5	17040.000	33.05	20.49	53.54	74.00	-20.46	peak
6	17625.000	31.40	21.95	53.35	74.00	-20.65	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.  
 4. AVG:  $VBW=1/Ton$ , where: Ton is the transmitting duration.  
 5. For the transmitting duration, please refer to clause 7.1.  
 6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.  
 7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

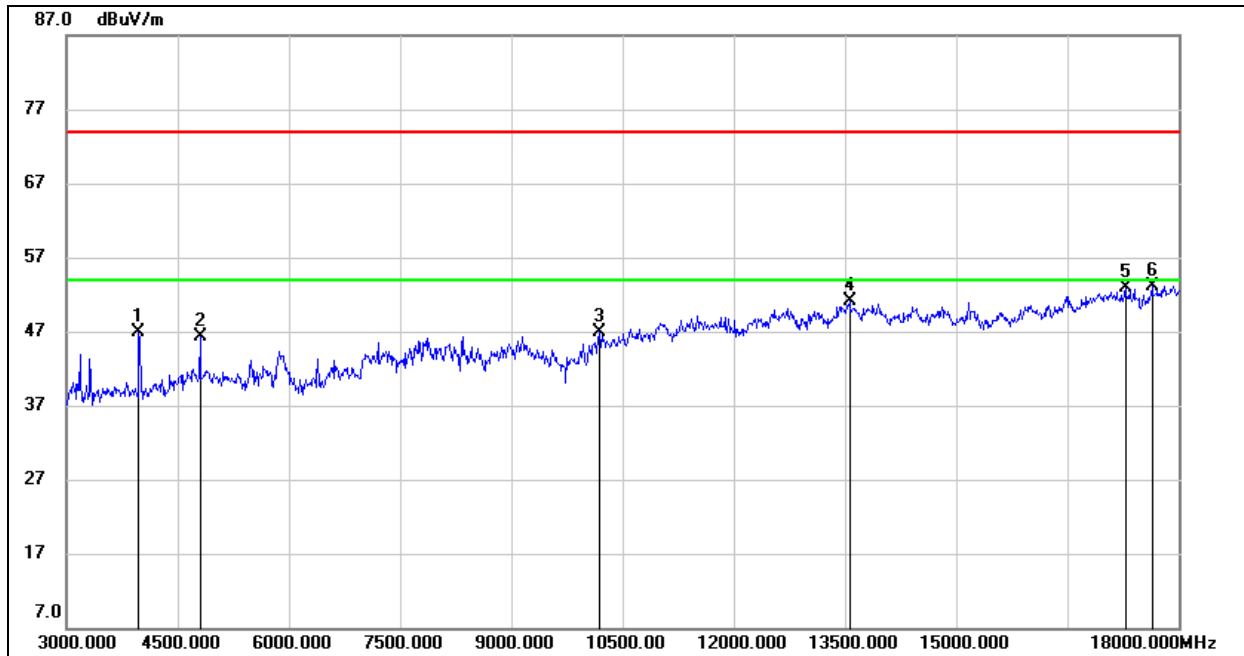**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**


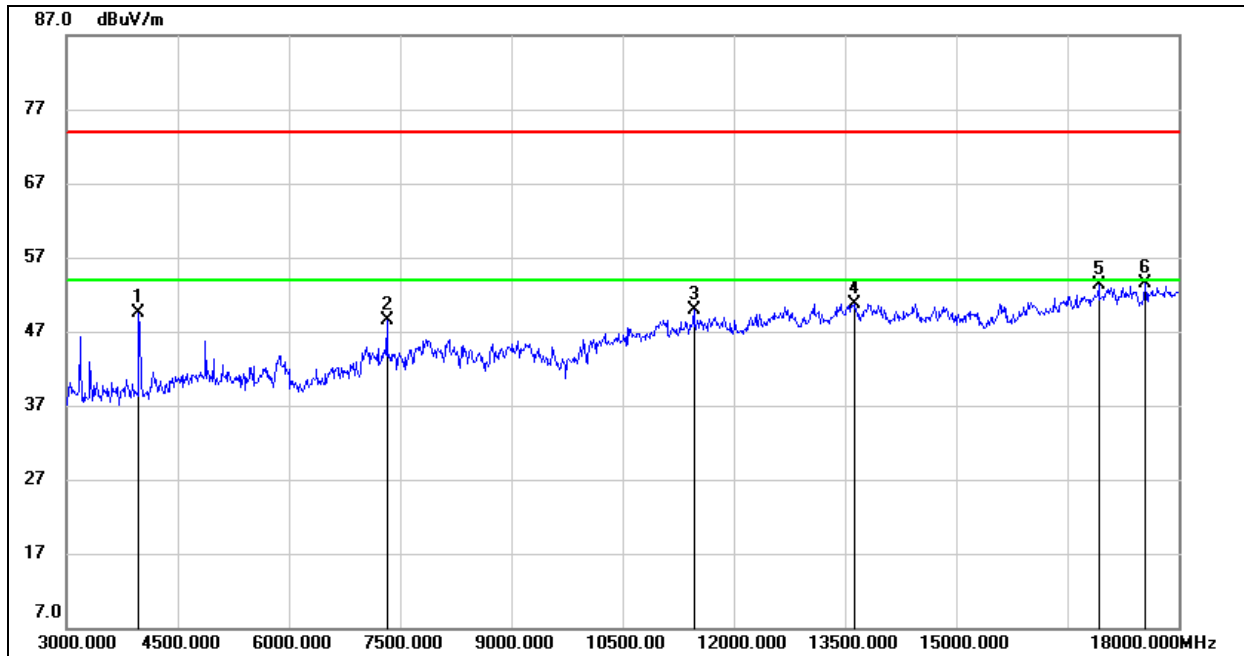
No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3975.000	49.81	-2.90	46.91	74.00	-27.09	peak
2	4800.000	45.77	0.46	46.23	74.00	-27.77	peak
3	10185.000	36.60	10.21	46.81	74.00	-27.19	peak
4	13560.000	35.16	15.93	51.09	74.00	-22.91	peak
5	17280.000	31.32	21.59	52.91	74.00	-21.09	peak
6	17640.000	31.08	22.05	53.13	74.00	-20.87	peak

- Note:
1. Peak Result = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. AVG:  $VBW=1/T_{on}$ , where:  $T_{on}$  is the transmitting duration.
  5. For the transmitting duration, please refer to clause 7.1.
  6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
  7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

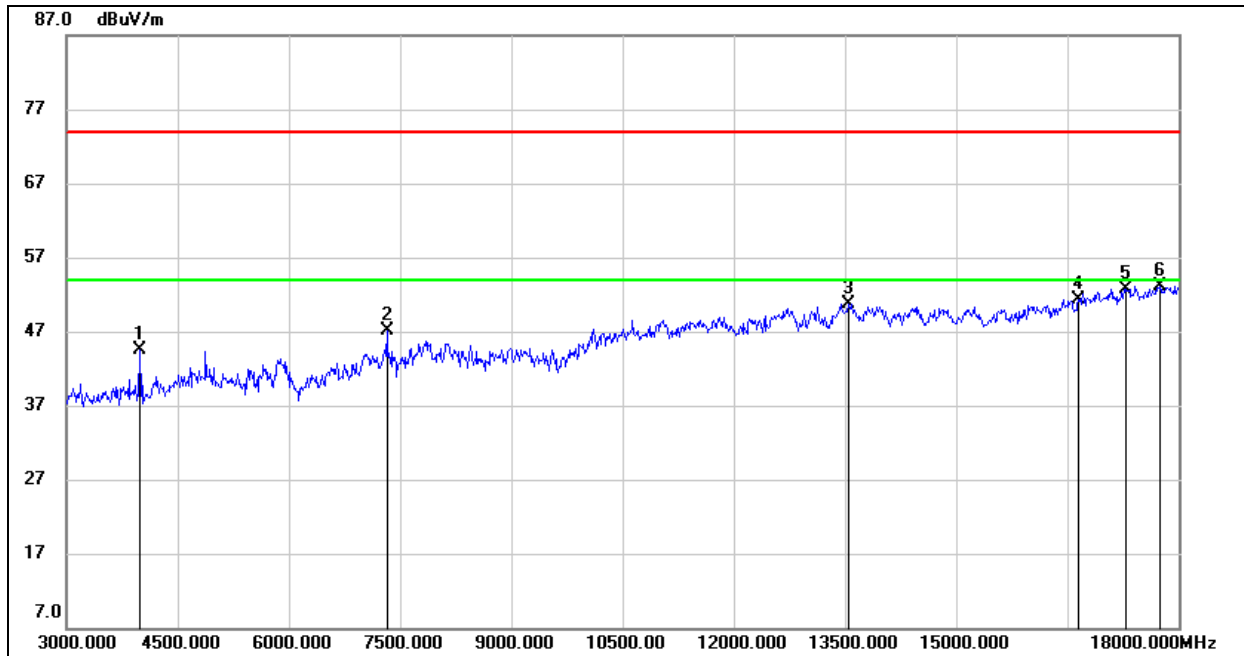**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**


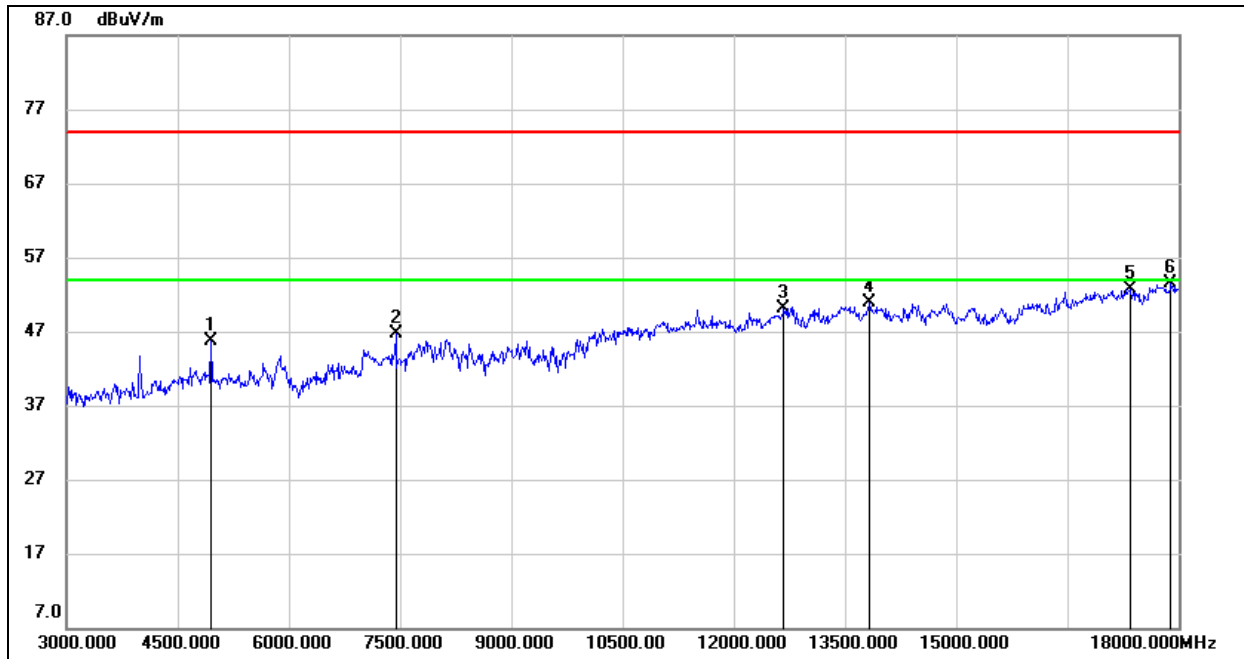
No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3990.000	47.48	-2.89	44.59	74.00	-29.41	peak
2	7320.000	41.03	6.14	47.17	74.00	-26.83	peak
3	13545.000	34.91	15.89	50.80	74.00	-23.20	peak
4	16650.000	31.67	19.70	51.37	74.00	-22.63	peak
5	17280.000	31.19	21.59	52.78	74.00	-21.22	peak
6	17745.000	30.22	22.82	53.04	74.00	-20.96	peak

- Note:
1. Peak Result = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. AVG:  $VBW=1/T_{on}$ , where:  $T_{on}$  is the transmitting duration.
  5. For the transmitting duration, please refer to clause 7.1.
  6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
  7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)**


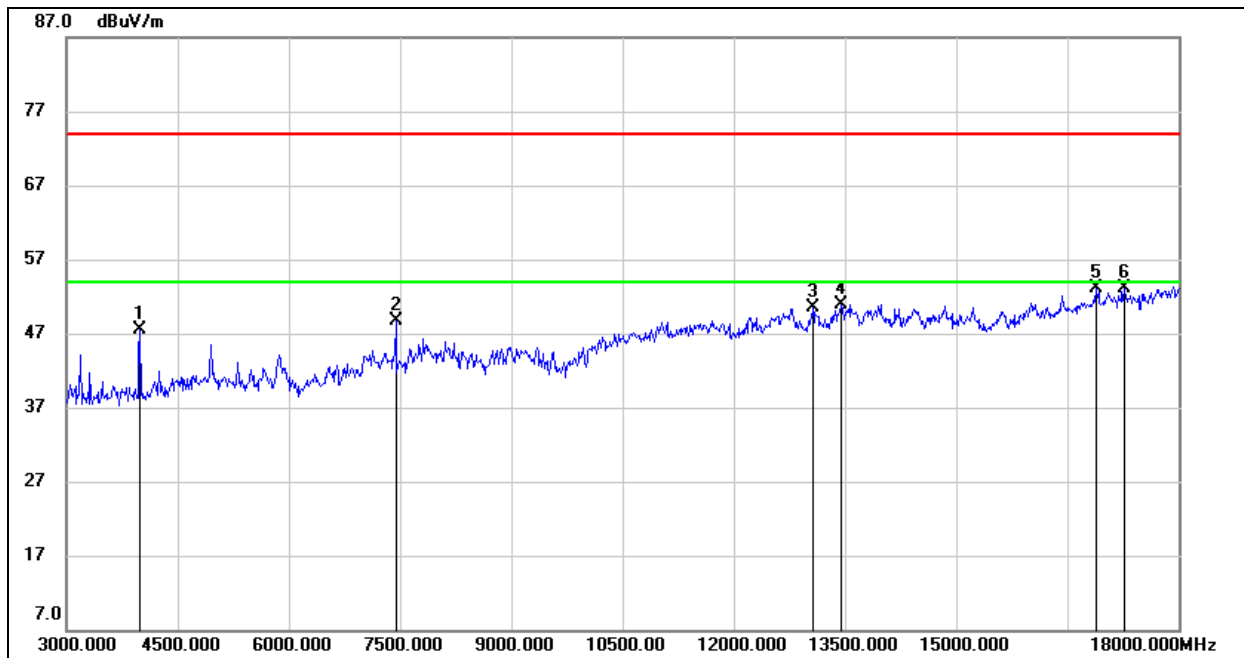
No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3975.000	52.31	-2.90	49.41	74.00	-24.59	peak
2	7320.000	42.30	6.14	48.44	74.00	-25.56	peak
3	11460.000	36.70	13.11	49.81	74.00	-24.19	peak
4	13620.000	34.77	15.99	50.76	74.00	-23.24	peak
5	16920.000	33.27	20.06	53.33	74.00	-20.67	peak
6	17550.000	31.85	21.57	53.42	74.00	-20.58	peak

- Note:
1. Peak Result = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. AVG:  $VBW=1/T_{on}$ , where:  $T_{on}$  is the transmitting duration.
  5. For the transmitting duration, please refer to clause 7.1.
  6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
  7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4950.000	44.56	1.13	45.69	74.00	-28.31	peak
2	7440.000	40.44	6.32	46.76	74.00	-27.24	peak
3	12675.000	35.89	14.21	50.10	74.00	-23.90	peak
4	13830.000	34.08	16.84	50.92	74.00	-23.08	peak
5	17340.000	31.15	21.61	52.76	74.00	-21.24	peak
6	17895.000	30.20	23.34	53.54	74.00	-20.46	peak

- Note:
1. Peak Result = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. AVG:  $VBW=1/T_{on}$ , where:  $T_{on}$  is the transmitting duration.
  5. For the transmitting duration, please refer to clause 7.1.
  6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
  7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

**HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3990.000	50.44	-2.89	47.55	74.00	-26.45	peak
2	7440.000	42.36	6.32	48.68	74.00	-25.32	peak
3	13065.000	35.37	15.11	50.48	74.00	-23.52	peak
4	13440.000	34.97	15.98	50.95	74.00	-23.05	peak
5	16890.000	33.10	19.97	53.07	74.00	-20.93	peak
6	17265.000	31.67	21.46	53.13	74.00	-20.87	peak


- Note:
1. Peak Result = Reading Level + Correct Factor.
  2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
  3. Peak: Peak detector.
  4. AVG:  $VBW=1/T_{on}$ , where:  $T_{on}$  is the transmitting duration.
  5. For the transmitting duration, please refer to clause 7.1.
  6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
  7. Proper operation of the transmitter prior to adding the filter to the measurement chain.



## 8.4. SPURIOUS EMISSIONS (18GHz ~ 26GHz)

### 8.4.1. GFSK MODE

#### SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

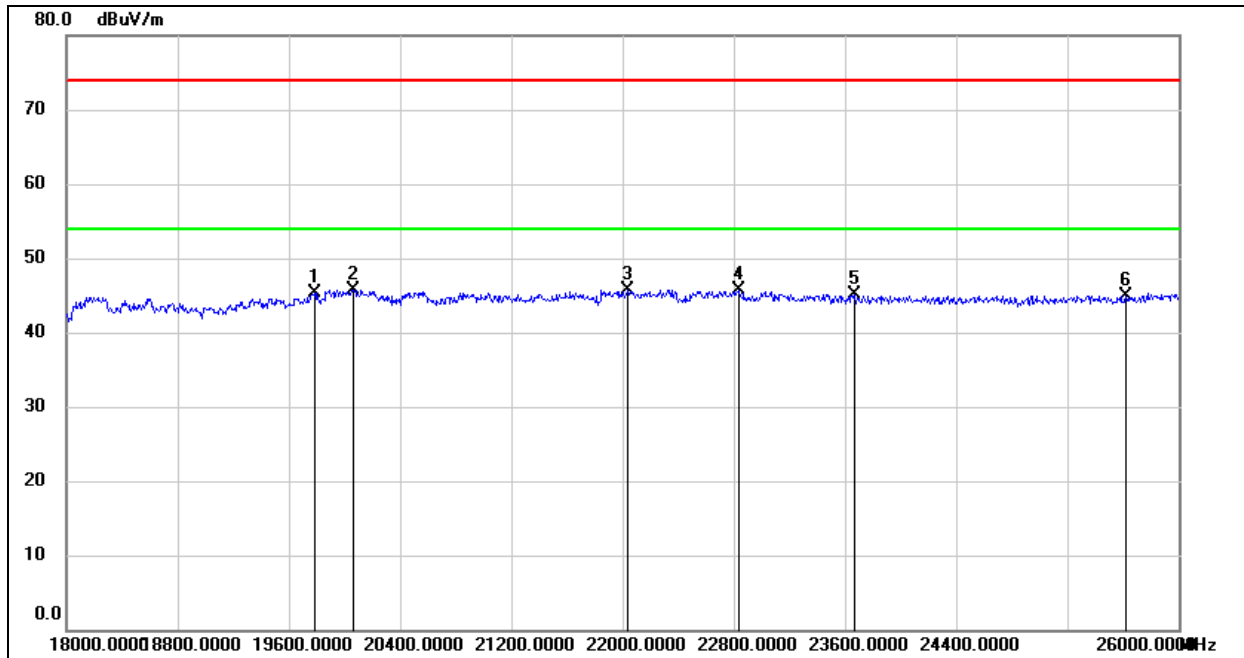

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	19784.000	50.58	-5.28	45.30	74.00	-28.70	peak
2	20064.000	51.26	-5.49	45.77	74.00	-28.23	peak
3	22040.000	50.07	-4.44	45.63	74.00	-28.37	peak
4	22840.000	49.26	-3.60	45.66	74.00	-28.34	peak
5	23664.000	48.32	-3.18	45.14	74.00	-28.86	peak
6	25616.000	46.18	-1.24	44.94	74.00	-29.06	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.



**SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)**

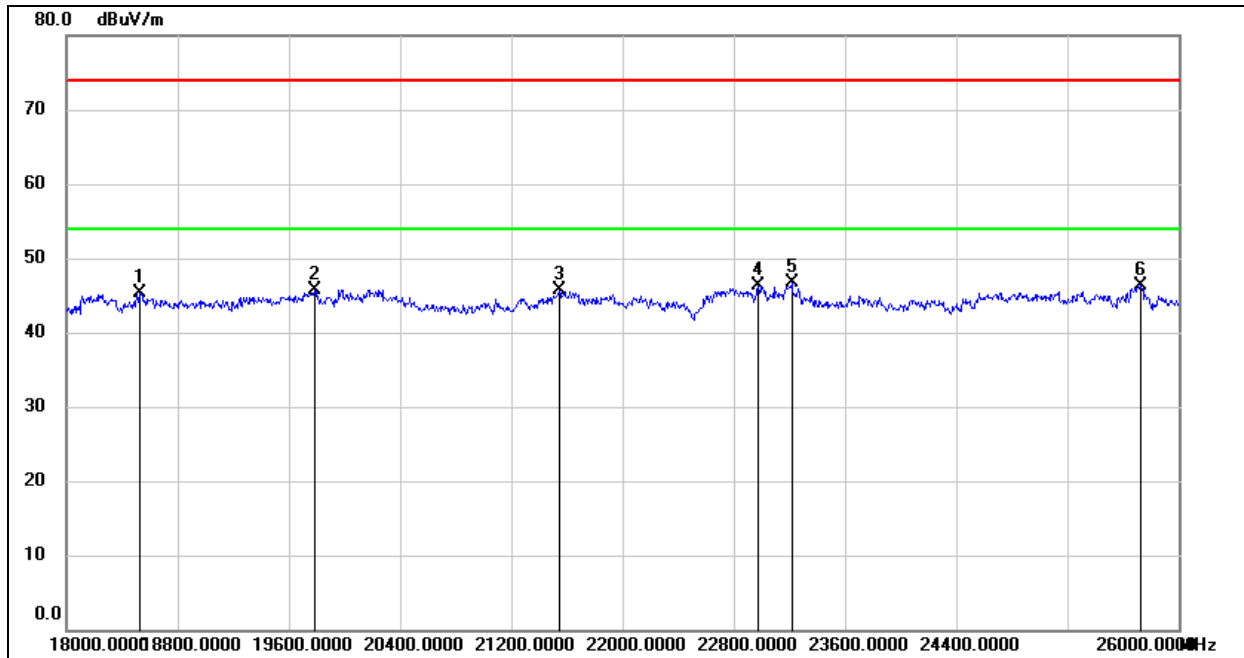

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18528.000	50.61	-5.26	45.35	74.00	-28.65	peak
2	19784.000	51.07	-5.28	45.79	74.00	-28.21	peak
3	21544.000	50.26	-4.63	45.63	74.00	-28.37	peak
4	22976.000	49.76	-3.46	46.30	74.00	-27.70	peak
5	23216.000	50.01	-3.38	46.63	74.00	-27.37	peak
6	25728.000	47.11	-0.72	46.39	74.00	-27.61	peak


- Note: 1. Peak Result = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Peak: Peak detector.

Note: All the modes and channels have been tested, only the worst data was recorded in the report.

## 8.5. SPURIOUS EMISSIONS (30MHz ~ 1 GHz)

### 8.5.1. GFSK MODE


#### SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

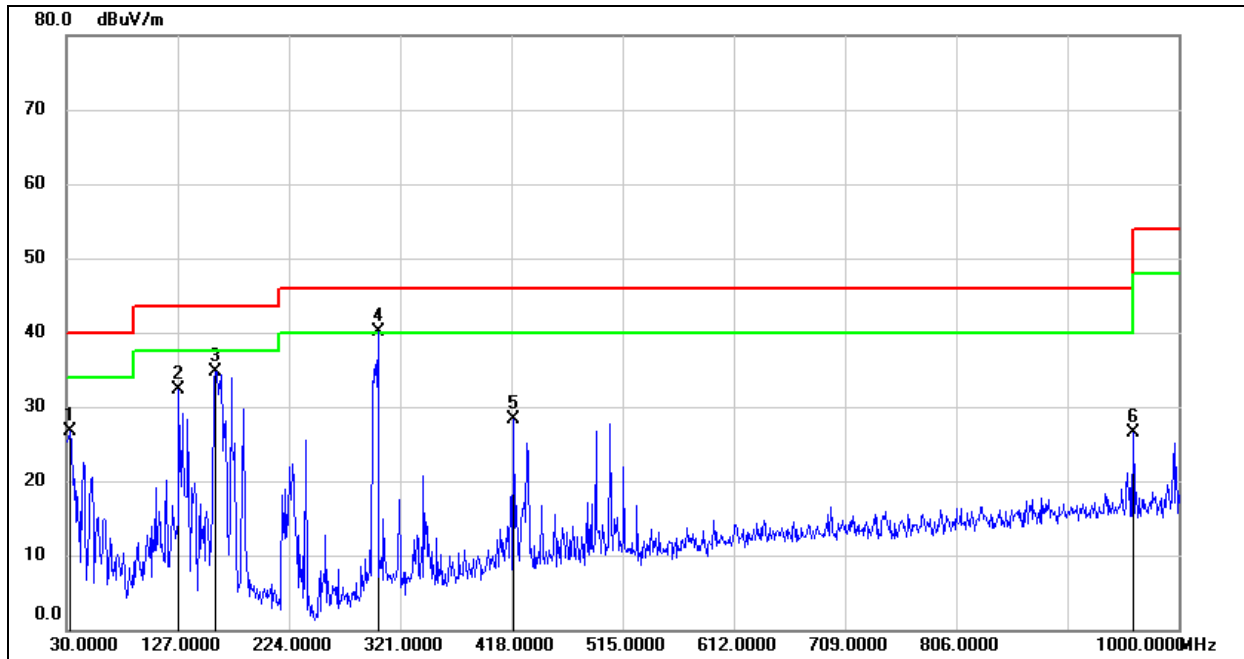

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	32.9100	46.04	-19.31	26.73	40.00	-13.27	QP
2	127.9700	51.92	-19.68	32.24	43.50	-11.26	QP
3	159.9800	52.80	-18.01	34.79	43.50	-8.71	QP
4	301.6000	55.71	-15.55	40.16	46.00	-5.84	QP
5	419.9400	41.43	-13.04	28.39	46.00	-17.61	QP
6	960.2300	31.52	-5.02	26.50	54.00	-27.50	QP

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.  
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

**SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)**

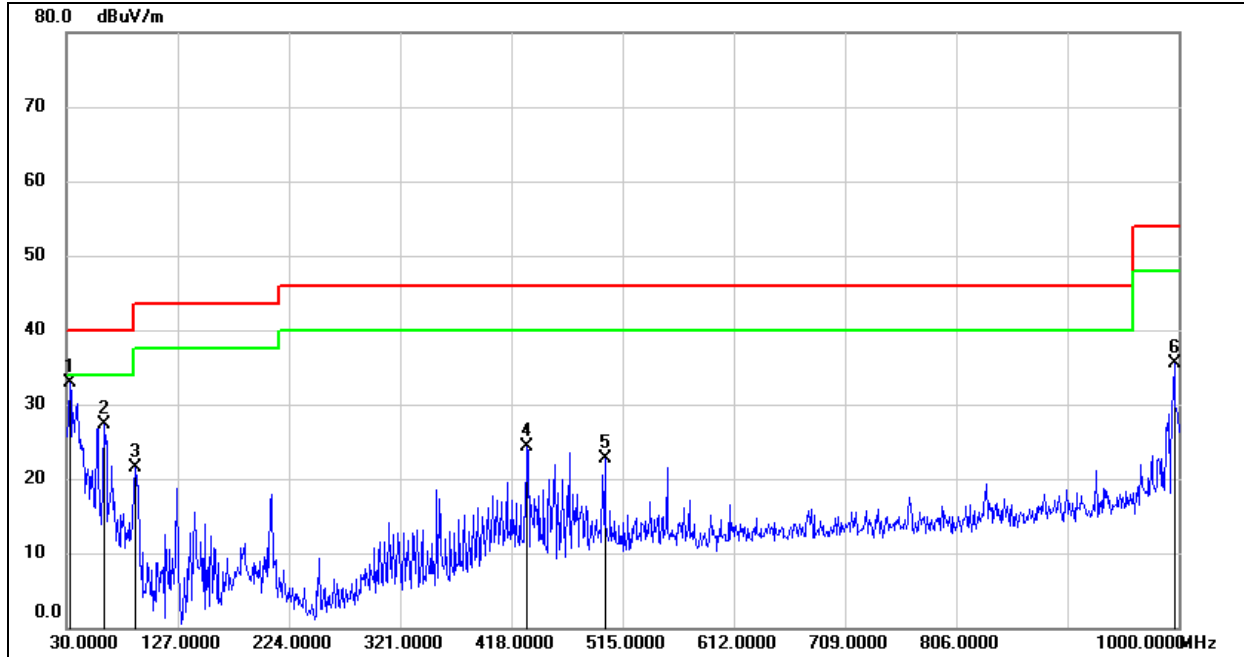

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	32.9100	52.25	-19.31	32.94	40.00	-7.06	QP
2	62.9800	47.95	-20.59	27.36	40.00	-12.64	QP
3	90.1400	43.60	-22.09	21.51	43.50	-21.99	QP
4	431.5800	37.06	-12.79	24.27	46.00	-21.73	QP
5	499.4800	34.23	-11.53	22.70	46.00	-23.30	QP
6	996.1200	40.24	-4.77	35.47	54.00	-18.53	QP

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.  
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto


Note: All the modes and channels have been tested, only the worst data was recorded in the report.

## 8.6. SPURIOUS EMISSIONS BELOW 30MHz

### 8.6.1. GFSK MODE

**(MID CHANNEL, LOOP ANTENNA FACE ON TO THE EUT, WORST-CASE CONFIGURATION)**

**9kHz~ 150kHz**

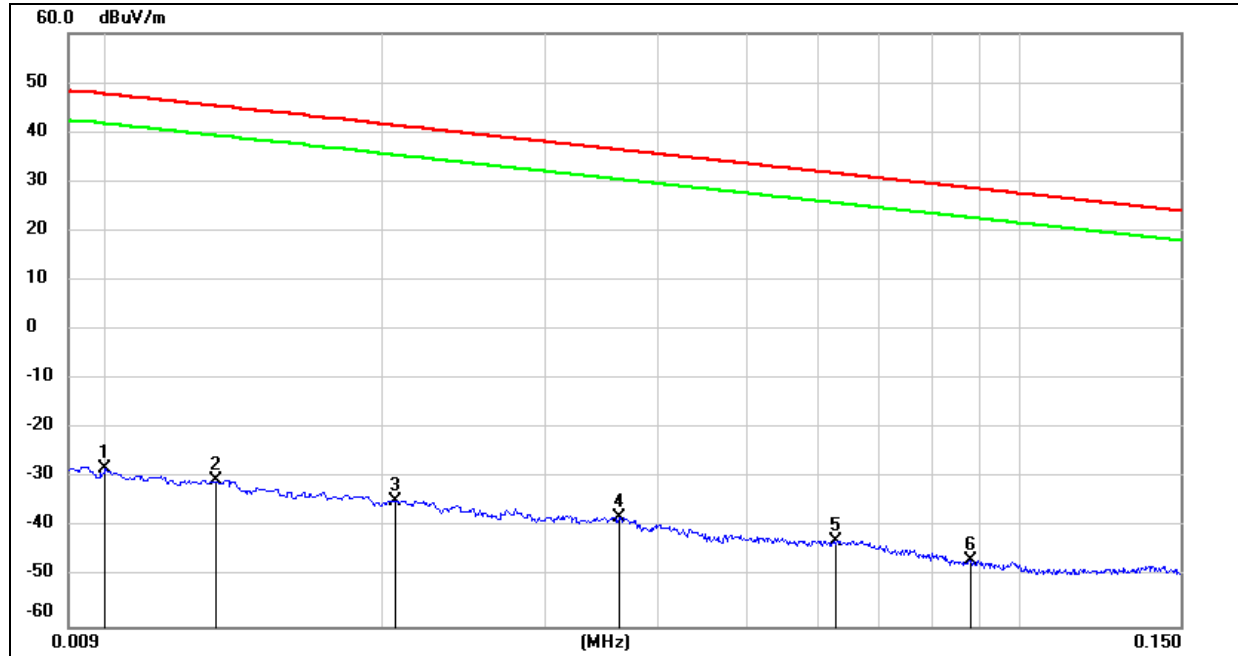


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.0100	73.22	-101.40	-28.18	47.60	-79.68	-3.90	-75.78	peak
2	0.0131	70.95	-101.38	-30.43	45.25	-81.93	-6.25	-75.68	peak
3	0.0206	66.71	-101.35	-34.64	41.32	-86.14	-10.18	-75.96	peak
4	0.0362	63.51	-101.42	-37.91	36.43	-89.41	-15.07	-74.34	peak
5	0.0627	58.91	-101.53	-42.62	31.66	-94.12	-19.84	-74.28	peak
6	0.0882	55.09	-101.70	-46.61	28.69	-98.11	-22.81	-75.30	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

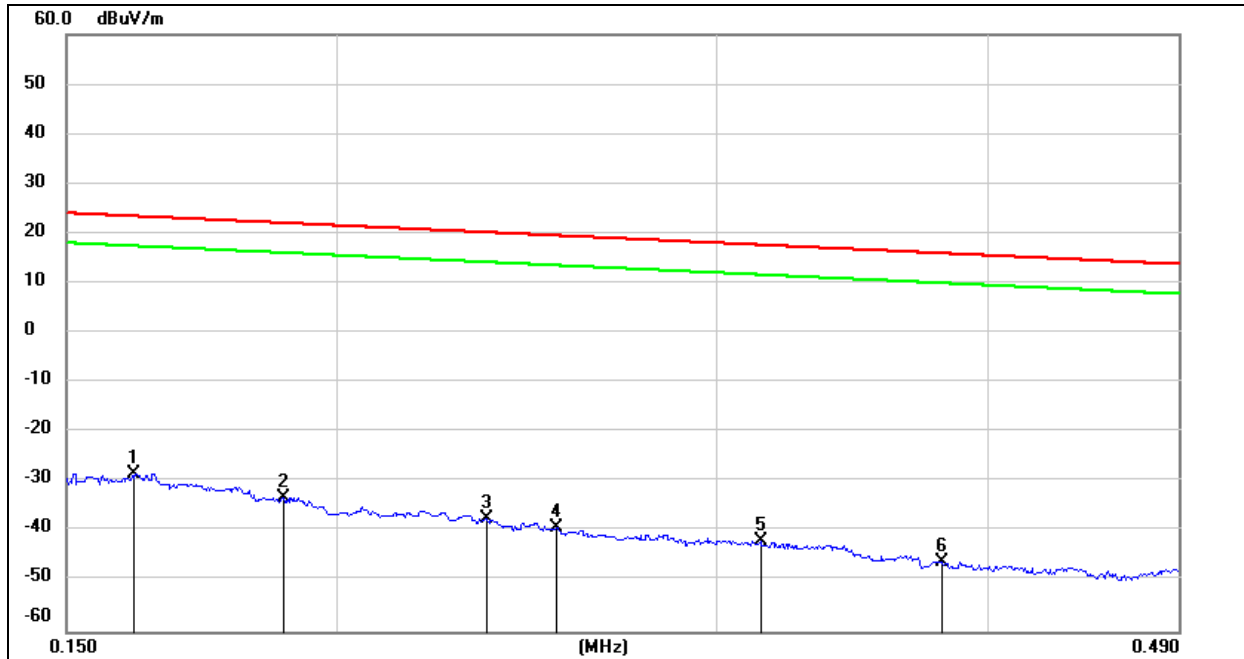
**150kHz ~ 490kHz**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.1612	73.28	-101.65	-28.37	23.46	-79.87	-28.04	-51.83	peak
2	0.1890	68.59	-101.70	-33.11	22.08	-84.61	-29.42	-55.19	peak
3	0.2346	64.35	-101.77	-37.42	20.19	-88.92	-31.31	-57.61	peak
4	0.2530	62.64	-101.80	-39.16	19.54	-90.66	-31.96	-58.70	peak
5	0.3140	60.14	-101.87	-41.73	17.66	-93.23	-33.84	-59.39	peak
6	0.3809	55.91	-101.94	-46.03	15.99	-97.53	-35.51	-62.02	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

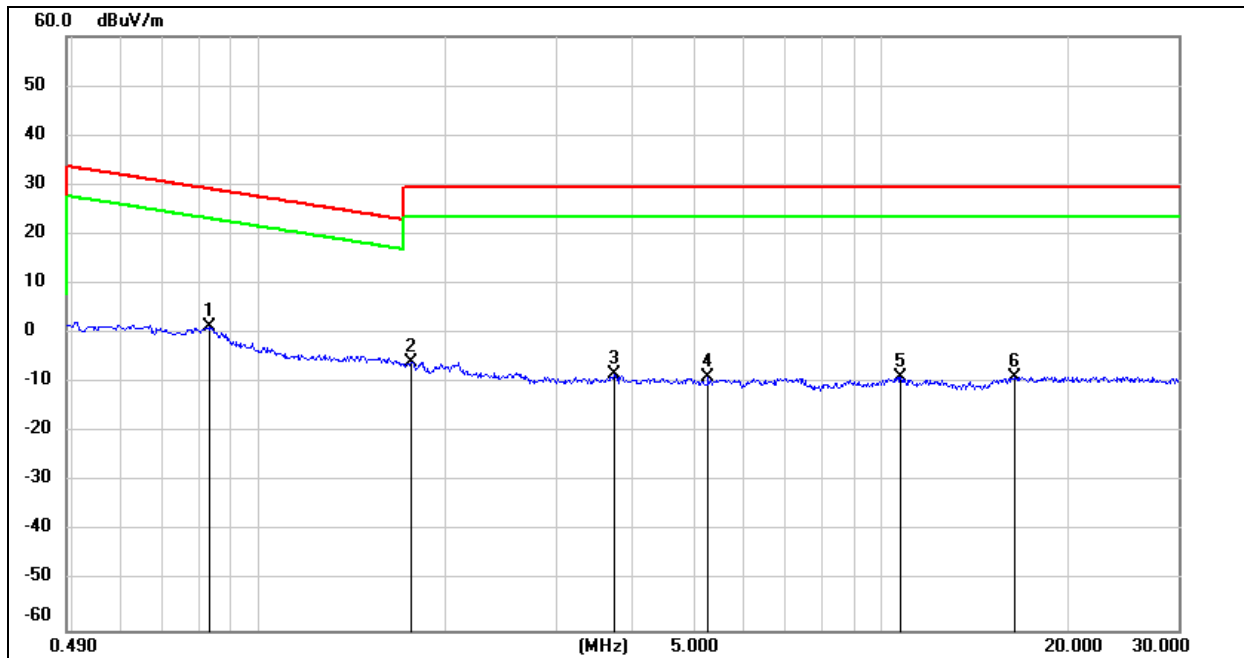**490kHz ~ 30MHz**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.8296	63.44	-62.17	1.27	29.23	-50.23	-22.27	-27.96	peak
2	1.7580	56.08	-61.93	-5.85	29.54	-57.35	-21.96	-35.39	peak
3	3.7100	53.20	-61.41	-8.21	29.54	-59.71	-21.96	-37.75	peak
4	5.2705	52.54	-61.45	-8.91	29.54	-60.41	-21.96	-38.45	peak
5	10.7299	51.98	-60.83	-8.85	29.54	-60.35	-21.96	-38.39	peak
6	16.3959	52.17	-60.96	-8.79	29.54	-60.29	-21.96	-38.33	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

Note: All the modes and channels have been tested, only the worst data was recorded in the report.

## 9. AC POWER LINE CONDUCTED EMISSIONS


### LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

### TEST SETUP AND PROCEDURE

Refer to ANSI C63.10-2013 clause 6.2.

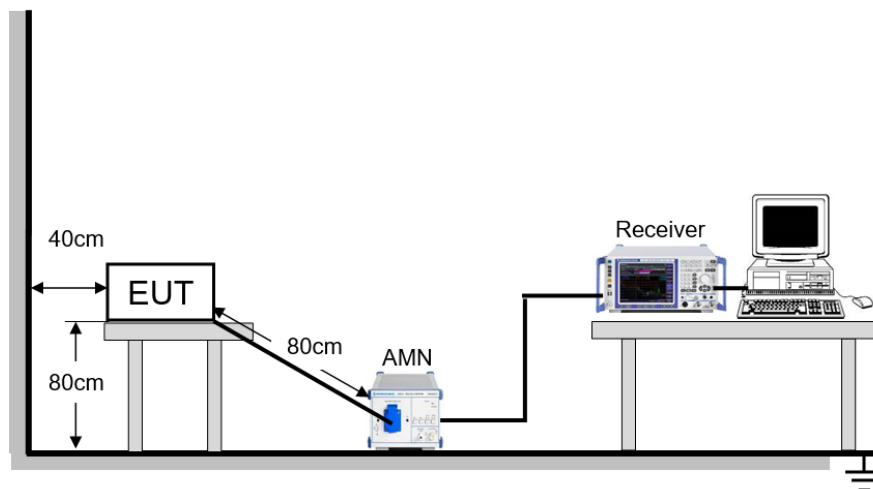

The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

### TEST ENVIRONMENT


Temperature	24.1°C	Relative Humidity	51%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V, 60Hz



**TEST RESULTS**


**9.1.1. GFSK MODE**

**LINE L RESULTS (LOW CHANNEL, WORST-CASE CONFIGURATION)**

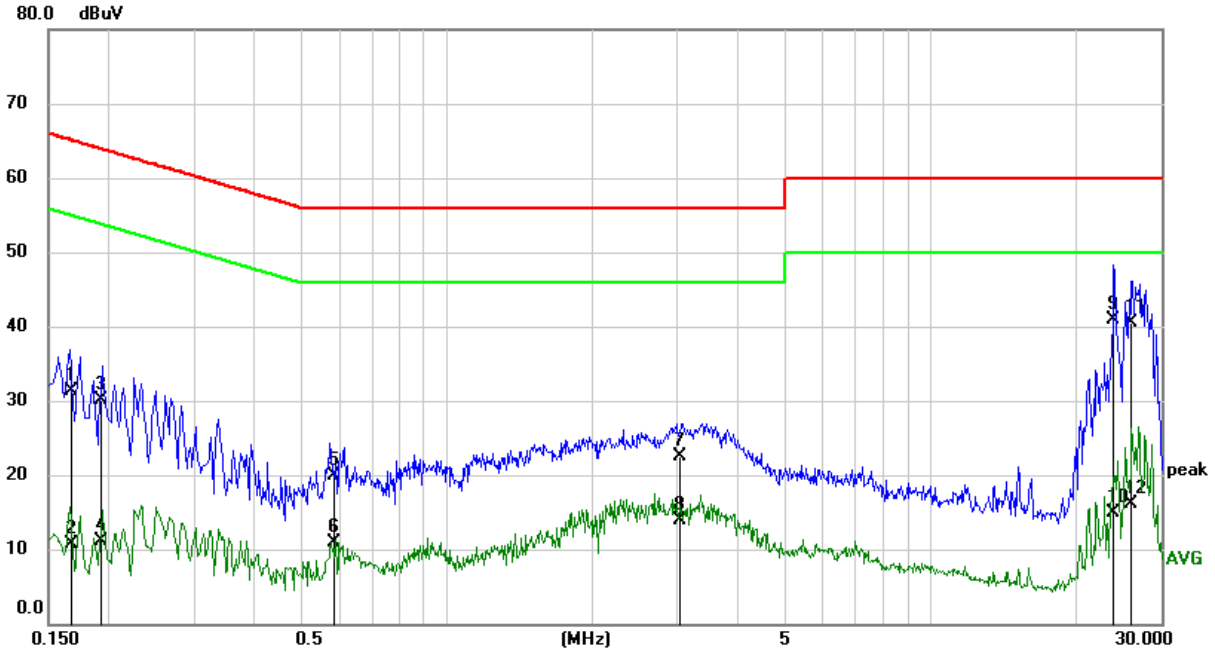

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1668	21.61	9.61	31.22	65.12	-33.90	QP
2	0.1668	1.12	9.61	10.73	55.12	-44.39	AVG
3	0.1923	20.55	9.60	30.15	63.94	-33.79	QP
4	0.1923	1.55	9.60	11.15	53.94	-42.79	AVG
5	0.5828	10.26	9.60	19.86	56.00	-36.14	QP
6	0.5828	1.26	9.60	10.86	46.00	-35.14	AVG
7	3.0225	12.90	9.64	22.54	56.00	-33.46	QP
8	3.0225	4.29	9.64	13.93	46.00	-32.07	AVG
9	24.0002	30.94	9.98	40.92	60.00	-19.08	QP
10	24.0002	4.99	9.98	14.97	50.00	-35.03	AVG
11	26.0399	30.68	9.92	40.60	60.00	-19.40	QP
12	26.0399	6.20	9.92	16.12	50.00	-33.88	AVG

- Note: 1. Result = Reading +Correct Factor.  
 2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 200 Hz (9 kHz-150 kHz), 9 kHz (150 kHz-30 MHz).  
 4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

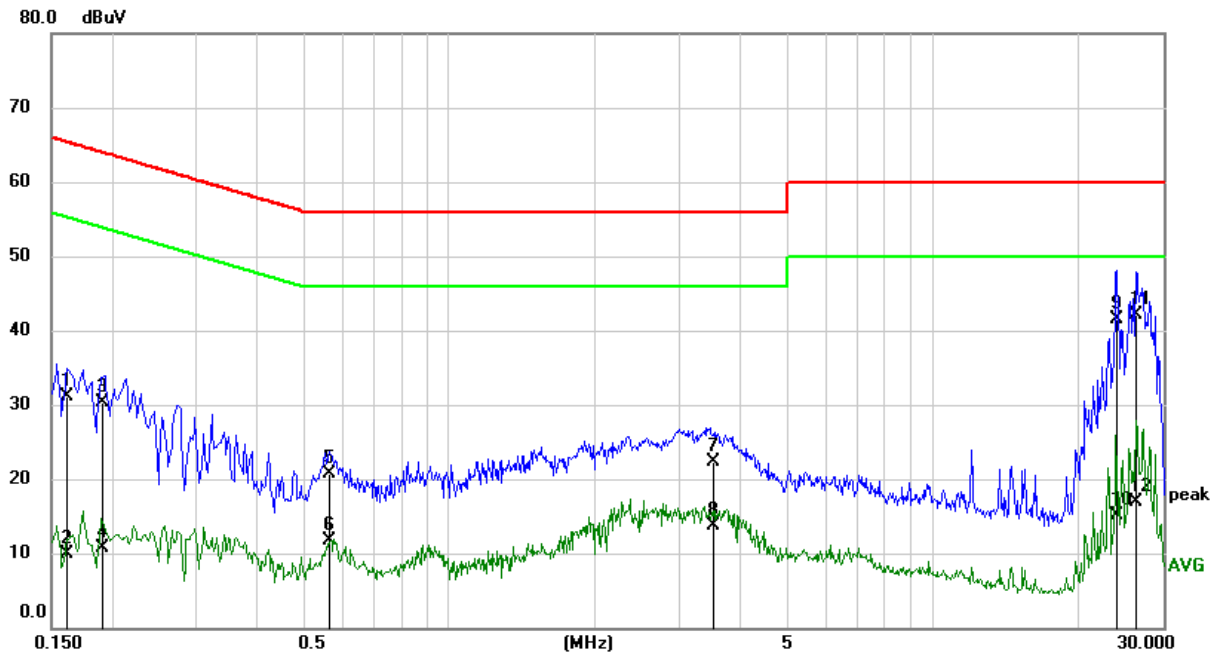**LINE N RESULTS (LOW CHANNEL, WORST-CASE CONFIGURATION)**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1618	21.46	9.60	31.06	65.37	-34.31	QP
2	0.1618	0.25	9.60	9.85	55.37	-45.52	AVG
3	0.1907	20.70	9.60	30.30	64.01	-33.71	QP
4	0.1907	1.18	9.60	10.78	54.01	-43.23	AVG
5	0.5641	11.02	9.60	20.62	56.00	-35.38	QP
6	0.5641	2.01	9.60	11.61	46.00	-34.39	AVG
7	3.5054	12.55	9.66	22.21	56.00	-33.79	QP
8	3.5054	3.98	9.66	13.64	46.00	-32.36	AVG
9	24.0002	31.50	10.10	41.60	60.00	-18.40	QP
10	24.0002	5.08	10.10	15.18	50.00	-34.82	AVG
11	26.3998	32.16	10.02	42.18	60.00	-17.82	QP
12	26.3998	6.94	10.02	16.96	50.00	-33.04	AVG

- Note: 1. Result = Reading +Correct Factor.  
 2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 200 Hz (9 kHz-150 kHz), 9 kHz (150 kHz-30 MHz).  
 4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

Note: All the modes and channels have been tested, only the worst data was recorded in the report.



## 10. ANTENNA REQUIREMENTS

### APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### RESULTS

Complies





## Appendix A: 20dB Emission Bandwidth Test Result

Test Mode	Antenna	Channel	20db EBW[MHz]	FL[MHz]	FH[MHz]	Verdict
DH5	Ant1	2402	0.915	2401.544	2402.459	PASS
		2441	0.939	2440.526	2441.465	PASS
		2480	0.942	2479.526	2480.468	PASS
3DH5	Ant1	2402	1.248	2401.352	2402.600	PASS
		2441	1.248	2440.352	2441.600	PASS
		2480	1.257	2479.349	2480.606	PASS




### Test Graphs

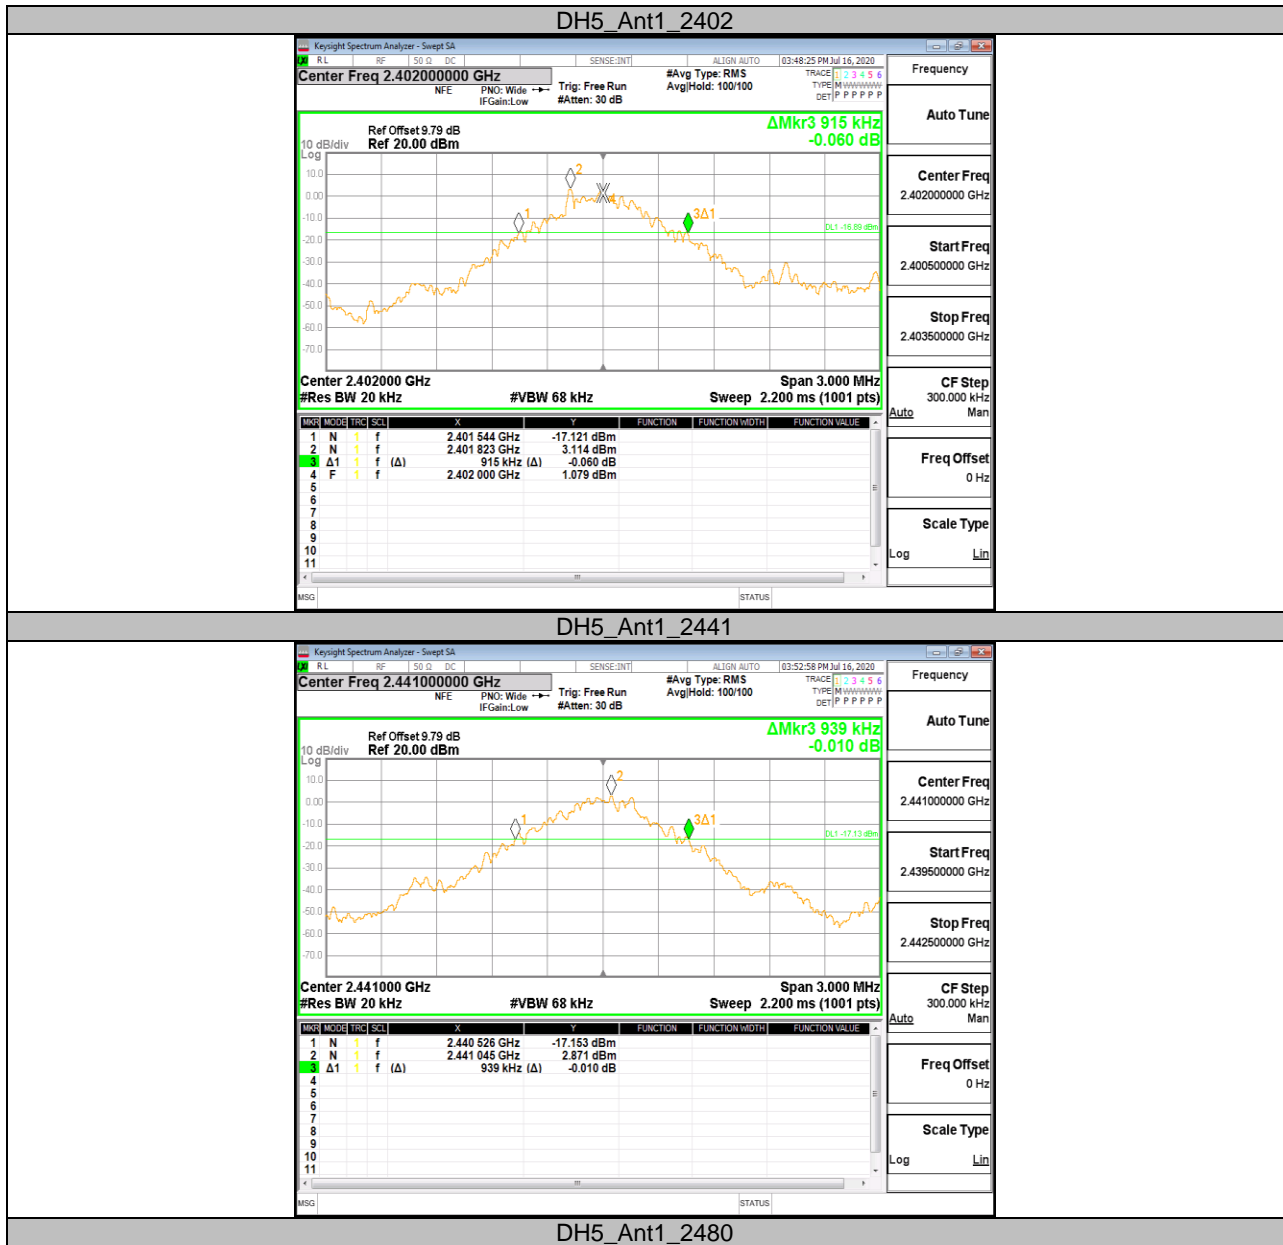

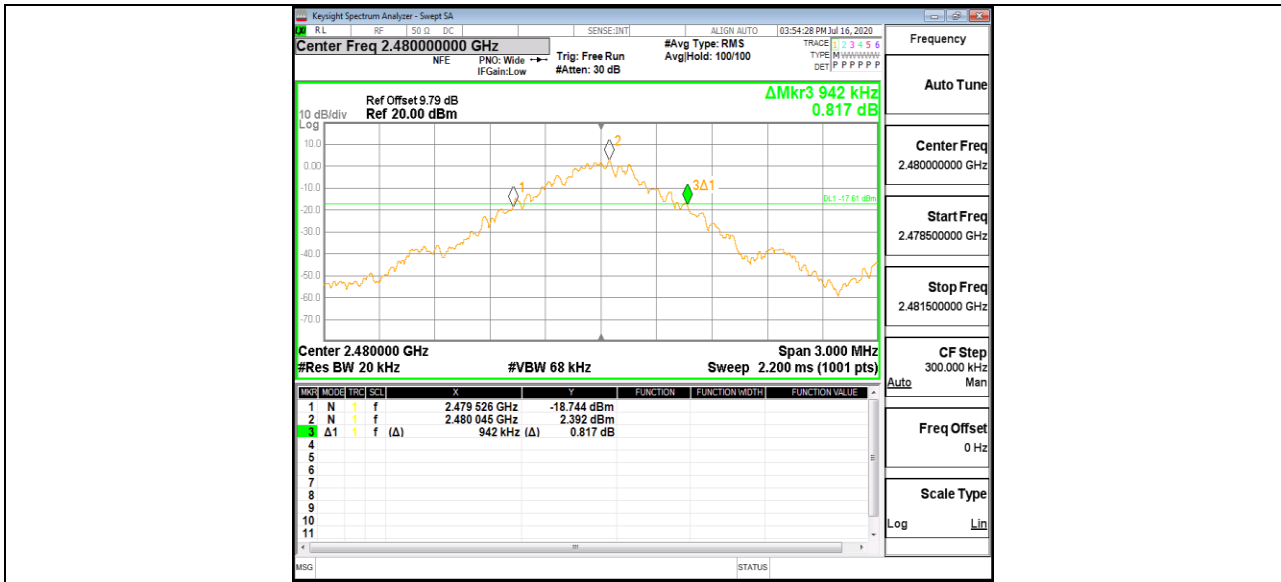


3DH5\_Ant1\_2402

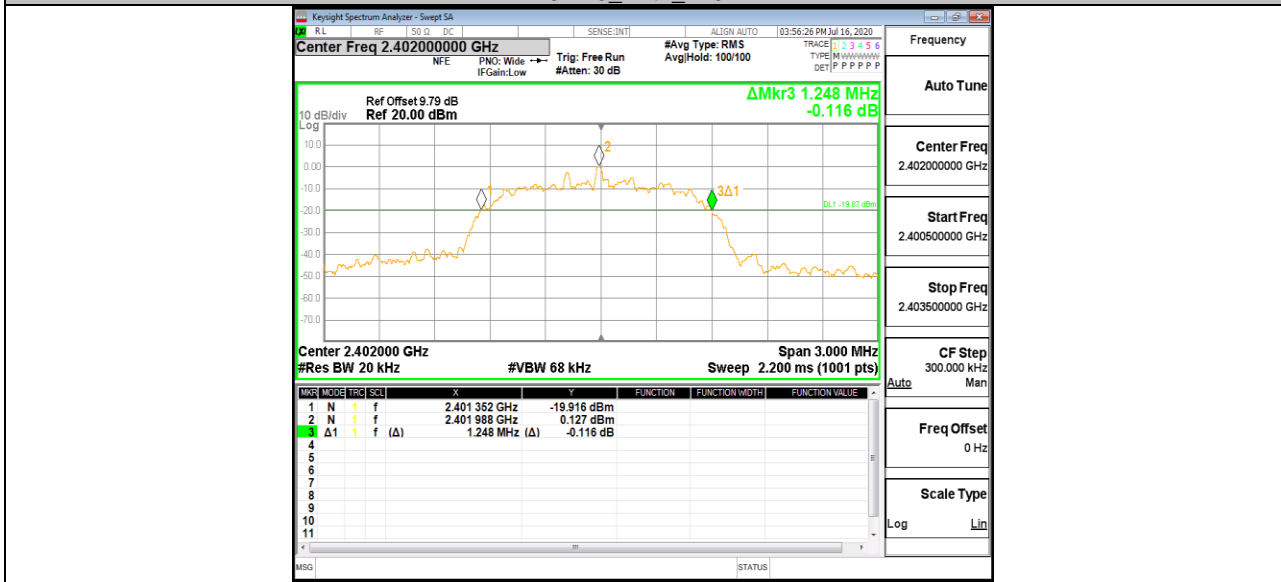

3DH5\_Ant1\_2441



3DH5\_Ant1\_2480

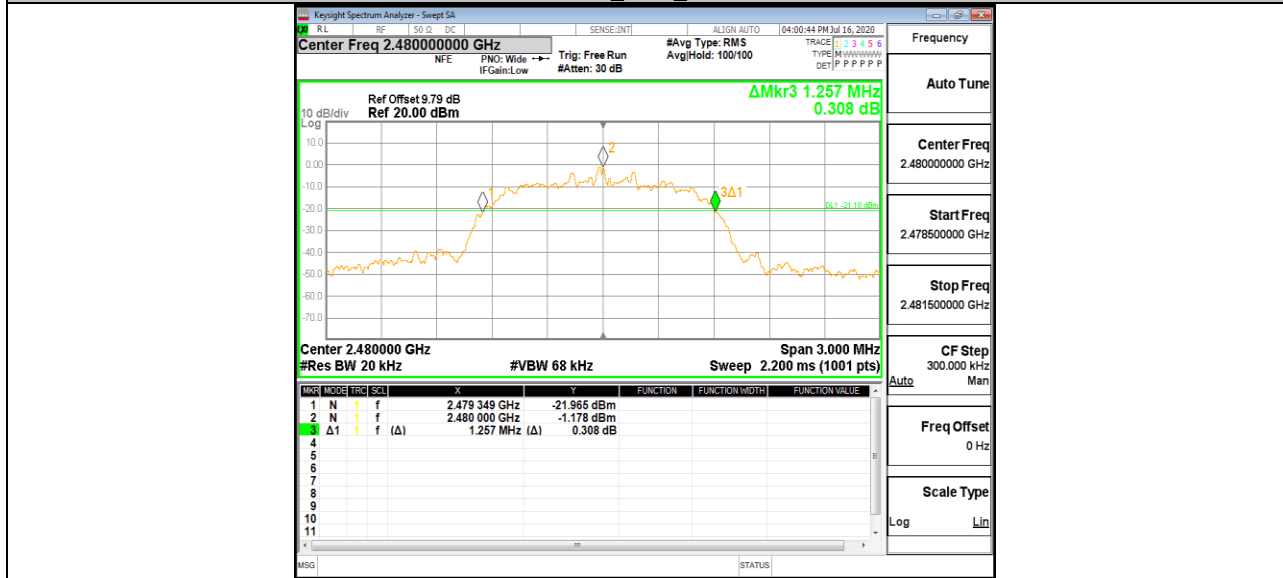




## Appendix B: Occupied Channel Bandwidth Test Result


Test Mode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Verdict
DH5	Ant1	2402	0.84890	2401.569	2402.417	PASS
		2441	0.86220	2440.550	2441.412	PASS
		2480	0.87348	2479.545	2480.419	PASS
3DH5	Ant1	2402	1.1748	2401.393	2402.568	PASS
		2441	1.1743	2440.394	2441.568	PASS
		2480	1.1881	2479.384	2480.572	PASS






Test Graphs

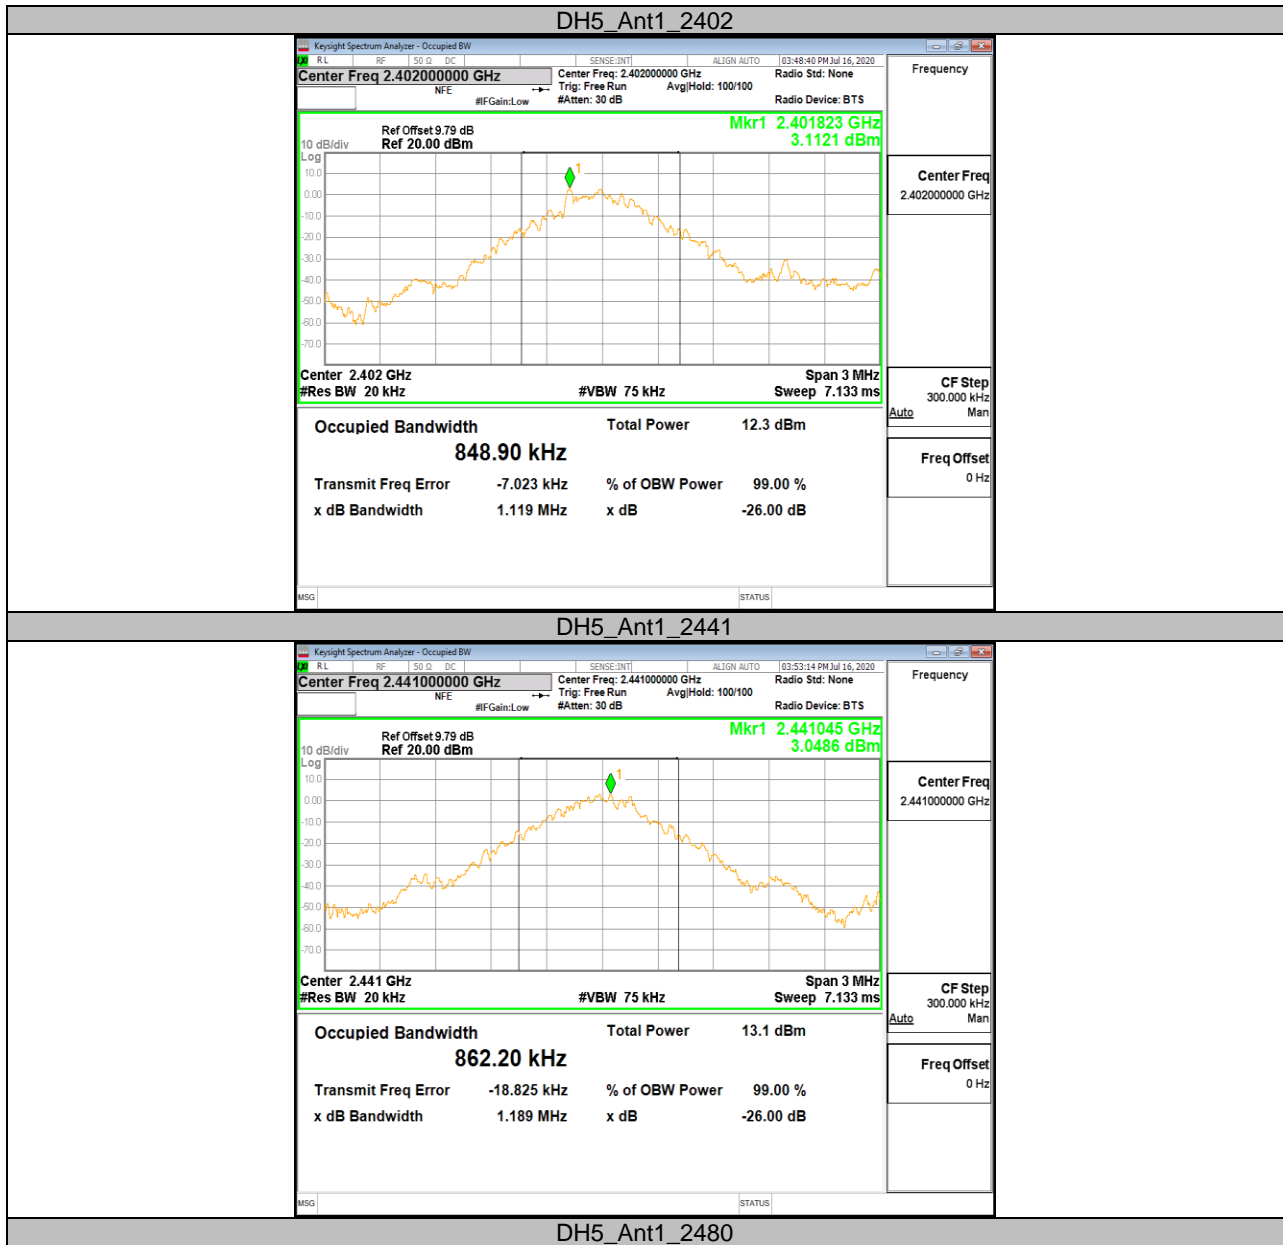


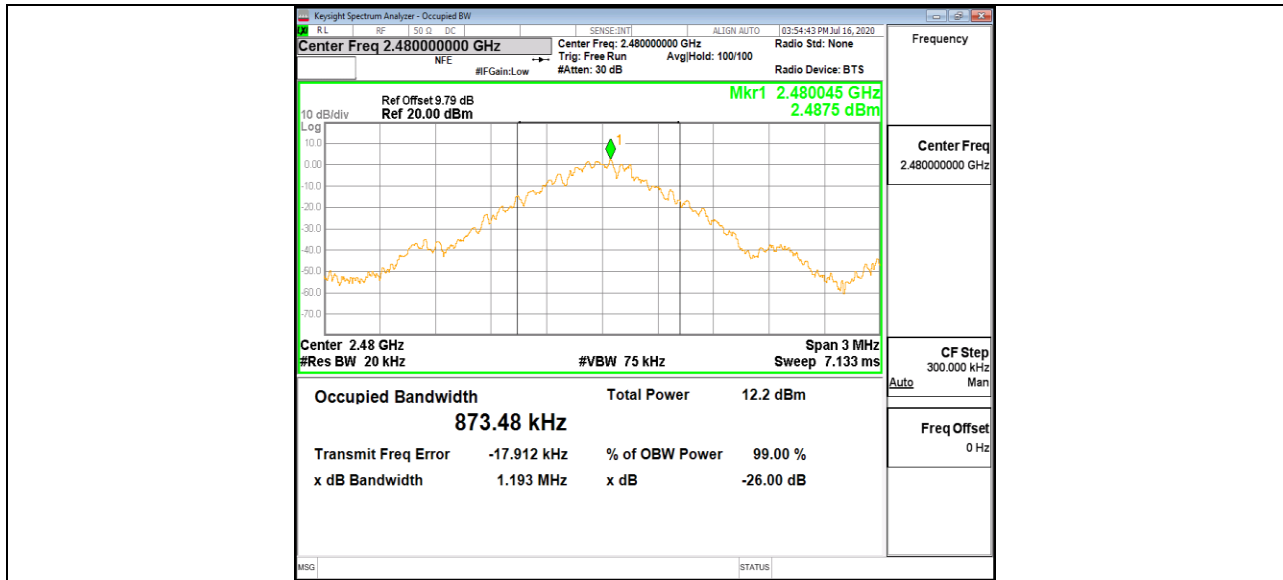


3DH5\_Ant1\_2402

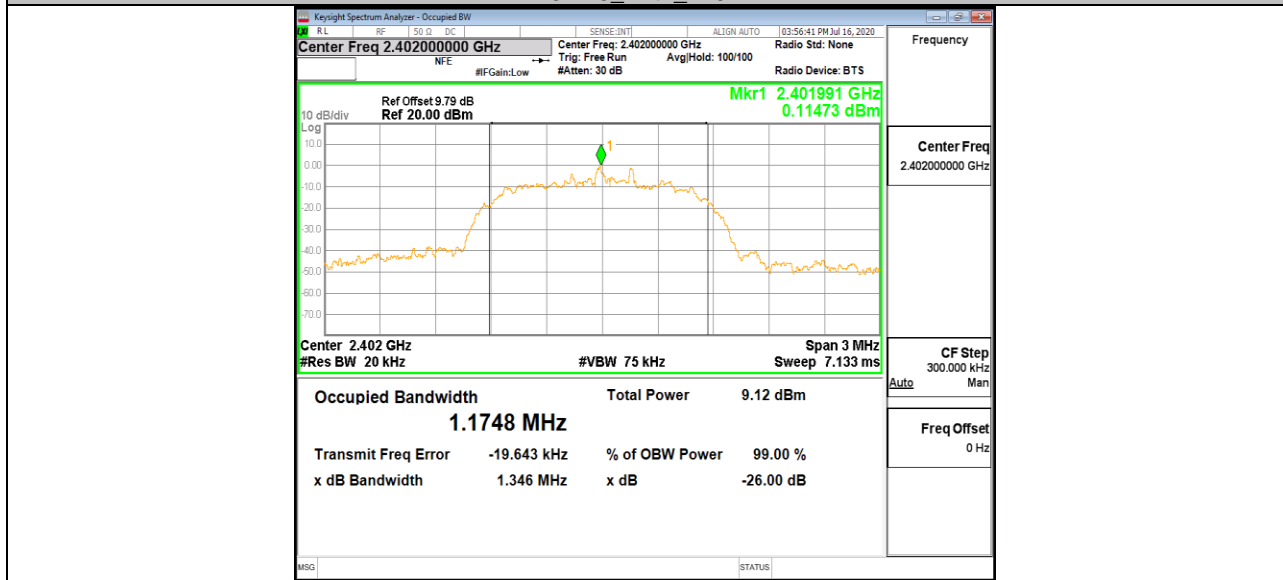

3DH5\_Ant1\_2441

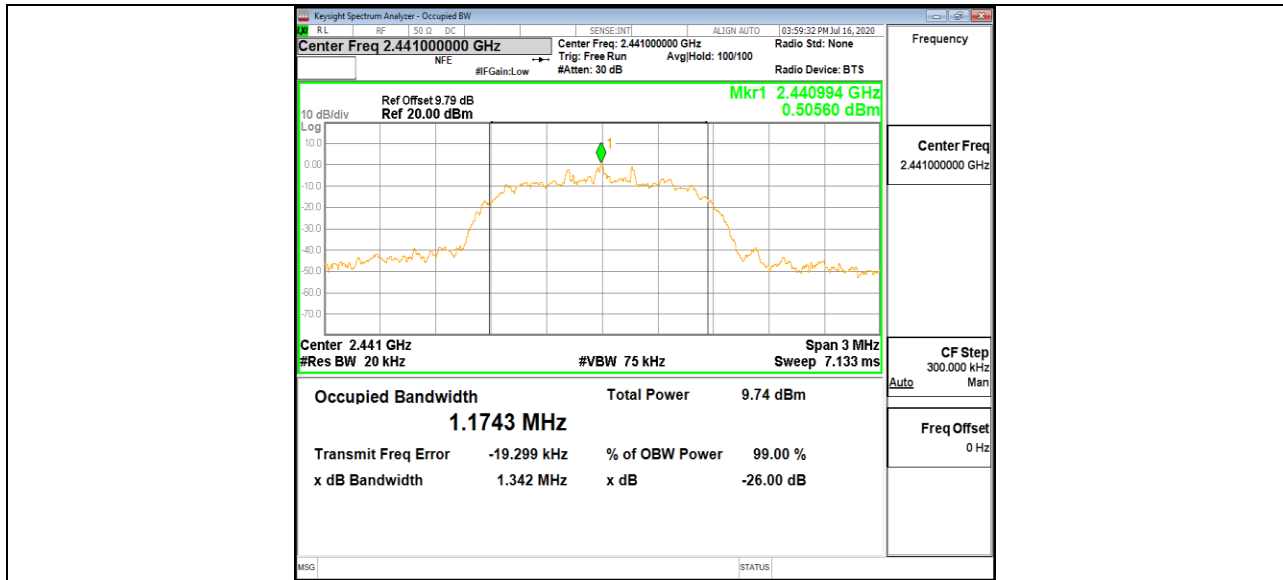

3DH5\_Ant1\_2480

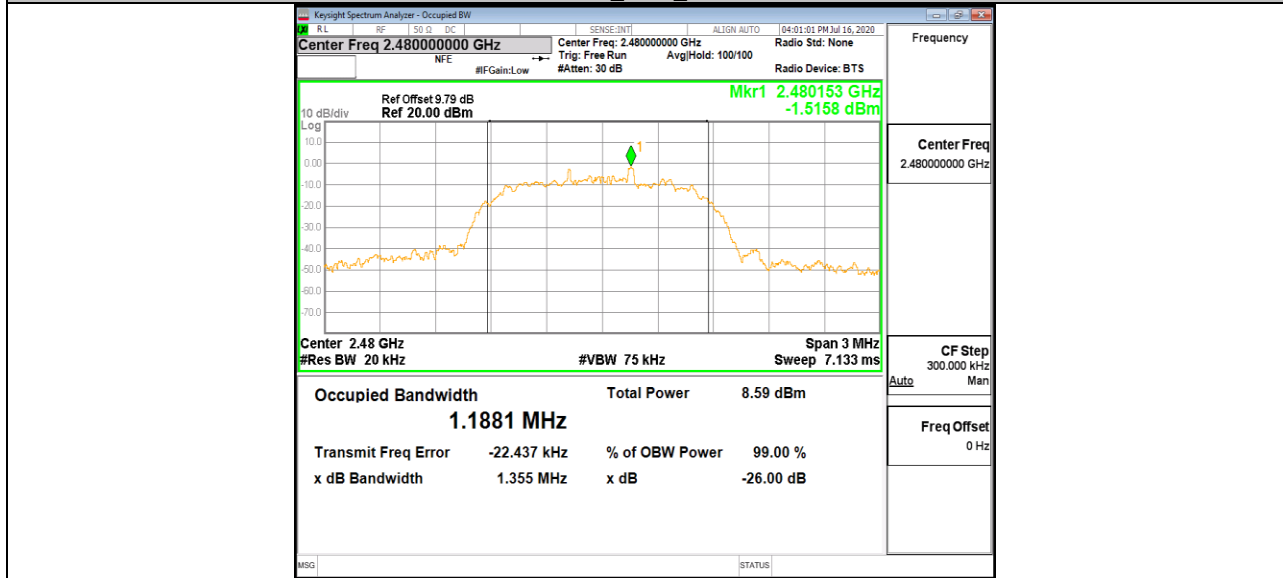



**Appendix C: Maximum conducted output power  
Test Result**

Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
DH5	Ant1	2402	6.30	30	PASS
		2441	6.67	30	PASS
		2480	6.09	30	PASS
3DH5	Ant1	2402	4.73	21	PASS
		2441	5.23	21	PASS
		2480	4.54	21	PASS




## Appendix D: Carrier frequency separation Test Result

Test Mode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1.004	0.942	PASS
3DH5	Ant1	Hop	1.004	0.838	PASS



### Test Graphs

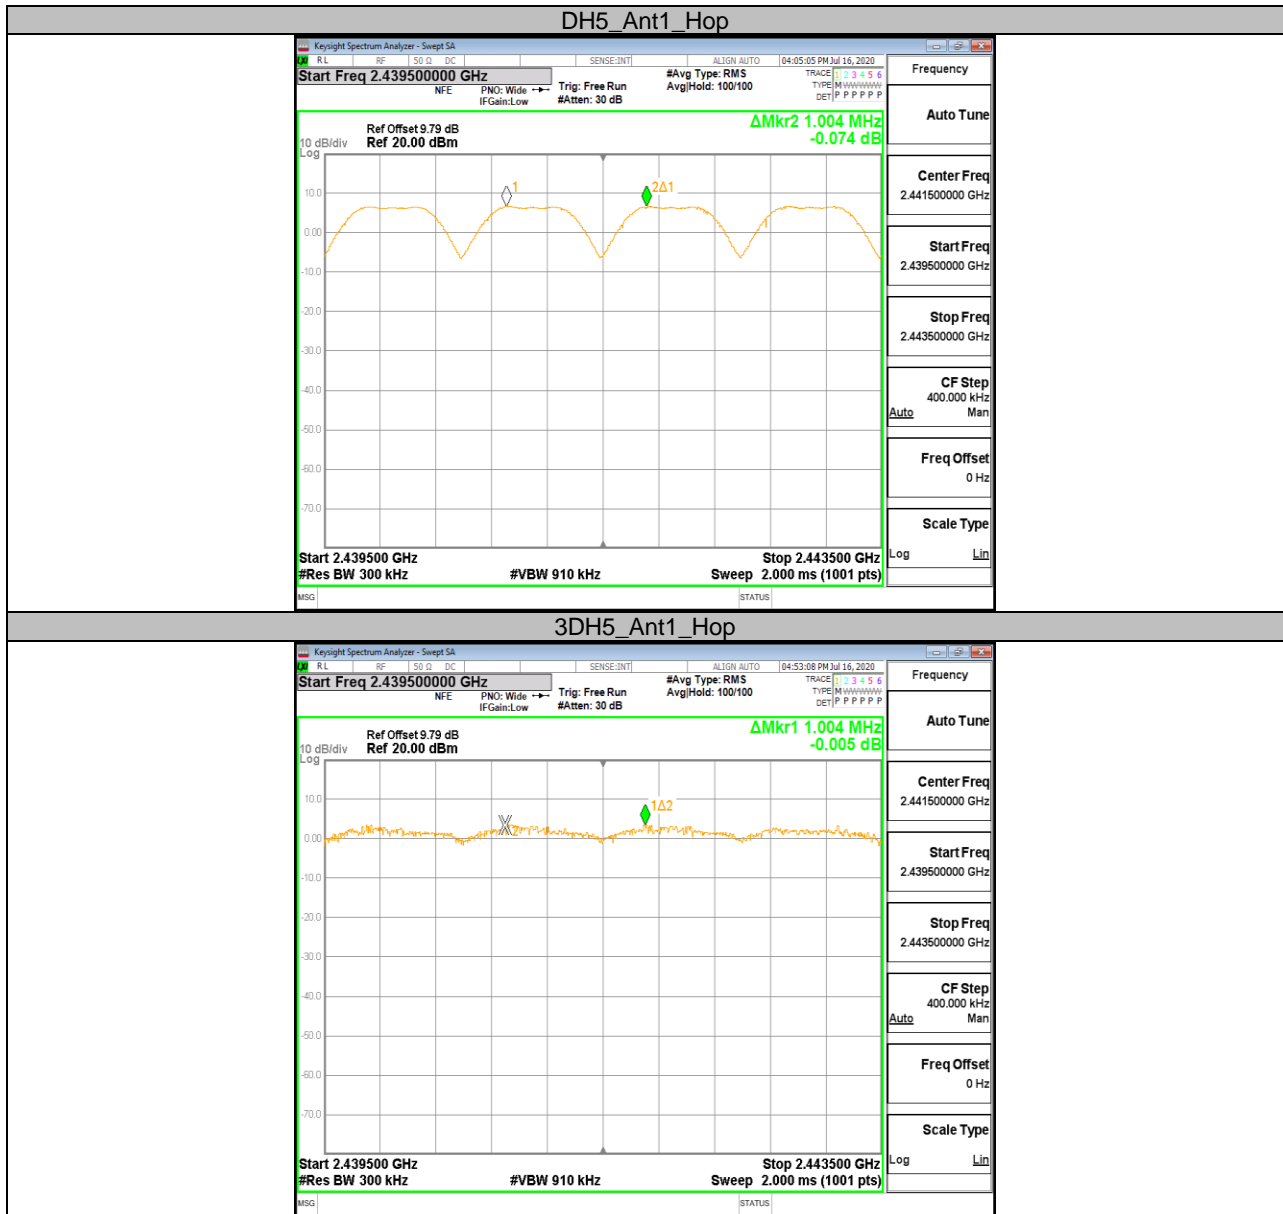


## Appendix E: Time of occupancy Test Result

FHSS Mode						
TestMode	Antenna	Channel	BurstWidth [ms]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.41	0.131	<=0.4	PASS
DH3	Ant1	Hop	1.67	0.267	<=0.4	PASS
DH5	Ant1	Hop	2.92	0.312	<=0.4	PASS
3DH1	Ant1	Hop	0.41	0.131	<=0.4	PASS
3DH3	Ant1	Hop	1.67	0.267	<=0.4	PASS
3DH5	Ant1	Hop	2.92	0.312	<=0.4	PASS


AFHSS Mode						
TestMode	Antenna	Channel	BurstWidth [ms]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.41	0.066	<=0.4	PASS
DH3	Ant1	Hop	1.67	0.134	<=0.4	PASS
DH5	Ant1	Hop	2.92	0.156	<=0.4	PASS
3DH1	Ant1	Hop	0.41	0.066	<=0.4	PASS
3DH3	Ant1	Hop	1.67	0.134	<=0.4	PASS
3DH5	Ant1	Hop	2.92	0.156	<=0.4	PASS




### Test Graphs

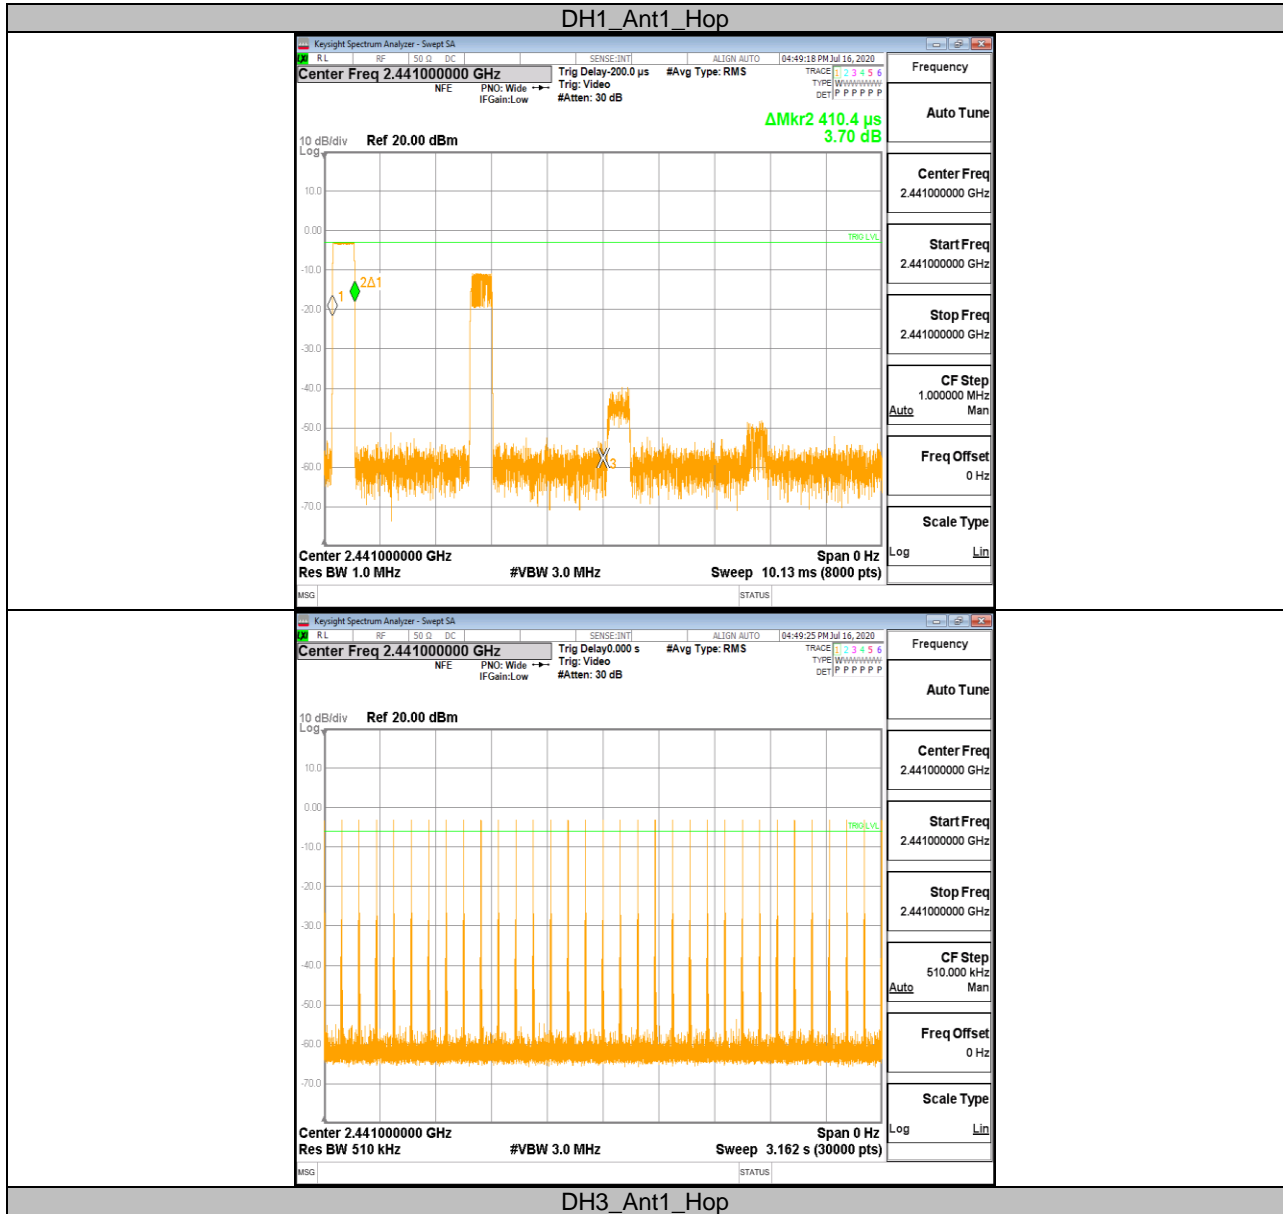





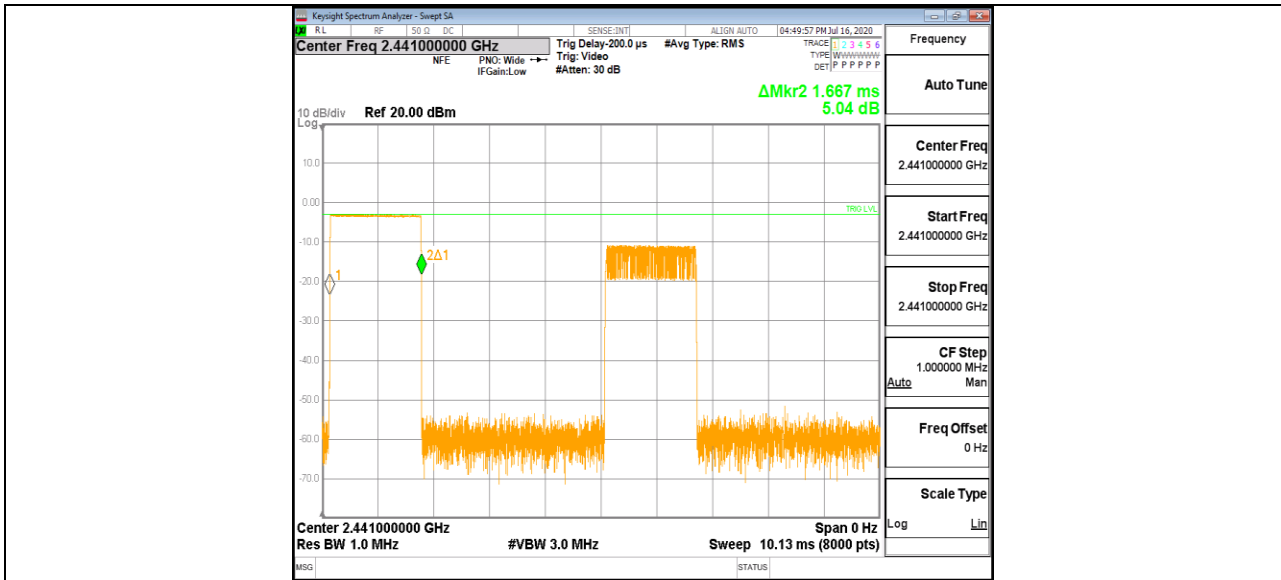



DH5\_Ant1\_Hop

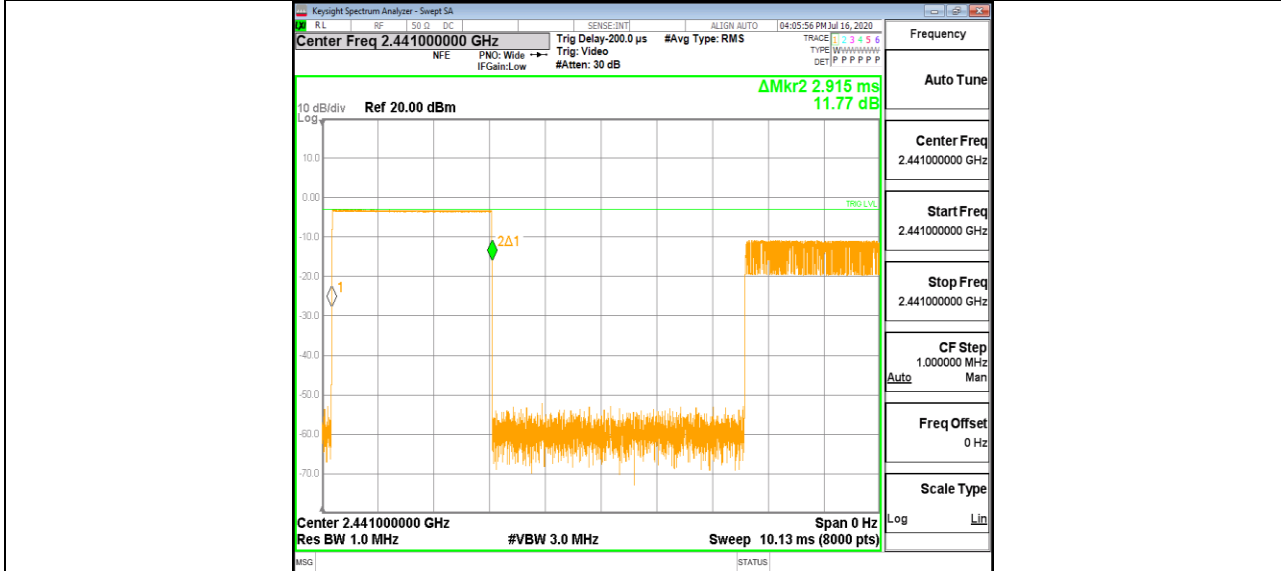


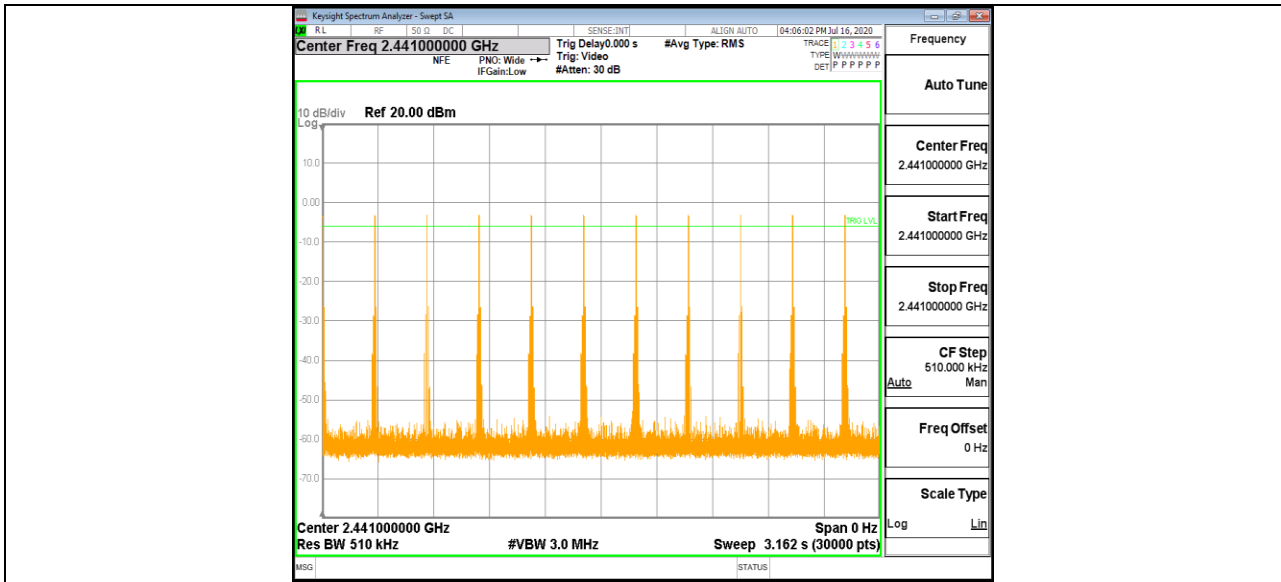

3DH1\_Ant1\_Hop

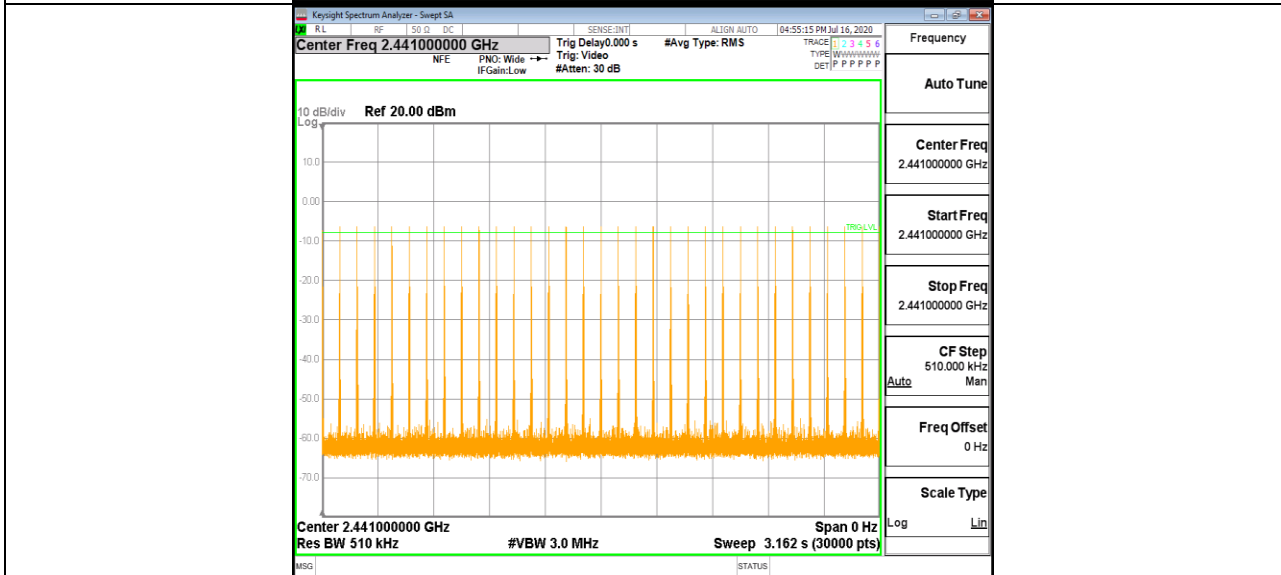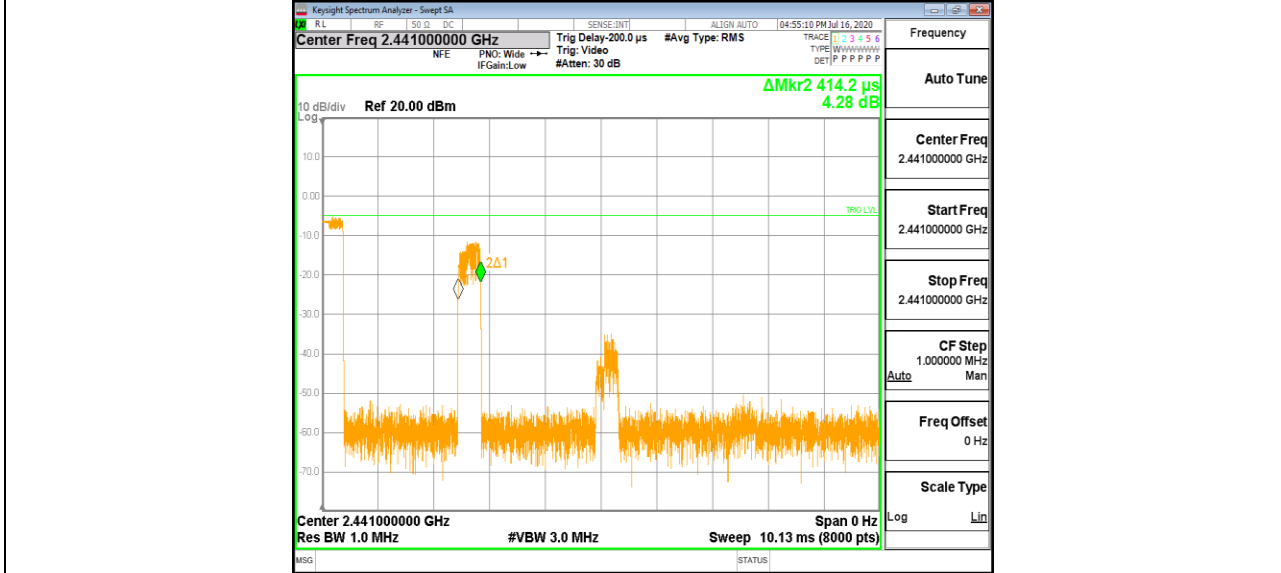

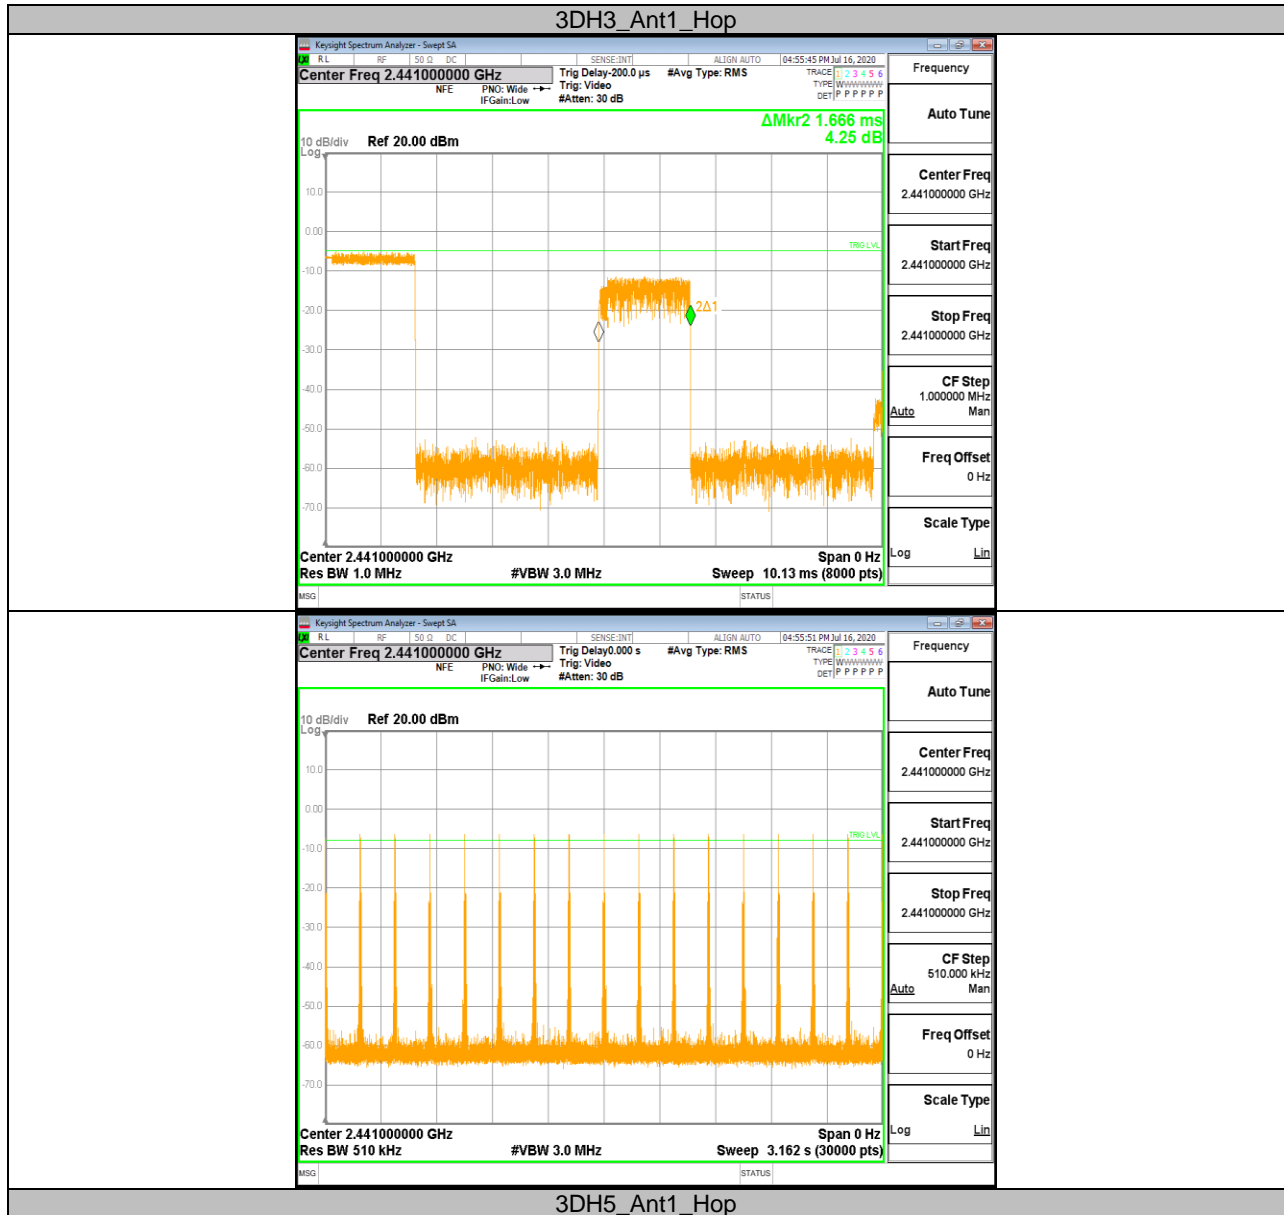

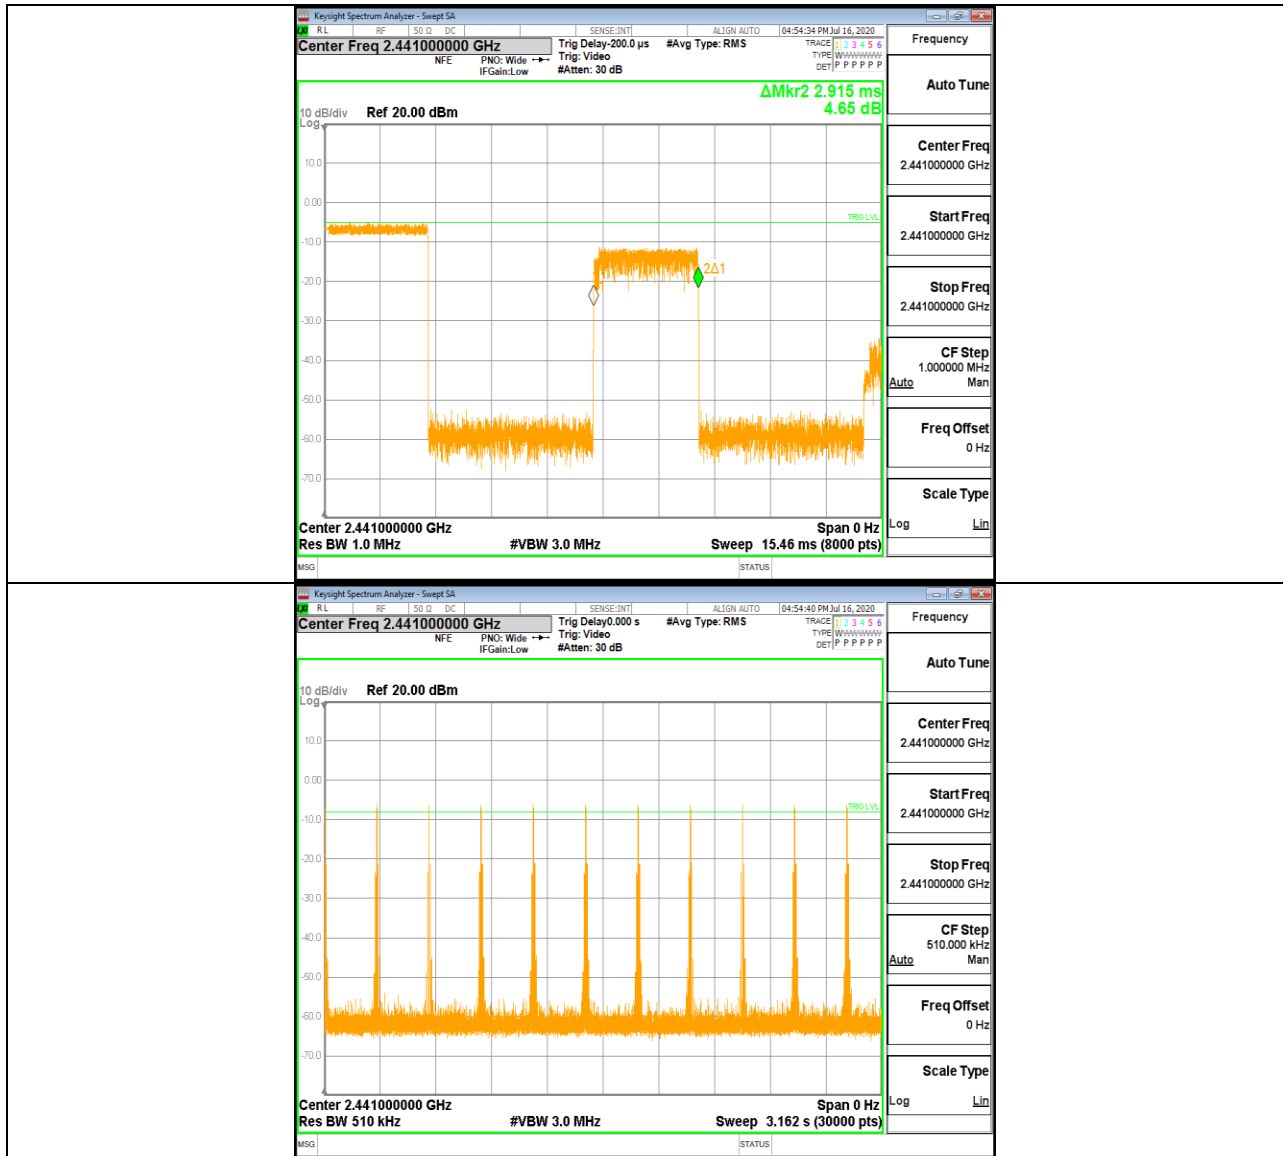




## Appendix F: Number of hopping channels Test Result

Test Mode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	$\geq 15$	PASS
3DH5	Ant1	Hop	79	$\geq 15$	PASS



### Test Graphs

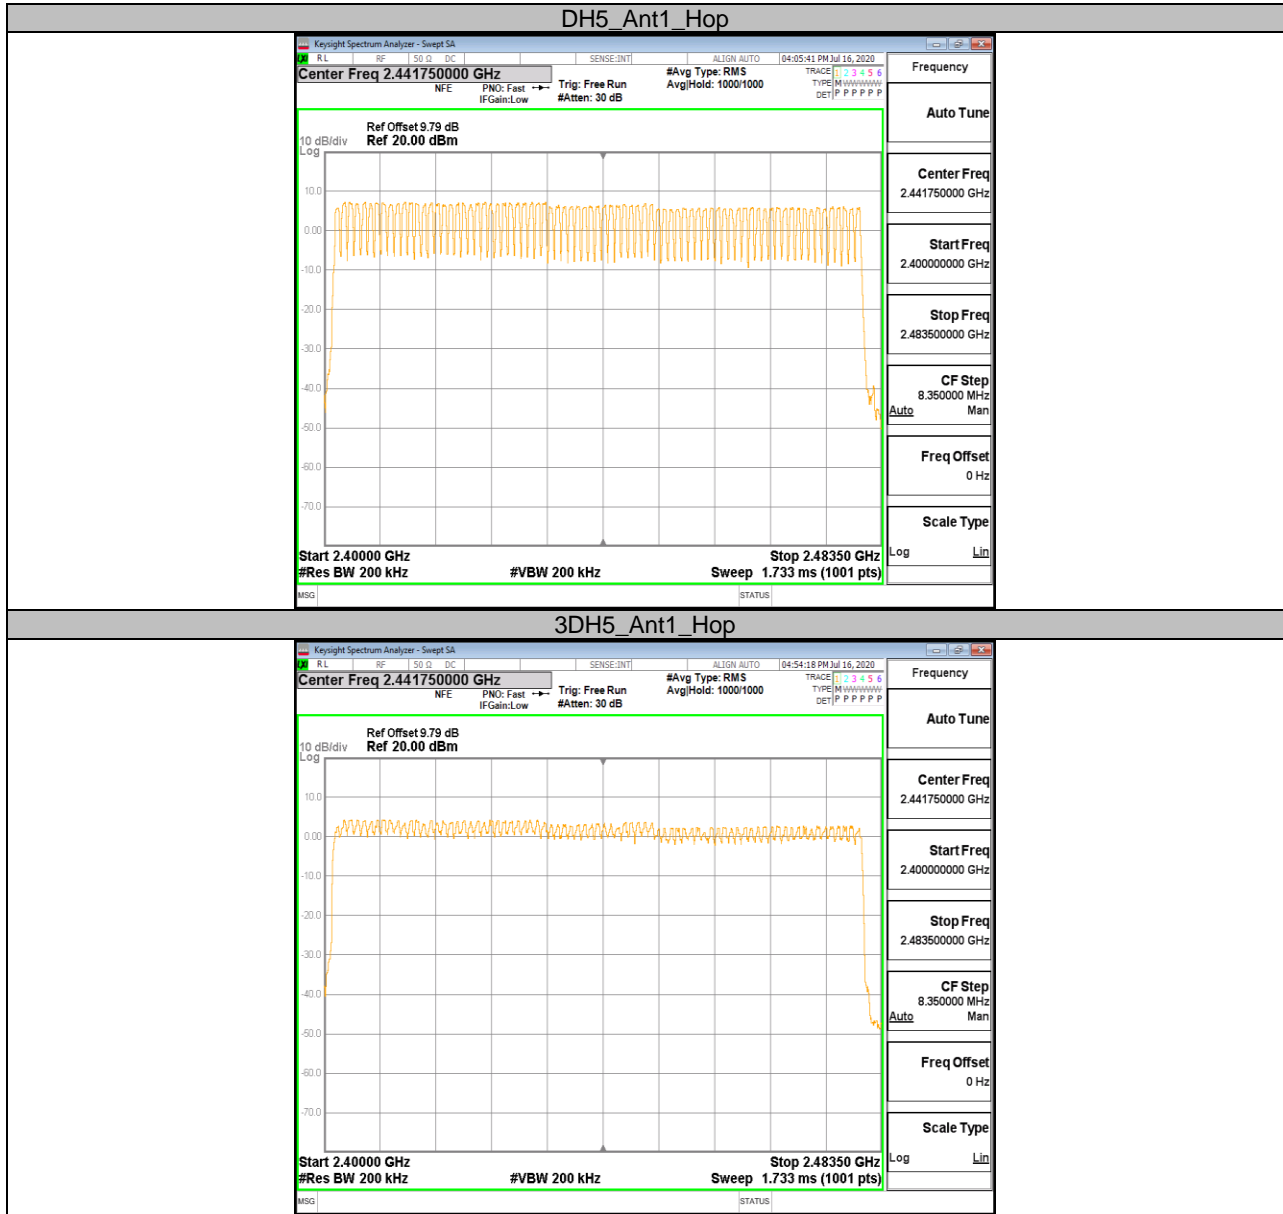




### Appendix G: Band edge measurements Test Result


Test Mode	Antenna	ChName	Channel	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	6.07	-39.67	<=-13.93	PASS
		High	2480	6.02	-45.67	<=-13.98	PASS
		Low	Hop_2402	6.12	-46.83	<=-13.88	PASS
		High	Hop_2480	5.53	-40.96	<=-14.48	PASS
3DH5	Ant1	Low	2402	2.78	-38.25	<=-17.22	PASS
		High	2480	2.83	-47.43	<=-17.17	PASS
		Low	Hop_2402	4.05	-49.84	<=-15.95	PASS
		High	Hop_2480	2.58	-43.32	<=-17.42	PASS




### Test Graphs

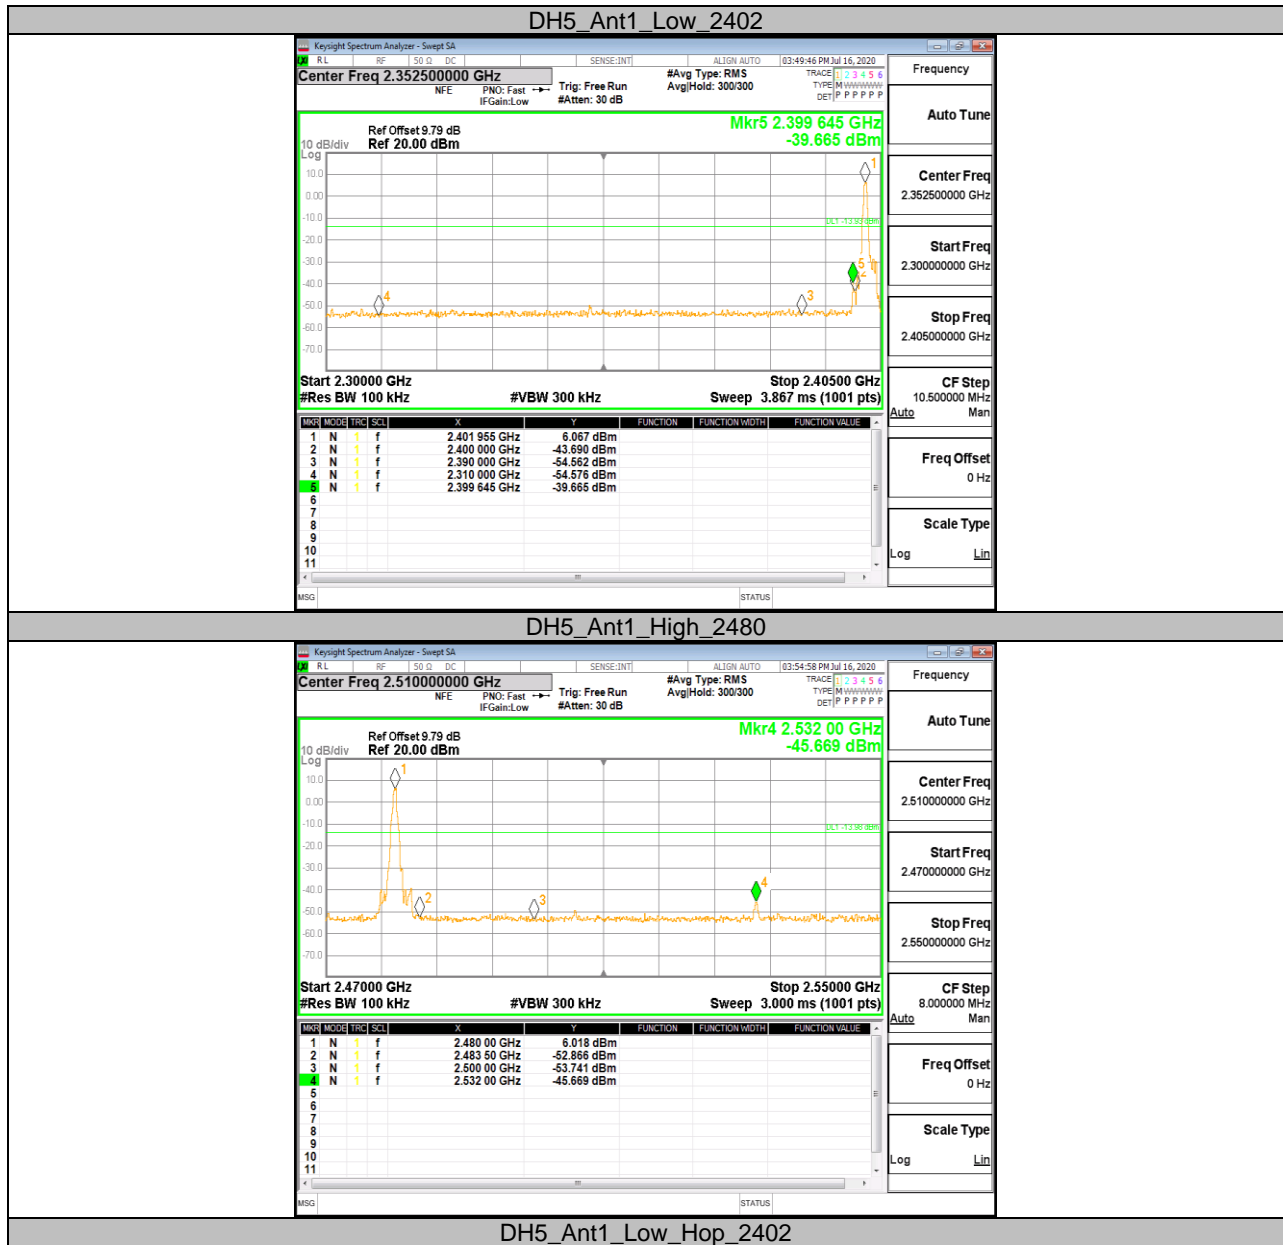




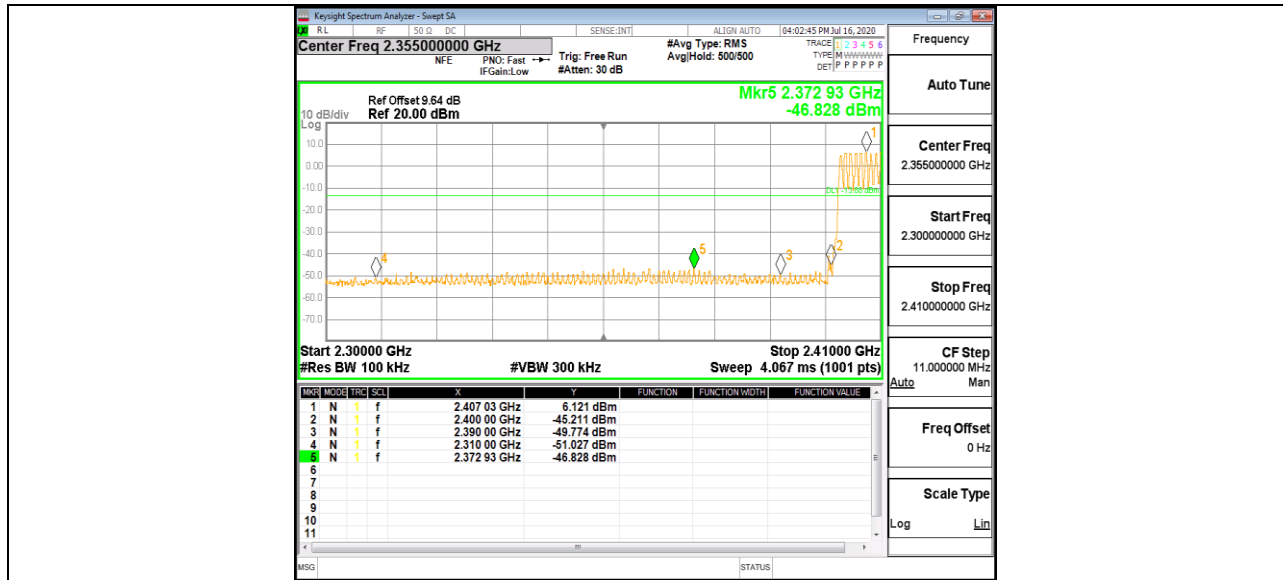


DH5\_Ant1\_High\_Hop\_2480

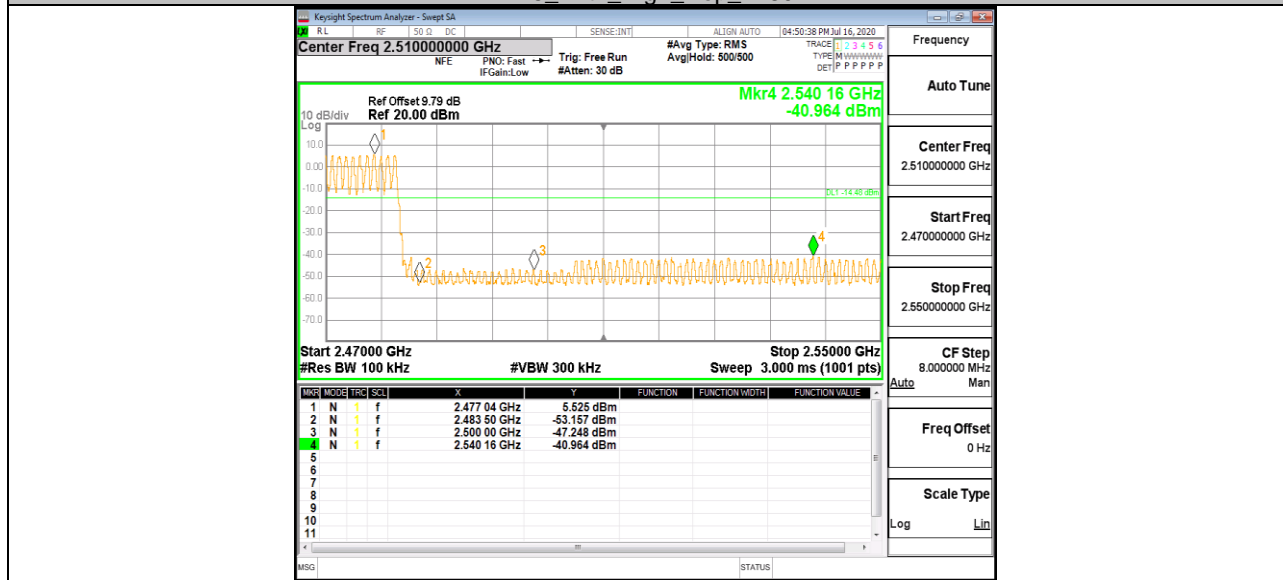


3DH5\_Ant1\_Low\_2402

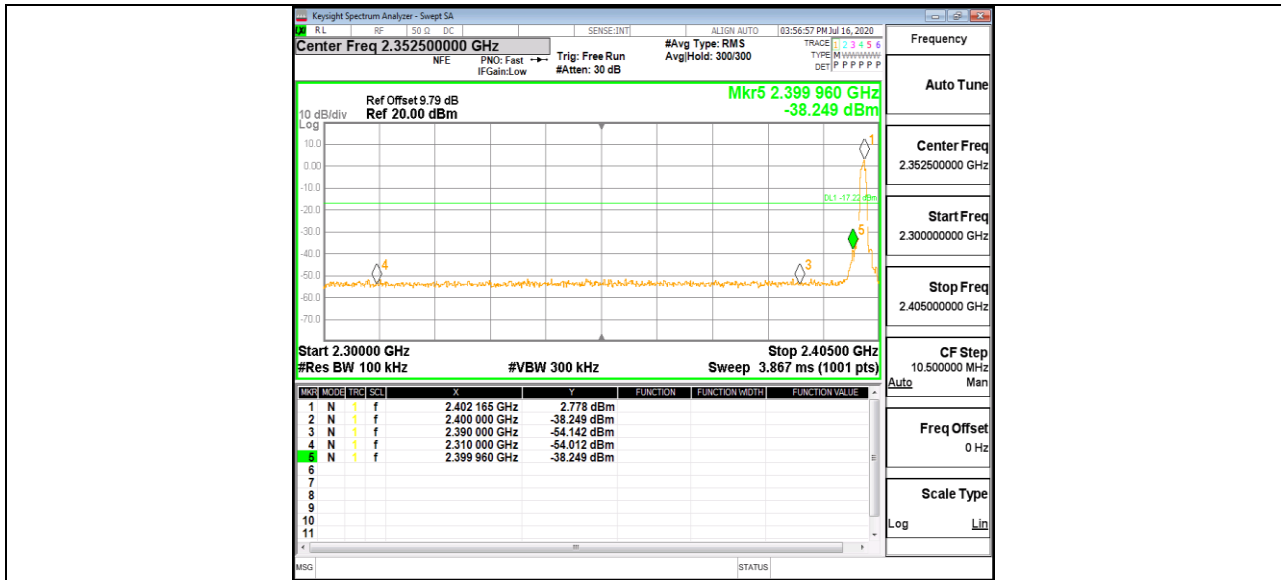


3DH5\_Ant1\_High\_2480

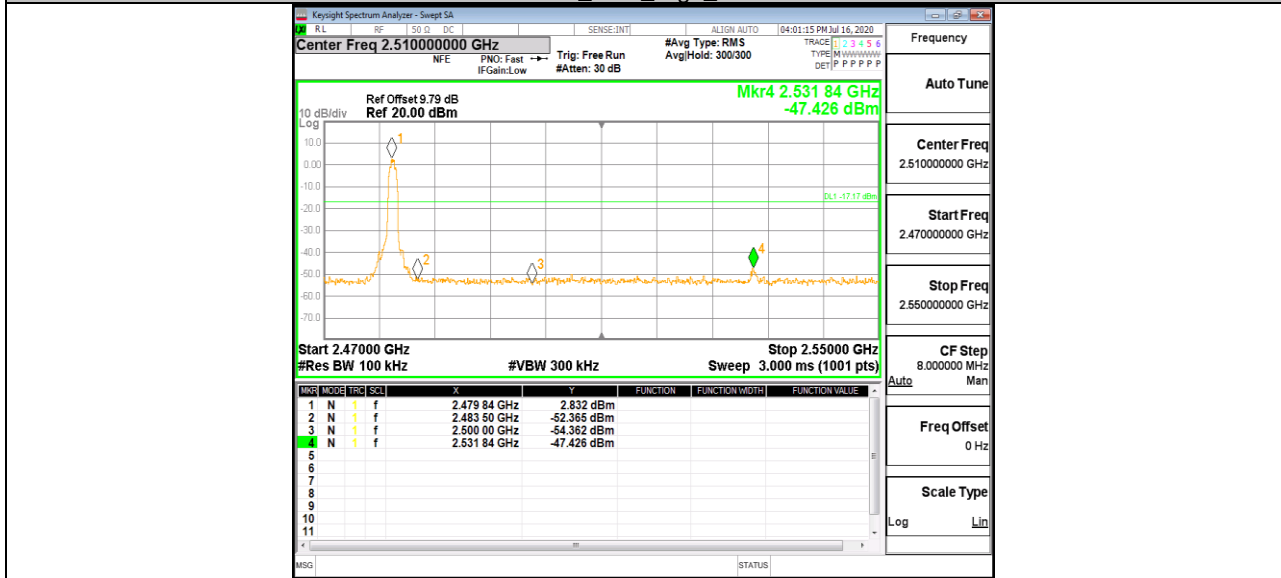

3DH5\_Ant1\_Low\_Hop\_2402

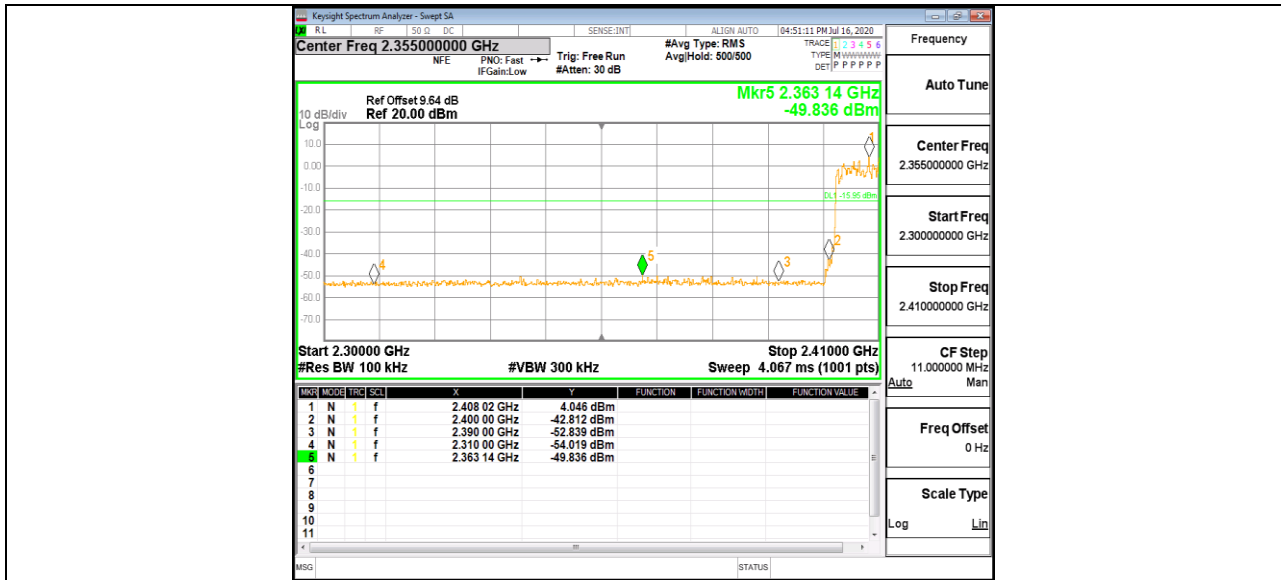

3DH5\_Ant1\_High\_Hop\_2480

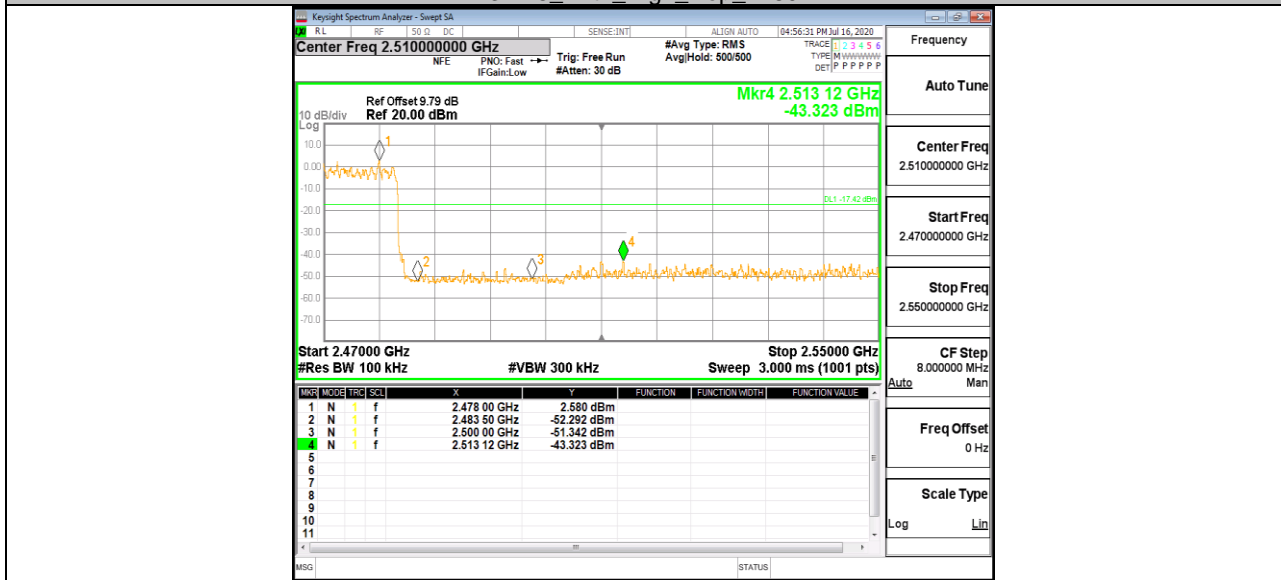





**Appendix H: Conducted Spurious Emission  
Test Result**

Test Mode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	Reference	6.15	6.15	---	PASS
			30~1000	---	-73.892	<=-13.855	PASS
			1000~26500	---	-43.511	<=-13.855	PASS
		2441	Reference	5.84	5.84	---	PASS
			30~1000	---	-72.835	<=-14.156	PASS
			1000~26500	---	-43.026	<=-14.156	PASS
		2480	Reference	5.98	5.98	---	PASS
			30~1000	---	-73.312	<=-14.017	PASS
			1000~26500	---	-41.967	<=-14.017	PASS
3DH5	Ant1	2402	Reference	2.87	2.87	---	PASS
			30~1000	---	-72.896	<=-17.131	PASS
			1000~26500	---	-48.982	<=-17.131	PASS
		2441	Reference	3.43	3.43	---	PASS
			30~1000	---	-72.866	<=-16.575	PASS
			1000~26500	---	-44.121	<=-16.575	PASS
		2480	Reference	2.79	2.79	---	PASS
			30~1000	---	-72.984	<=-17.207	PASS
			1000~26500	---	-47.78	<=-17.207	PASS




### Test Graphs

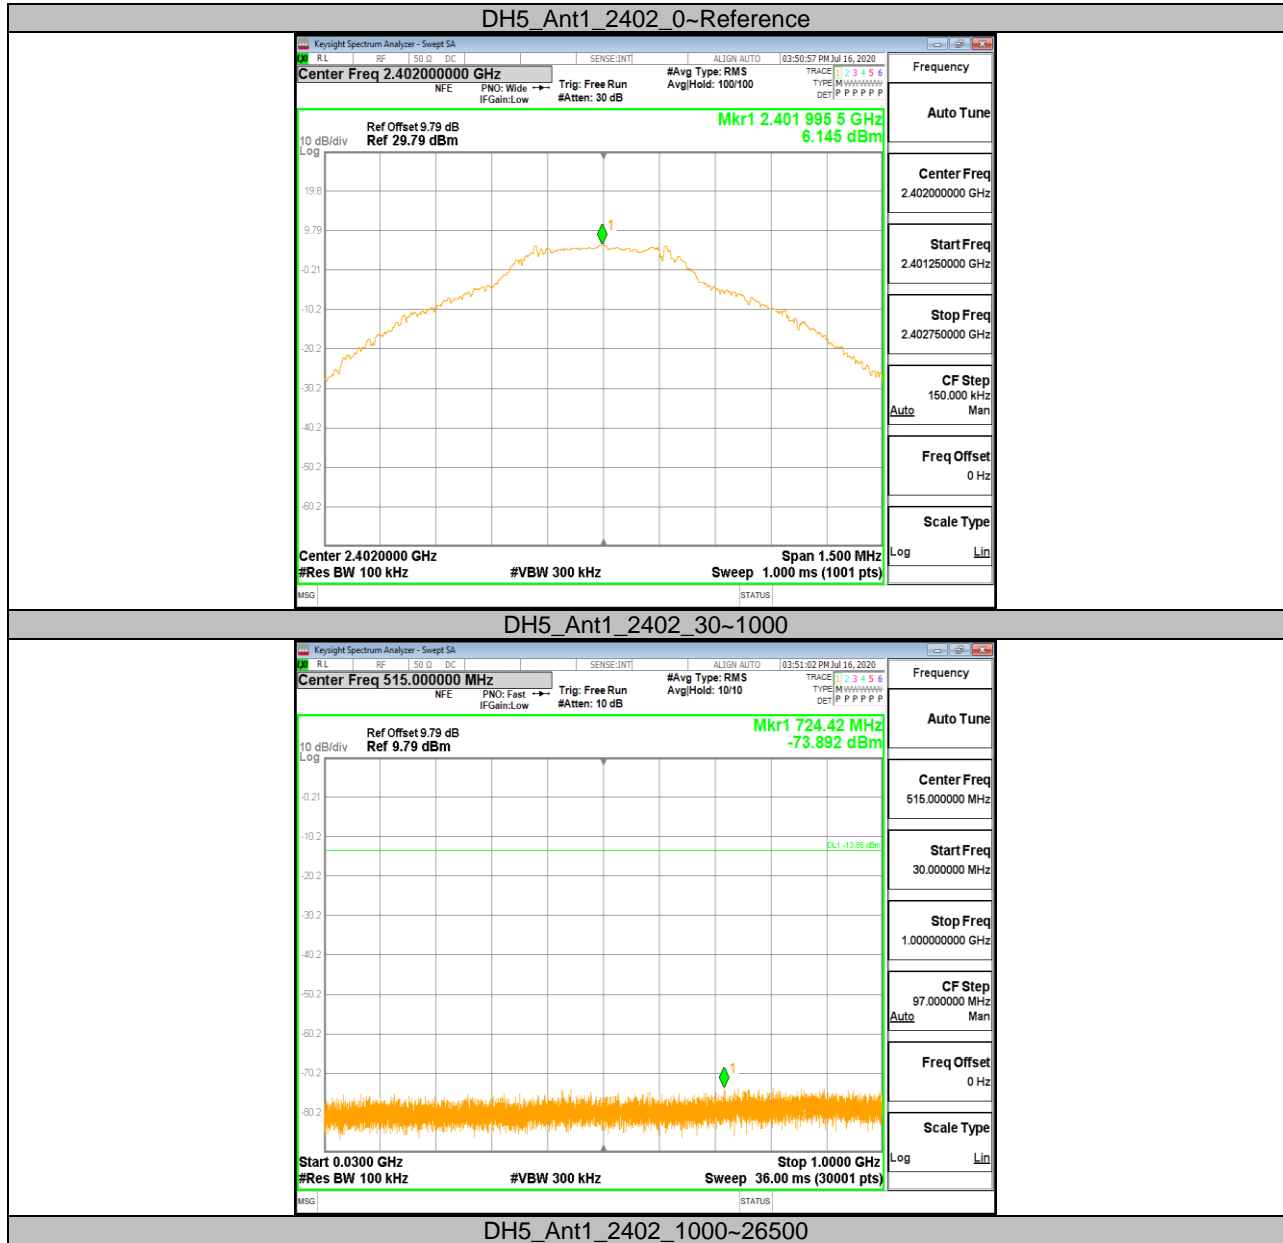


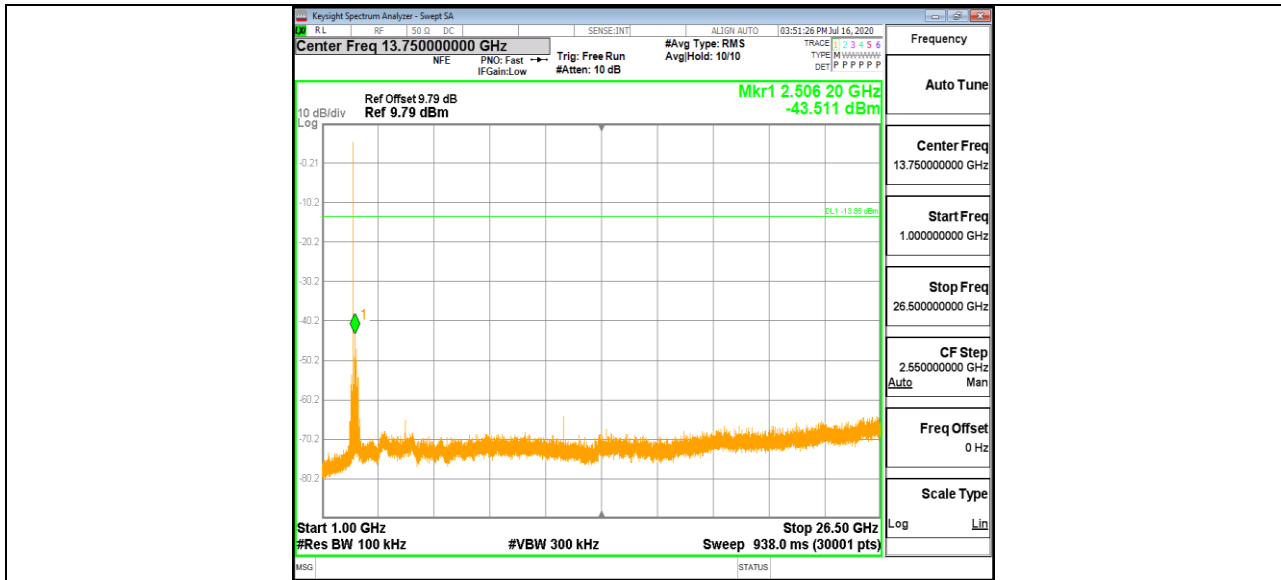


DH5\_Ant1\_2441\_0-Reference

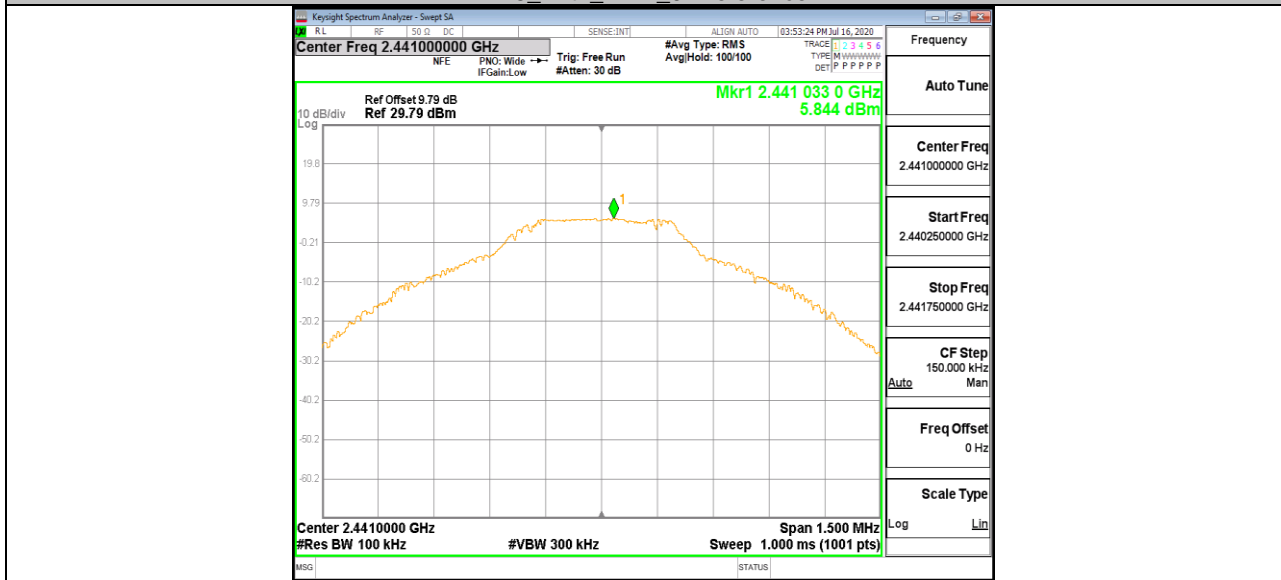


DH5\_Ant1\_2441\_30-1000

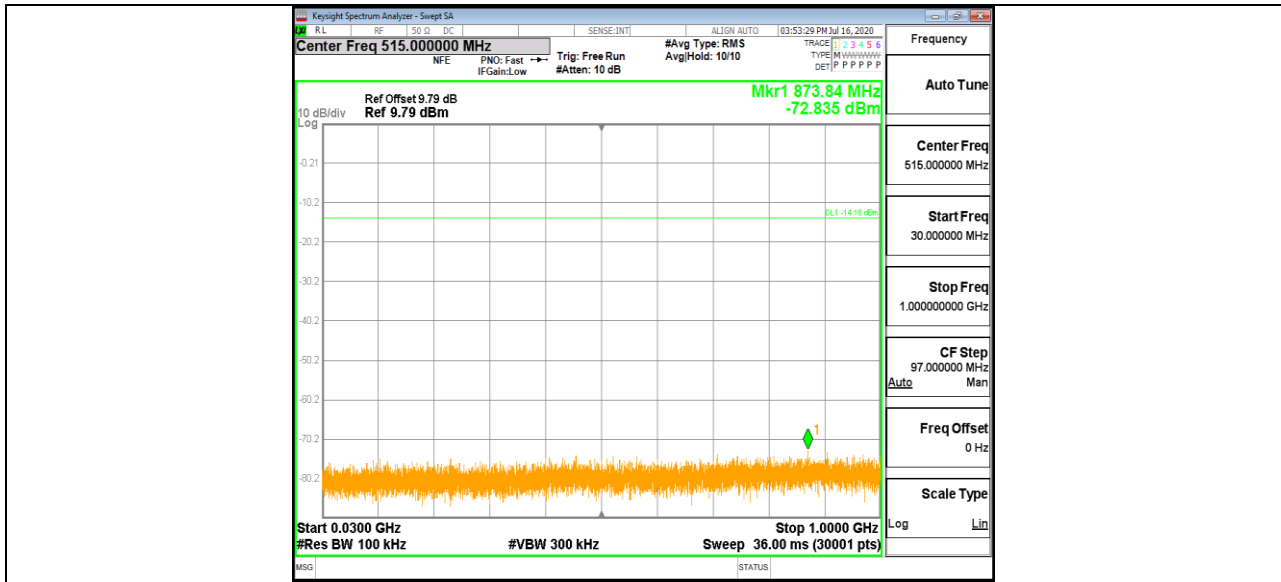


DH5\_Ant1\_2441\_1000~26500

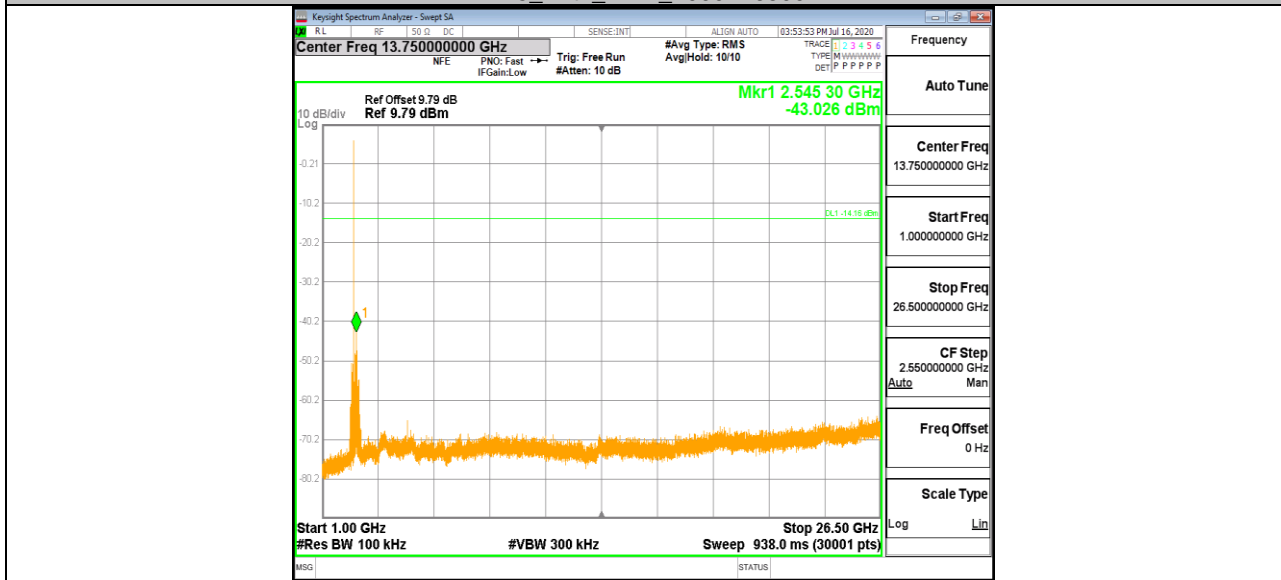

DH5\_Ant1\_2480\_0~Reference

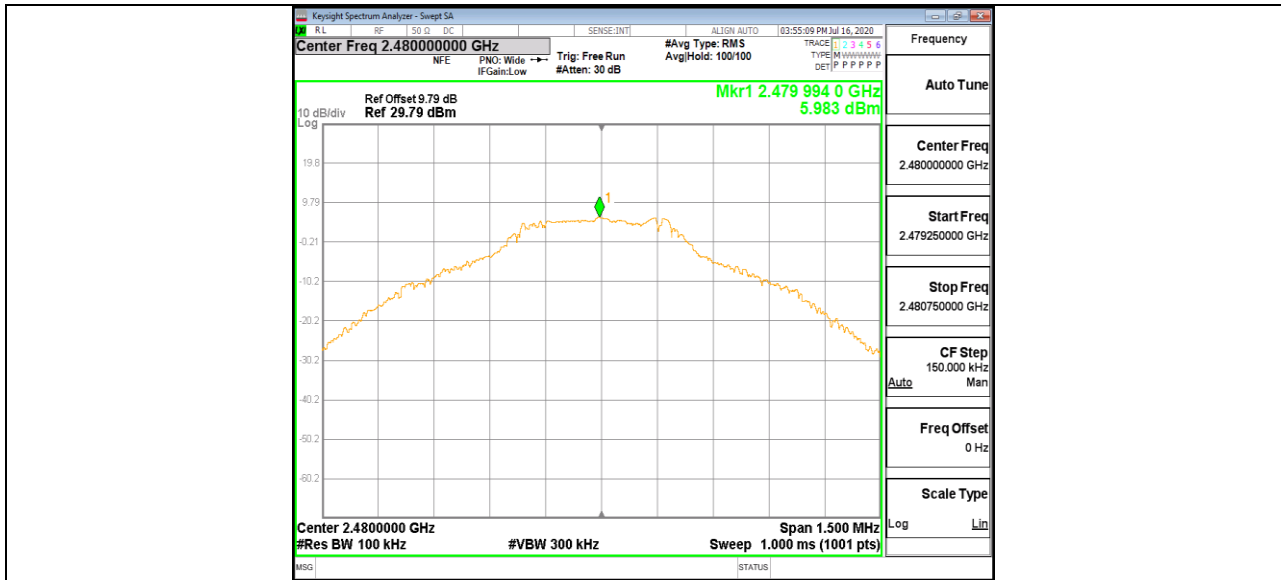


DH5\_Ant1\_2480\_30~1000

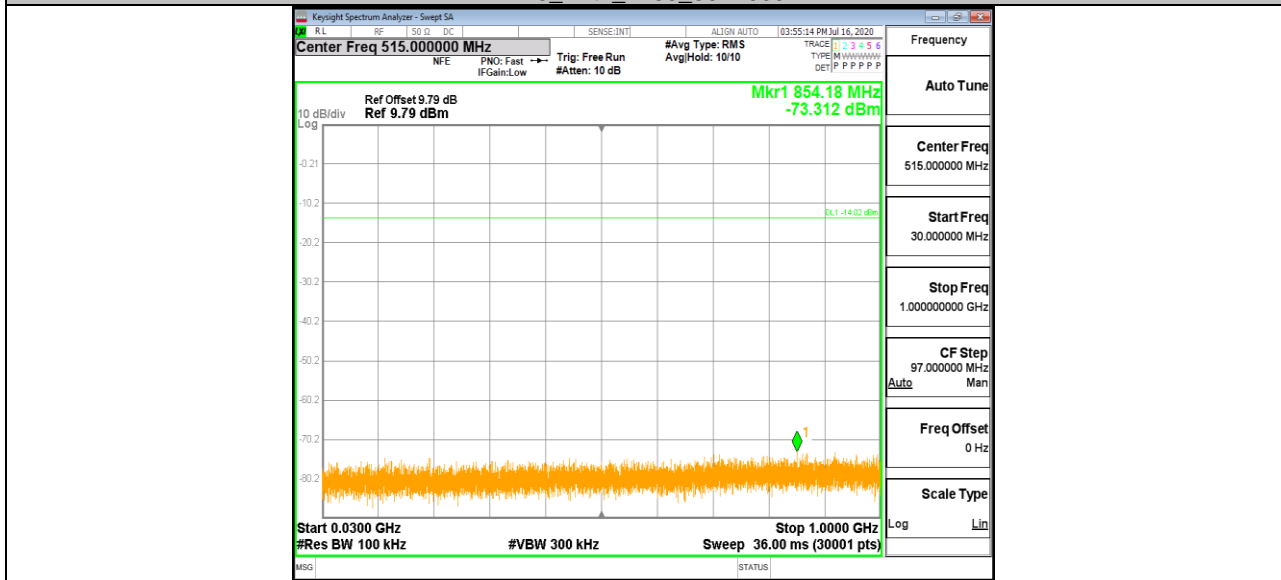


DH5\_Ant1\_2480\_1000~26500




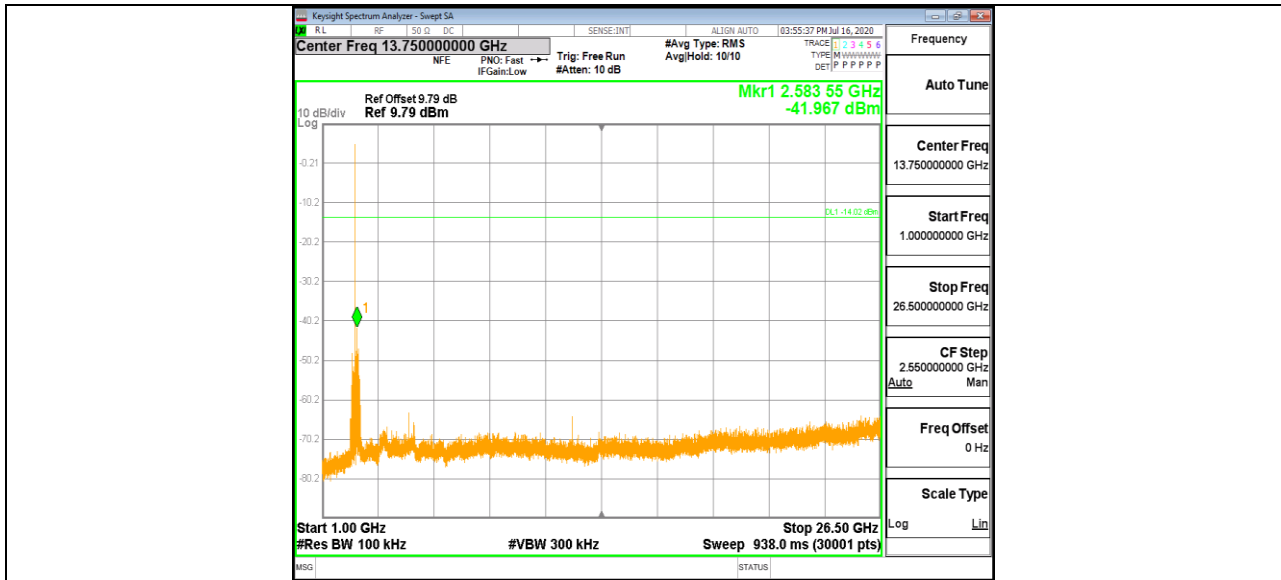


3DH5\_Ant1\_2402\_0~Reference

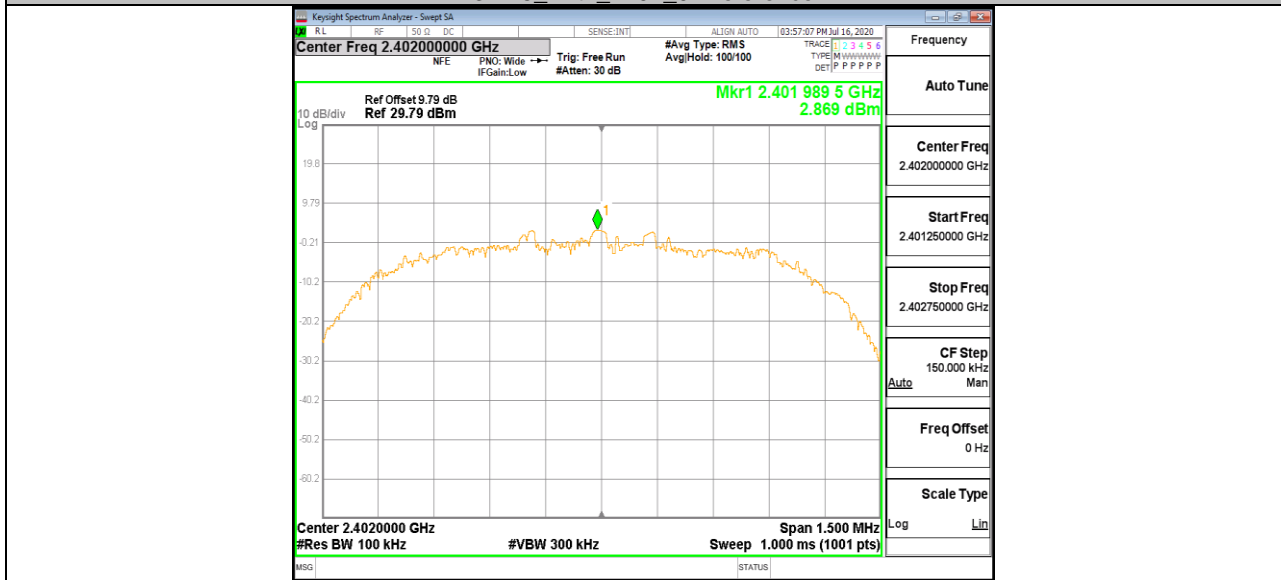


3DH5\_Ant1\_2402\_30~1000

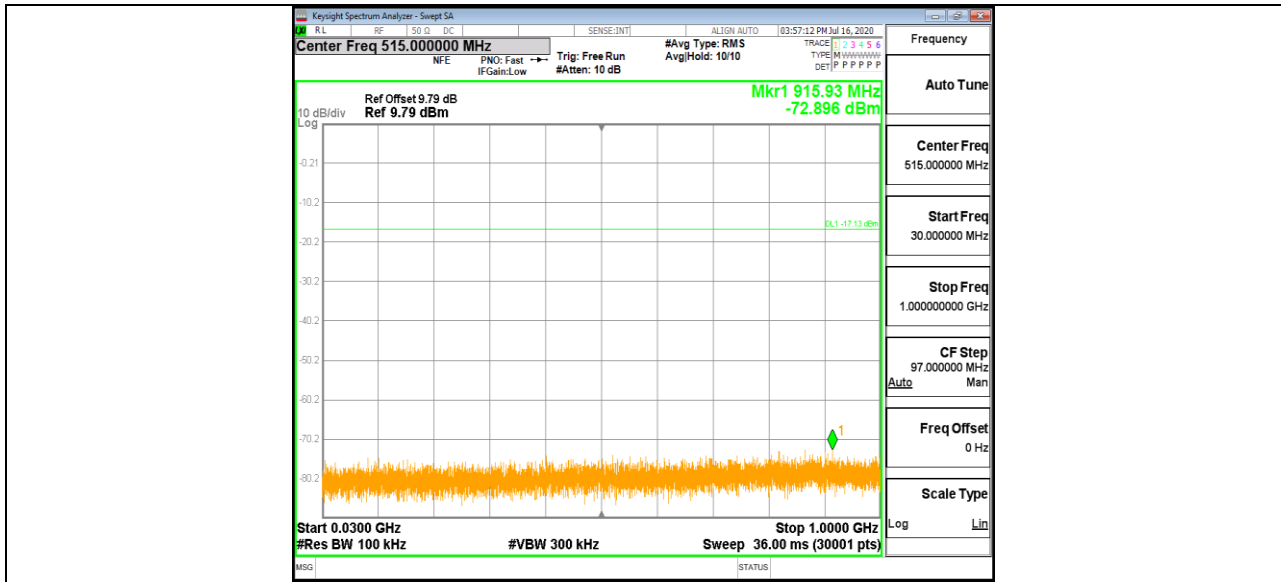


3DH5\_Ant1\_2402\_1000-26500

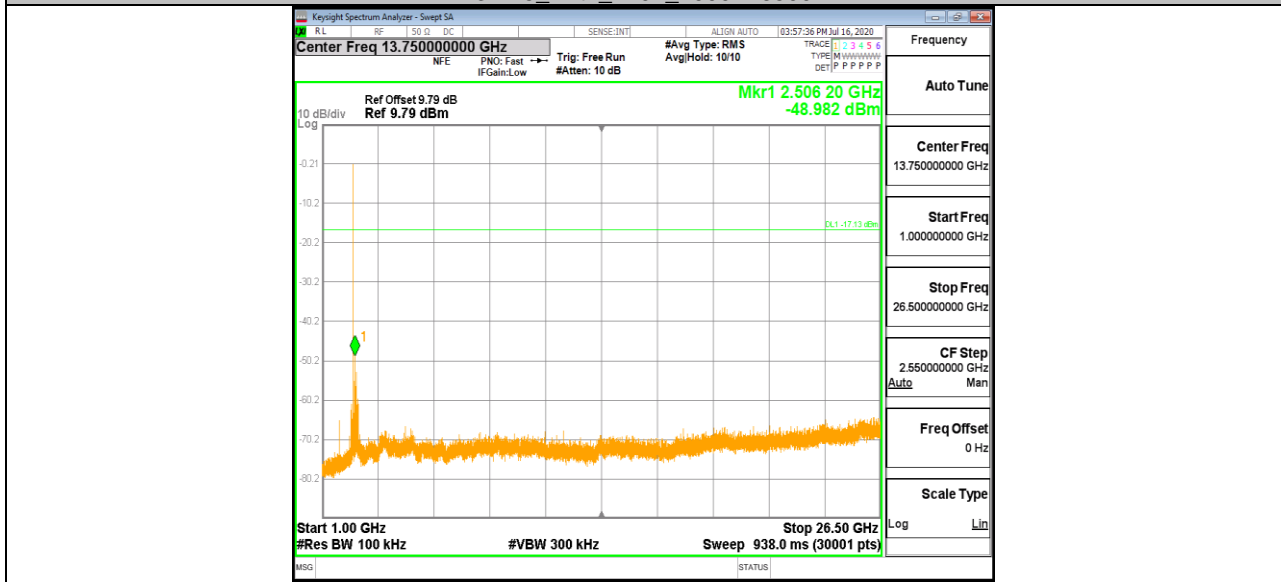


3DH5\_Ant1\_2441\_0-Reference

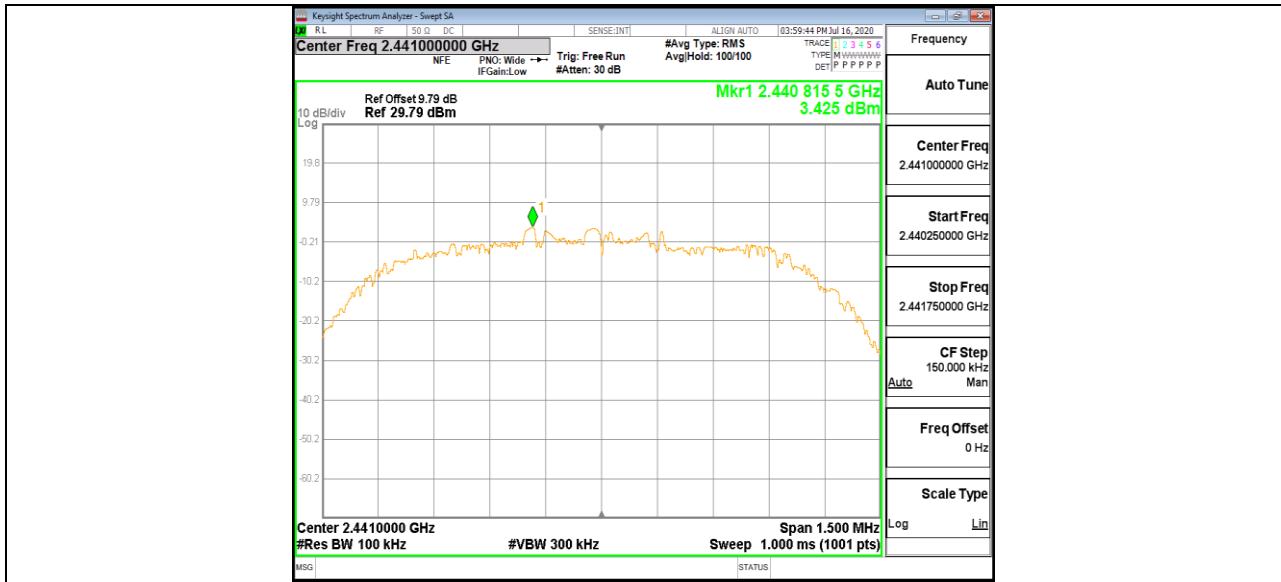


3DH5\_Ant1\_2441\_30~1000

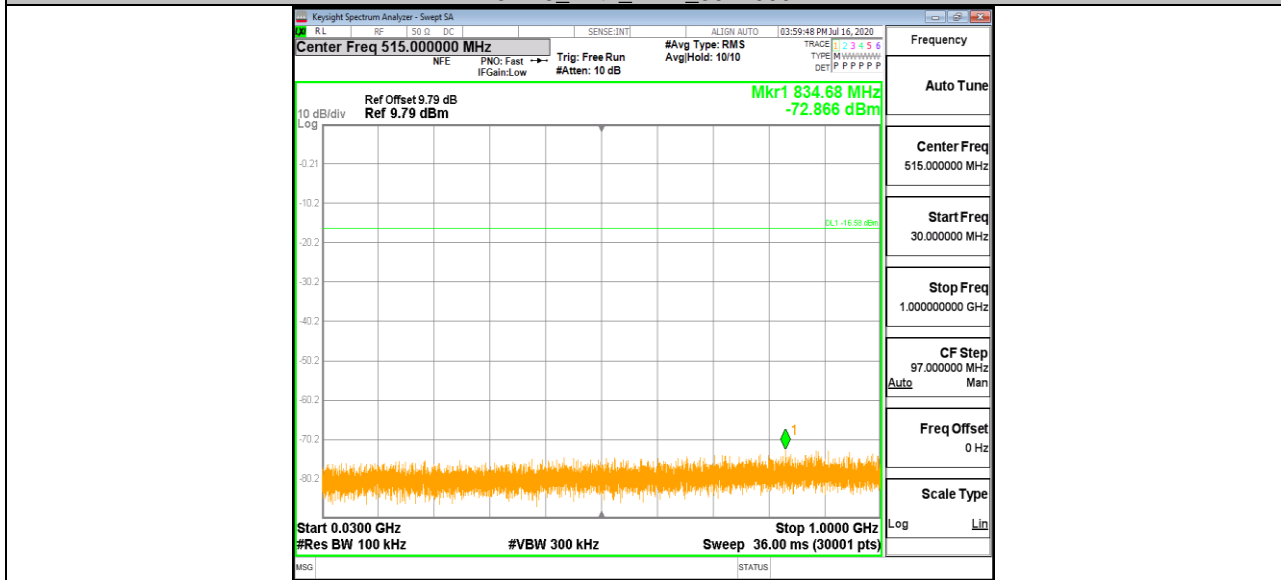


3DH5\_Ant1\_2441\_1000~26500

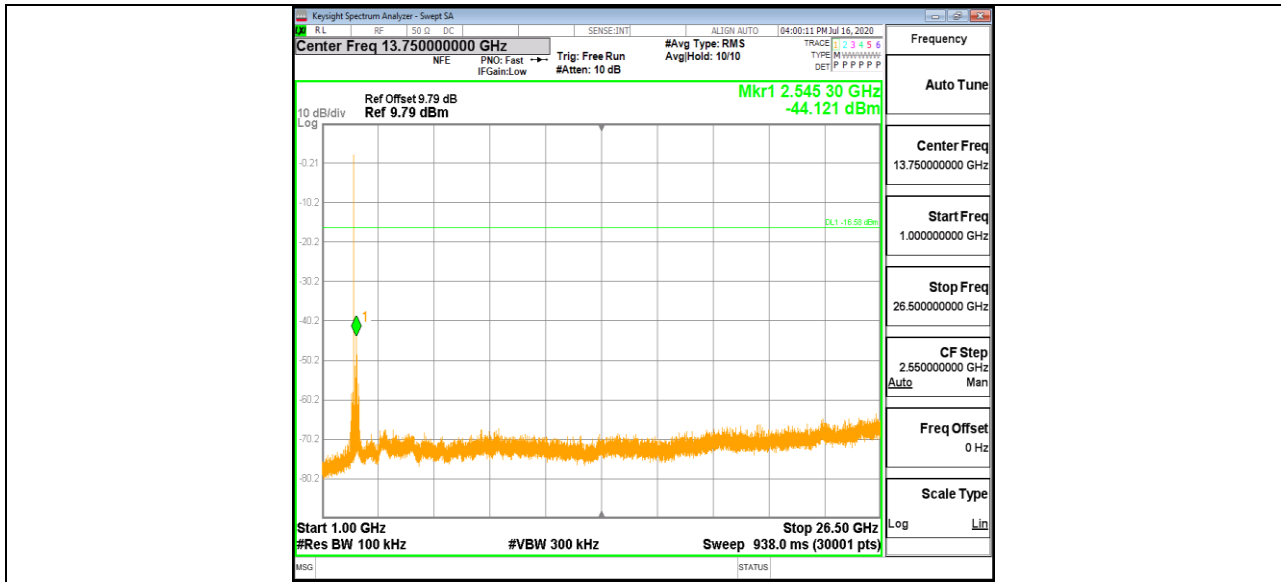


3DH5\_Ant1\_2480\_0~Reference

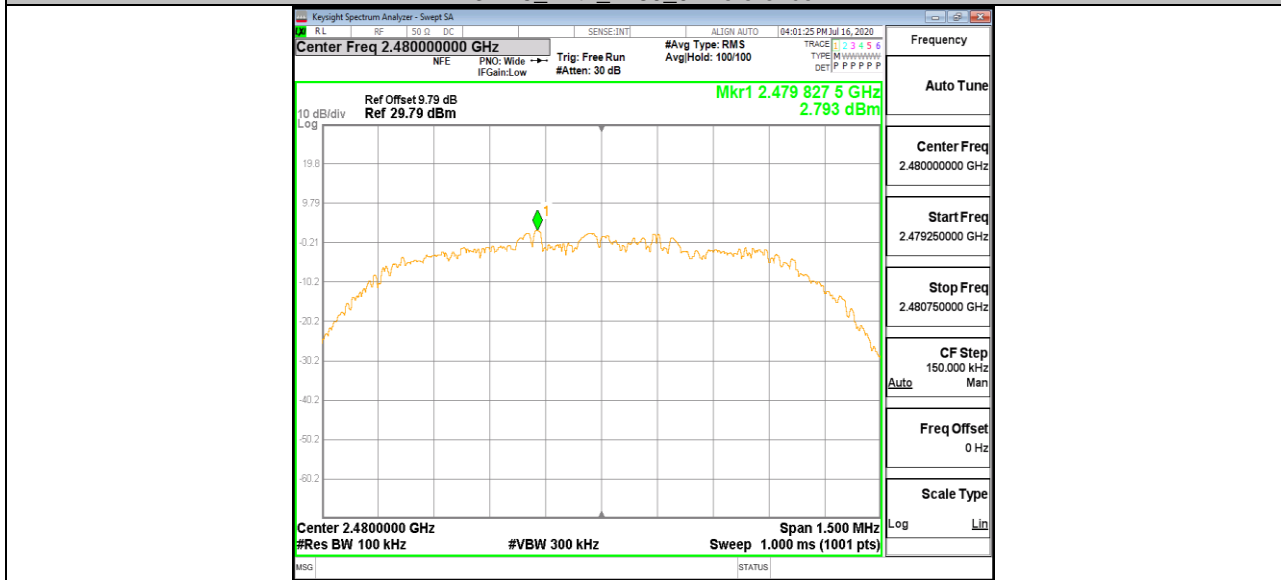

3DH5\_Ant1\_2480\_30~1000

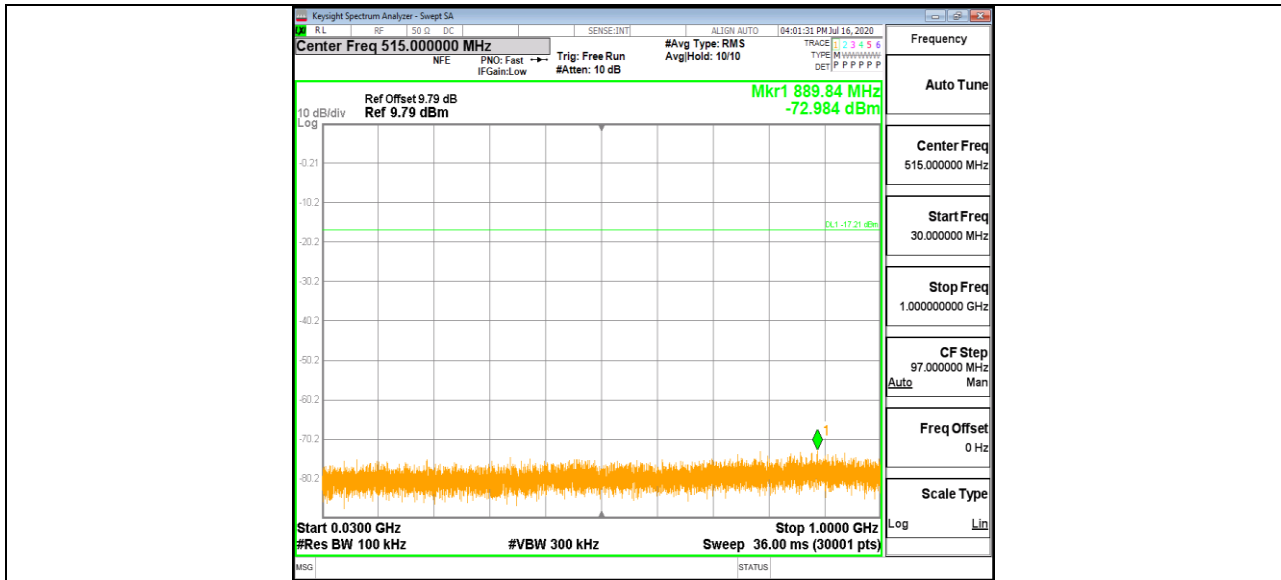

3DH5\_Ant1\_2480\_1000-26500

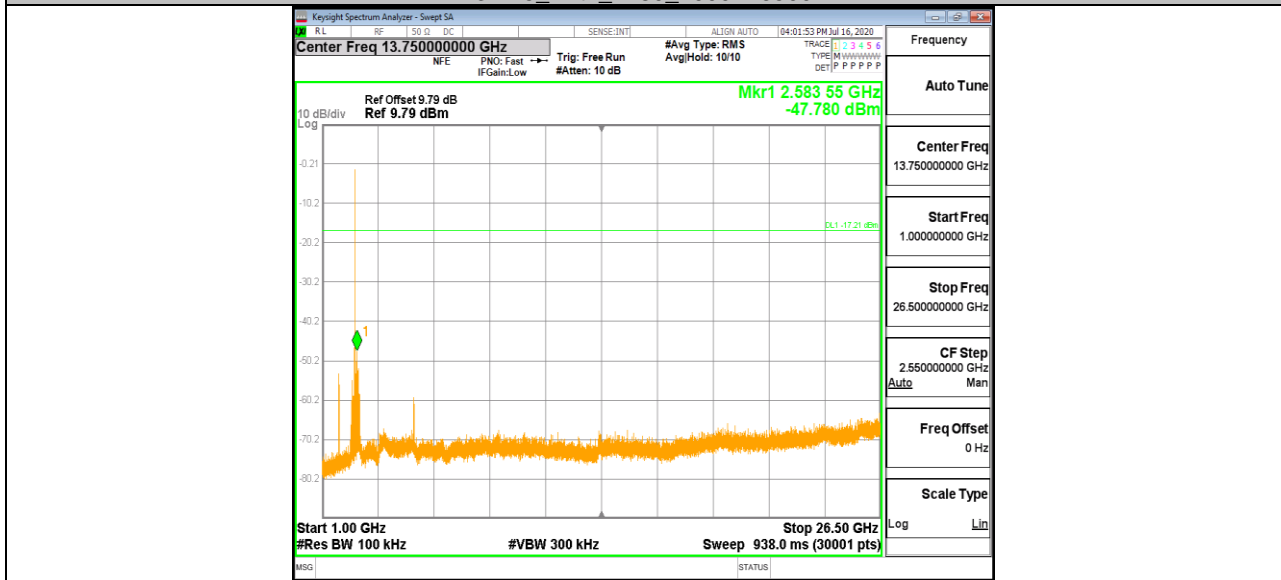



## Appendix I: Duty Cycle Test Result

Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (db)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
GFSK	2.915	3.749	0.7775	77.75	1.093	0.34	0.5
8DPSK	2.921	3.749	0.7791	77.91	1.084	0.34	0.5

Note:

Duty Cycle Correction Factor= $10\log(1/x)$ .


Where: x is Duty Cycle (Linear)

Where: T is On Time (transmit duration)

If that calculated VBW is not available on the analyzer then the next higher value should be used.



Test Graphs

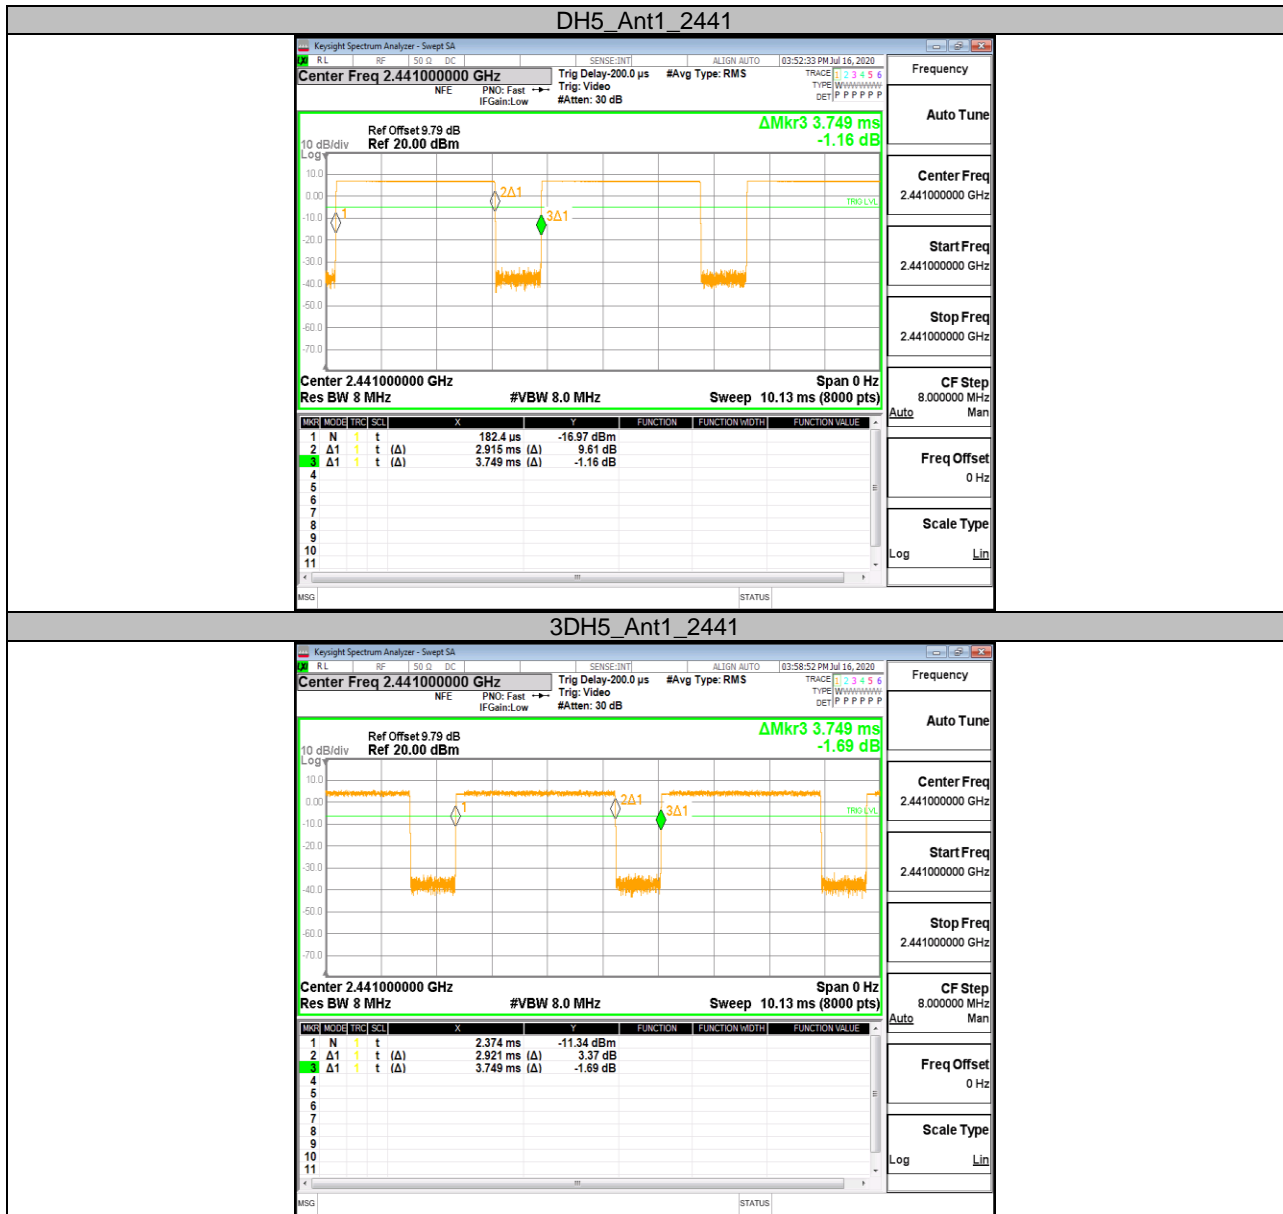

END OF REPORT