


Mechanical Drawing

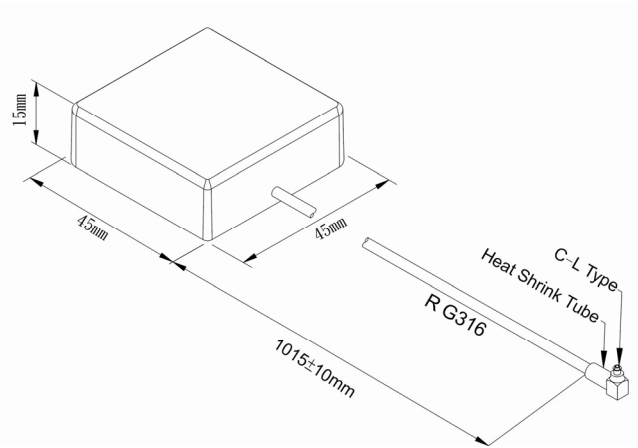

Unit: mm

Electrical Specification

Frequency Range	2.4~2.4835GHz
Impedance	50Ω
V.S.W.R.	≤2.0
Radiation	Directional
Gain	4dBi
Polarization	Linear

Mechanical Specification

Connector Type	RP-SMA
Material	ABS / PC
Cable	RG316 (1015mm)
Bushing Type	--
Dimension	45x45x15mm
Weight	54g (est.)

Environmental Specification

Operating Temp	- 30℃ ~ + 65℃
Storage Temp	- 30℃ ~ + 70℃
Substance	Meets RoHs requirement

