


### Mechanical Drawing



Unit: mm

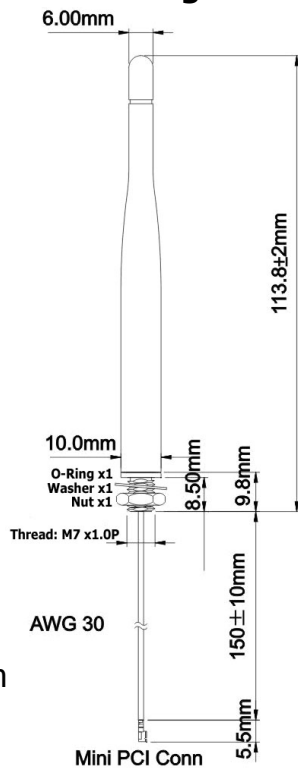

### Electrical Specification

<b>Frequency Range</b>	2.4~2.4835GHz
<b>Impedance</b>	50Ω
<b>V.S.W.R.</b>	≤2.0
<b>Radiation</b>	Omni
<b>Gain</b>	4dBi
<b>Polarization</b>	Vertical

### Mechanical Specification

<b>Connector Type</b>	μFL/Mini PCI (Brass)
<b>Material</b>	Cover(PU) / Base(PC)
<b>Cable</b>	AWG30 (150mm)
<b>Bushing Type</b>	Straight 0°
<b>Length</b>	113.8mm
<b>Water Proof</b>	IP65
<b>Weight</b>	16g (est.)

### Environmental Specification

<b>Operating Temp</b>	- 20°C ~ + 65°C
<b>Storage Temp</b>	- 30°C ~ + 70°C
<b>Substance</b>	Meets RoHs requirement

