


### Mechanical Drawing

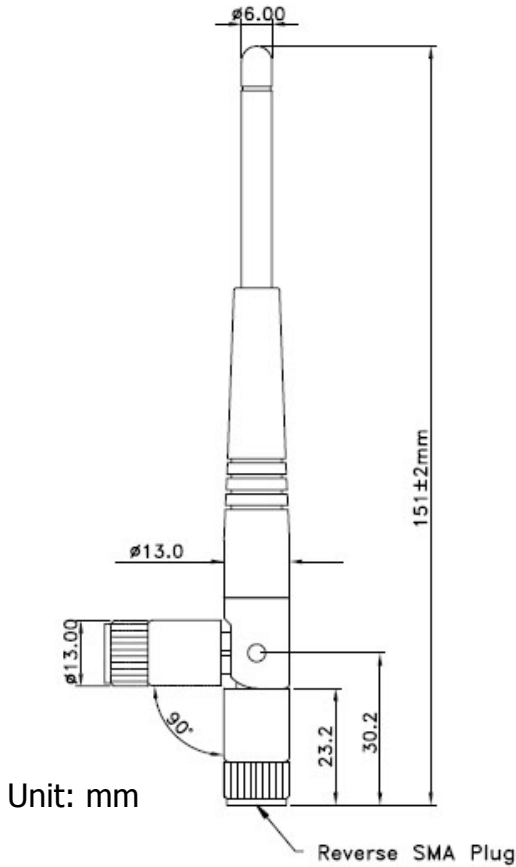

### Electrical Specification

<b>Frequency Range</b>	2.4~2.4835GHz
<b>Impedance</b>	50 $\Omega$
<b>V.S.W.R.</b>	$\leq 2.0$
<b>Radiation</b>	Omn
<b>Gain</b>	4dBi
<b>Polarization</b>	Vertical

### Mechanical Specification

<b>Connector Type</b>	Reverse SMA Plug (Brass)
<b>Material</b>	Cover(PU) / Base(PC)
<b>Cable</b>	--
<b>Bushing Type</b>	Swivel 0°, 45°, 90°
<b>Length</b>	151mm
<b>Water Proof</b>	--
<b>Weight</b>	24g (est.)

### Environmental Specification

<b>Operating Temp</b>	- 20°C ~ + 65°C
<b>Storage Temp</b>	- 30°C ~ + 70°C
<b>Substance</b>	Meets RoHs requirement

