


Mechanical Drawing

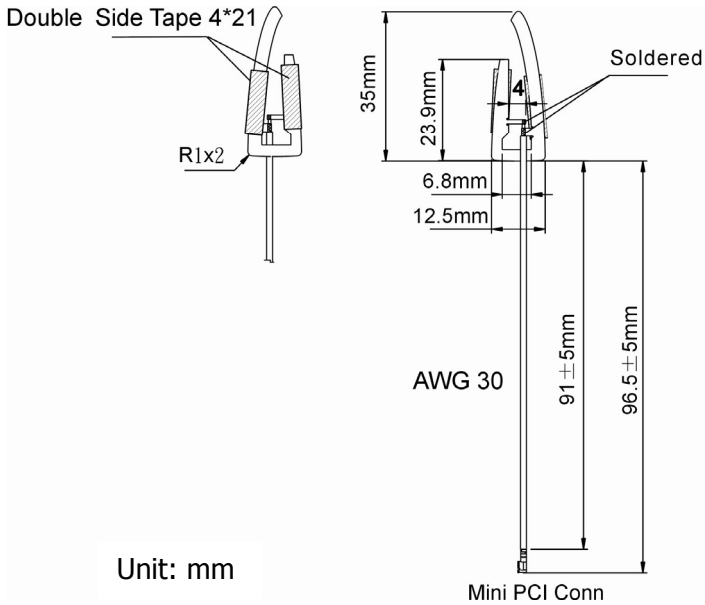

Electrical Specification


Frequency Range	2.4~2.4835GHz
Impedance	50Ω
V.S.W.R.	≤2.0
Radiation	Omni
Gain	2.5dBi
Polarization	Linear

Mechanical Specification


Connector Type	Mini PCI (Brass)
Material	Nickel Silver Strip
Cable	AWG30 (96mm)
Bushing Type	Tape
Length	54.3mm
Water Proof	--
Weight	1g (est.)

Environmental Specification

Operating Temp	- 30°C ~ + 65°C
Storage Temp	- 30°C ~ + 70°C
Substance	Meet RoHs requirement

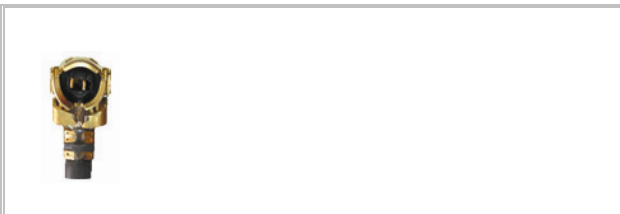

Far-field amplitude of YZ.nsi

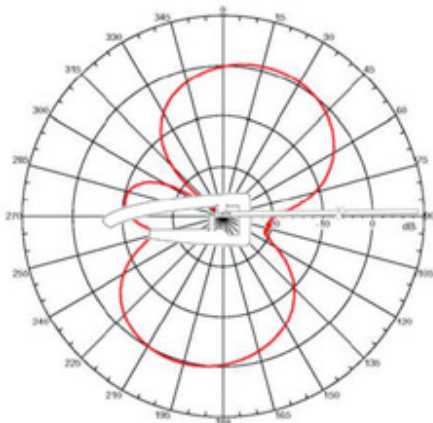

Far-field amplitude of XZ.nsi

