


Mechanical Drawing

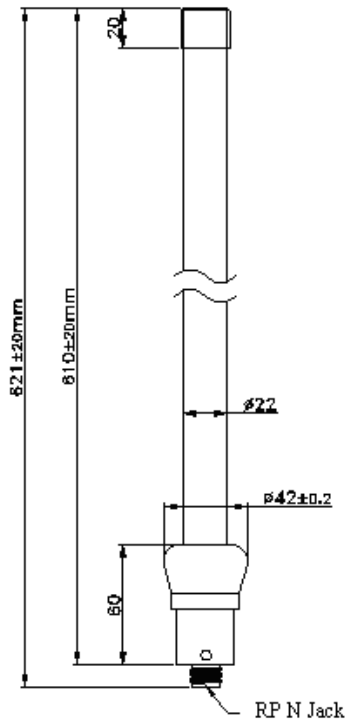

Unit: mm

Electrical Specification

Frequency Range	2.4~2.5GHz
Impedance	50Ω
V.S.W.R.	≤ 2.0
Radiation	Omni-directional
Gain	9dBi
Polarization	Vertical

Mechanical Specification

Connector Type	RP N Jack (Brass)
Material	Fiberglass
Cable	--
Length	621mm
Water Proof	IP65
Weight	461g (est.)

Environmental Specification

Operating Temp	- 20°C ~ + 70°C
Storage Temp	- 30°C ~ + 85°C
Substance	RoHS Compliant

