

#01_Bluetooth_1Mbps_Front_0mm_Ch78


Communication System: Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:1.229
Medium: MSL_2450_181130 Medium parameters used: $f = 2480$ MHz; $\sigma = 2.03$ S/m; $\epsilon_r = 52.531$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(4.4, 4.4, 4.4) @ 2480 MHz; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn853; Calibrated: 2018/7/24
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Area Scan (61x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.129 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 5.816 V/m; Power Drift = -0.14 dB
Peak SAR (extrapolated) = 0.248 W/kg
SAR(1 g) = 0.091 W/kg; SAR(10 g) = 0.034 W/kg
Maximum value of SAR (measured) = 0.128 W/kg

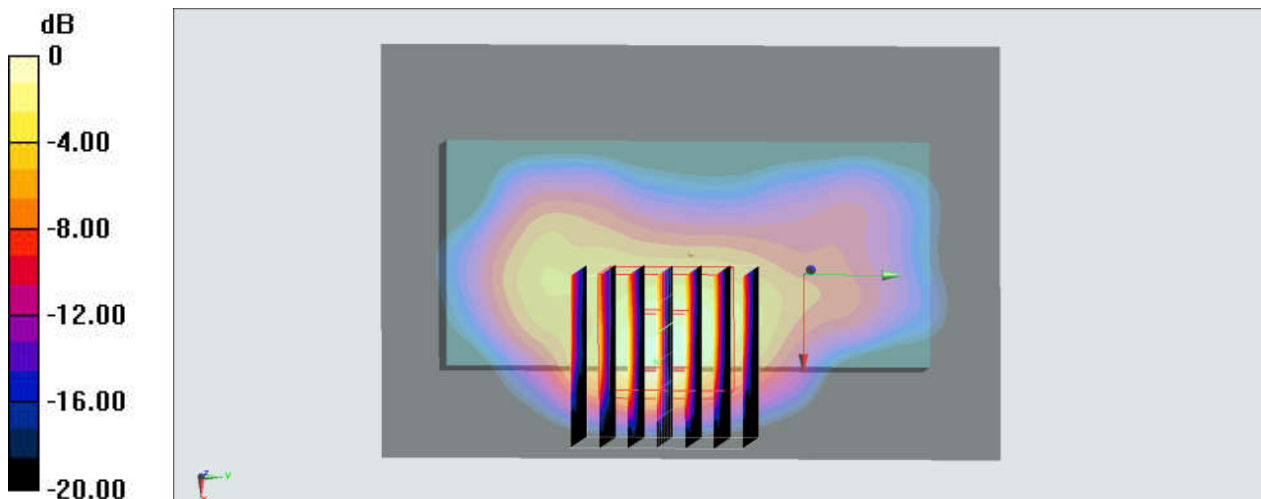

0 dB = 0.128 W/kg = -8.93 dBW/kg