



MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

3162 BELICK STREET • SANTA CLARA, CALIFORNIA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372

January 5, 2012

Outsite Networks, Inc.
2551 Eltham Ave., Suite N
Norfolk, VA 23513

Dear Wim Vanderbijl,

Enclosed is the EMC Wireless test report for compliance testing of the Outsite Networks, Inc., All In One Printer Server as tested to the requirements of Title 47 of the CFR, Ch. 1 (10-1-06 ed.), Part 15, Subpart B, ICES-003, Issue 4 February 2004 for a Class A Digital Device and FCC Part 15 Subpart C, RSS-210, Issue 8, Dec. 2010 for Intentional Radiators.

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,
MET LABORATORIES, INC.

Jennifer Warnell
Documentation Department

Reference: (\Outsite Networks, Inc.\EMC33123-FCC247 Rev. 1)

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc.

Electromagnetic Compatibility Criteria Test Report

for the

**Outsite Networks, Inc.
All In One Printer Server**

Tested under
the FCC Certification Rules
contained in
Title 47 of the CFR, Parts 15 Subpart B & ICES-003
for Class A Digital Devices
&
15.247 Subpart C & RSS-210, Issue 8, Dec. 2010
for Intentional Radiators

MET Report: EMC33123-FCC247 Rev. 1

January 5, 2012

Prepared For:

**Outsite Networks, Inc.
2551 Eltham Ave., Suite N
Norfolk, VA 23513**

Prepared By:
MET Laboratories, Inc.
914 W. Patapsco Ave
Baltimore, MD 21230

Electromagnetic Compatibility Criteria Test Report

for the

**Outsite Networks, Inc.
All In One Printer Server**

Tested under
the FCC Certification Rules
contained in
Title 47 of the CFR, Parts 15 Subpart B & ICES-003
for Class A Digital Devices
&
15.247 Subpart C & RSS-210, Issue 8, Dec. 2010
for Intentional Radiators



Len Knight, Project Engineer
Electromagnetic Compatibility Lab



Jennifer Warnell
Documentation Department

Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules Parts 15B, 15.247 and Industry Canada standards ICES-003, Issue 4 February 2004, RSS-210, Issue 8, Dec. 2010 under normal use and maintenance.



Shawn McMillen,
Wireless Manager, Electromagnetic Compatibility Lab

Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	December 2, 2011	Initial Issue.
1	January 5, 2012	Revised to reflect engineer corrections.

Table of Contents

I.	Executive Summary	1
	A. Purpose of Test	2
	B. Executive Summary	2
II.	Equipment Configuration	3
	A. Overview.....	4
	B. References.....	5
	C. Test Site	5
	D. Description of Test Sample	6
	E. Equipment Configuration.....	8
	F. Support Equipment	8
	G. Ports and Cabling Information.....	8
	H. Mode of Operation.....	9
	I. Modifications	9
	a) Modifications to EUT	9
	b) Modifications to Test Standard.....	9
	J. Disposition of EUT	9
III.	Electromagnetic Compatibility Criteria for Unintentional Radiators	10
	§ 15.107(a) Conducted Emissions Limits.....	11
	§ 15.109(a) Radiated Emissions Limits.....	15
IV.	Electromagnetic Compatibility Criteria for Intentional Radiators.....	19
	§ 15.203 Antenna Requirement	20
	§ 15.207(a) Conducted Emissions Limits.....	21
	§ 15.247(a)(a) 6 dB and 99% Bandwidth	25
	§ 15.247(b) Peak Power Output	29
	§ 15.247(d) Radiated Spurious Emissions Requirements and Band Edge.....	32
	§ 15.247(d) RF Conducted Spurious Emissions Requirements and Band Edge.....	42
	§ 15.247(e) Peak Power Spectral Density	46
	§ 15.247(i) Maximum Permissible Exposure	49
	RSS-GEN Receiver Spurious Emissions	50
V.	Test Equipment	52
VI.	Certification & User's Manual Information	54
	A. Certification Information	55
	B. Label and User's Manual Information	59
VII.	ICES-003 Procedural & Labeling Requirements.....	61

List of Tables

Table 1. Executive Summary of EMC Part 15.247 Compliance Testing	2
Table 2. EUT Summary Table.....	4
Table 3. References	5
Table 4. Equipment Configuration	8
Table 5. Support Equipment.....	8
Table 6. Ports and Cabling Information	8
Table 7. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Subsections 15.107(a) (b) and 15.207(a)	11
Table 8. Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz).....	12
Table 9. Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz)	13
Table 10. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b)	15
Table 11. Radiated Emissions Limits, Test Results, 30 MHz – 1 GHz, FCC Limits	16
Table 12. Radiated Emissions Limits, Test Results, ICES-003 Limits	17
Table 13. Antenna Information	20
Table 14. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)	21
Table 15. Conducted Emissions, 15.207(a), Phase Line, Test Results	22
Table 16. Conducted Emissions, 15.207(a), Neutral Line, Test Results	23
Table 17. 6 dB Occupied Bandwidth, Test Results	26
Table 18. 99% Occupied Bandwidth, Test Results	26
Table 19. Output Power Requirements from §15.247(b)	29
Table 20. Peak Power Output, Test Results	30
Table 21. Restricted Bands of Operation.....	32
Table 22. Radiated Emissions Limits Calculated from FCC Part 15, § 15.209 (a)	33
Table 23. Peak Power Spectral Density, Test Results	47
Table 24. Spurious Emission Limits for Receivers	50
Table 25. Test Equipment List	53

List of Plots

Plot 1. Conducted Emission, Phase Line Plot	12
Plot 2. Conducted Emission, Neutral Line Plot.....	13
Plot 3. Radiated Emissions, 30 MHz - 1 GHz, FCC Limits	16
Plot 4. Radiated Emissions, ICES-003 Limits.....	17
Plot 5. Conducted Emissions, 15.207(a), Phase Line	22
Plot 6. Conducted Emissions, 15.207(a), Neutral Line	23
Plot 7. 6 dB Occupied Bandwidth, Low Channel.....	27
Plot 8. 6 dB Occupied Bandwidth, Mid Channel	27
Plot 9. 6 dB Occupied Bandwidth, High Channel	27
Plot 10. 99% Occupied Bandwidth, Low Channel	28
Plot 11. 99% Occupied Bandwidth, Mid Channel.....	28
Plot 12. 99% Occupied Bandwidth, High Channel	28
Plot 13. Peak Power Output, Low Channel	31
Plot 14. Peak Power Output, Mid Channel.....	31
Plot 15. Peak Power Output, High Channel	31
Plot 16. Radiated Spurious Emissions, Low Channel, 30 MHz – 1 GHz	34
Plot 17. Radiated Spurious Emissions, Low Channel, 1 GHz – 18 GHz, Peak.....	34
Plot 18. Radiated Spurious Emissions, Low Channel, 1 GHz – 18 GHz, Average	34
Plot 19. Radiated Spurious Emissions, Low Channel, 18 GHz – 26.5GHz, Peak.....	35
Plot 20. Radiated Spurious Emissions, Low Channel, 18 GHz – 26.5GHz, Average	35
Plot 21. Radiated Spurious Emissions, Mid Channel, 30 MHz – 1 GHz	35

Plot 22. Radiated Spurious Emissions, Mid Channel, 1 GHz – 18 GHz, Peak	36
Plot 23. Radiated Spurious Emissions, Mid Channel, 1 GHz – 18 GHz, Average.....	36
Plot 24. Radiated Spurious Emissions, Mid Channel, 18 GHz – 26.5GHz, Peak	36
Plot 25. Radiated Spurious Emissions, Mid Channel, 18 GHz – 26.5GHz, Average.....	37
Plot 26. Radiated Spurious Emissions, High Channel, 30 MHz – 1 GHz	37
Plot 27. Radiated Spurious Emissions, High Channel, 1 GHz – 18 GHz, Peak	37
Plot 28. Radiated Spurious Emissions, High Channel, 1 GHz – 18 GHz, Average	38
Plot 29. Radiated Spurious Emissions, High Channel, 18 GHz – 26.5GHz, Peak	38
Plot 30. Radiated Spurious Emissions, High Channel, 18 GHz – 26.5GHz, Average	38
Plot 31. Radiated Restricted Band Edge, Low Channel, Average.....	39
Plot 32. Radiated Restricted Band Edge, Low Channel, Peak	39
Plot 33. Radiated Restricted Band Edge, High Channel, Average	40
Plot 34. Radiated Restricted Band Edge, High Channel, Peak.....	40
Plot 35. Conducted Spurious Emissions, Low Channel, 30 MHz – 18 GHz.....	43
Plot 36. Conducted Spurious Emissions, Low Channel, 18 GHz – 26.5 GHz	43
Plot 37. Conducted Spurious Emissions, Mid Channel, 30 MHz – 18 GHz	43
Plot 38. Conducted Spurious Emissions, Mid Channel, 18 GHz – 26.5 GHz	44
Plot 39. Conducted Spurious Emissions, High Channel, 30 MHz – 18 GHz	44
Plot 40. Conducted Spurious Emissions, High Channel, 18 GHz – 26.5 GHz.....	44
Plot 41. Conducted Band Edge, Low Channel	45
Plot 42. Conducted Band Edge, High Channel	45
Plot 43. Peak Power Spectral Density, Low Channel.....	48
Plot 44. Peak Power Spectral Density, Mid Channel	48
Plot 45. Peak Power Spectral Density, High Channel	48
Plot 46. Receiver Spurious Emission, 30 MHz – 1 GHz.....	51
Plot 47. Receiver Spurious Emission, 1 GHz – 10 GHz	51

List of Figures

Figure 1. Block Diagram of Test Configuration.....	7
Figure 2. Block Diagram, Occupied Bandwidth Test Setup.....	25
Figure 3. Peak Power Output Test Setup.....	29
Figure 4. Block Diagram, Conducted Spurious Emissions Test Setup.....	42
Figure 5. Block Diagram, Peak Power Spectral Density Test Setup	46
Figure 6. Block Diagram, Conducted Receiver Spurious Emissions Test Setup	50

List of Photographs

Photograph 1. Outsite Networks, Inc. All In One Printer Server	6
Photograph 2. Conducted Emissions, Test Setup	14
Photograph 3. Radiated Emission, Test Setup.....	18
Photograph 4. Conducted Emissions, 15.207(a), Test Setup.....	24
Photograph 5. Radiated Spurious Emissions, Test Setup, Below 1 GHz	41
Photograph 6. Radiated Spurious Emissions, Test Setup, Above 1 GHz	41

List of Terms and Abbreviations

AC	Alternating Current
ACF	Antenna Correction Factor
Cal	Calibration
<i>d</i>	Measurement Distance
dB	Decibels
dB_μA	Decibels above one microamp
dB_μV	Decibels above one microvolt
dB_μA/m	Decibels above one microamp per meter
dB_μV/m	Decibels above one microvolt per meter
DC	Direct Current
E	Electric Field
DSL	Digital Subscriber Line
ESD	Electrostatic Discharge
EUT	Equipment Under Test
<i>f</i>	Frequency
FCC	Federal Communications Commission
GRP	Ground Reference Plane
H	Magnetic Field
HCP	Horizontal Coupling Plane
Hz	Hertz
IEC	International Electrotechnical Commission
kHz	kilohertz
kPa	kilopascal
kV	kilovolt
LISN	Line Impedance Stabilization Network
MHz	Megahertz
μH	microhenry
μ	microfarad
μs	microseconds
NEBS	Network Equipment-Building System
PRF	Pulse Repetition Frequency
RF	Radio Frequency
RMS	Root-Mean-Square
TWT	Traveling Wave Tube
V/m	Volts per meter
VCP	Vertical Coupling Plane

I. Executive Summary

A. Purpose of Test

An EMC evaluation was performed to determine compliance of the Outsite Networks, Inc. All In One Printer Server, with the requirements of Part 15, §15.247. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the All In One Printer Server. Outsite Networks, Inc. should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the All In One Printer Server, has been **permanently** discontinued.

B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, §15.247, in accordance with Outsite Networks, Inc., purchase order number 0204442. All tests were conducted using measurement procedure ANSI C63.4-2003.

FCC Reference 47 CFR Part 15.247:2005	IC Reference RSS-210 Issue 8: 2010; RSS-GEN Issue 3: 2010	Description	Compliance
47 CFR Part 15.107 (a)	ICES-003 Issue 4 February 2004	Conducted Emission Limits for a Class A Digital Device	Compliant
47 CFR Part 15.109 (a)	ICES-003 Issue 4 February 2004	Radiated Emission Limits for a Class A Digital Device	Compliant
Title 47 of the CFR, Part 15 §15.203	N/A	Antenna Requirement	Compliant
Title 47 of the CFR, Part 15 §15.207(a)	RSS-Gen (7.2.4)	Conducted Emission Limits	Compliant
Title 47 of the CFR, Part 15 §15.247(a)(2)	RSS-Gen(4.6)	6dB Occupied Bandwidth	Compliant
		99% Occupied Bandwidth	Compliant
Title 47 of the CFR, Part 15 §15.247(b)	RSS-210(A8.4)	Peak Power Output	Compliant
Title 47 of the CFR, Part 15 §15.247(d); §15.209; §15.205	RSS-210(A8.5)	Radiated Spurious Emissions Requirements	Compliant
Title 47 of the CFR, Part 15 §15.247(d)	RSS-210(A8.5)	RF Conducted Spurious Emissions Requirements	Compliant
Title 47 of the CFR, Part 15 §15.247(d)	RSS-210(A8.5)	RF Conducted Band Edge	Compliant
Title 47 of the CFR, Part 15; §15.247(e)	RSS-210(A8.2)	Peak Power Spectral Density	Compliant
Title 47 of the CFR, Part 15 §15.247(i)	RSS-Gen(5.6)	Maximum Permissible Exposure (MPE)	Compliant
N/A	RSS-Gen(4.10)	Receiver Spurious Emissions	Compliant

Table 1. Executive Summary of EMC Part 15.247 Compliance Testing

II. Equipment Configuration

A. Overview

MET Laboratories, Inc. was contracted by Outsite Networks, Inc. to perform testing on the All In One Printer Server, under Outsite Networks, Inc.'s purchase order number 0204442.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the Outsite Networks, Inc., All In One Printer Server.

The results obtained relate only to the item(s) tested.

Model(s) Tested:	All In One Printer Server
Model(s) Covered:	All In One Printer Server
EUT Specifications:	Primary Power: 120 VAC, 60 Hz
	FCC ID: U2C-AIO-2011
	IC: 6944A-AIO2011
	Type of Modulations: DSSS
	Equipment Code: DTS
	Peak RF Output Power: 12.03 dBm
Analysis:	EUT Frequency Ranges: 2410 – 2475 MHz
	The results obtained relate only to the item(s) tested.
	Temperature: 15-35° C
	Relative Humidity: 30-60%
Environmental Test Conditions:	Barometric Pressure: 860-1060 mbar
	Evaluated by: Len Knight
	Report Date(s): January 5, 2012

Table 2. EUT Summary Table

B. References

CFR 47, Part 15, Subpart C	Federal Communication Commission, Code of Federal Regulations, Title 47, Part 15: General Rules and Regulations, Allocation, Assignment, and Use of Radio Frequencies
CFR 47, Part 15, Subpart B	Electromagnetic Compatibility: Criteria for Radio Frequency Devices
RSS-210, Issue 8, Dec. 2010	Low-power Licence-exempt Radiocommunications Devices (All Frequency Bands): Category I Equipment
RSS-GEN, Issue 3, Dec. 2010	General Requirements and Information for the Certification of Radio Apparatus
ICES-003, Issue 4 February 2004	Electromagnetic Compatibility: Criteria for Radio Frequency Devices
ANSI C63.4:2003	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI/NCSL Z540-1-1994	Calibration Laboratories and Measuring and Test Equipment - General Requirements
ANSI/ISO/IEC 17025:2000	General Requirements for the Competence of Testing and Calibration Laboratories
ANSI C63.10-2009	American National Standard for Testing Unlicensed Wireless Devices

Table 3. References

C. Test Site

All testing was performed at MET Laboratories, Inc., 914 W. Patapsco Ave., Baltimore, MD 21230. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 3 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

D. Description of Test Sample

The Outsite Networks, Inc. All In One Printer Server, Equipment Under Test (EUT), is connected over a serial connection to a transaction generator running on a lap-top (support equipment), transmitting a continuous stream of transaction data. Whenever a RFID tag is detected above the keypad a beep will sound and an LED will flash. The EUT serves as the Zigbee network master and will on a regular basis attempt to connect to other/remote units.



Photograph 1. Outsite Networks, Inc. All In One Printer Server

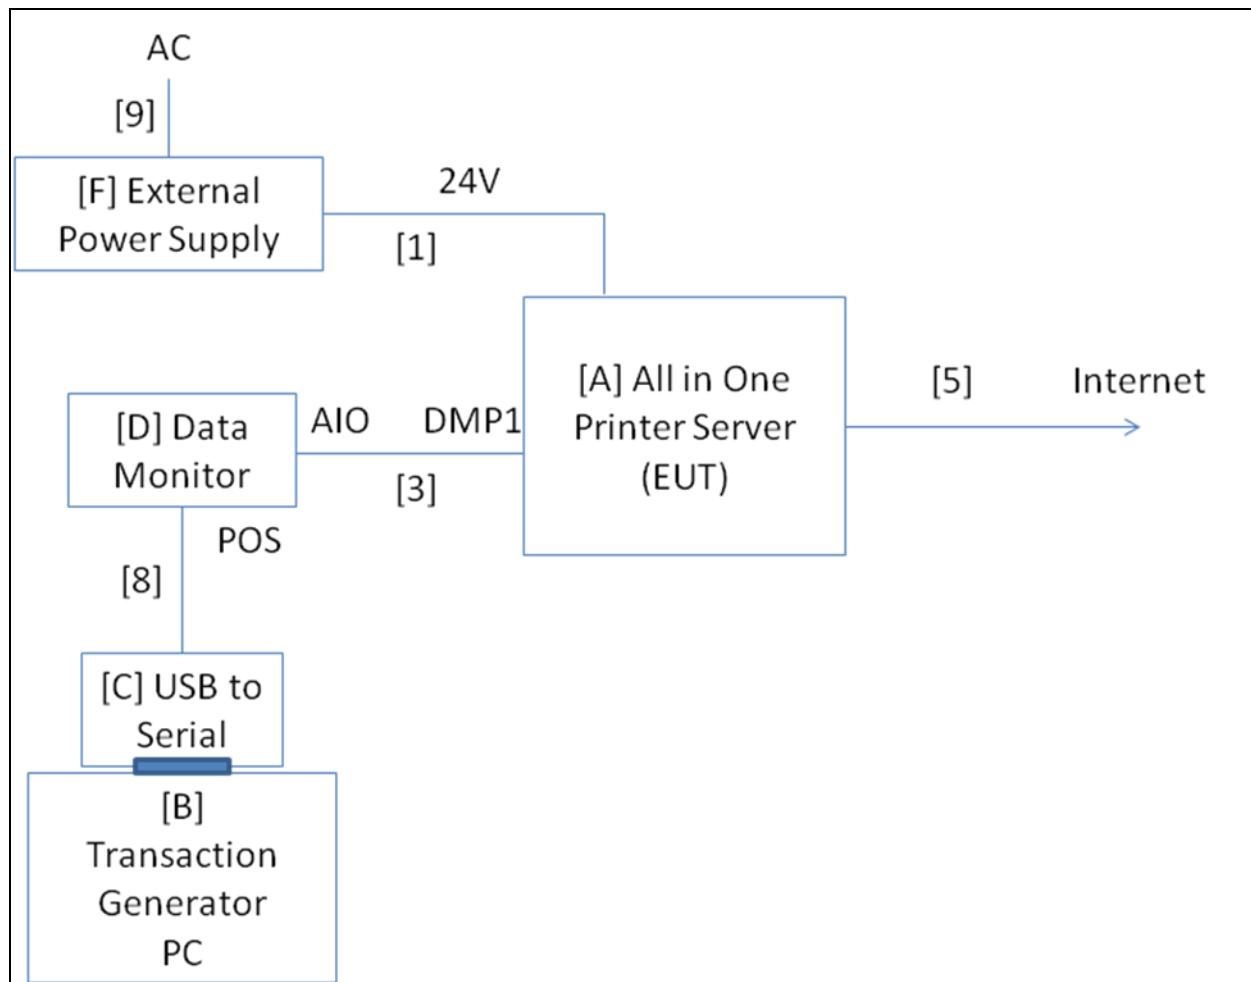


Figure 1. Block Diagram of Test Configuration

E. Equipment Configuration

The EUT was set up as outlined in Figure 1, Block Diagram of Test Setup. All cards, racks, etc., incorporated as part of the EUT is included in the following list.

Ref. ID	Name / Description	Model Number	Serial Number
[A]	All In One Printer Server	AIO	WPS11101214

Table 4. Equipment Configuration

F. Support Equipment

Support equipment necessary for the operation and testing of the EUT is included in the following list.

Ref. ID	Name / Description	Manufacturer	Model Number
B	Lap Top PC	Sony	VAIO
C	USB to Serial Converter	N/A	N/A
D	Data Monitor	Outsite Networks	Data Monitor
F	Power Supply	Star Micronics	PS60A024B

Table 5. Support Equipment

G. Ports and Cabling Information

Ref. ID	Port Name on EUT	Cable Description	Qty.	Length (m)	Shielded (Y/N)	Termination Point
1	Power	External Power Cable	1	1.5	Yes	N/A
2	POS Loyalty Port	Not used	0	N/A	N/A	N/A
3	Data Monitor Port 1	CAT5 serial	1	0.6	No	N/A
4	Data Monitor Port 2	Not Used	0	N/A	N/A	N/A
5	Ethernet	CAT5	1	As needed	No	N/A
6	USB	Not used	0	N/A	N/A	N/A
7	Not Used	Not used	0	N/A	N/A	N/A
8	N/A	CAT5 serial	1	2	No	N/A
9	N/A	AC In	1	1.5	No	N/A

Table 6. Ports and Cabling Information

H. Mode of Operation

The EUT came with test software installed. The EUT was able to transmit any channel of operation in the 2.4 GHz band. For the purposes of evaluation, the EUT was tested on the low, mid, and high channels.

I. Modifications

a) Modifications to EUT

No modifications were made to the EUT.

b) Modifications to Test Standard

No modifications were made to the test standard.

J. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to Outsite Networks, Inc. upon completion of testing.

III. Electromagnetic Compatibility Criteria for Unintentional Radiators

Electromagnetic Compatibility Criteria

§ 15.107 Conducted Emissions Limits

Test Requirement(s):

15.107 (a) Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 7. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

15.107 (b) For a Class A digital device that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 7. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals. The lower limit applies at the band edges.

15.207(a), Except as shown in paragraphs (b) and (c) of this section*, charging, AC adapters or battery eliminators the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the Table 7, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency range (MHz)	Class A Conducted Limits (dB μ V)		*Class B Conducted Limits (dB μ V)	
	Quasi-Peak	Average	Quasi-Peak	Average
* 0.15- 0.45	79	66	66 - 56	56 - 46
0.45 - 0.5	79	66	56	46
0.5 - 30	73	60	60	50

Note 1 — The lower limit shall apply at the transition frequencies.
 Note 2 — The limit decreases linearly with the logarithm if the frequency in the range 0.15 MHz to 0.5 MHz.
 * -- Limits per Subsection 15.207(a).

Table 7. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Subsections 15.107(a) (b) and 15.207(a)

Test Results:

The EUT was compliant with the Class A requirement(s) of this section. Measured emissions were below applicable limits.

Test Engineer(s):

Len Knight


Test Date(s):

10/24/11

Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz)

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.1556	50.32	0	50.32	79	-28.68	37	0	37	66	-29
0.4452	38.32	0	38.32	79	-40.68	32.29	0	32.29	66	-33.71
0.8575	26.07	0	26.07	73	-46.93	19.01	0	19.01	60	-40.99
1.67	27.04	0	27.04	73	-45.96	19.85	0	19.85	60	-40.15
13.56	45.4	0.06	45.46	73	-27.54	41.8	0.06	41.86	60	-18.14
17	34.32	0.08	34.4	73	-38.6	24.94	0.08	25.02	60	-34.98

Table 8. Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz)

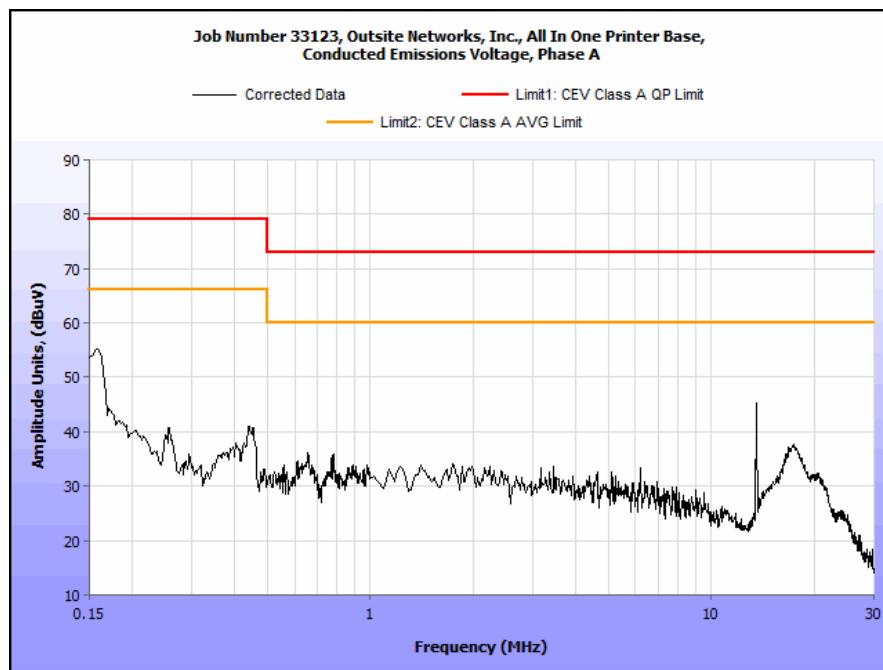


Plot 1. Conducted Emission, Phase Line Plot

Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz)

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.1534	50.34	0	50.34	79	-28.66	39.6	0	39.6	66	-26.4
0.443	38.16	0	38.16	79	-40.84	36.18	0	36.18	66	-29.82
0.6338	27.99	0	27.99	73	-45.01	24.27	0	24.27	60	-35.73
2.08	26.66	0	26.66	73	-46.34	19.84	0	19.84	60	-40.16
13.56	47.2	0.06	47.26	73	-25.74	46.98	0.06	47.04	60	-12.96
16.71	35.7	0.07	35.77	73	-37.23	29.59	0.07	29.66	60	-30.34

Table 9. Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz)

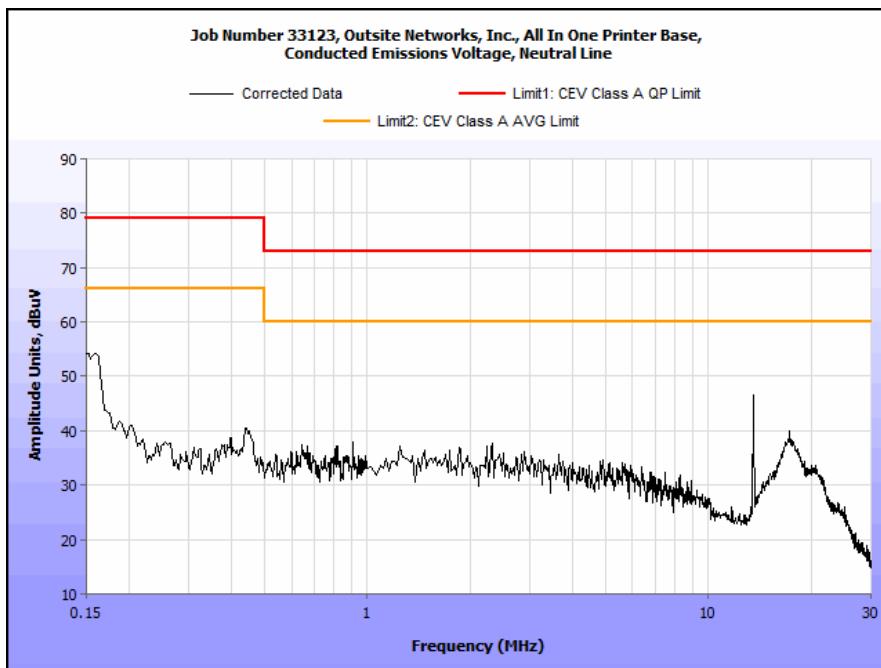

Conducted Emission Limits Test Setup



Photograph 2. Conducted Emissions, Test Setup

Radiated Emission Limits

§ 15.109 Radiated Emissions Limits

Test Requirement(s):

15.109 (a) Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the Class B limits expressed in Table 10.

15.109 (b) The field strength of radiated emissions from a Class A digital device, as determined at a distance of 10 meters, shall not exceed the Class A limits expressed in Table 10.

Frequency (MHz)	Field Strength (dB μ V/m)	
	§15.109 (b), Class A Limit (dB μ V) @ 10m	§15.109 (a), Class B Limit (dB μ V) @ 3m
30 - 88	39.00	40.00
88 - 216	43.50	43.50
216 - 960	46.40	46.00
Above 960	49.50	54.00

Table 10. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b)

Test Procedures:

The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber. The method of testing and test conditions of ANSI C63.4 were used. An antenna was located 3 m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. Unless otherwise specified, measurements were made using a quasi-peak detector with a 120 kHz bandwidth.

Test Results:

The EUT was compliant with the Class A requirement(s) of this section. Measured emissions were below applicable limits.


Test Engineer(s): Benjamin Taylor

Test Date(s): 10/21/11

Radiated Emissions Limits Test Results, Class A

Frequency (MHz)	EUT Azimuth (Degrees)	Antenna Polarity (H/V)	Antenna HEIGHT (m)	Uncorrected Amplitude (dBuV)	Antenna Correction Factor (dB) (+)	Cable Loss (dB) (-)	Distance Correction Factor (dB) (-)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
88.836736	326	H	1.00	10.41	7.68	0.23	10.46	7.86	43.50	-35.64
88.836736	304	V	1.02	30.98	7.68	0.23	10.46	28.43	43.50	-15.07
124.11542	266	H	1.61	17.34	13.81	0.23	10.46	20.92	43.50	-22.58
124.11542	151	V	1.01	27.33	13.81	0.23	10.46	30.91	43.50	-12.59
248.20354	96	H	1.09	28.02	12.14	0.48	10.46	30.18	46.40	-16.22
248.20354	355	V	1.01	21.92	12.14	0.48	10.46	24.08	46.40	-22.32
372.32786	283	H	1.01	34.05	15.50	0.83	10.46	39.92	46.40	-6.48
372.32786	40	V	1.31	35.04	15.50	0.83	10.46	40.91	46.40	-5.49
868.76213	43	H	1.01	26.60	22.42	1.67	10.46	40.23	46.40	-6.17
868.76213	264	V	1.01	23.29	22.42	1.67	10.46	36.92	46.40	-9.48
992.88264	282	H	1.45	16.56	23.40	1.83	10.46	31.33	49.50	-18.17
992.88264	53	V	1.59	15.82	23.40	1.83	10.46	30.59	49.50	-18.91

Table 11. Radiated Emissions Limits, Test Results, 30 MHz – 1 GHz, FCC Limits

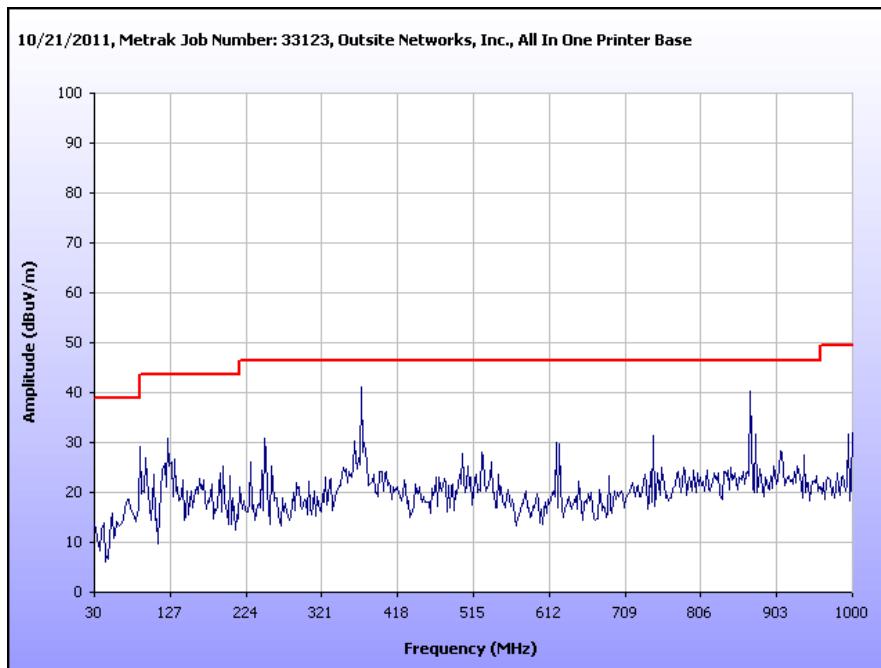


Plot 3. Radiated Emissions, 30 MHz - 1 GHz, FCC Limits

Radiated Emissions Limits Test Results, Class A

Frequency (MHz)	EUT Azimuth (Degrees)	Antenna Polarity (H/V)	Antenna HEIGHT (m)	Uncorrected Amplitude (dBuV)	Antenna Correction Factor (dB) (+)	Cable Loss (dB) (+)	Distance Correction Factor (dB) (-)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
88.836736	326	H	1.00	10.41	7.68	0.23	10.46	7.86	40.00	-32.14
88.836736	304	V	1.02	30.98	7.68	0.23	10.46	28.43	40.00	-11.57
124.11542	266	H	1.61	17.34	13.81	0.23	10.46	20.92	40.00	-19.08
124.11542	151	V	1.01	27.33	13.81	0.23	10.46	30.91	40.00	-9.09
248.20354	96	H	1.09	28.02	12.14	0.48	10.46	30.18	47.00	-16.82
248.20354	355	V	1.01	21.92	12.14	0.48	10.46	24.08	47.00	-22.92
372.32786	283	H	1.01	34.05	15.50	0.83	10.46	39.92	47.00	-7.08
372.32786	40	V	1.31	35.04	15.50	0.83	10.46	40.91	47.00	-6.09
868.76213	43	H	1.01	26.60	22.42	1.67	10.46	40.23	47.00	-6.77
868.76213	264	V	1.01	23.29	22.42	1.67	10.46	36.92	47.00	-10.08
992.88264	282	H	1.45	16.56	23.40	1.83	10.46	31.33	47.00	-15.67
992.88264	53	V	1.59	15.82	23.40	1.83	10.46	30.59	47.00	-16.41

Table 12. Radiated Emissions Limits, Test Results, ICES-003 Limits

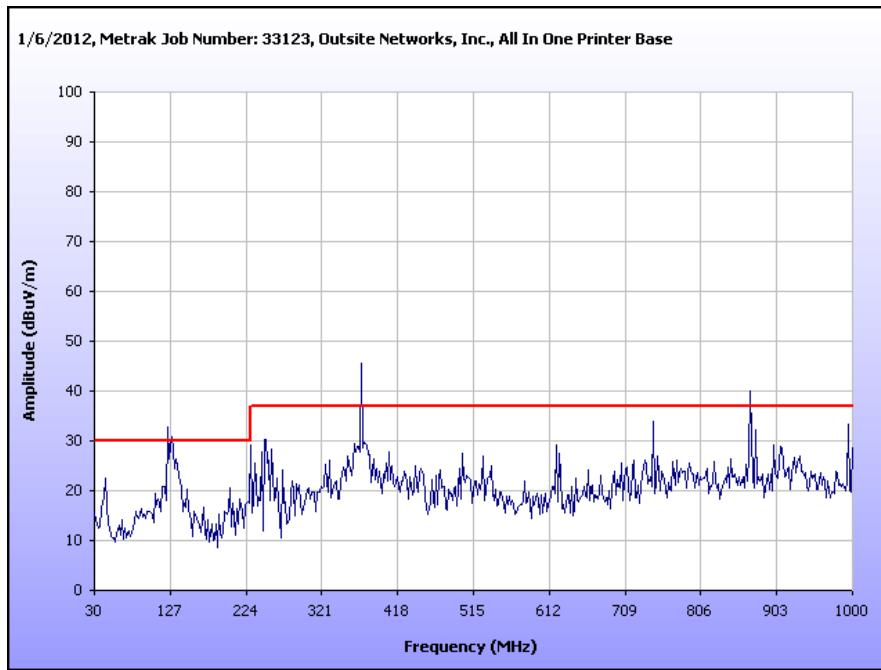

Plot 4. Radiated Emissions, ICES-003 Limits

Radiated Emission Limits Test Setup



Photograph 3. Radiated Emission, Test Setup

IV. Electromagnetic Compatibility Criteria for Intentional Radiators

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.203 Antenna Requirement

Test Requirement:

§ 15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

Results: The EUT as tested is compliant the criteria of §15.203. The EUT antenna has an unique connector.

Test Engineer(s): Len Knight

Test Date(s): 10/25/11

Antenna Type	Gain	Model	Manufacture
1/4 Wave Whip	2.15 dBi	BY-2400-01-02	JIAXING Beyonddoor Electroncis Co., Ltd.

Table 13. Antenna Information

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.207(a) Conducted Emissions Limits

Test Requirement(s): **§ 15.207 (a):** For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency range (MHz)	§ 15.207(a), Conducted Limit (dB μ V)	
	Quasi-Peak	Average
* 0.15- 0.45	66 - 56	56 - 46
0.45 - 0.5	56	46
0.5 - 30	60	50

Table 14. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)

Test Procedure:

The EUT was placed on a 0.8 m-high wooden table inside a screen room. The EUT was situated such that the back of the EUT was 0.4 m from one wall of the vertical ground plane, and the remaining sides of the EUT were no closer than 0.8 m from any other conductive surface. The EUT was powered from a 50 Ω /50 μ H Line Impedance Stabilization Network (LISN). The EMC receiver scanned the frequency range from 150 kHz to 30 MHz. Conducted Emissions measurements were made in accordance with *ANSI C63.4-2003 "Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz"*. The measurements were performed over the frequency range of 0.15 MHz to 30 MHz using a 50 Ω /50 μ H LISN as the input transducer to an EMC/field intensity meter. For the purpose of this testing, the transmitter was turned on. Scans were performed with the transmitter on.

Test Results:

The EUT was compliant with this requirement. Measured emissions were below applicable limits.


Test Engineer(s): Len Knight

Test Date(s): 10/25/11

15.207(a) Conducted Emissions Test Results

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.1556	50.32	0	50.32	65.7	-15.38	37	0	37	55.7	-18.7
0.4452	38.32	0	38.32	56.96	-18.64	32.29	0	32.29	46.96	-14.67
0.8575	26.07	0	26.07	56	-29.93	19.01	0	19.01	46	-26.99
1.67	27.04	0	27.04	56	-28.96	19.85	0	19.85	46	-26.15
13.56	45.4	0.06	45.46	60	-14.54	41.8	0.06	41.86	50	-8.14
17	34.32	0.08	34.4	60	-25.6	24.94	0.08	25.02	50	-24.98

Table 15. Conducted Emissions, 15.207(a), Phase Line, Test Results

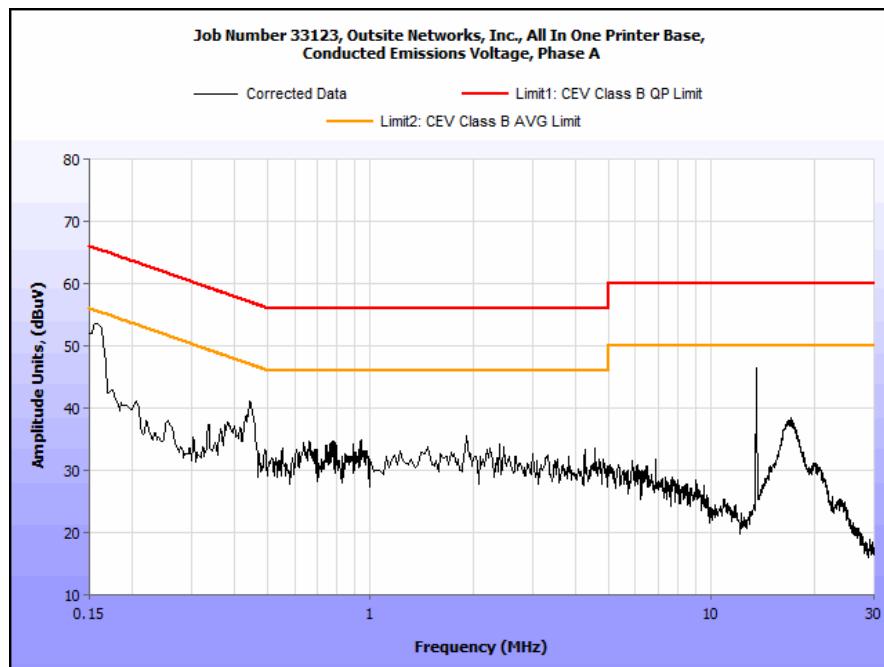


Plot 5. Conducted Emissions, 15.207(a), Phase Line

15.207(a) Conducted Emissions Test Results

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.1534	50.34	0	50.34	65.81	-15.47	39.6	0	39.6	55.81	-16.21
0.443	38.16	0	38.16	57.01	-18.85	36.18	0	36.18	47.01	-10.83
0.6338	27.99	0	27.99	56	-28.01	24.27	0	24.27	46	-21.73
2.08	26.66	0	26.66	56	-29.34	19.84	0	19.84	46	-26.16
13.56	47.2	0.06	47.26	60	-12.74	46.98	0.06	47.04	50	-2.96
16.71	35.7	0.07	35.77	60	-24.23	29.59	0.07	29.66	50	-20.34

Table 16. Conducted Emissions, 15.207(a), Neutral Line, Test Results

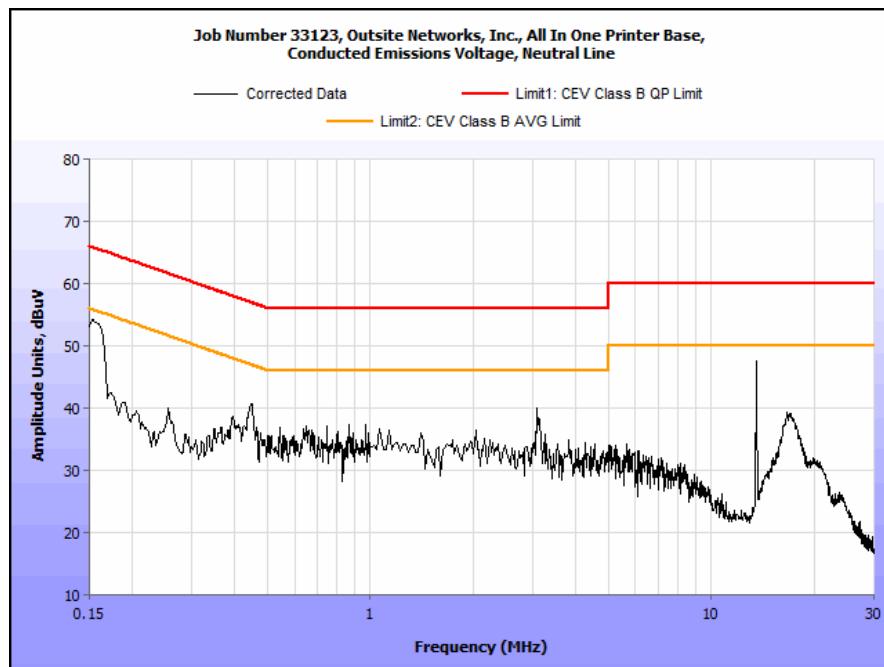

Plot 6. Conducted Emissions, 15.207(a), Neutral Line

15.207(a) Conducted Emissions Test Setup Photo



Photograph 4. Conducted Emissions, 15.207(a), Test Setup

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(a)(2) 6 dB and 99% Bandwidth

Test Requirements: **§ 15.247(a)(2):** Operation under the provisions of this section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

For systems using digital modulation techniques, the EUT may operate in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

Test Procedure: The transmitter was on and transmitting at the highest output power. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately 1% of the total emission bandwidth, $VBW > RBW$. The 6 dB Bandwidth was measured and recorded. The measurements were performed on the low, mid and high channels.

Test Results The EUT was compliant with § 15.247 (a)(2).

The 6 dB and 99% Bandwidth was determined from the plots on the following pages.

Test Engineer(s): Len Knight

Test Date(s): 10/31/11



Figure 2. Block Diagram, Occupied Bandwidth Test Setup

Occupied Bandwidth Test Results


Occupied Bandwidth		
Carrier Channel	Frequency (MHz)	Measured 6 dB Bandwidth (MHz)
Low	2410	1.507
Mid	2440	1.559
High	2475	1.551

Table 17. 6 dB Occupied Bandwidth, Test Results


Occupied Bandwidth		
Carrier Channel	Frequency (MHz)	Measured 99% Bandwidth (MHz)
Low	2410	2.1274
Mid	2440	2.1117
High	2475	2.2582

Table 18. 99% Occupied Bandwidth, Test Results


Occupied Bandwidth Test Results

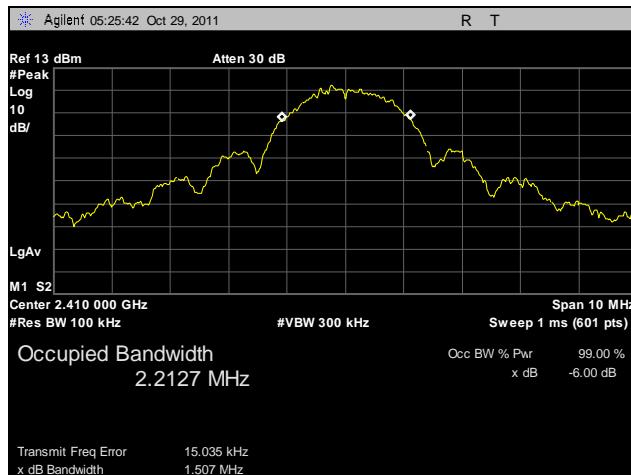


Plot 7. 6 dB Occupied Bandwidth, Low Channel

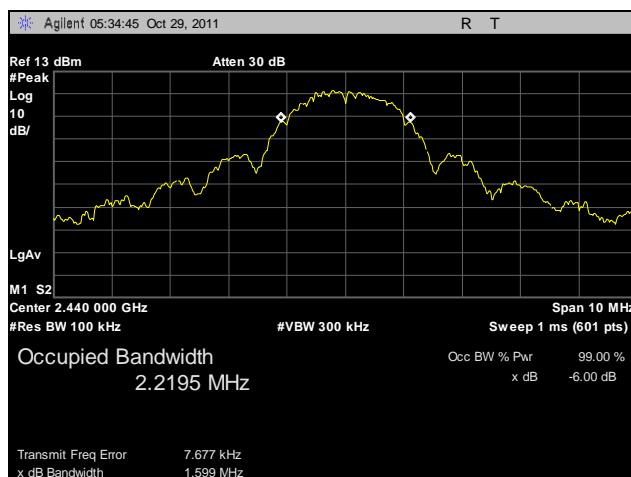


Plot 8. 6 dB Occupied Bandwidth, Mid Channel

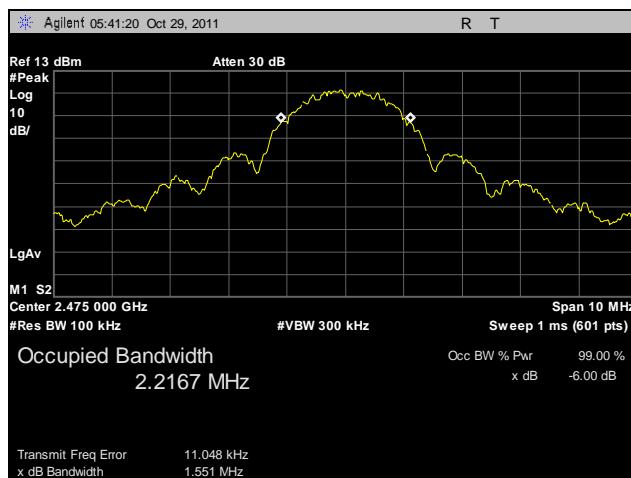


Plot 9. 6 dB Occupied Bandwidth, High Channel

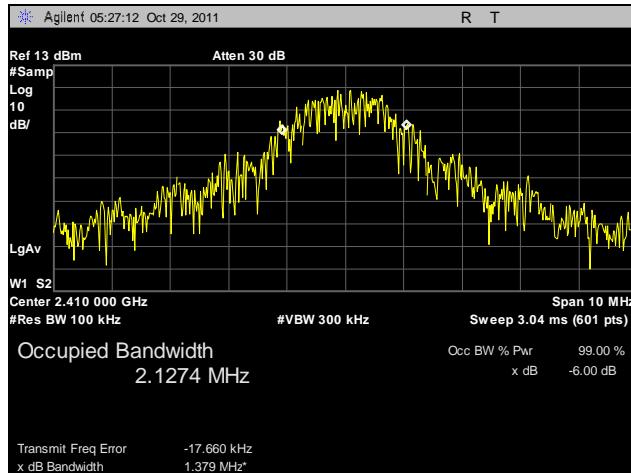

Plot 10. 99% Occupied Bandwidth, Low Channel

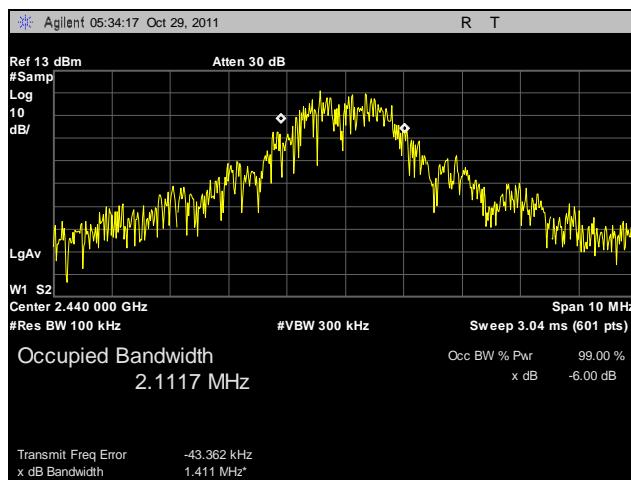

Plot 11. 99% Occupied Bandwidth, Mid Channel

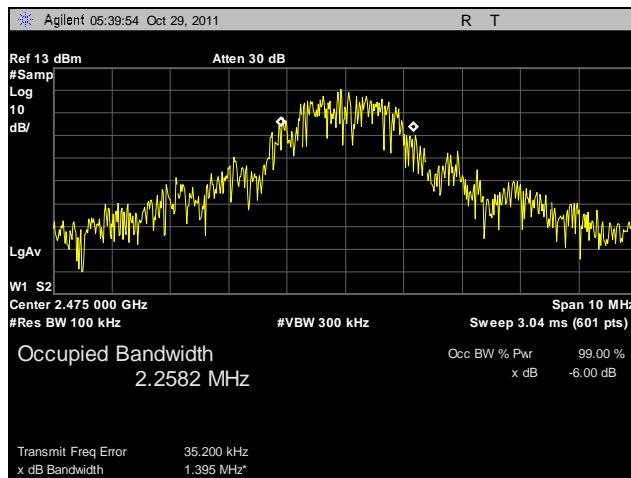

Plot 12. 99% Occupied Bandwidth, High Channel

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(b) Peak Power Output

Test Requirements: **§15.247(b):** The maximum peak output power of the intentional radiator shall not exceed the following:

Digital Transmission Systems (MHz)	Output Limit (Watts)
902-928	1.000
2400-2483.5	1.000
5725-5850	1.000

Table 19. Output Power Requirements from §15.247(b)

§15.247(c): if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in the Table 19, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 2400 – 2483.5 MHz band and using a point to point application may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 5725 – 5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

Fixed, point-to-point operation excludes the use of point-to-multipoint systems, Omni-directional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.

Test Procedure: The transmitter was connected to a calibrated spectrum analyzer. The EUT was measured at the low, mid and high channels of each band at the maximum power level.

Test Results: The EUT was compliant with the Peak Power Output limits of **§15.247(b)**.

Test Engineer(s): Len Knight

Test Date(s): 10/31/11





Figure 3. Peak Power Output Test Setup

Peak Power Output Test Results


Peak Conducted Output Power		
Carrier Channel	Frequency (MHz)	Measured Peak Output Power dBm
Low	2410	11.44
Mid	2440	11.76
High	2475	12.03

Table 20. Peak Power Output, Test Results


Peak Power Output Test Results

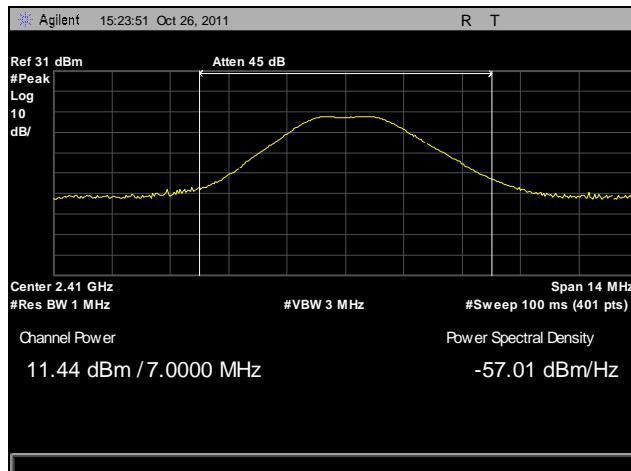

Plot 13. Peak Power Output, Low Channel

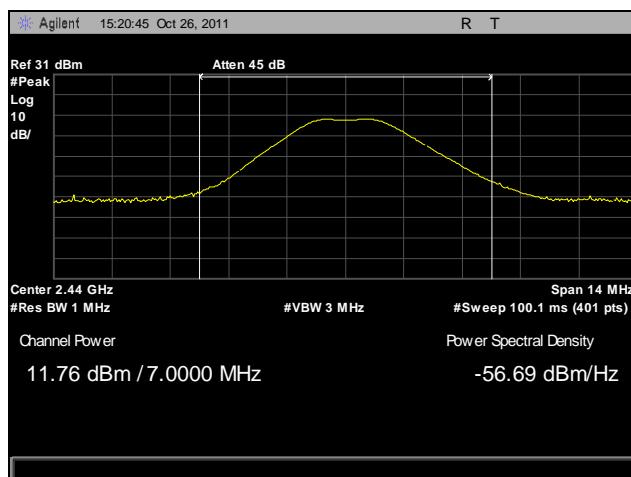

Plot 14. Peak Power Output, Mid Channel

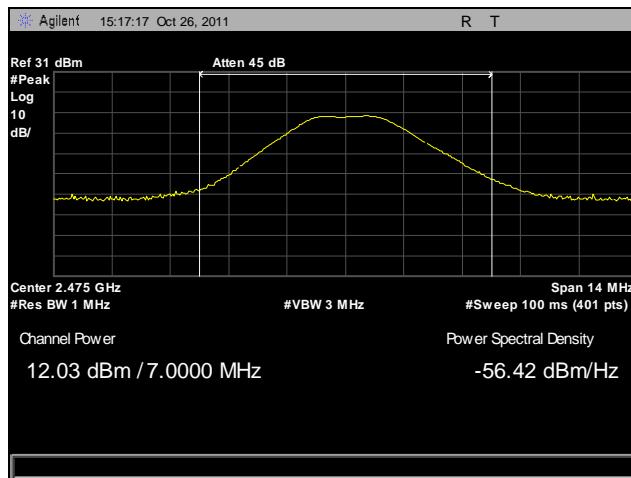

Plot 15. Peak Power Output, High Channel

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(d) Radiated Spurious Emissions Requirements and Band Edge

Test Requirements: **§15.247(d); §15.205:** Emissions outside the frequency band.

§15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a).

§15.205(a): Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090–0.110-----	16.42–16.423	399.9–410	4.5–5.15
¹ 0.495–0.505-----	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905-----	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128-----	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775-----	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775-----	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218-----	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825-----	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225-----	123–138	2200–2300	14.47–14.5
8.291–8.294-----	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366-----	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675-----	156.7–156.9	2655–2900	22.01–23.12
8.41425–8.41475-----	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293-----	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025-----	240–285	3345.8–3358.36.	43–36.5
12.57675–12.57725-----	322–335.4	3600–4400	(²)

Table 21. Restricted Bands of Operation

¹ Until February 1, 1999, this restricted band shall be 0.490 – 0.510 MHz.

² Above 38.6

Test Requirement(s): **§ 15.209 (a):** Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in Table 22.

Frequency (MHz)	§ 15.209(a), Radiated Emission Limits (dB μ V) @ 3m
30 - 88	40.00
88 - 216	43.50
216 - 960	46.00
Above 960	54.00

Table 22. Radiated Emissions Limits Calculated from FCC Part 15, § 15.209 (a)


Test Procedures: The transmitter was turned on. Measurements were performed of the low, mid and high Channels. The EUT was rotated orthogonally through all three axes. Plots shown are corrected for both antenna correction factor and distance and compared to a 3 m limit line.

Test Results: The EUT was compliant with the Radiated Spurious Emission limits of § 15.247(d).


Test Engineer(s): Jeffrey Pratt

Test Date(s): 10/31/11


Radiated Spurious Emissions Test Results

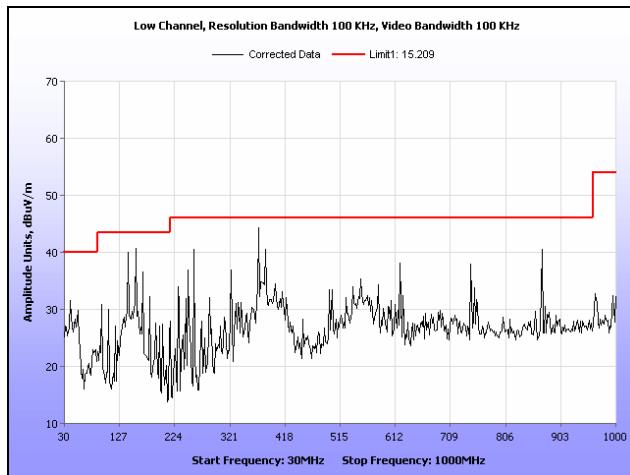


Plot 16. Radiated Spurious Emissions, Low Channel, 30 MHz – 1 GHz

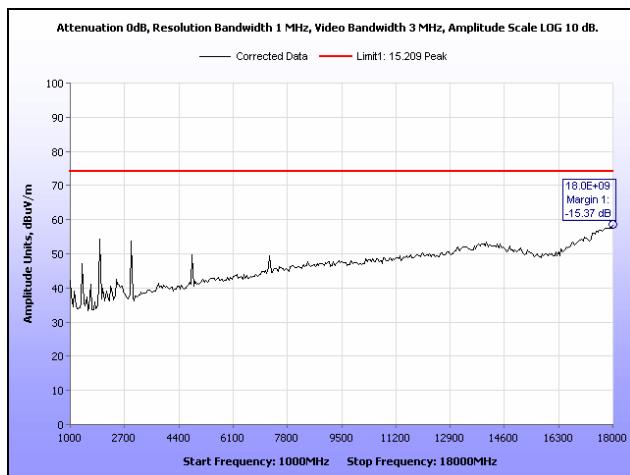


Plot 17. Radiated Spurious Emissions, Low Channel, 1 GHz – 18 GHz, Peak

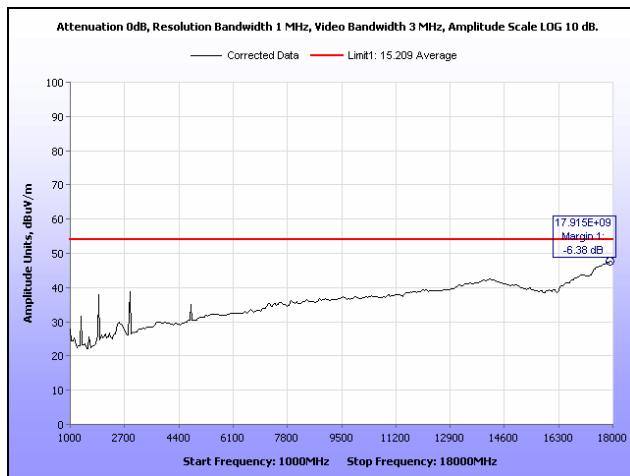


Plot 18. Radiated Spurious Emissions, Low Channel, 1 GHz – 18 GHz, Average

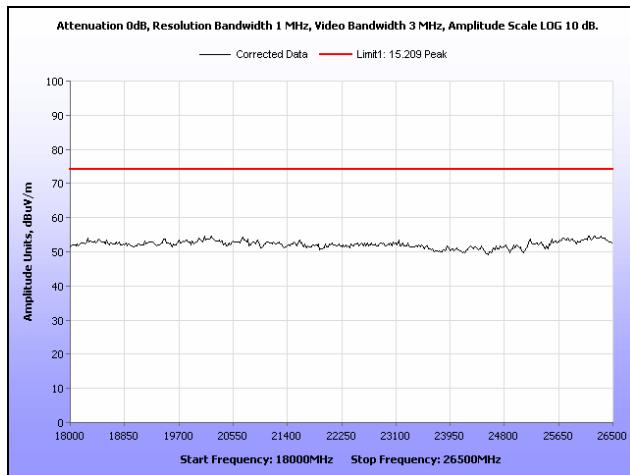


Plot 19. Radiated Spurious Emissions, Low Channel, 18 GHz – 26.5GHz, Peak

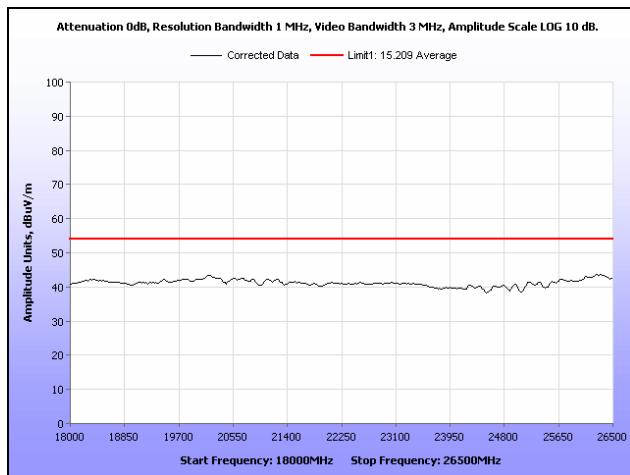


Plot 20. Radiated Spurious Emissions, Low Channel, 18 GHz – 26.5GHz, Average

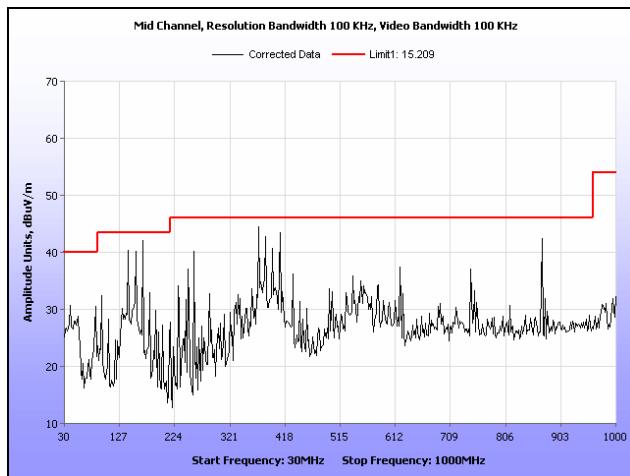


Plot 21. Radiated Spurious Emissions, Mid Channel, 30 MHz – 1 GHz

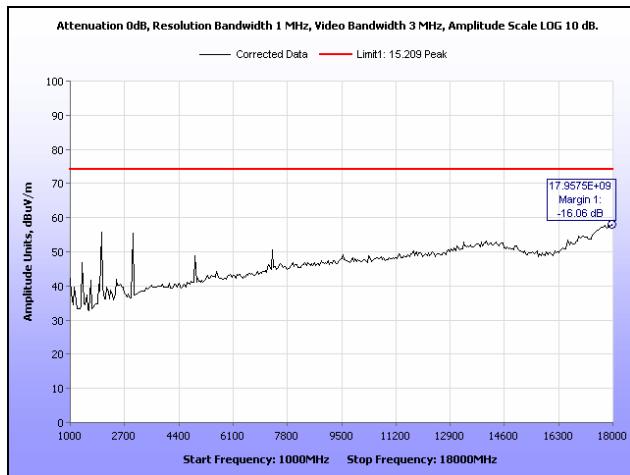


Plot 22. Radiated Spurious Emissions, Mid Channel, 1 GHz – 18 GHz, Peak

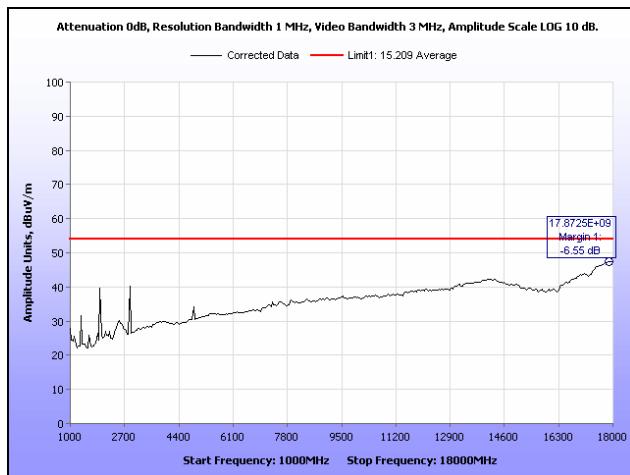


Plot 23. Radiated Spurious Emissions, Mid Channel, 1 GHz – 18 GHz, Average

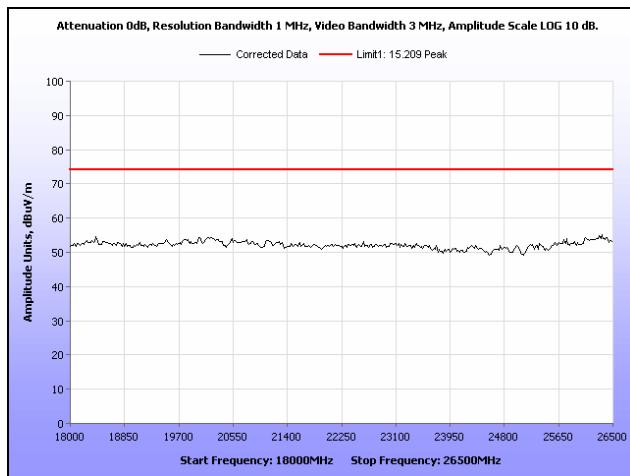


Plot 24. Radiated Spurious Emissions, Mid Channel, 18 GHz – 26.5GHz, Peak

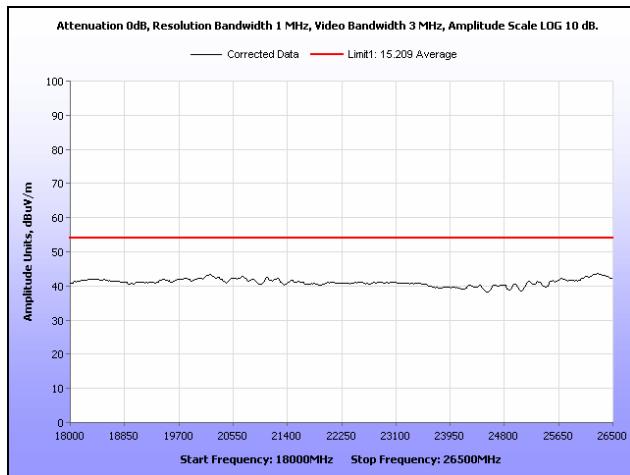


Plot 25. Radiated Spurious Emissions, Mid Channel, 18 GHz – 26.5GHz, Average

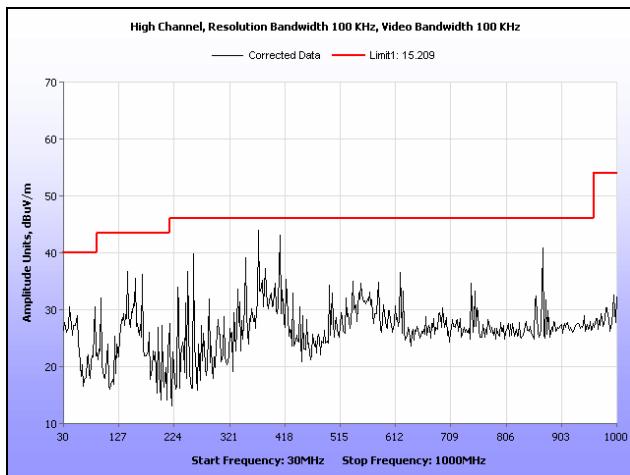


Plot 26. Radiated Spurious Emissions, High Channel, 30 MHz – 1 GHz

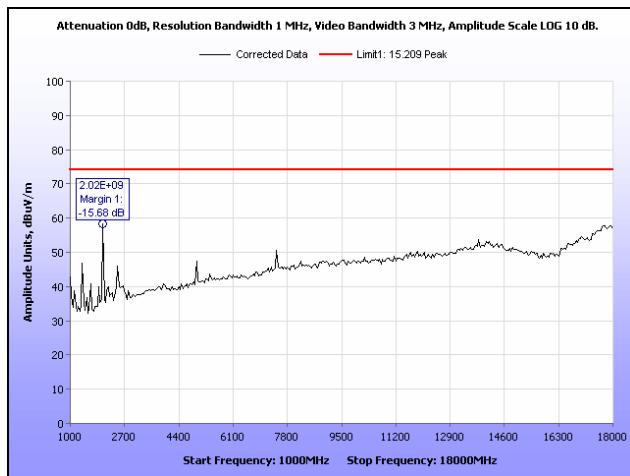


Plot 27. Radiated Spurious Emissions, High Channel, 1 GHz – 18 GHz, Peak

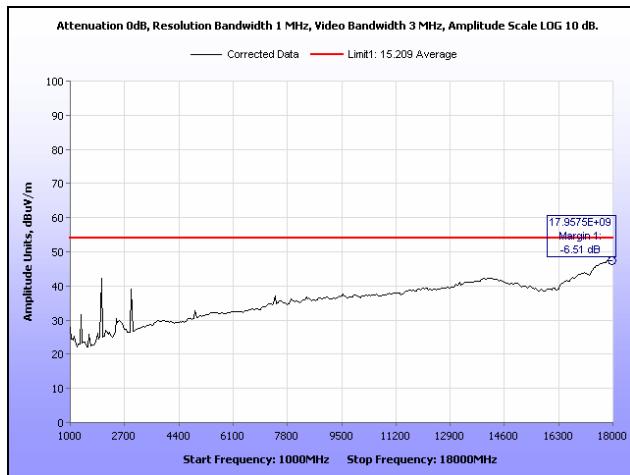

Plot 28. Radiated Spurious Emissions, High Channel, 1 GHz – 18 GHz, Average

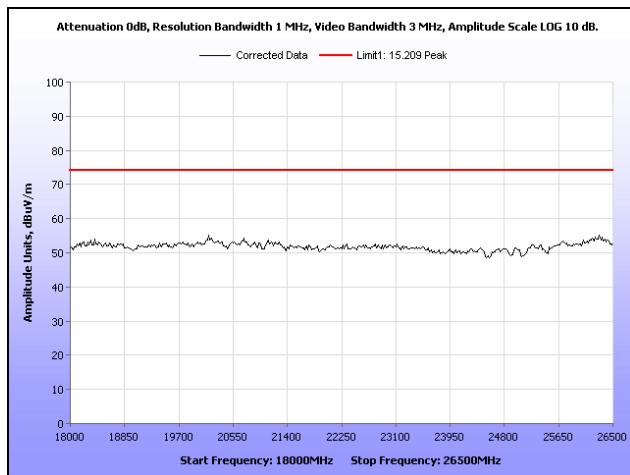

Plot 29. Radiated Spurious Emissions, High Channel, 18 GHz – 26.5GHz, Peak

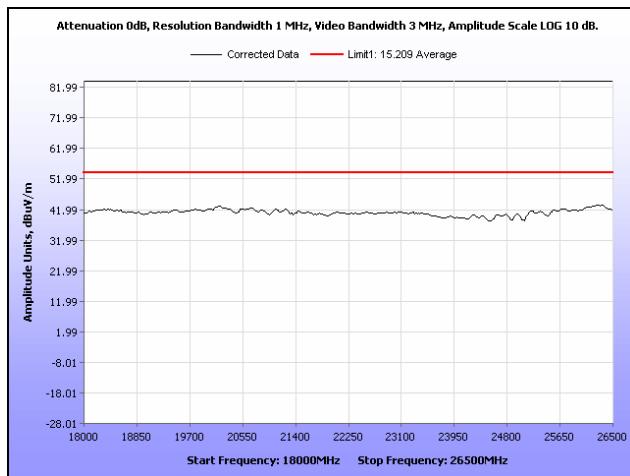


Plot 30. Radiated Spurious Emissions, High Channel, 18 GHz – 26.5GHz, Average


Radiated Band Edge Measurements

Test Procedures:


The transmitter was turned on. Measurements were performed of the low, mid and high Channels. The EUT was rotated orthogonally through all three axes. Plots shown are corrected for both antenna correction factor and distance and compared to a 3 m limit line.

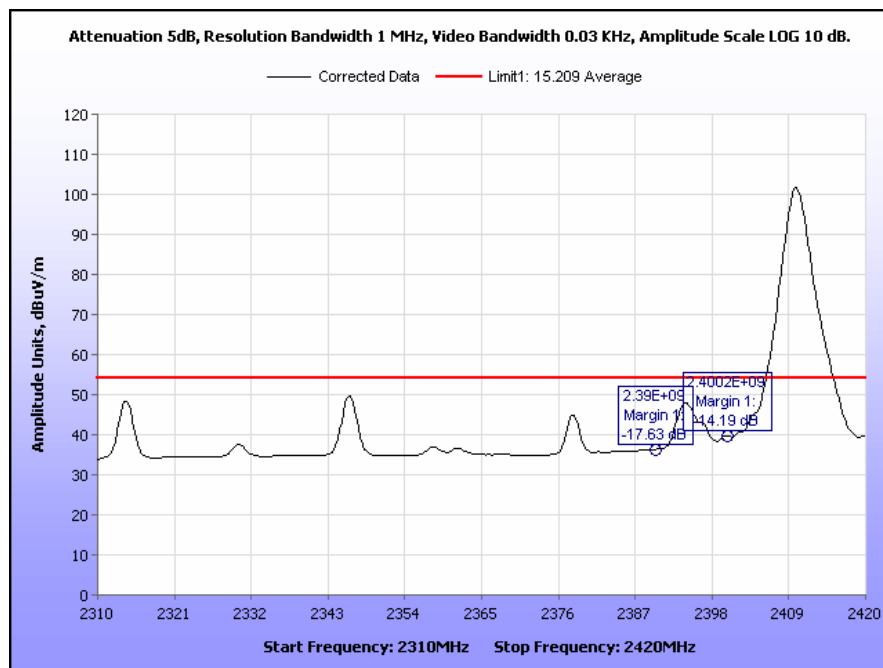


Plot 31. Radiated Restricted Band Edge, Low Channel, Average

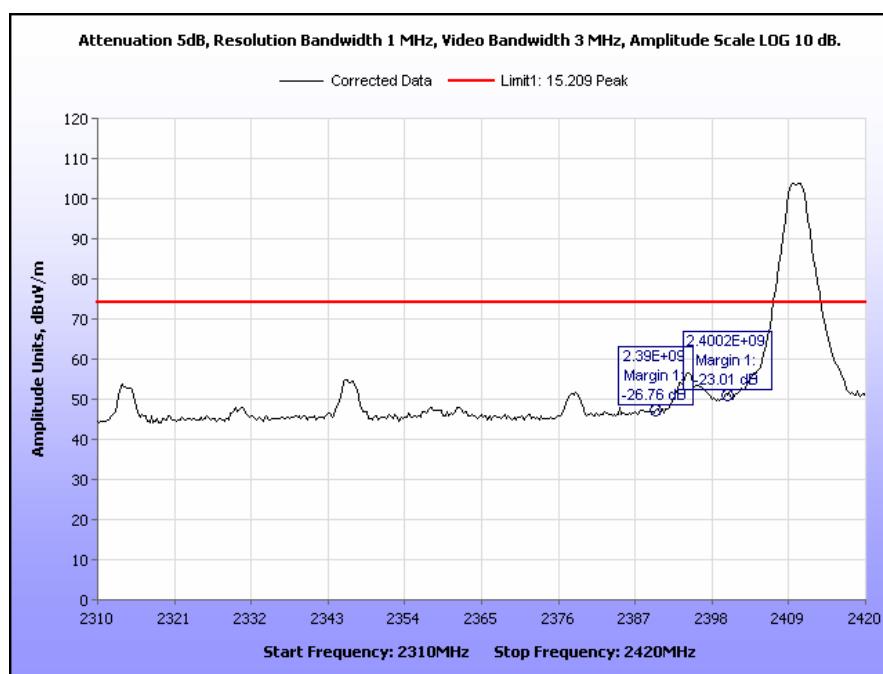

Plot 32. Radiated Restricted Band Edge, Low Channel, Peak

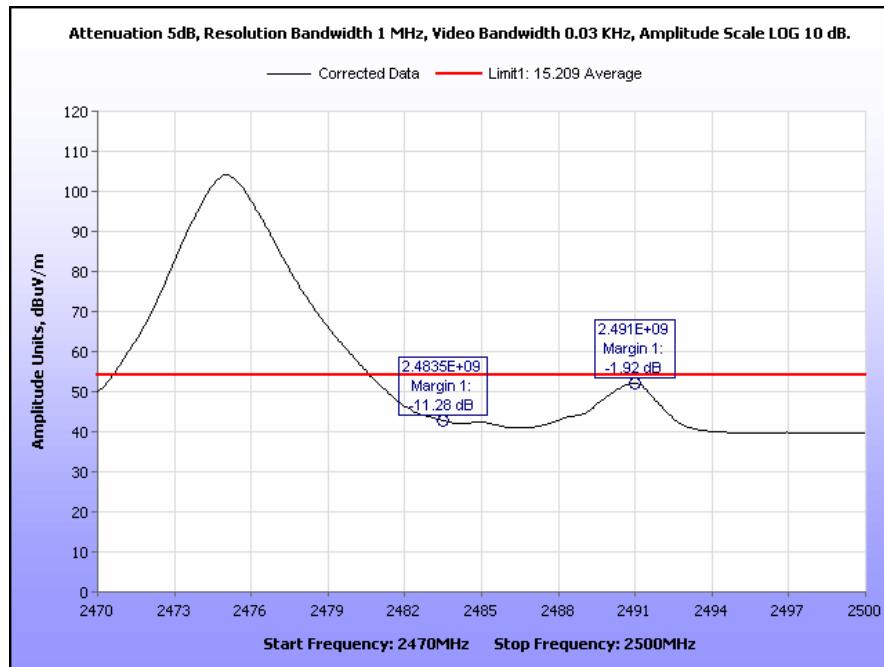


Plot 33. Radiated Restricted Band Edge, High Channel, Average

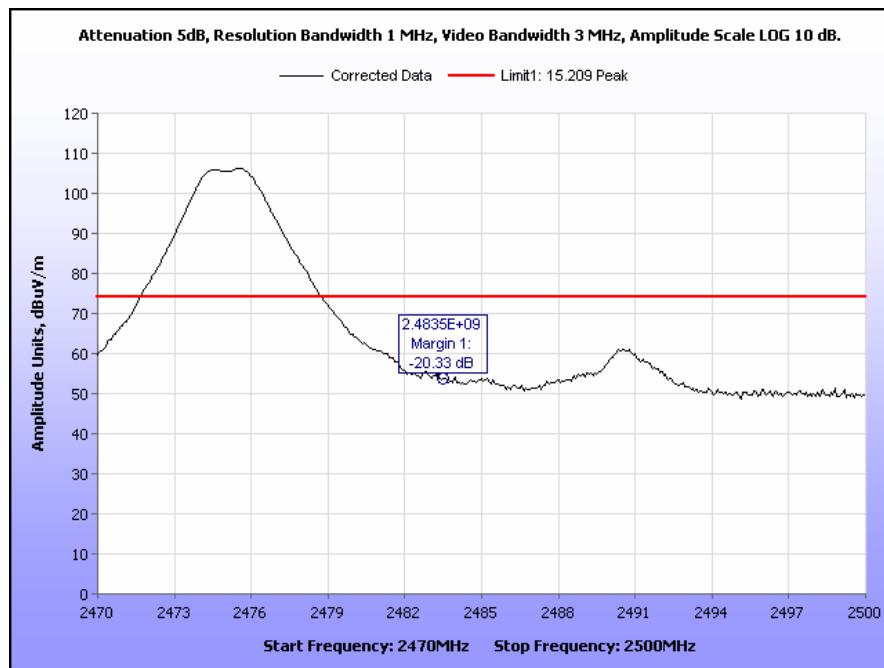


Plot 34. Radiated Restricted Band Edge, High Channel, Peak

Radiated Spurious Emissions Test Setup

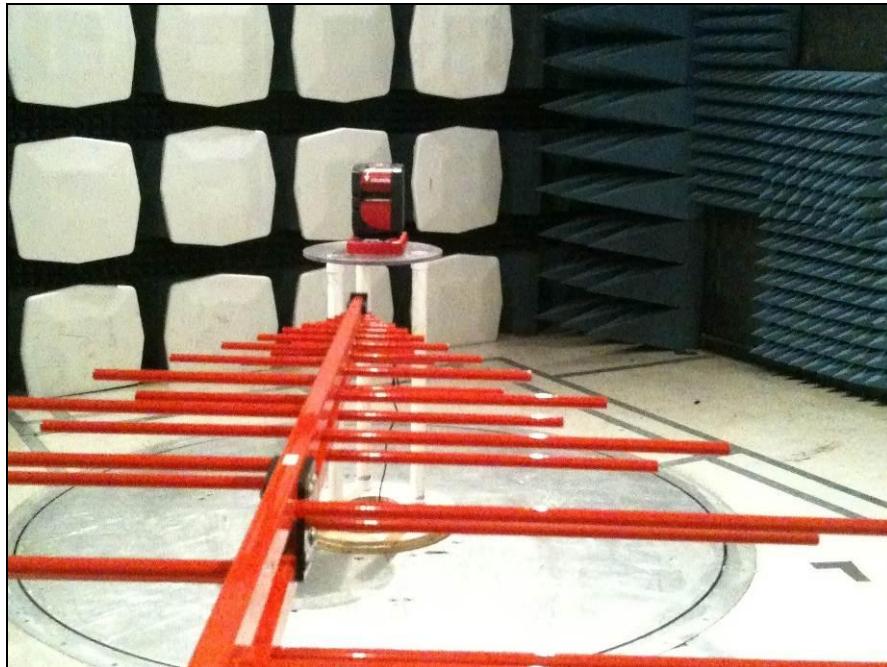

Photograph 5. Radiated Spurious Emissions, Test Setup, Below 1 GHz

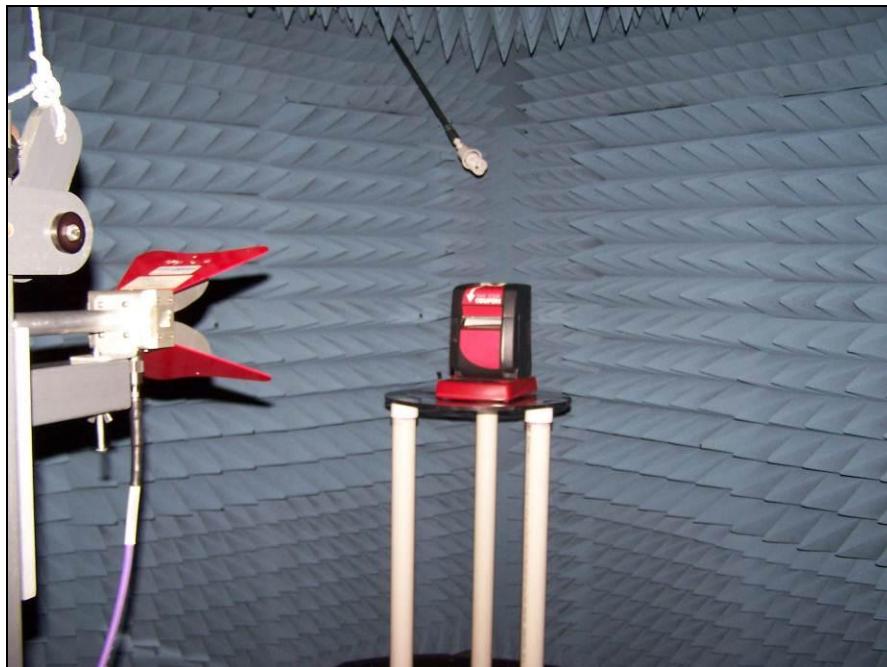

Photograph 6. Radiated Spurious Emissions, Test Setup, Above 1 GHz

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(d) RF Conducted Spurious Emissions Requirements and Band Edge

Test Requirement:

15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Test Procedure:

For intentional radiators with a digital device portion which operates below 10 GHz, the spectrum was investigated as per §15.33(a)(1) and §15.33(a)(4); i.e., the lowest RF signal generated or used in the device up to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

The EUT was connected to a spectrum analyzer through an attenuator. Scans were made from 30 MHz – 26.5 GHz at the low, mid and high channels of the EUT. Plots are corrected for cable loss.

See following pages for detailed test results with RF Conducted Spurious Emissions.

Test Results:

The EUT was compliant with the Conducted Spurious Emission limits of **§15.247(d)**.

Test Engineer(s):

Len Knight

Test Date(s):

10/31/11






Figure 4. Block Diagram, Conducted Spurious Emissions Test Setup


Conducted Spurious Emissions Test Results

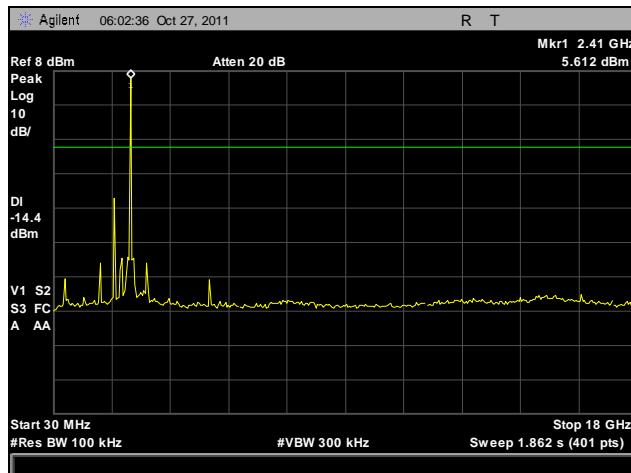


Plot 35. Conducted Spurious Emissions, Low Channel, 30 MHz – 18 GHz

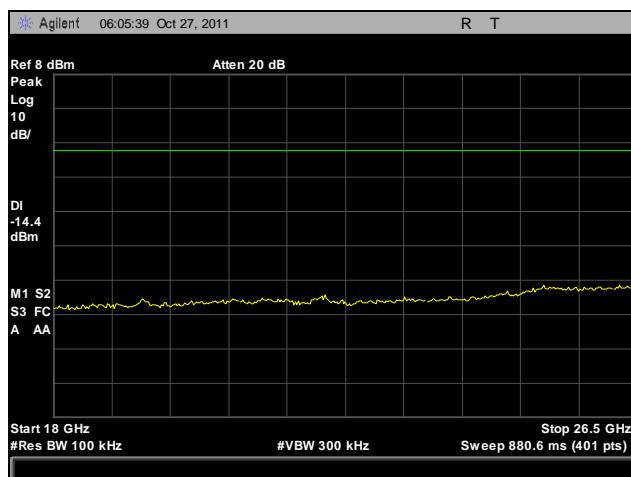


Plot 36. Conducted Spurious Emissions, Low Channel, 18 GHz – 26.5 GHz

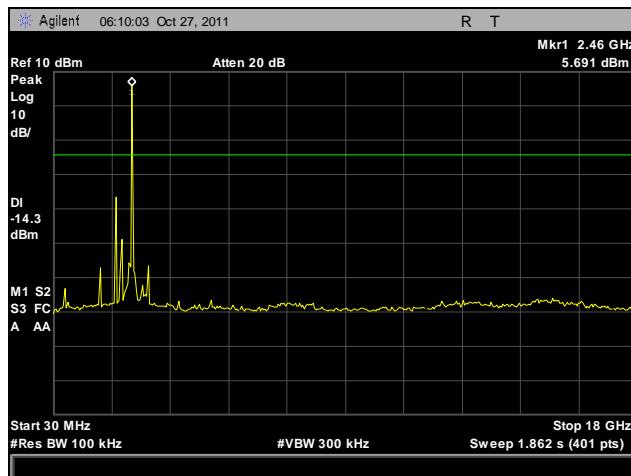


Plot 37. Conducted Spurious Emissions, Mid Channel, 30 MHz – 18 GHz

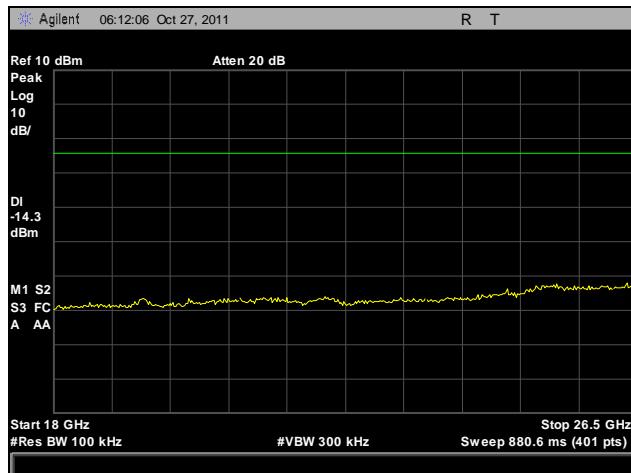

Plot 38. Conducted Spurious Emissions, Mid Channel, 18 GHz – 26.5 GHz

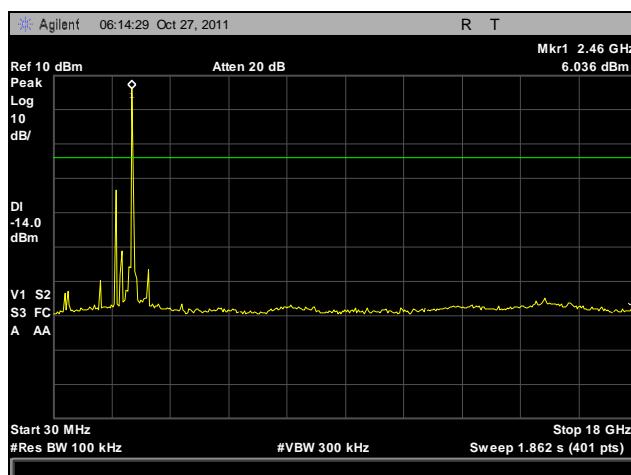


Plot 39. Conducted Spurious Emissions, High Channel, 30 MHz – 18 GHz

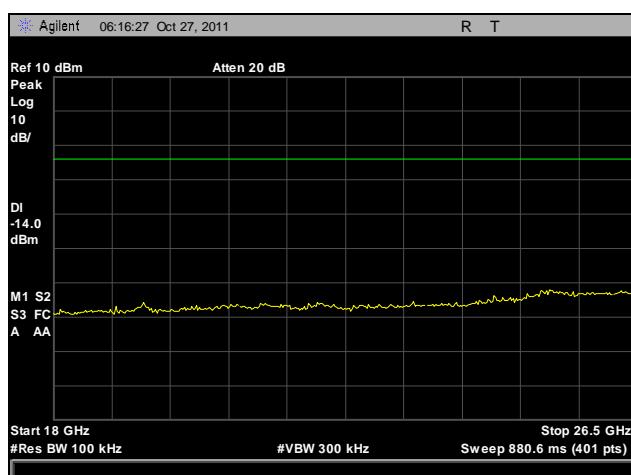


Plot 40. Conducted Spurious Emissions, High Channel, 18 GHz – 26.5 GHz

Conducted Band Edge Test Results

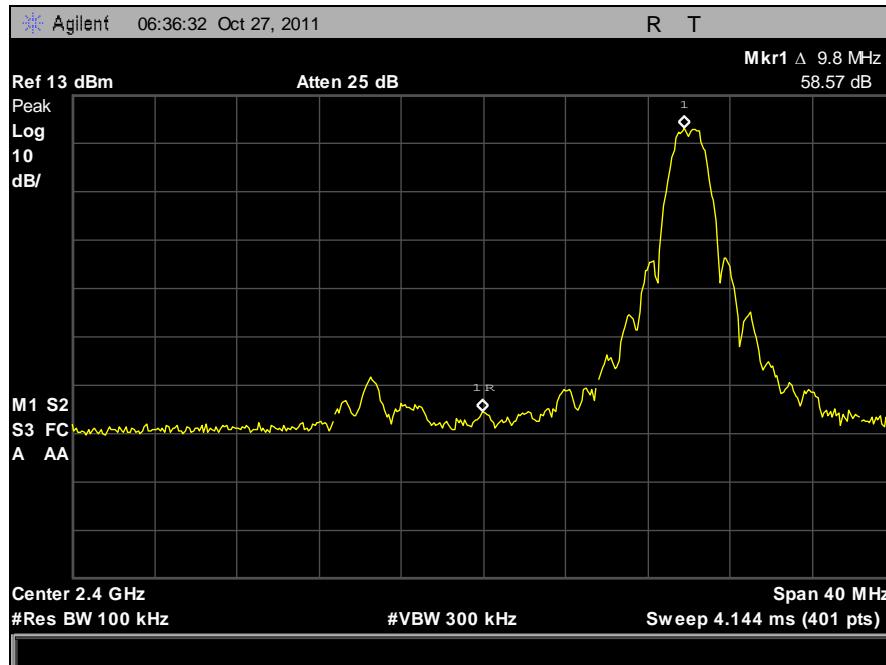

Plot 41. Conducted Band Edge, Low Channel

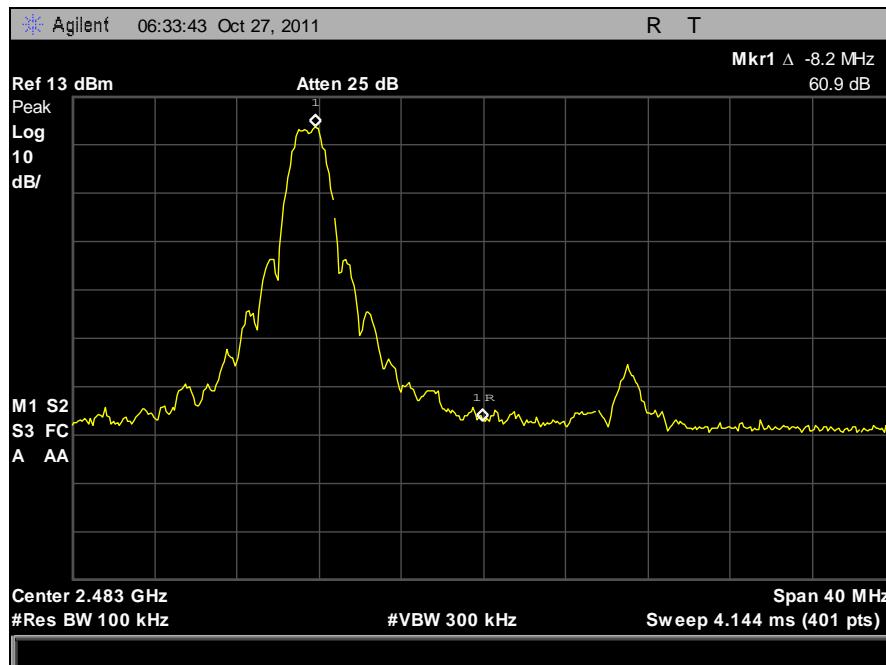

Plot 42. Conducted Band Edge, High Channel

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(e) Peak Power Spectral Density

Test Requirements: **§15.247(e):** For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

Test Procedure: The transmitter was connected directly to a Spectrum Analyzer through an attenuator. The RBW was set to 3 kHz and the VBW set to 10 kHz. The spectrum analyzer sweep time was set to span/RBW and a peak detector was used. Measurements were carried out at the low, mid and high channels.

Test Results: The EUT was compliant with the peak power spectral density limits of **§ 15.247 (e)**.

The peak power spectral density was determined from plots on the following page(s).

Test Engineer: Len Knight

Test Date: 10/31/11





Figure 5. Block Diagram, Peak Power Spectral Density Test Setup

Peak Power Spectral Density Test Results


Peak Power Spectral Density				
Carrier Channel	Frequency (MHz)	Measured PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2410	-2.437	8	-10.2437
Mid	2440	-1.606	8	-9.606
High	2475	-1.347	8	-9.347

Table 23. Peak Power Spectral Density, Test Results


Peak Power Spectral Density

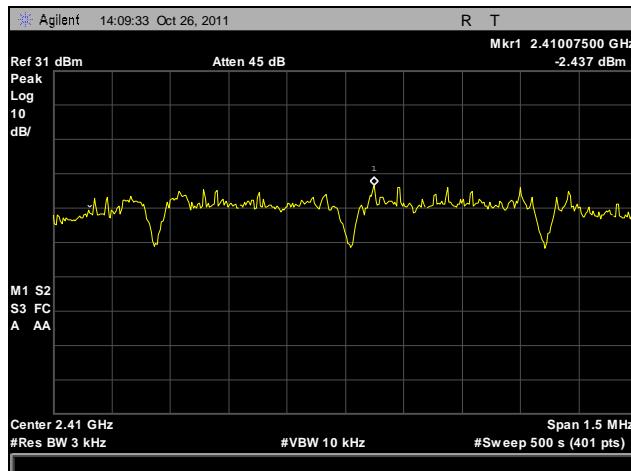

Plot 43. Peak Power Spectral Density, Low Channel

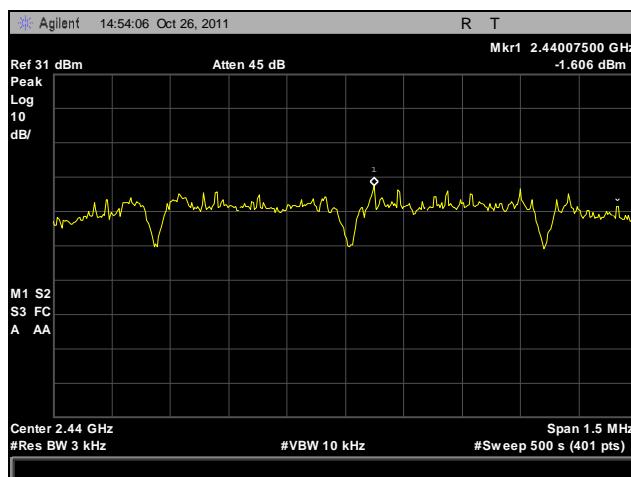

Plot 44. Peak Power Spectral Density, Mid Channel

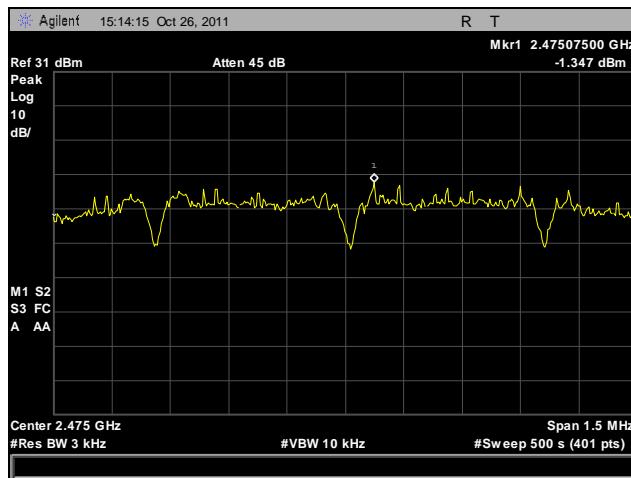

Plot 45. Peak Power Spectral Density, High Channel

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(i) Maximum Permissible Exposure

RF Exposure Requirements: **§1.1307(b)(1) and §1.1307(b)(2):** Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

RF Radiation Exposure Limit: **§1.1310:** As specified in this section, the Maximum Permissible Exposure (MPE) Limit shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in Sec. 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of Sec. 2.1093 of this chapter.

MPE Limit Calculation: EUT's operating frequencies @ 2400-2483.5 MHz; highest conducted power = 12.03dBm (peak) therefore, **Limit for Uncontrolled exposure: 1 mW/cm² or 10 W/m²**

EUT maximum antenna gain = 2.15 dBi.

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2 \quad \text{or} \quad R = \sqrt{PG / 4\pi S}$$

where, S = Power Density (1 mW/cm²)
 P = Power Input to antenna (15.96mW)
 G = Antenna Gain (1.64 numeric)
 R = 20 cm

$$\begin{aligned} S &= PG / 4\pi R^2 \\ S &= 15.96 * 1.64 / 4\pi R^{400} \\ S &= 0.005207 \text{ mW/cm}^2 \end{aligned}$$

Electromagnetic Compatibility Criteria for Intentional Radiators

RSS-GEN Receiver Spurious Emissions Requirements

Test Requirements: The following receiver spurious emission limits shall be complied with:

- (a) If a radiated measurement is made, all spurious emissions shall comply with the limits of Table 24.

Spurious Frequency (MHz)	Field Strength (microvolt/m at 3 metres)
30 – 88	100
88 – 216	150
216 – 960	200
Above 960	500

Table 24. Spurious Emission Limits for Receivers

- (b) If a conducted measurement is made, no spurious output signals appearing at the antenna terminals shall exceed 2 nanowatts per any 4 kHz spurious frequency in the band 30-1000 MHz, or 5 nanowatts above 1 GHz.

Test Procedures: The EUT was programmed for receive mode only. Conducted measurements were taken at the antenna port of the EUT. 5.1 kHz resolution bandwidth was used from 30 MHz - 10 GHz. All plots are corrected for cable loss.

Test Results: Equipment is compliant with the Receiver Spurious Emissions Requirements of RSS-GEN.

Test Engineer(s): Len Knight

Test Date(s): 10/31/11



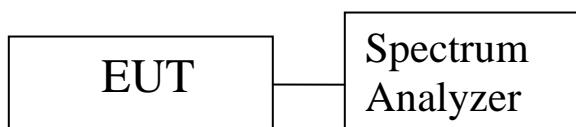


Figure 6. Block Diagram, Conducted Receiver Spurious Emissions Test Setup

Conducted Receiver Spurious Emissions

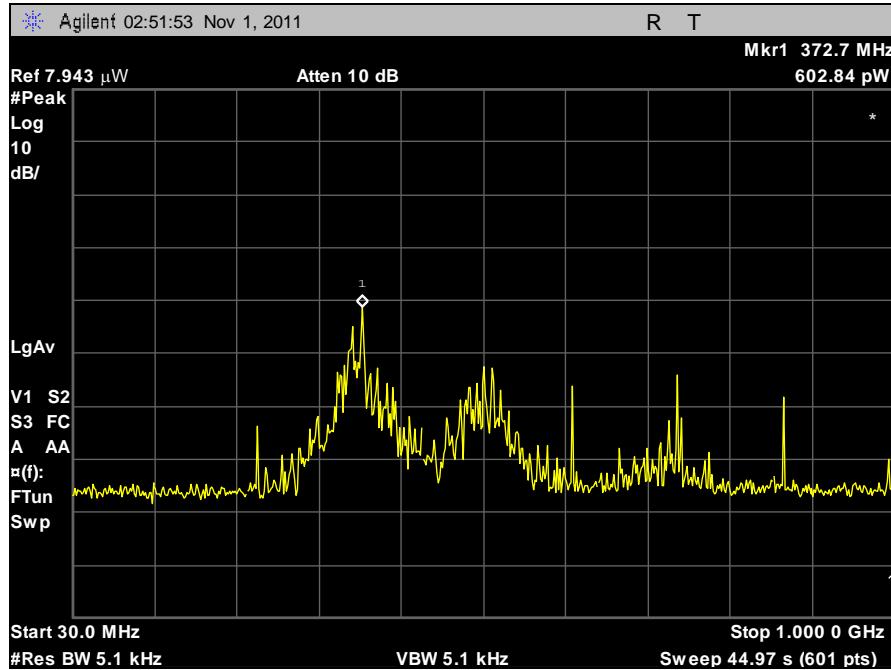

Plot 46. Receiver Spurious Emission, 30 MHz – 1 GHz

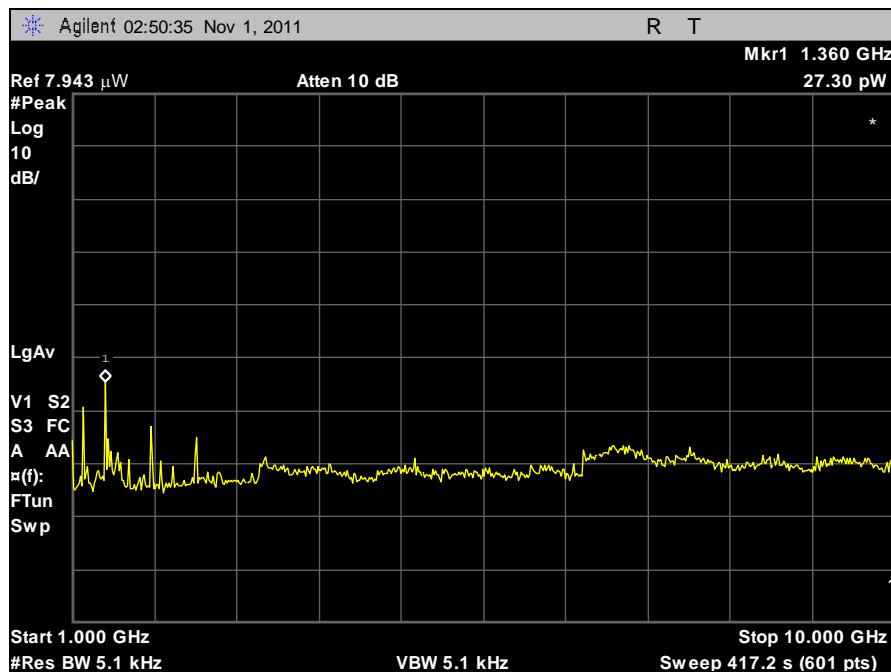

Plot 47. Receiver Spurious Emission, 1 GHz – 10 GHz

IV. Test Equipment

Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ANSI/NCSL Z540-1-1994 and ANSI/ISO/IEC 17025:2000.

MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1T4300	SEMI-ANECHOIC CHAMBER # 1	EMC TEST SYSTEMS	NONE	08/23/2010	08/23/2013
1T4568	RADIATING NOISE SOURCE	MET LABORATORIES	N/A	SEE NOTE	
1T4621	SPECTRUM ANALYZER	AGILENT TECHNOLOGIES	E4402B	05/31/2011	05/31/2012
1T4563	LISN (10 AMP)	SOLAR ELECTRONICS	9322-50-R-10-BNC	10/28/2010	10/28/2011
1T4214	SHIELD ROOM #4	UNIVERSAL SHIELD INC	N/A	NOT REQUIRED	NOT REQUIRED
1T4773	THERMO/HYGROMETER	CONTROL COMPANY	4040	05/21/2010	05/21/2012
1T4409	EMI RECEIVER	ROHDE & SCHWARZ	ESIB7	06/14/2011	06/14/2012
1T4751	ANTENNA - BILOG	SUNOL SCIENCES	JB6	11/03/2010	11/03/2011
1T4634	THERMO/HYGRO/BAROMETER	CONTROL COMPANY	02-401	03/11/2010	03/11/2012
1T4612	SPECTRUM ANALYZER	AGILENT TECHNOLOGIES	E4407B	12/27/2010	12/27/2011
1T4752	PRE-AMPLIFIER	MITEQ	JS44-18004000-35-8P	SEE NOTE	
1T4442	PRE-AMPLIFIER, MICROWAVE	MITEQ	AFS42-01001800-30-10P	SEE NOTE	
1T4592	RF FILTER KIT	VARIOUS	N/A	NOT REQUIRED	
1T4483	ANTENNA; HORN	ETS-LINDGREN	3117	07/19/2011	07/19/2012
1T4745	ANTENNA, HORN	ETS-LINDGREN	3116	10/04/2011	10/04/2012

Table 25. Test Equipment List

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

V. Certification & User's Manual Information

Certification & User's Manual Information

A. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

§ 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of Emitting radio-frequency energy by radiation, conduction, or other means. Radio- frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

§ 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
 - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
 - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.

(e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:

- (i) *Compliance testing;*
- (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
- (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
- (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production stages; or
- (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.

(e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.

(f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.

Certification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:

§ 2.901 Basis and Purpose

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.¹ *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer,* be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

§ 2.907 Certification.

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

¹ In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.

Certification & User's Manual Information

§ 2.948 Description of measurement facilities.

(a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.

(1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.

(i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*

(ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.

(2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.

Certification & User's Manual Information

1. Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

§ 15.19 Labeling requirements.

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

(1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

(2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

(3) All other devices shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

(4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

(5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

§ 15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Verification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

§ 15.105 Information to the user.

(a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at own expense.

(b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

ICES-003 Procedural & Labeling Requirements

From the Industry Canada Electromagnetic Compatibility Advisory Bulletin entitled, "Implementation and Interpretation of the Interference-Causing Equipment Standard for Digital Apparatus, ICES-003" (EMCAB-3, Issue 2, July 1995):

"At present, CISPR 22: 2002 and ICES technical requirements are essentially equivalent. Therefore, if you have CISPR 22: 2002 approval by meeting CISPR Publication 22, the only additional requirements are: to attach a note to the report of the test results for compliance, indicating that these results are deemed satisfactory evidence of compliance with ICES-003 of the Canadian Interference-Causing Equipment Regulations; to maintain these records on file for the requisite five year period; and to provide the device with a notice of compliance in accordance with ICES-003."

Procedural Requirements:

According to Industry Canada's Interference Causing Equipment Standard for Digital Apparatus ICES-003 Issue 4, February 2004:

Section 6.1: A record of the measurements and results, showing the date that the measurements were completed, shall be retained by the manufacturer or importer for a period of at least five years from the date shown in the record and made available for examination on the request of the Minister.

Section 6.2: A written notice indicating compliance must accompany each unit of digital apparatus to the end user. The notice shall be in the form of a label that is affixed to the apparatus. Where because of insufficient space or other constraints it is not feasible to affix a label to the apparatus, the notice may be in the form of a statement in the user's manual.

Labeling Requirements:

The suggested text for the notice, in English and in French, is provided below, from the Annex of ICES-003:

This Class ^[2] digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe ^[1] est conforme à la norme NMB-003 du Canada.

² Insert either A or B but not both as appropriate for the equipment requirements.

End of Report