



## **MET Laboratories, Inc.** *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

3162 BELICK STREET • SANTA CLARA, CALIFORNIA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372

January 4, 2012

Outsite Networks, Inc.  
2551 Eltham Ave., Suite N  
Norfolk, VA 23513

Dear Wim Vanderbijl,

Enclosed is the EMC test report for compliance testing of the Outsite Networks, Inc., All In One Printer Server, tested to the requirements of Title 47 of the CFR, Part 15.225, Subpart C for Certification as an Intentional Radiator.

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,  
MET LABORATORIES, INC.

Jennifer Warnell  
Documentation Department

Reference: (Outsite Networks, Inc.\ EMC33123-FCC225 Rev. 2)

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc. This letter of transmittal is not a part of the attached report.

DOC-EMC705 2/26/2004



## **MET Laboratories, Inc.**

*Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

3162 BELICK STREET • SANTA CLARA, CALIFORNIA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372

### **Electromagnetic Compatibility Criteria Test Report**

For the

**Outsite Networks, Inc.  
All In One Printer Server**

Tested under

**The FCC Certification Rules Contained in Title 47 of the CFR, Part 15, Subpart C  
For Certification as an Intentional Radiator**

**MET Report: EMC33123-FCC225 Rev. 2**

January 4, 2012

**Prepared For:**

**Outsite Networks, Inc.  
2551 Eltham Ave., Suite N  
Norfolk, VA 23513**

**Prepared By:**

**MET Laboratories, Inc.  
914 West Patapsco Avenue  
Baltimore, MD 21230**

## Electromagnetic Compatibility Criteria Test Report

For the

**Outsite Networks, Inc.  
All In One Printer Server**

Tested under

**The FCC Certification Rules Contained in Title 47 of the CFR, Part 15, Subpart C  
For Certification as an Intentional Radiator**

**MET Report: EMC33123-FCC225 Rev. 2**



Len Knight, Project Engineer  
Electromagnetic Compatibility Lab



Jennifer Warnell  
Documentation Department

**Engineering Statement:** The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Title 47 of the CFR, Part 15, Subpart C for Certification as a Intentional Radiator and Part 15, Subpart B for a Class B Unintentional Radiator under normal use and maintenance.



Shawn McMillen,  
Wireless Manager, Electromagnetic Compatibility Lab



## Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	December 20, 2011	Initial Issue.
1	December 21, 2011	Revised to reflect engineer corrections.
2	January 4, 2012	Revised to add antenna test equipment.

## Table of Contents

1. Testing Summary .....	1
2. Equipment Configuration.....	2
2.1.1.1. Overview.....	2
2.1.1.2. References.....	3
2.1.1.3. Test Site .....	3
2.1.1.4. Description of Test Sample.....	3
2.1.1.5. Equipment Configuration.....	5
2.1.1.6. Support Equipment .....	5
2.1.1.7. Ports and Cabling Information.....	5
2.1.1.8. Mode of Operation.....	6
2.1.1.9. Modifications .....	6
2.1.2. Modifications to EUT .....	6
2.1.3. Modifications to Test Standard .....	6
2.1.3.1. Disposition of EUT .....	6
3. Electromagnetic Compatibility Emission Criteria.....	7
3.1. §15.203 Antenna Requirement.....	7
3.2. §15.207(a) Conducted Emissions Limits .....	8
3.3. §15.225(a)(b)(c) Field Strength of Fundamental Emission.....	12
3.4. §15.225(d) Field Strength of Spurious Emissions.....	17
3.5. §15.225(e) Frequency Stability .....	20
4. Test Equipment .....	22
5. Compliance Information.....	23
6. Label and User's Manual Information.....	28

## List of Tables

Table 1. Summary of Test Results .....	1
Table 2. Equipment Configuration .....	5
Table 3. Support Equipment.....	5
Table 4. Ports and Cabling Information .....	5
Table 5. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a) .....	8
Table 6. Conducted Emissions, 15.207(a), Phase Line, Test Results.....	9
Table 7. Conducted Emissions, 15.207(a), Neutral Line, Test Results .....	10
Table 8. Frequency Stability, Test Results .....	21

## List of Figures

Figure 1. Block Diagram of Test Configuration.....	4
--	---

## List of Photographs

Photograph 1. Conducted Emissions, 15.207(a), Test Setup.....	11
Photograph 2. Field Strength of Fundamental Emission, Test Setup .....	16
Photograph 3. Radiated Spurious Emissions, Below 1 GHz, Test Setup Photo .....	19
Photograph 4. Frequency Stability, Test Setup .....	21

## List of Terms and Abbreviations

<b>AC</b>	Alternating Current
<b>ACF</b>	Antenna Correction Factor
<b>Cal</b>	Calibration
<b>d</b>	Measurement Distance
<b>dB</b>	Deci Bels
<b>dB<math>\mu</math>V</b>	Deci-Bels above one <b>micro Volt</b>
<b>dB<math>\mu</math>V/m</b>	Deci-Bels above one <b>micro Volt per meter</b>
<b>DC</b>	Direct Current
<b>DCF</b>	Distance Correction Factor
<b>E</b>	Electric Field
<b>DSL</b>	Digital Subscriber Line
<b>ESD</b>	Electrostatic Discharge
<b>EUT</b>	Equipment Under Test
<b>f</b>	Frequency
<b>FCC</b>	Federal Communications Commission
<b>H</b>	Magnetic Field
<b>GHz</b>	Giga Hertz
<b>Hz</b>	Hertz
<b>ICES</b>	Interference-Causing Equipment Standard
<b>kHz</b>	kilohertz
<b>kPa</b>	kilopascal
<b>kV</b>	kilo Volt
<b>LISN</b>	Line Impedance Stabilization Network
<b>MHz</b>	MegaHertz
<b><math>\mu</math>H</b>	<b>micro</b> Henry
<b><math>\mu</math>F</b>	<b>micro</b> Farad
<b><math>\mu</math>s</b>	<b>micro</b> seconds
<b>RF</b>	Radio Frequency
<b>RMS</b>	Root-Mean-Square

## 1. Testing Summary

Title 47 of the CFR, Part 15, Subpart C, Reference and Test Description	IC Reference RSS-210 Issue 8: 2010; RSS-GEN Issue 3: 2010	Results
15.203 Antenna Requirements	N/A	Compliant
15.207(a) FCC Part 15 Intentional Radiator, Sections: Conducted Emission Limits	RSS-GEN (7.2.4)	Compliant
15.225(a) Field Strength emissions within the band 13.553 – 13.567 MHz	RSS-210(A2.6(a))	Compliant
15.225(b) Field Strength emissions within the band 13.410 – 13.553 MHz and 13.567 – 13.710 MHz	RSS-210(A2.6(b))	Compliant
15.225(c) Field Strength emissions within the band 13.110 – 13.410 MHz and 13.710 – 14.010 MHz	RSS-210(A2.6(c))	Compliant
15.225(d) Outside-Band Field Strength emissions per 15.209	RSS-210(A2.6(d))	Compliant
15.225(e) Frequency Tolerance of the Carrier	RSS-210(A2.6)	Compliant

**Table 1. Summary of Test Results**



## 2. Equipment Configuration

### 2.1 Overview

MET Laboratories, Inc. was contracted by Outsite Networks, Inc. to perform testing on the All In One Printer Server, under Outsite Networks, Inc.'s purchase order number 0204442.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the Outsite Networks, Inc., All In One Printer Server.

The results obtained relate only to the item(s) tested.

<b>Filing Status:</b>	Original
<b>Model(s) Tested:</b>	All In One Printer Server
<b>Model(s) Covered:</b>	All In One Printer Server
<b>EUT Specifications:</b>	Primary Power: 120 VAC, 60 Hz
	FCC ID: U2C-AIO-2011
	IC: 6944A-AIO2011
	Type of Modulations: ASK
	Equipment Code: DXX
<b>Analysis:</b>	EUT TX Frequency Ranges: 13.56 MHz
	The results obtained relate only to the item(s) tested.
<b>Evaluated by:</b>	Len Knight
<b>Report Date(s):</b>	January 4, 2012



## 2.2 References

<b>CFR 47, Part 15, Subpart C</b>	Federal Communication Commission, Code of Federal Regulations, Title 47, Part 15: General Rules and Regulations, Allocation, Assignment, and Use of Radio Frequencies
<b>CFR 47, Part 15, Subpart B</b>	Electromagnetic Compatibility: Criteria for Radio Frequency Devices
<b>ANSI C63.4:2003</b>	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
<b>ANSI/NCSL Z540-1-1994</b>	Calibration Laboratories and Measuring and Test Equipment - General Requirements
<b>ANSI/ISO/IEC 17025:2000</b>	General Requirements for the Competence of Testing and Calibration Laboratories
<b>ANSI C63.10-2009</b>	American National Standard for Testing Unlicensed Wireless Devices

## 2.3 Test Site

All testing was performed at MET Laboratories, Inc., 914 West Patapsco Avenue, Baltimore, MD 21230. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a semi-anechoic chamber. In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

## 2.4 Description of Test Sample

The Outsite Networks, Inc. All In One Printer Server, Equipment Under Test (EUT), is connected over a serial connection to a transaction generator running on a lap-top (support equipment), transmitting a continuous stream of transaction data. Whenever a RFID tag is detected above the keypad a beep will sound and an LED will flash. The EUT serves as the Zigbee network master and will on a regular basis attempt to connect to other/remote units.

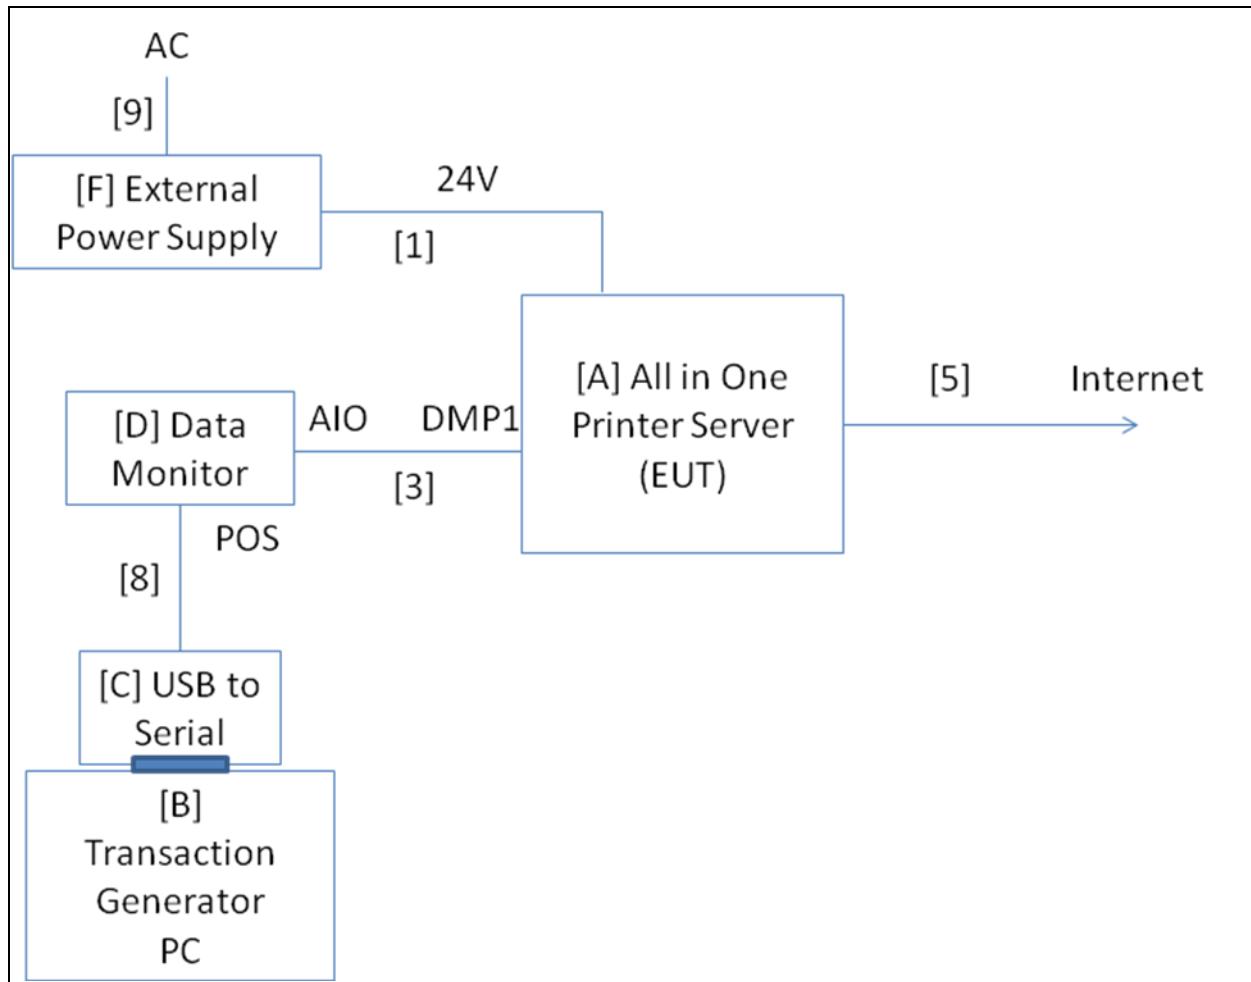


Figure 1. Block Diagram of Test Configuration



## 2.5 Equipment Configuration

The EUT is part of a system as shown in Figure 1, Block Diagram of Test Setup. All cards, etc., incorporated as part of the EUT is included in the following list.

Ref. ID	Name / Description	Model Number	Serial Number
[A]	All In One Printer Server	AIO	WPS11101214
[A']	All In On Printer Server w/ Dummy Load	N/A	WPS11101188

Table 2. Equipment Configuration

## 2.6 Support Equipment

Support equipment necessary for the operation and testing of the EUT is included in the following list.

Ref. ID	Name / Description	Manufacturer	Model Number
B	Lap Top PC	Sony	VAIO
C	USB to Serial Converter	N/A	N/A
D	Data Monitor	Outsite Networks	Data Monitor
F	Power Supply	Star Micronics	PS60A024B

Table 3. Support Equipment

## 2.7 Ports and Cabling Information

Ref. ID	Port Name on EUT	Cable Description	Qty.	Length (m)	Shielded (Y/N)	Termination Point
1	Power	External Power Cable	1	1.5	Yes	N/A
2	POS Loyalty Port	Not used	0	N/A	N/A	N/A
3	Data Monitor Port 1	CAT5 serial	1	0.6	No	N/A
4	Data Monitor Port 2	Not Used	0	N/A	N/A	N/A
5	Ethernet	CAT5	1	As needed	No	N/A
6	USB	Not used	0	N/A	N/A	N/A
7	Not Used	Not used	0	N/A	N/A	N/A
8	N/A	CAT5 serial	1	2	No	N/A
9	N/A	AC In	1	1.5	No	N/A

Table 4. Ports and Cabling Information



## 2.8 Mode of Operation

For the purposes of compliance testing, the radio was set to continuously transmit.

## 2.9 Modifications

### a) Modifications to EUT

No modifications were made to the EUT.

### b) Modifications to Test Standard

No modifications were made to the test standard.

## 2.10 Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to Outsite Networks, Inc. upon completion of testing.

### 3.0 Electromagnetic Compatibility Emission Criteria

#### 3.1 §15.203 Antenna Requirements

**Test Requirement:** § 15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

**Results:** The EUT as tested is compliant the criteria of §15.203. The EUT antenna has an integral antenna, 4" x 3" inductive rectangle.

**Test Engineer(s):** Len Knight

**Test Date(s):** 10/25/11

## Electromagnetic Compatibility Emission Criteria

### 3.2. §15.207(a) Conducted Emissions Limits

**Test Requirement(s):** **§ 15.207 (a):** For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50  $\Omega$  line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency range (MHz)	§ 15.207(a), Conducted Limit (dB $\mu$ V)	
	Quasi-Peak	Average
* 0.15- 0.45	66 - 56	56 - 46
0.45 - 0.5	56	46
0.5 - 30	60	50

**Table 5. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)**

**Test Procedure:** The EUT was placed on a 0.8 m-high wooden table inside a screen room. The EUT was situated such that the back of the EUT was 0.4 m from one wall of the vertical ground plane, and the remaining sides of the EUT were no closer than 0.8 m from any other conductive surface. The EUT was powered from a 50  $\Omega$ /50  $\mu$ H Line Impedance Stabilization Network (LISN). The EMC receiver scanned the frequency range from 150 kHz to 30 MHz. Conducted Emissions measurements were made in accordance with *ANSI C63.4-2003 "Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz"*. The measurements were performed over the frequency range of 0.15 MHz to 30 MHz using a 50  $\Omega$ /50  $\mu$ H LISN as the input transducer to an EMC/field intensity meter. For the purpose of this testing, the transmitter was turned on. Scans were performed with the transmitter on.

**Test Results:** The EUT was compliant with this requirement. Measured emissions were below applicable limits.


**Test Engineer(s):** Len Knight

**Test Date(s):** 10/25/11

## 15.207(a) Conducted Emissions Test Results

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.1556	50.32	0	50.32	65.7	-15.38	37	0	37	55.7	-18.7
0.4452	38.32	0	38.32	56.96	-18.64	32.29	0	32.29	46.96	-14.67
0.8575	26.07	0	26.07	56	-29.93	19.01	0	19.01	46	-26.99
1.67	27.04	0	27.04	56	-28.96	19.85	0	19.85	46	-26.15
13.56	45.4	0.06	45.46	60	-14.54	41.8	0.06	41.86	50	-8.14
17	34.32	0.08	34.4	60	-25.6	24.94	0.08	25.02	50	-24.98

Table 6. Conducted Emissions, 15.207(a), Phase Line, Test Results

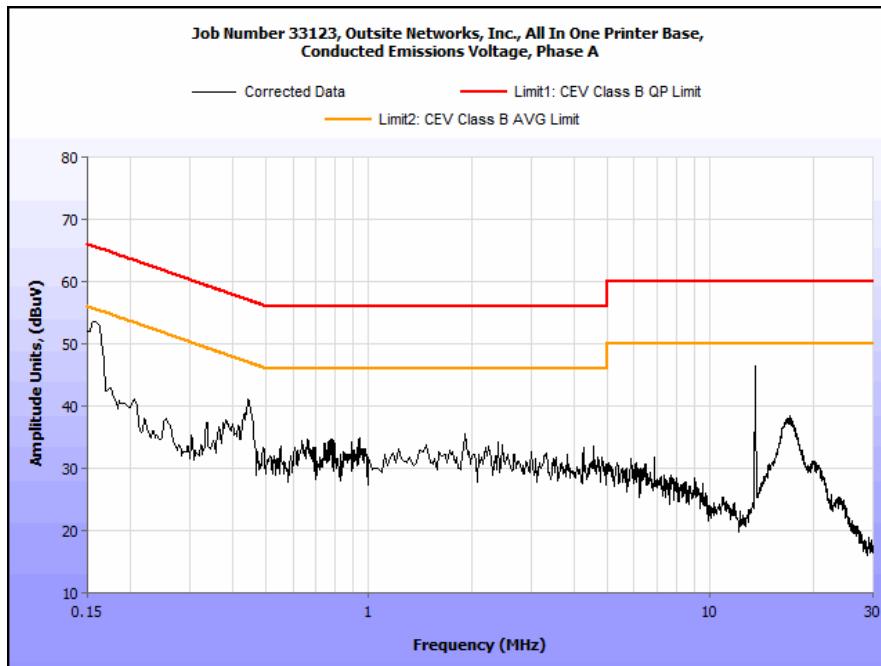


Plot 1. Conducted Emissions, 15.207(a), Phase Line

## 15.207(a) Conducted Emissions Test Results

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.1534	50.34	0	50.34	65.81	-15.47	39.6	0	39.6	55.81	-16.21
0.443	38.16	0	38.16	57.01	-18.85	36.18	0	36.18	47.01	-10.83
0.6338	27.99	0	27.99	56	-28.01	24.27	0	24.27	46	-21.73
2.08	26.66	0	26.66	56	-29.34	19.84	0	19.84	46	-26.16
13.56	47.2	0.06	47.26	60	-12.74	46.98	0.06	47.04	50	-2.96
16.71	35.7	0.07	35.77	60	-24.23	29.59	0.07	29.66	50	-20.34

Table 7. Conducted Emissions, 15.207(a), Neutral Line, Test Results

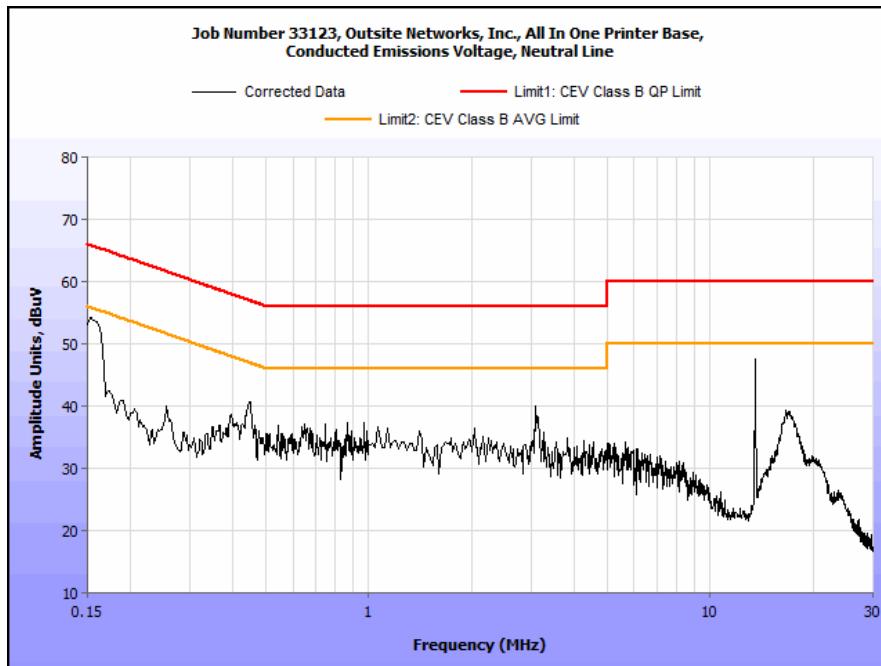

Plot 2. Conducted Emissions, 15.207(a), Neutral Line

### 15.207(a) Conducted Emissions Test Setup



Photograph 1. Conducted Emissions, 15.207(a), Test Setup

## Electromagnetic Compatibility Emission Criteria

### 3.3. §15.225(a)(b)(c) Field Strength of Fundamental Emission

**Test Requirement(s):** **§15.225 (a)** The field strength of any emissions within the band 13.553 – 13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.

**§15.225 (b)** Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

**§15.225 (c)** Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

**Test Procedure:** The EUT was set to transmit and placed on a 0.8m-high non-conductive stand inside a semi-anechoic chamber. The method of testing and test conditions of ANSI C63.4: 2003 were used. The loop antenna was located 3 m from the EUT. Measurements were conducted with the loop antenna at coaxial (parallel) and planar (perpendicular) orientations. The Spectrum analyzer RBW was set to 10 kHz and a peak detector was used.


For the purposes of showing compliance, the measurements were made at 3m and then extrapolated to 30m using the following correction factor.

$$40\log(1/30) = -59.1 \text{ dB} \quad 20\log(3/30) = -20$$


**Test Results:** The EUT was found compliant with Part 15.225 (a)(b)(c) requirements of this section. In order to show compliance with band edge measurements within the bands 13.410 – 13.553 MHz and 13.567 – 13.710 MHz, the FCC Marker Delta Method was used.

**Test Engineer(s):** Len Knight


**Test Date(s):** 11/1/11

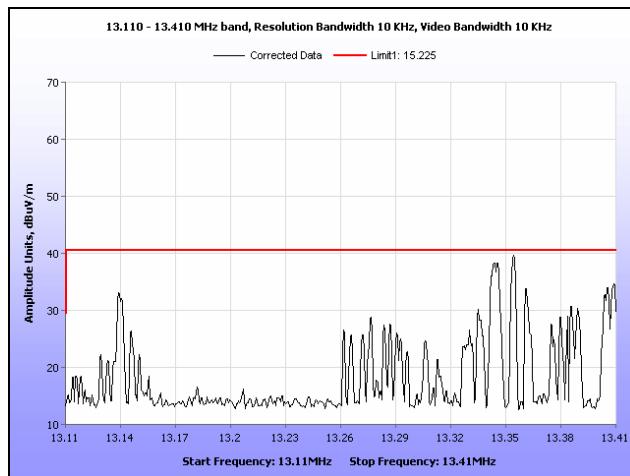


**Plot 3. Field Strength of Fundamental Emission, 13.110 – 13.410 MHz Band**

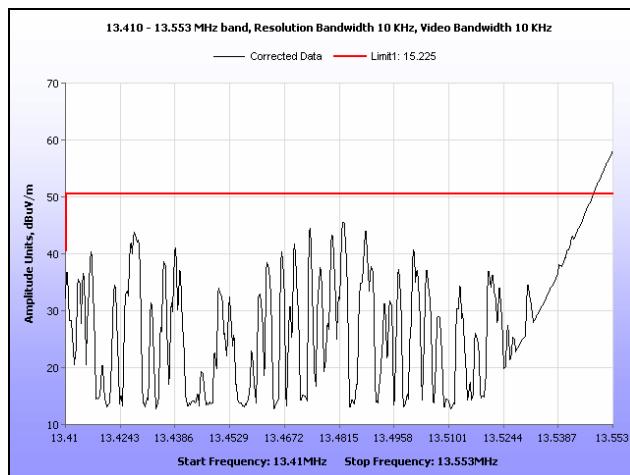


**Plot 4. Field Strength of Fundamental Emission, 13.410 – 13.553 MHz Band**

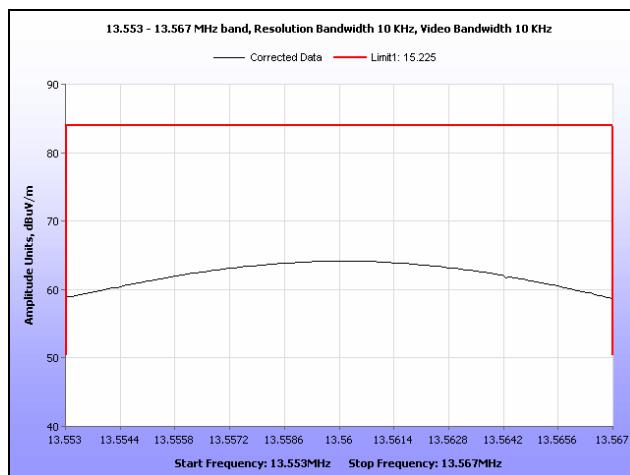


**Plot 5. Field Strength of Fundamental Emissions, 13.553 – 13.567 MHz Band**

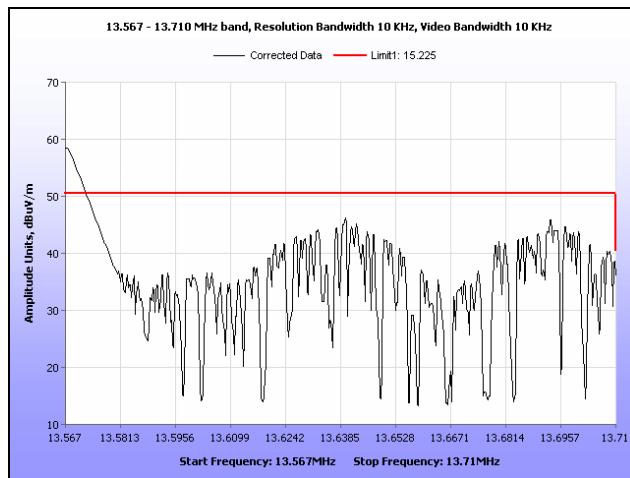


**Plot 6. Field Strength of Fundamental Emission, 13.567 – 13.710 MHz Band**

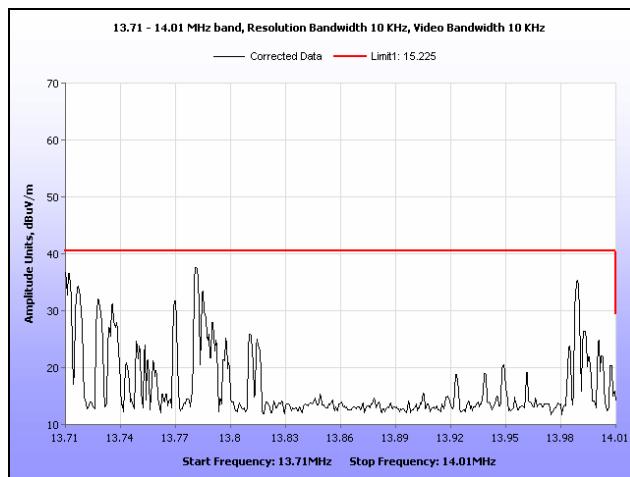


**Plot 7. Field Strength of Fundamental Emission, 13.710 – 14.010 MHz Band**

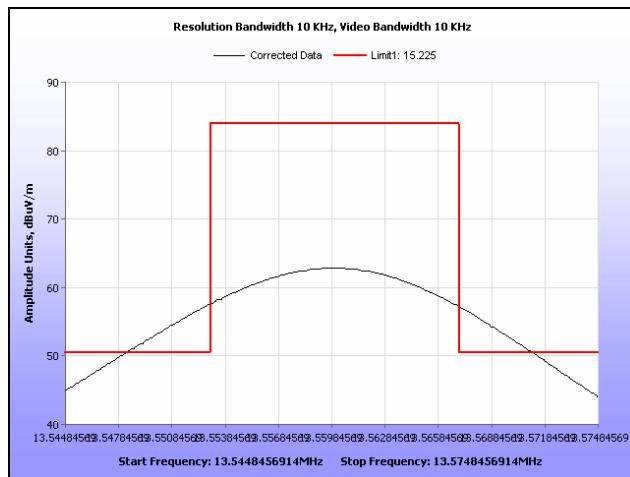

**Plot 8. Field Strength of Fundamental Emission, Band Edge at 13.553 – 14.010 MHz**

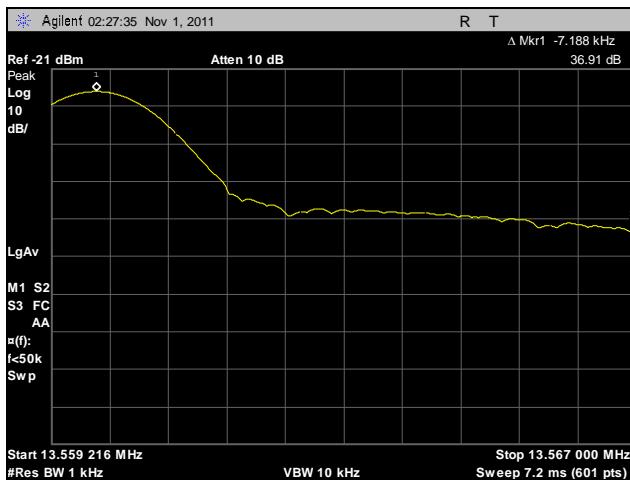


**Plot 9. Field Strength of Fundamental Emission, Delta High in 1 kHz RBW**

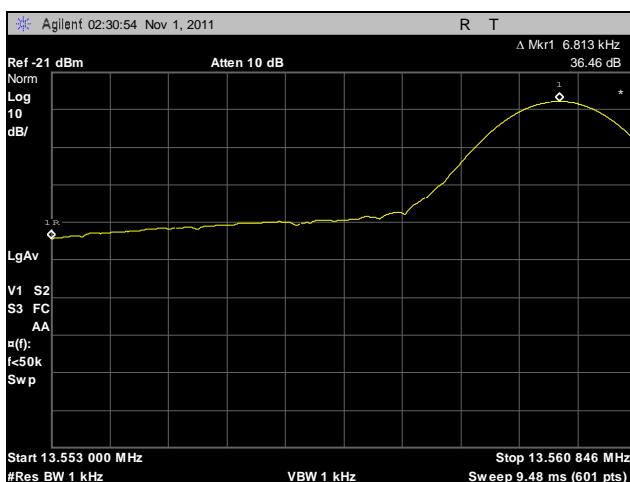

**Plot 10. Field Strength of Fundamental Emission, Delta Low in 1 kHz RBW**

Peak Measurement of Fundamental (dB $\mu$ V/m)	Delta of Band Edge High and Peak (dB)	Marker Delta Correction (dB)	Original Band Edge Measurement High (dB $\mu$ V/m)	Corrected for Marker Delta (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)
62.83	36.91	25.92	57.16	31.24	50.47
Peak Measurement of Fundamental (dB $\mu$ V/m)	Delta of Band Edge Low and Peak (dB)	Marker Delta Correction (dB)	Original Band Edge Measurement Low (dB $\mu$ V/m)	Corrected for Marker Delta (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)
62.83	36.46	26.37	57.52	31.15	50.47

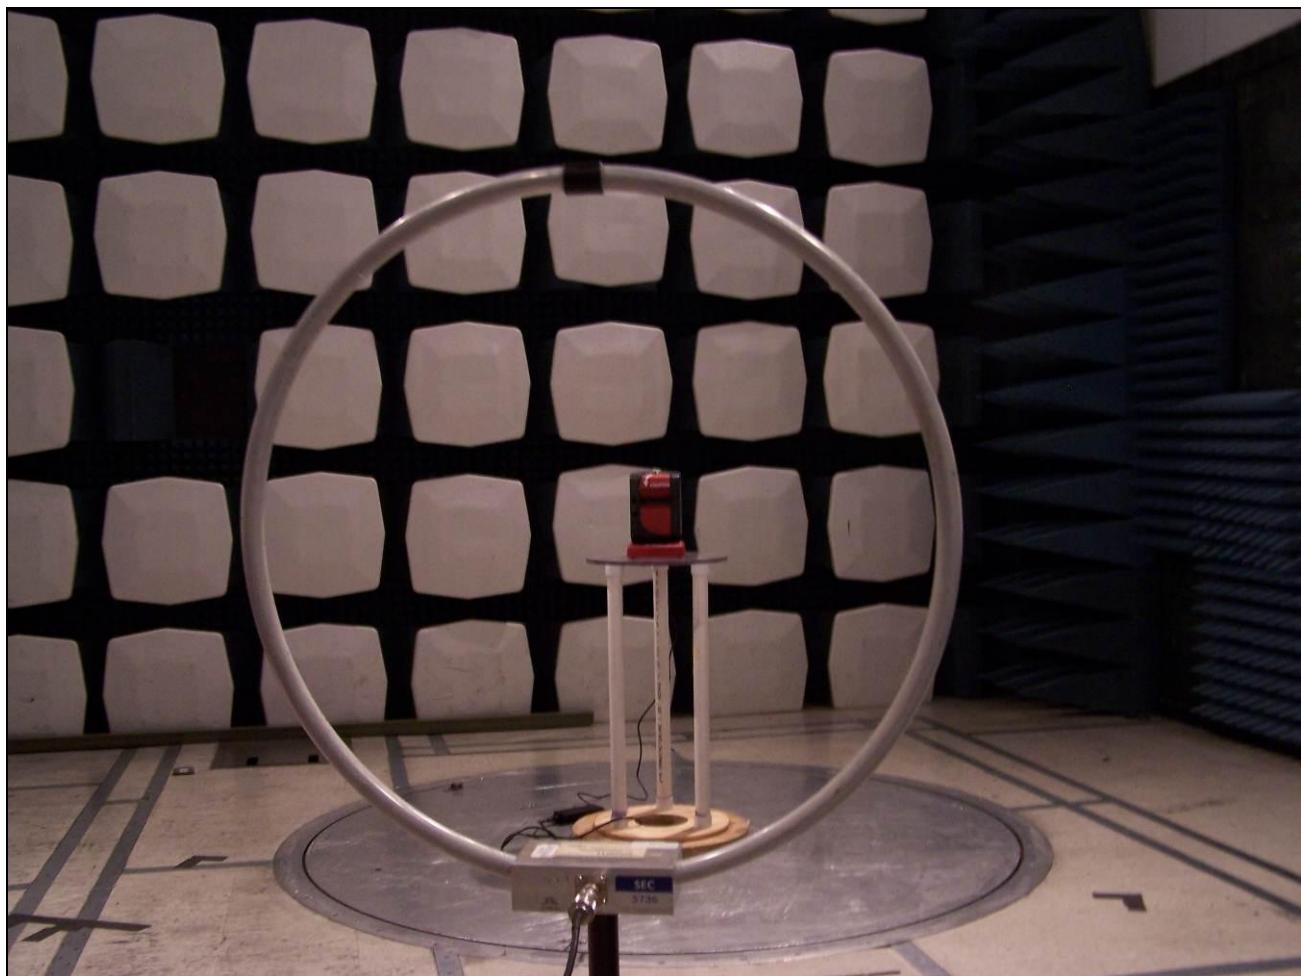

**Photograph 2. Field Strength of Fundamental Emission, Test Setup**

## Electromagnetic Compatibility Emission Criteria

### 3.4. §15.225(d) Field Strength of Spurious Emissions

**Test Requirement(s):** 15.225 (d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in § 15.209.

**Test Procedures:** The EUT was set to transmit and placed on a 0.8m-high wooden stand inside a semi-anechoic chamber. The method of testing and test conditions of ANSI C63.4: 2003 were used. For measurements below 30 MHz a loop antenna placed 1m away from the unit was used. For measurements above 30 MHz a biconalog antenna placed 3m away from the unit was used. Measurements were conducted with the loop antenna at coaxial (parallel) and planar (perpendicular) orientations. The Spectrum analyzer RBW was set to 10 kHz and VBW was set to 30 kHz. A peak detector was used below 30 MHz and a Quasi-peak detector was used for measurements for above 30 MHz.


The measurements made at 3m with the loop antenna were then extrapolated to 30m using the following correction factor.

$$40\log(1/30) = -59.1 \text{ dB} \quad 20\log(3/30) = -20$$


**Test Results:** The EUT was found compliant with Part 15.225 (d) requirements of this section. For emissions above 30 MHz, a peak plot was compared to a quasi-peak limit line in order to show compliance. Emissions which peaked above the quasi-peak limit line were determined to be emanating from a digital source and not from the transmitter.

**Test Engineer(s):** Len Knight


**Test Date(s):** 11/01/11

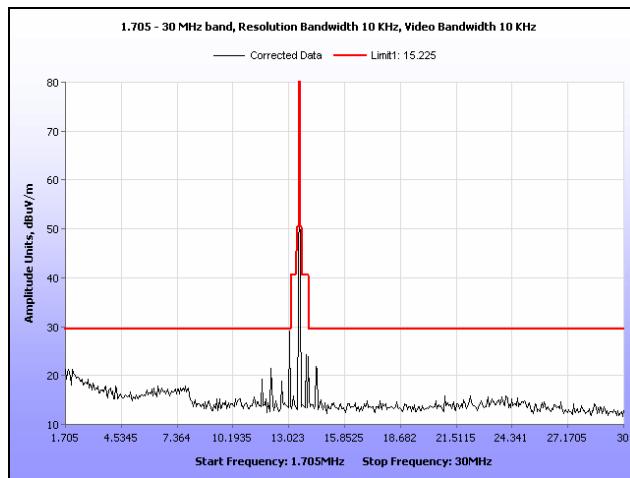

**Plot 11. Field Strength of Spurious Emissions, 1.750 – 30 MHz Band**

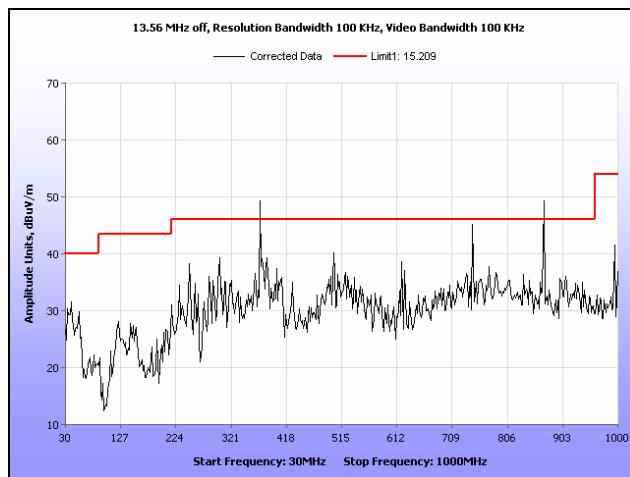

**Plot 12. Field Strength of Spurious Emissions, 30 MHz – 1 GHz, 13.56 MHz Off**

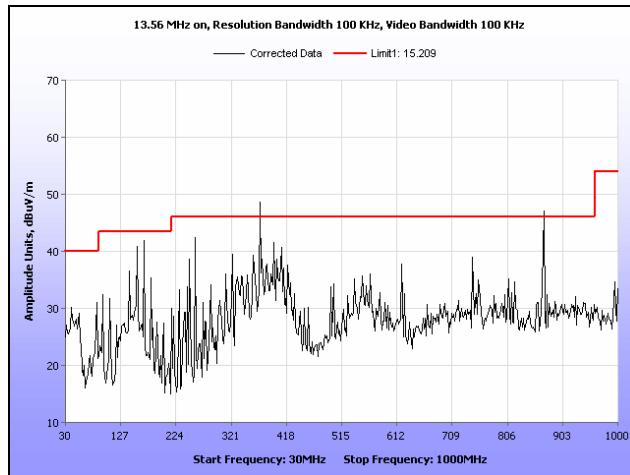

**Plot 13. Field Strength of Spurious Emissions, 30 MHz – 1 GHz, 13.56 MHz On**



**Photograph 3. Radiated Spurious Emissions, Below 1 GHz, Test Setup Photo**

## Electromagnetic Compatibility Emission Criteria

### 3.5. §15.225(e) Frequency Stability

**Test Requirement(s):** **15.225(e)** The frequency tolerance of the carrier signal shall be maintained within +/-0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

**Test Procedure:** The EUT was placed in the Environmental Chamber and allowed to reach desired temperature. A spectrum analyzer was used to measure the frequency drift. The EUT was set to transmit in the operating frequency range. Frequency drift was investigated for every 10°C increment until the unit is stabilized then recorded the reading in tabular format with the temperature range of -20° to +50°C.

**Test Results:** The EUT was found compliant with Part 15.225 (e) requirement(s) of this section.

**Test Engineer(s):** Len Knight

**Test Date(s):** 10/31/11

## Frequency Stability – Section 15.225 (e) Test Results

Temperature (deg C)	Frequency (MHz)	Drift (%)	Limit (%)
-20	13.560101	0.00074	+/-0.01
-10	13.560061	0.00045	+/-0.01
0	13.560011	0.00008	+/-0.01
10	13.559951	-0.00036	+/-0.01
20	13.559894	-0.00078	+/-0.01
30	13.559860	-0.00103	+/-0.01
40	13.559814	-0.00137	+/-0.01
50	13.559795	-0.00151	+/-0.01

Voltage (VAC)	Frequency (MHz)	Drift (%)	Limit (%)
120	13.559894	-0.00078	+/-0.01
102	13.559894	-0.00078	+/-0.01
138	13.559894	-0.00078	+/-0.01

Table 8. Frequency Stability, Test Results



Photograph 4. Frequency Stability, Test Setup



## 4.0. Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ANSI/NCSL Z540-1-1994 and ANSI/ISO/IEC 17025:2000.

MET Asset #	Nomenclature	Manufacturer	Model	Last Cal Date	Cal Due Date
1T4621	SPECTRUM ANALYZER	AGILENT TECHNOLOGIES	E4402B	05/31/2011	05/31/2012
1T4563	LISN (10 AMP)	SOLAR ELECTRONICS	9322-50-R-10-BNC	10/28/2010	10/28/2011
1T4214	SHIELD ROOM #4	UNIVERSAL SHIELD INC	N/A	NOT REQUIRED	
1T4773	THERMO/HYGROMETER	CONTROL COMPANY	4040	05/21/2010	05/21/2012
1T4505	TEMPERATURE CHAMBER	TEST EQUITY	115	11/29/2010	11/29/2011
1T4728	PROGRAMMABLE AC POWER SOURCE	QUADTECH	31010	SEE NOTE	
1T4771	SPECTRUM ANALYZER	AGILENT	E4446A	06/25/2011	06/25/2012
1T4601	TRUE RMS MULTIMETER	FLUKE	87 V	01/26/2011	01/26/2012
1U0006	ANTENNA, LOOP	EMCO	6512	05/12/2011	05/12/2012
1T4751	ANTENNA - BILOG	SUNOL SCIENCES	JB6	12/07/2011	12/07/2012

Note: Functionally verified test equipment is verified using calibrated instrumentation at the time of testing.



## 5.0. Compliance Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

### § 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of emitting radio-frequency energy by radiation, conduction, or other means. Radio-frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.



**§ 2.803 Marketing of radio frequency devices prior to equipment authorization.**

(a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:

- (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
- (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.

(d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.



(e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:

- (i) *Compliance testing;*
- (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
- (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
- (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production states; or
- (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.

(e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.

(f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a provision that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.



**The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:**

**§ 2.901 Basis and Purpose**

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.<sup>1</sup> *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer*, be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

**§ 2.948 Description of measurement facilities.**

- (a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.
  - (1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.
    - (i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*
    - (ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.

<sup>1</sup> In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart C (of Part 15), which deals with unintentional radiators.



- (2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.

**§ 2.955 Retention of records.**

- (a) For each equipment subject to verification, the responsible party, as shown in §2.909 shall maintain the records listed as follows:
  - (1) A record of the original design drawings and specifications and all changes that have been made that may affect compliance with the requirements of §2.953.
  - (2) A record of the procedures used for production inspection and testing (if tests were performed) to insure the conformance required by §2.953. (Statistical production line Emission testing is not required.)
- (b) The records listed in paragraph (a) of this section shall be retained for two years after the manufacture of said equipment item has been permanently discontinued, or until the conclusion of an investigation or a proceeding if the manufacturer or importer is officially notified that an investigation or any other administrative proceeding involving his equipment has been instituted.

**§ 2.956 FCC inspection and submission of equipment for testing.**

- (a) Each responsible party shall upon receipt of reasonable request:
  - (1) Submit to the Commission the records required by §2.955.
  - (2) Submit one or more sample units for measurements at the Commission's Laboratory.
    - (i) Shipping costs to the Commission's Laboratory and return shall be borne by the responsible party.
    - (ii) In the event the responsible party believes that shipment of the sample to the Commission's Laboratory is impractical because of the size or weight of the equipment, or the power requirement or for any other reason, the responsible party may submit a written explanation why such shipment is impractical and should not be required.



## 6.0. Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

### § 15.19 Labeling requirements.

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

(1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

*This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.*

(2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

*This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.*

(3) All other devices shall bear the following statement in a conspicuous location on the device:

*This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.*

(4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

(5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

### § 15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



**The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart C — Unintentional Radiators:**

**§ 15.105 Information to the user.**

(a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

*Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at own expense.*

(b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

*NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful power line and ground at the power terminal. The lower limit applies at the band edges.*



Outsite Networks, Inc.  
All In One Printer Server

Electromagnetic Compatibility  
Label and User's Manual Information  
CFR Title 47, Part 15, Subpart C

## End of Report