

Senao IAP2300AE

AX3000 Indoor Ceiling Mount AP

QSG

Package Contents



Indoor Access Point



Ceiling Mount Base
(9/16" T-Rail)



Ceiling Mount Base
(15/16" T-Rail)



Mounting Kit

Hardware Overview

Ports



LED



DC in Connector

RJ45
(Power-over-Ethernet)

Reset Button


Hardware Mounting

The access point can be mounted on the **Ceiling** and **Wall**. Please perform the following steps to install successfully.

Ceiling Mount

- T-Rail

1. Slide the **Ceiling Mount Base** into the designated slot on the access point slot of the Access Point.

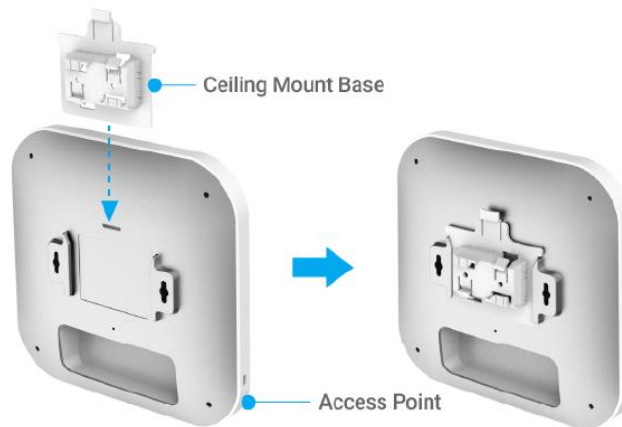


2. Slightly hook the ceiling mount bracket onto the T-Rail until you hear a click.




- Hard Ceiling

1. Screw the included **Screws** into the **Ceiling Mount Base**, and then screw the **Screws** into the surface until they are flush with the surface.

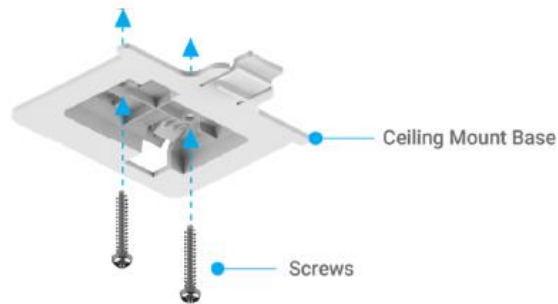


2. Slide the Access Point into the **Ceiling Mount Base**.

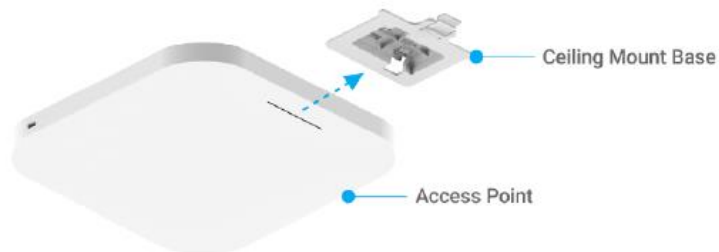

Wall Mount

1. Determine where the **Access Point** will be placed and mark the location on the surface for the two mounting holes. Use the appropriate drill bit to drill two 8.1mm diameter and 26mm-deep holes on the marks.
2. Screw the **Anchors** into the holes until they are flush with the wall; screw the included **Screws** into the **Anchors** but leave the screw head sticking out so you can hang the **Access Point** on it.

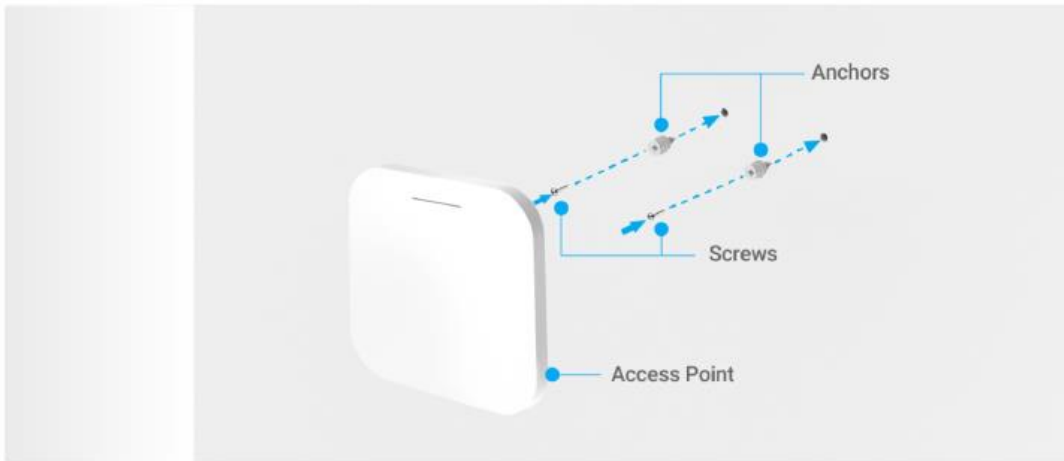


3. Hang the **Access Point** against the wall onto the **Screw** heads.



Powering the AP

Connecting to a PoE Switch


Connect the Ethernet cable from the EnGenius Fit AP directly to the PoE port of the PoE switch.

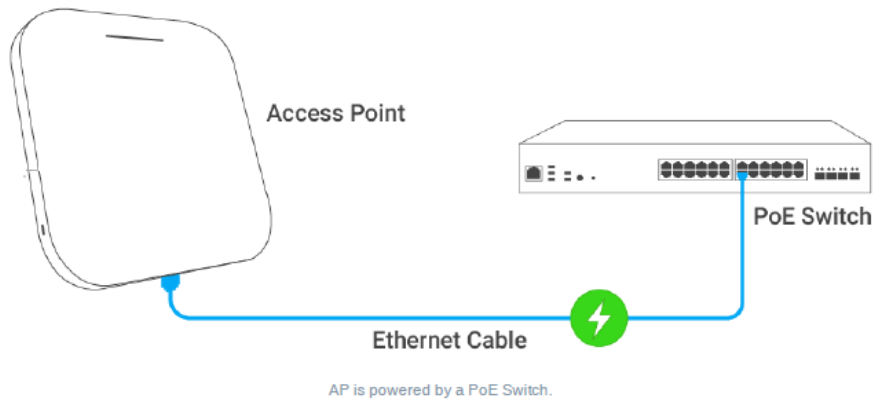

Powering with a PoE Adapter

(A) Connect one end of the Ethernet cable into the LAN (PoE) port of EnGenius FIT AP and the other end to the PoE port on the PoE Adapter.

(B) Connect the power cord with the PoE Adapter and plug the other end into an electrical outlet. (C) Connect the second Ethernet cable into the LAN port of the PoE Adapter and the other end to the Ethernet port on the computer.

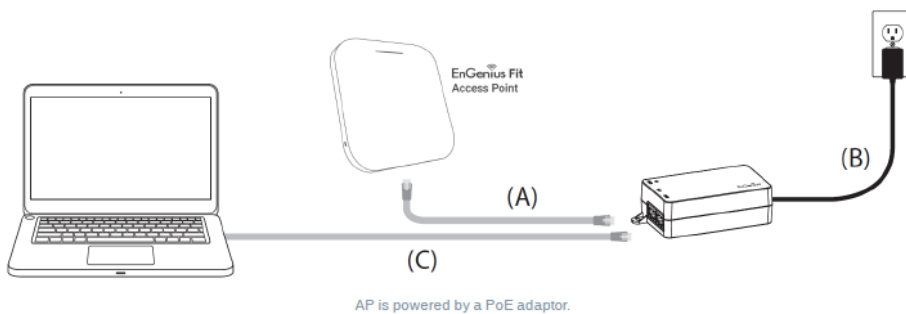

Powering with a Power Adapter

Connect the Power Cord to the adapter, and then plug the Power Cord into the power outlet.

