

# FCC Radio Test Report

**FCC ID** : U2M-IAP4701A  
**Equipment** : WiFi 7 Tri-radio concurrent indoor ceiling mount AP  
**Brand Name** : Senao  
**Model Name** : IAP4701A  
**Applicant** : Senao Networks, Inc.  
3F., No.529, Zhongzheng Rd., Xindian Dist.,  
New Taipei City, Taiwan  
**Manufacturer** : Senao Networks, Inc.  
3F., No.529, Zhongzheng Rd., Xindian Dist.,  
New Taipei City, Taiwan  
**Standard** : 47 CFR FCC Part 15.407

The product was received on Oct. 31, 2023, and testing was started from Nov. 08, 2023 and completed on Nov. 21, 2023. We, SPORTON INTERNATIONAL INC. Hsinhua Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. Hsinhua Laboratory, the test report shall not be reproduced except in full.



Approved by: Jackson Tsai

**SPORTON INTERNATIONAL INC. Hsinhua Laboratory**

No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan (R.O.C.)



# Table of Contents

**HISTORY OF THIS TEST REPORT .....3**

**SUMMARY OF TEST RESULT .....4**

**1 GENERAL DESCRIPTION .....5**

1.1 Information.....5

1.2 Testing Applied Standards .....9

1.3 Testing Location Information .....9

1.4 Measurement Uncertainty .....9

**2 TEST CONFIGURATION OF EUT.....10**

2.1 Test Channel Mode .....10

2.2 The Worst Case Measurement Configuration.....12

2.3 Accessories .....13

2.4 Support Equipment.....13

2.5 Test Setup Diagram .....14

**3 TRANSMITTER TEST RESULT .....16**

3.1 AC Power-line Conducted Emissions .....16

3.2 Emission Bandwidth.....18

3.3 Maximum Conducted Output Power .....19

3.4 Peak Power Spectral Density.....21

3.5 Unwanted Emissions.....23

**4 TEST EQUIPMENT AND CALIBRATION DATA.....27**

**APPENDIX A. TEST RESULTS OF AC POWER-LINE CONDUCTED EMISSIONS**

**APPENDIX B. TEST RESULTS OF EMISSION BANDWIDTH**

**APPENDIX C. TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER**

**APPENDIX D. TEST RESULTS OF PEAK POWER SPECTRAL DENSITY**

**APPENDIX E. TEST RESULTS OF UNWANTED EMISSIONS**

**APPENDIX F. TEST RESULTS OF RADIATED EMISSION CO-LOCATION**

**APPENDIX G. TEST PHOTOS**

**PHOTOGRAPHS OF EUT V01**



## History of this test report

Report No.	Version	Description	Issued Date
FR381814AN	01	Initial issue of report	Feb. 01, 2024



### Summary of Test Result

Report Clause	Ref. Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.407(a)	Emission Bandwidth	PASS	-
3.3	15.407(a)	Maximum Conducted Output Power	PASS	-
3.4	15.407(a)	Peak Power Spectral Density	PASS	-
3.5	15.407(b)	Unwanted Emissions	PASS	-

Note 1: From Sporton Project No.:FR381846AN.

<b>Declaration of Conformity:</b>
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
<b>Comments and explanations:</b>
The EUT supports beamforming and CDD modes, and the CDD mode is the worst case. Therefore, all test items are evaluated in the report. The beamforming mode only evaluates the output power.

Reviewed by: Barry Hsiao

Report Producer: Michelle Tsai



# 1 General Description

## 1.1 Information

### 1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5150-5250	a, n (HT20), ac (VHT20), ax(HEW20), be(EHT20)	5180-5240	36-48 [4]
5725-5850		5745-5825	149-165 [5]
5150-5250	n (HT40), ac (VHT40), ax(HEW40), be(EHT40)	5190-5230	38-46 [2]
5725-5850		5755-5795	151-159 [2]
5150-5250	ac (VHT80), ax(HEW80), be(EHT80)	5210	42 [1]
5725-5850		5775	155 [1]

#### Non-Beamforming

Band	Mode	BWch	Nant
5.15-5.25GHz	802.11a	20	4TX
5.725-5.85GHz	802.11a	20	4TX
5.15-5.25GHz	802.11be EHT20	20	4TX
5.725-5.85GHz	802.11be EHT20	20	4TX
5.15-5.25GHz	802.11be EHT40	40	4TX
5.725-5.85GHz	802.11be EHT40	40	4TX
5.15-5.25GHz	802.11be EHT80	80	4TX
5.725-5.85GHz	802.11be EHT80	80	4TX

#### Beamforming

Band	Mode	BWch	Nant
5.15-5.25GHz	802.11be EHT20-BF	20	4TX
5.725-5.85GHz	802.11be EHT20-BF	20	4TX
5.15-5.25GHz	802.11be EHT40-BF	40	4TX
5.725-5.85GHz	802.11be EHT40-BF	40	4TX
5.15-5.25GHz	802.11be EHT80-BF	80	4TX
5.725-5.85GHz	802.11be EHT80-BF	80	4TX



Note:

- ♦ 11a, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ♦ VHT20, VHT40, VHT80 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.
- ♦ HEW20, HEW40, HEW80 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ EHT20, EHT40, EHT80 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM modulation.
- ♦ BWch is the nominal channel bandwidth.
- ♦ Evaluated EHT20/EHT40/EHT80 mode only due to the similar modulation. The power setting of HT20/HT40/VHT20/VHT40/VHT80/HEW20/HEW40/HEW80. mode are the same or lower than EHT20/EHT40/EHT80.

1.1.2 Antenna Information

Ant.	Brand	Model Name	Antenna Type	Connector	Support	Radio
1	Senao	5718A0738300	PIFA	I-Pex	2.4G	Radio 1
2	Senao	5718A0739300	PIFA	I-Pex	2.4G	
3	Senao	5718A0740300	PIFA	I-Pex	2.4G	
4	Senao	5718A0741300	PIFA	I-Pex	2.4G	
5	Senao	5718A0742300	PIFA	I-Pex	5G	Radio 2
6	Senao	5718A0743300	PIFA	I-Pex	5G	
7	Senao	5718A0744300	PIFA	I-Pex	5G	
8	Senao	5718A0745300	PIFA	I-Pex	5G	
9	ADVANCED WIRELESS & ANTENNA Inc.	A8P8P-100089	Alford loop	I-Pex	6E	Radio 3
10	ADVANCED WIRELESS & ANTENNA Inc.	A8P8P-100090	Alford loop	I-Pex	6E	
11	ADVANCED WIRELESS & ANTENNA Inc.	A8P8P-100091	Alford loop	I-Pex	6E	
12	ADVANCED WIRELESS & ANTENNA Inc.	A8P8P-100092	Alford loop	I-Pex	6E	
13	ADVANCED WIRELESS & ANTENNA Inc.	A8P8P-100093	Dipole	I-Pex	BT	-



Ant.	Port	Gain (dBi)									
		2.4G	BT	5G				6E			
				UNII-1	UNII-2A	UNII-2C	UNII-3	6.175G	6.475G	6.695G	6.995G
1	1	2.82	-	-	-	-	-	-	-	-	-
2	2	2.39	-	-	-	-	-	-	-	-	-
3	3	2.33	-	-	-	-	-	-	-	-	-
4	4	2.69	-	-	-	-	-	-	-	-	-
5	1	-	-	4.81	4.19	5.45	4.98	-	-	-	-
6	2	-	-	2.63	3.44	5.31	5.17	-	-	-	-
7	3	-	-	5.06	5.29	4.27	3.96	-	-	-	-
8	4	-	-	3.72	3.52	4.66	4.51	-	-	-	-
9	1	-	-	-	-	-	-	4.96	4.99	4.98	4.78
10	2	-	-	-	-	-	-	4.72	4.74	4.53	4.69
11	3	-	-	-	-	-	-	4.88	4.63	4.47	4.94
12	4	-	-	-	-	-	-	4.77	4.84	4.61	4.26
13	1	-	3.07	-	-	-	-	-	-	-	-

Composite Gain (dBi)										
	2.4G	UNII-1	UNII-2A	UNII-2C	UNII-3	6.175G	6.475G	6.695G	6.995G	
DG [1SS]	6.46	7.31	7.57	8.57	8.92	9.98	9.93	9.53	9.86	
DG [2SS]	3.46	5.06	5.29	5.57	5.92	6.98	6.93	6.53	6.86	
DG [4SS]	2.82	5.06	5.29	5.45	5.17	4.96	4.99	4.98	4.94	

Note 1: The EUT has thirteen antennas.

Note 2: The composite gain is derived as KDB 662911 D03 v01 which was used as directional gain. For more detail information, please refer to the Antenna Pattern Report AP381814.

**For 2.4GHz function:**

For IEEE 802.11 b/g/n/VHT/ax/be mode (4TX/4RX)

Ant. 1 (port 1), Ant. 2 (port 2), Ant. 3 (port 3) and Ant. 4 (port 4) could transmit/receive simultaneously.

**For 5GHz function:**

For IEEE 802.11 a/n/ac/ax/be mode (4TX/4RX)

Ant. 5 (port 1), Ant. 6 (port 2), Ant. 7 (port 3) and Ant. 8 (port 4) could transmit/receive simultaneously.

**For 6GHz function:**

For IEEE 802.11 ax/be mode (4TX/4RX)

Ant. 9 (port 1), Ant. 10 (port 2), Ant. 11(port 3) and Ant. 12 (port 4) could transmit/receive simultaneously.

**For BT function:**

For IEEE 802.15.1 Bluetooth mode (1TX/1RX)

Ant. 13 (port 1) could transmit/receive.



1.1.3 EUT Information

Operational Condition	
EUT Power Type	From AC Adapter
EUT Function	<input type="checkbox"/> Outdoor AP <input checked="" type="checkbox"/> Indoor AP
	<input type="checkbox"/> Fixed P2P AP <input type="checkbox"/> Client
Beamforming Function	<input checked="" type="checkbox"/> With beamforming <input type="checkbox"/> Without beamforming
Resource Unit(802.11ax)	<input checked="" type="checkbox"/> Full RU <input type="checkbox"/> Partial RU
Type of EUT	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device)
	Combined Equipment - Brand Name / Model No.: ...
<input type="checkbox"/>	Plug-in radio (EUT intended for a variety of host systems)
	Host System - Brand Name / Model No.:
<input type="checkbox"/>	Other:

1.1.4 Mode Test Duty Cycle

Non-Beamforming

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11a_Nss 1,(6D)_4TX	0.942	0.26	1.977m	1k
802.11be EHT20_Nss 1,(M0)_4TX	0.821	0.86	5.453m	300
802.11be EHT40_Nss 1,(M0)_4TX	0.777	1.1	5.452m	300
802.11be EHT80_Nss 1,(M0)_4TX	0.776	1.1	5.452m	300

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Beamforming

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT20-BF_Nss1,(MCS0)_4TX	0.821	0.86	5.453m	300
802.11be EHT40-BF_Nss1,(MCS0)_4TX	0.777	1.1	5.452m	300
802.11be EHT80-BF_Nss1,(MCS0)_4TX	0.776	1.1	5.452m	300

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.





## 1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013
- ♦ KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF:

- ♦ KDB 662911 D01 v02r01
- ♦ KDB 662911 D03 v01
- ♦ KDB 414788 D01 v01r01

## 1.3 Testing Location Information

Test Lab. : Sporton International Inc. Hsinhua Laboratory				
<input checked="" type="checkbox"/>	Hsinhua (TAF: 3785)	ADD: No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan (R.O.C.)		
		TEL: 886-3-327-3456	FAX: 886-3-327-0973	
Test site Designation No. TW3785 with FCC.				
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
AC Conduction	CO04-HY	Simon Cheng	22.1~23.8°C / 56~61%	21/Nov/2023
RF Conducted	TH07-HY	Yuna Lin	22.2~23.6°C / 50~60%	10/Nov/2023~16/Nov/2023
Radiated (Below 1GHz)	03CH02-HY	Vasari Huang	23.4~23.8°C / 52~55%	10/Nov/2023
<input checked="" type="checkbox"/>	Wenhua 3rd. (TAF: 3785)	ADD: No. 58, Aly. 75, Ln. 564, Wenhua 3rd Rd., Guishan Dist. Taoyuan City 333, Taiwan (R.O.C.)		
		TEL: 886-3-327-0868		
Test site Designation No. TW0036 with FCC.				
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
Radiated (Above 1GHz)	03CH24-HY	Henry Ho	22.5~23.6°C / 50~52%	08/Nov/2023~09/Nov/2023
Radiated (Co-location)	03CH25-HY	Billy Wang	22.6~22.8°C / 51~54%	17/Nov/2023

## 1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
AC Power-line Conducted Emissions	4.53 dB	Confidence levels of 95%
Emission Bandwidth	3 MHz	Confidence levels of 95%
Maximum Conducted Output Power	2 dB	Confidence levels of 95%
Power Spectral Density	2 dB	Confidence levels of 95%
Unwanted Emissions	4.8 dB	Confidence levels of 95%
Temperature	0.41 °C	Confidence levels of 95%
Humidity	3.4 %	Confidence levels of 95%



## 2 Test Configuration of EUT

### 2.1 Test Channel Mode

Test Software Version	qdart_conn.win.1.0_installer_00099
-----------------------	------------------------------------

#### Non-Beamforming

Mode	Power Setting
802.11a_Nss1,(6Mbps)_4TX	-
5180MHz	17.5
5200MHz	18.5
5240MHz	21
5745MHz	21
5785MHz	21
5825MHz	21
802.11be EHT20_Nss1,(MCS0)_4TX	-
5180MHz	17.5
5200MHz	18.5
5240MHz	21
5745MHz	21
5785MHz	21
5825MHz	21
802.11be EHT40_Nss1,(MCS0)_4TX	-
5190MHz	17
5230MHz	19
5755MHz	20
5795MHz	21
802.11be EHT80_Nss1,(MCS0)_4TX	-
5210MHz	17
5775MHz	19






Beamforming

Mode	Power Setting
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-
5180MHz	17.5
5200MHz	18.5
5240MHz	21
5745MHz	20.5
5785MHz	20.5
5825MHz	21
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-
5190MHz	17
5230MHz	19
5755MHz	20
5795MHz	20.5
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-
5210MHz	17
5775MHz	19

## 2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	CTX
1	Adapter Mode

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth Maximum Conducted Output Power Peak Power Spectral Density
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests			
Tests Item	Unwanted Emissions		
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.		
Operating Mode < 1GHz	CTX		
1	Adapter Mode		
Operating Mode > 1GHz	CTX		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			
Worst Planes of EUT			V

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis
Operating Mode	CTX
1	WLAN 2.4GHz + WLAN 5GHz+ WLAN 6GHz + Bluetooth
Refer to Sporton Test Report No.: FA381814 for Co-location RF Exposure Evaluation and Appendix F for Radiated Emission Co-location.	



### 2.3 Accessories

Accessories				
Bracket	Brand Name	Dragonjet	Model Name	6301A6543000


Reminder: Regarding to more detail and other information, please refer to user manual.


### 2.4 Support Equipment

Support Equipment – AC Conduction and Radiated					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	AC Adapter	ASIAN POWER DEVICES INC.	WA-48A12R	-	Provided by Customer

Support Equipment – Conducted					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	Notebook	DELL	E5410	-	-
2	Adapter for NB	DELL	HA65NM130	-	-
3	AC Adapter	ASIAN POWER DEVICES INC.	WA-48A12R	-	Provided by Customer

## 2.5 Test Setup Diagram

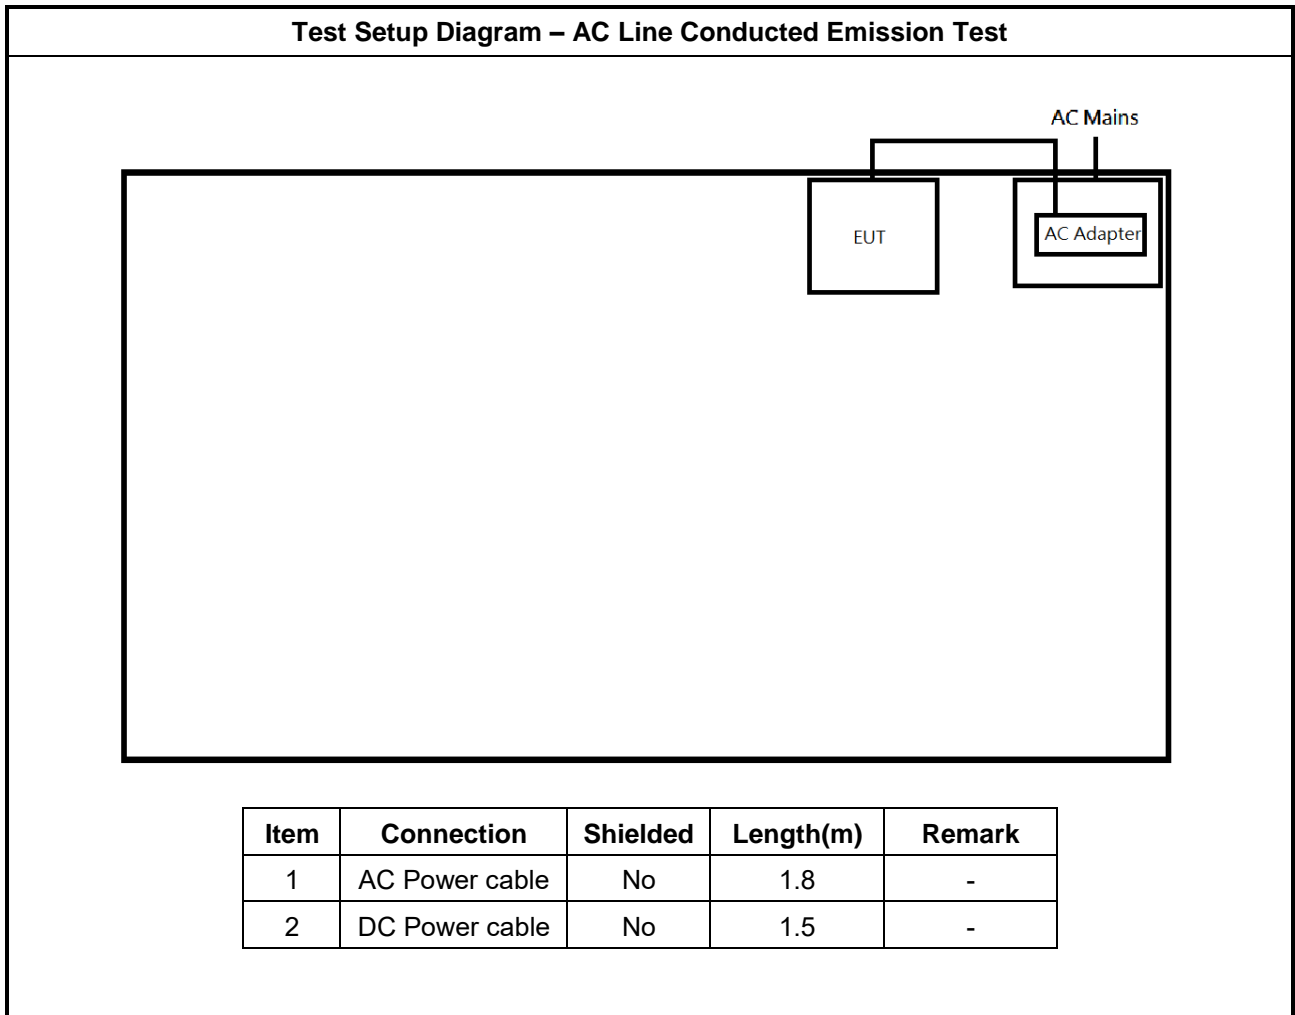

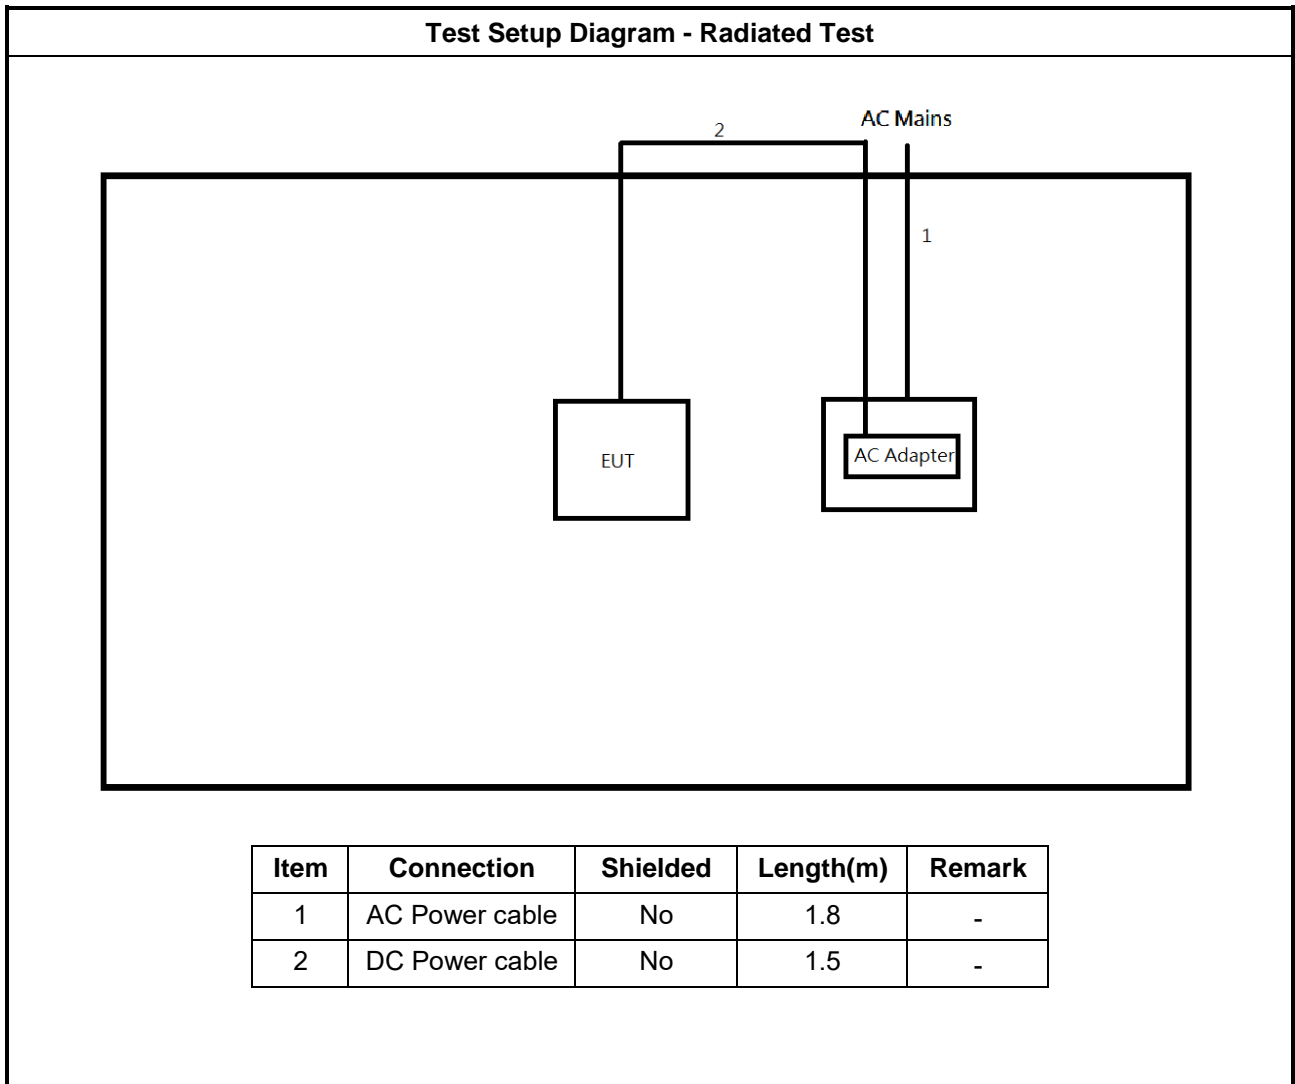

### 3 Transmitter Test Result

#### 3.1 AC Power-line Conducted Emissions

##### 3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.

##### 3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

##### 3.1.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.


##### 3.1.4 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Raw(Read Level) + LISN(LISN Factor) + CL(Cable Loss) + AT(Attenuator).



### 3.1.5 Test Setup

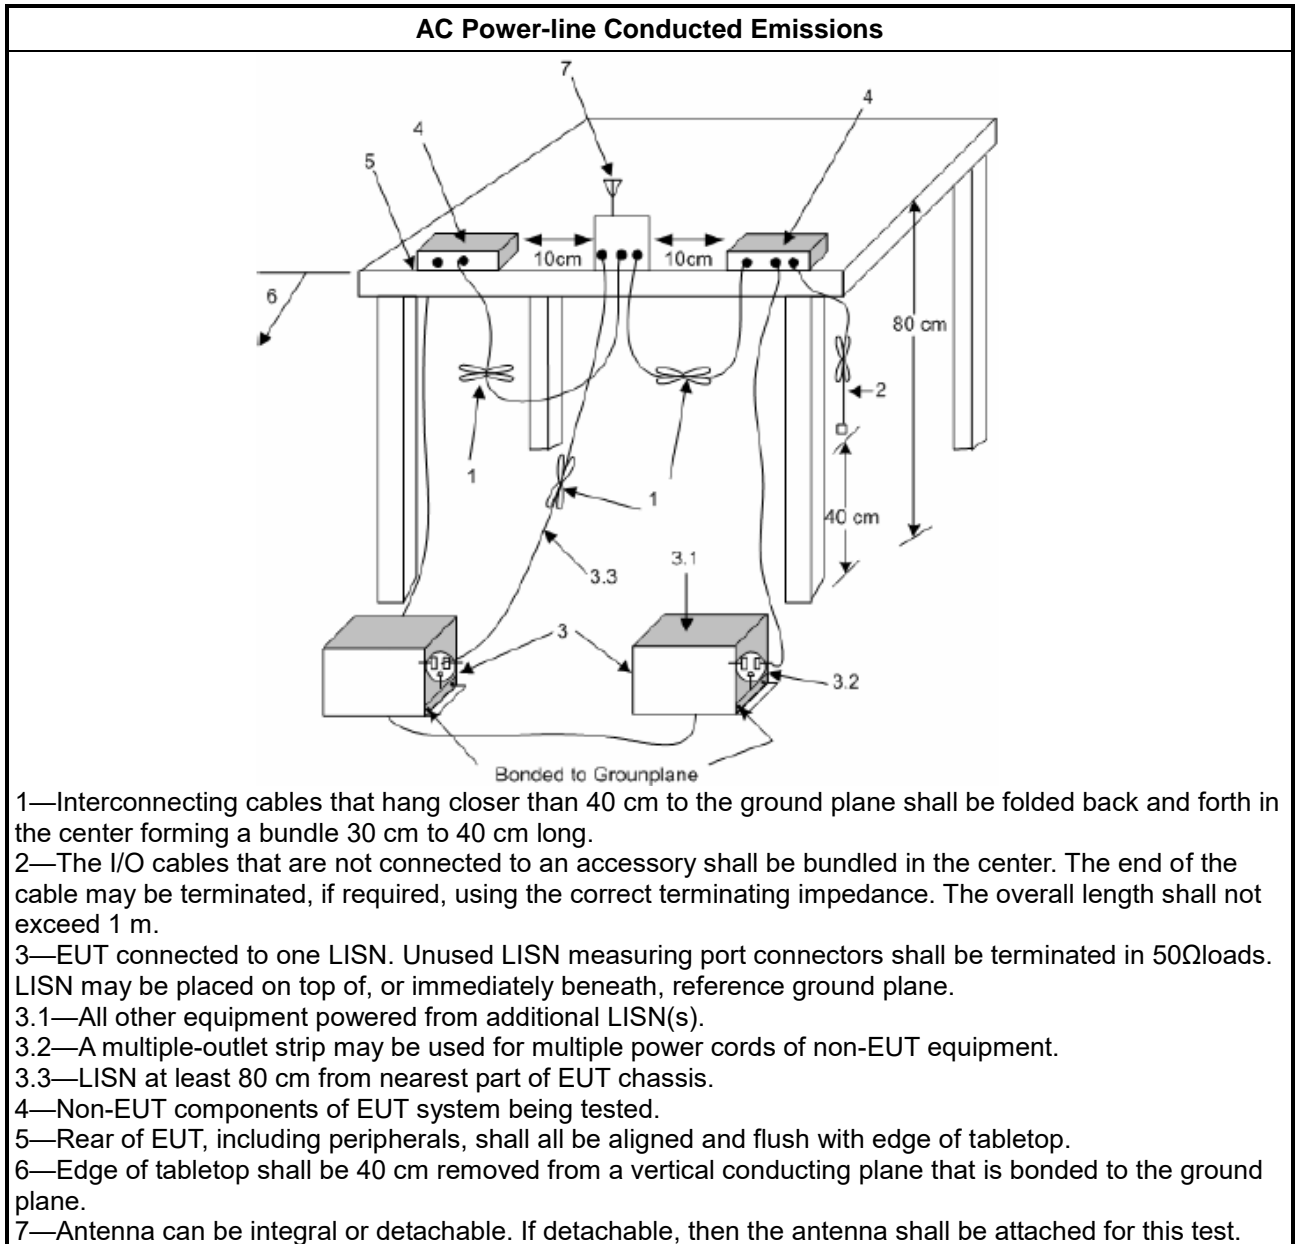

### 3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

### 3.2 Emission Bandwidth

#### 3.2.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
<b>UNII Devices</b>	
<input checked="" type="checkbox"/>	For the 5.15-5.25 GHz band, N/A
<input type="checkbox"/>	For the 5.25-5.35 GHz band, N/A
<input type="checkbox"/>	For the 5.47-5.725 GHz band, N/A
<input checked="" type="checkbox"/>	For the 5.725-5.85 GHz band, 6 dB emission bandwidth $\geq$ 500kHz.


#### 3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.2.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> <li>For the emission bandwidth shall be measured using one of the options below:</li> </ul>	
<input checked="" type="checkbox"/>	Refer as KDB 789033, clause C for EBW and clause D for OBW measurement.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.3 for occupied bandwidth testing.
<input type="checkbox"/>	Refer as IC RSS-Gen, clause 6.7 for bandwidth testing.

#### 3.2.4 Test Setup

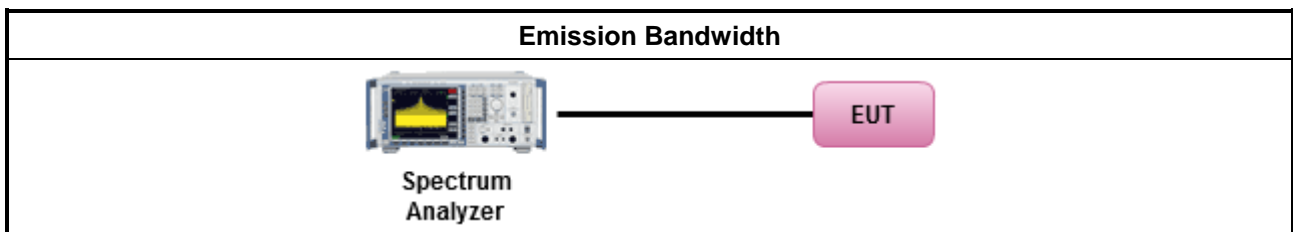

#### 3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

### 3.3 Maximum Conducted Output Power

#### 3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
<b>UNII Devices</b>	
<input checked="" type="checkbox"/> For the 5.15-5.25 GHz band:	
	<ul style="list-style-type: none"> <li>▪ Outdoor AP: the maximum conducted output power (<math>P_{Out}</math>) shall not exceed 1 W. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)</math>. e.i.r.p. at any elevation angle above 30 degrees <math>\leq 125</math>mW [21dBm]</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Indoor AP: the maximum conducted output power (<math>P_{Out}</math>) shall not exceed 1 W. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)</math></li> </ul>
	<ul style="list-style-type: none"> <li>▪ Point-to-point AP: the maximum conducted output power (<math>P_{Out}</math>) shall not exceed 1 W. If <math>G_{TX} &gt; 23</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 23)</math>.</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Mobile or Portable Client: the maximum conducted output power (<math>P_{Out}</math>) shall not exceed 250 mW. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 24 - (G_{TX} - 6)</math>.</li> </ul>
<input type="checkbox"/> For the 5.25-5.35 GHz band, the maximum conducted output power ( $P_{Out}$ ) shall not exceed 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$ .	
<input type="checkbox"/> For the 5.47-5.725 GHz band, the maximum conducted output power ( $P_{Out}$ ) shall not exceed 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$ .	
<input checked="" type="checkbox"/> For the 5.725-5.85 GHz band:	
	<ul style="list-style-type: none"> <li>▪ Point-to-multipoint systems (P2M): the maximum conducted output power (<math>P_{Out}</math>) shall not exceed 1 W. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 30 - (G_{TX} - 6)</math>.</li> </ul>
	<ul style="list-style-type: none"> <li>▪ Point-to-point systems (P2P): the maximum conducted output power (<math>P_{Out}</math>) shall not exceed 1 W.</li> </ul>
$P_{Out}$ = maximum conducted output power in dBm, $G_{TX}$ = the maximum transmitting antenna directional gain in dBi.	


### 3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.3.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> <li>Maximum Conducted Output Power</li> </ul>	
	Duty cycle $\geq 98\%$
<input type="checkbox"/>	Refer as KDB 789033, clause E Method SA-2 (spectral trace averaging).
	Duty cycle $< 98\%$
<input type="checkbox"/>	Refer as KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
Wideband RF power meter and average over on/off periods with duty factor	
<input checked="" type="checkbox"/>	Refer as KDB 789033, clause E Method PM (using an RF average power meter).
<ul style="list-style-type: none"> <li>For conducted measurement.</li> </ul>	
	<ul style="list-style-type: none"> <li>If the EUT supports multiple transmit chains using options given below: Refer as KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.</li> </ul>
	<ul style="list-style-type: none"> <li>If multiple transmit chains, EIRP calculation could be following as methods:  <math>P_{total} = P_1 + P_2 + \dots + P_n</math>                      (calculated in linear unit [mW] and transfer to log unit [dBm])  <math>EIRP_{total} = P_{total} + DG</math> </li> </ul>

### 3.3.4 Test Setup

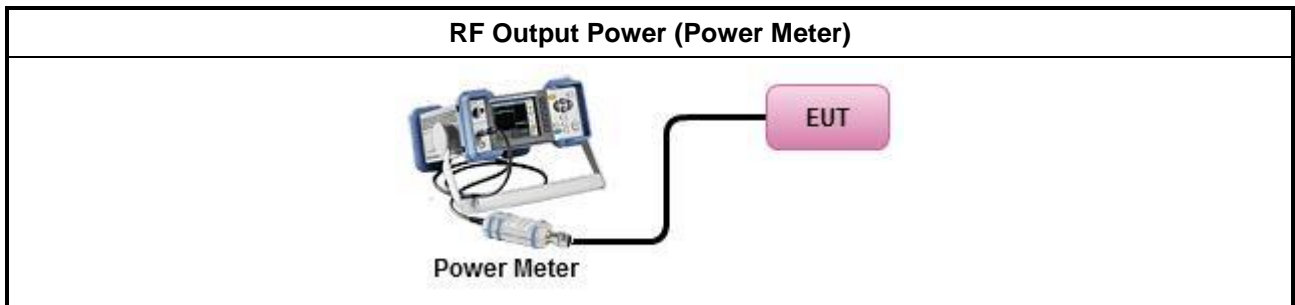

### 3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C



### 3.4 Peak Power Spectral Density

#### 3.4.1 Peak Power Spectral Density Limit

Peak Power Spectral Density Limit	
<b>UNII Devices</b>	
<input checked="" type="checkbox"/> For the 5.15-5.25 GHz band:	
<input type="checkbox"/>	<ul style="list-style-type: none"> <li>▪ Outdoor AP: the peak power spectral density (PPSD) shall not exceed 17dBm/MHz. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 17 - (G_{TX} - 6)</math>.</li> </ul>
<input type="checkbox"/>	<ul style="list-style-type: none"> <li>▪ Indoor AP: the peak power spectral density (PPSD) shall not exceed 17dBm/MHz. If <math>G_{TX} &gt; 6</math> dBi, then <math>P_{Out} = 17 - (G_{TX} - 6)</math>.</li> </ul>
<input type="checkbox"/>	<ul style="list-style-type: none"> <li>▪ Point-to-point AP: the peak power spectral density (PPSD) shall not exceed 17dBm/MHz. If <math>G_{TX} &gt; 23</math> dBi, then <math>P_{Out} = 17 - (G_{TX} - 23)</math>.</li> </ul>
<input type="checkbox"/>	<ul style="list-style-type: none"> <li>▪ Mobile or Portable Client: the peak power spectral density (PPSD) <math>\leq 11</math> dBm/MHz. If <math>G_{TX} &gt; 6</math> dBi, then <math>PPSD = 11 - (G_{TX} - 6)</math>.</li> </ul>
<input type="checkbox"/> For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) $\leq 11$ dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$ .	
<input type="checkbox"/> For the 5.47-5.725 GHz band, the peak power spectral density (PPSD) $\leq 11$ dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$ .	
<input checked="" type="checkbox"/> For the 5.725-5.85 GHz band:	
<input type="checkbox"/>	<ul style="list-style-type: none"> <li>▪ Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) <math>\leq 30</math> dBm/500kHz. If <math>G_{TX} &gt; 6</math> dBi, then <math>PPSD = 30 - (G_{TX} - 6)</math>.</li> </ul>
<input type="checkbox"/>	<ul style="list-style-type: none"> <li>▪ Point-to-point systems (P2P): the peak power spectral density (PPSD) <math>\leq 30</math> dBm/500kHz.</li> </ul>
<p><b>PPSD</b> = peak power spectral density that he same method as used to determine the conducted output power shall be used to determine the power spectral density. And power spectral density in dBm/MHz</p> <p><b>G<sub>TX</sub></b> = the maximum transmitting antenna directional gain in dBi.</p>	


### 3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.4.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> <li>Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:</li> </ul>	
<input type="checkbox"/>	Refer as KDB 789033, F)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth Duty cycle ≥ 98%
<input type="checkbox"/>	Refer as KDB 789033, clause E Method SA-2 (spectral trace averaging). Duty cycle < 98%
<input checked="" type="checkbox"/>	Refer as KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
<ul style="list-style-type: none"> <li>For conducted measurement.</li> </ul>	
<ul style="list-style-type: none"> <li>If the EUT supports multiple transmit chains using options given below:               <ul style="list-style-type: none"> <li>Measure and sum the spectra across the outputs. Refer as KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.</li> </ul> </li> </ul>	
<ul style="list-style-type: none"> <li>If multiple transmit chains, EIRP PPSD calculation could be following as methods:  <math>PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n</math>            (calculated in linear unit [mW] and transfer to log unit [dBm])  <math>EIRP_{total} = PPSD_{total} + DG</math> </li> </ul>	

### 3.4.4 Test Setup

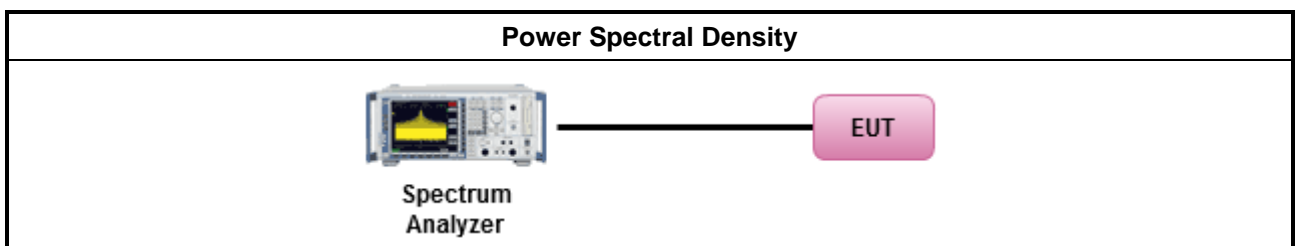

### 3.4.5 Test Result of Peak Power Spectral Density

Refer as Appendix D

### 3.5 Unwanted Emissions

#### 3.5.1 Transmitter Radiated Unwanted Emissions Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.725 - 5.85 GHz	5.650-5700 GHz: e.i.r.p. -27 ~ 10 dBm [68.2 ~ 105.2 dBuV/m@3m] 5.700-5720 GHz: e.i.r.p. 10 ~ 15.6 dBm [105.2 ~ 110.8 dBuV/m@3m] 5.720-5725 GHz: e.i.r.p. 15.6 ~ 27 dBm [110.8 ~ 122.2 dBuV/m@3m] 5.850-5.855 GHz: e.i.r.p. 27 ~ 15.6 dBm [122.2 ~ 110.8 dBuV/m@3m] 5.855-5.875 GHz: e.i.r.p. 15.6 ~ 10 dBm [110.8 ~ 105.2 dBuV/m@3m] 5.875-5.925 GHz: e.i.r.p. 10 ~ -27 dBm [105.2 ~ 68.2dBuV/m@3m] Other un-restricted band: e.i.r.p. -27 dBm [68.2 dBuV/m@3m]

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

### 3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.5.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> <li>Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).</li> </ul>	
<ul style="list-style-type: none"> <li>The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].</li> </ul>	
<ul style="list-style-type: none"> <li>For the transmitter unwanted emissions shall be measured using following options below:           <ul style="list-style-type: none"> <li>Refer as KDB 789033, clause G)2) for unwanted emissions into non-restricted bands.</li> <li>Refer as KDB 789033, clause G)1) for unwanted emissions into restricted bands.</li> <li><input checked="" type="checkbox"/> Refer as KDB 789033, G)6) Method VB (ANSI C63.10, clause 4.1.4.2.3), Reduced VBW.</li> <li><input checked="" type="checkbox"/> Refer as KDB 789033, clause G)5) (ANSI C63.10, clause 4.1.4.2.2), measurement procedure peak limit.</li> </ul> </li> </ul>	
<ul style="list-style-type: none"> <li>For radiated measurement.           <ul style="list-style-type: none"> <li>Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.</li> <li>Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.</li> <li>Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.</li> </ul> </li> </ul>	
<ul style="list-style-type: none"> <li>The any unwanted emissions level shall not exceed the fundamental emission level.</li> <li>All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.</li> </ul>	
<ul style="list-style-type: none"> <li>Use the following spectrum analyzer settings:           <ul style="list-style-type: none"> <li>Set RBW=100 kHz for <math>f &lt; 1</math> GHz; VBW=3 * RBW; Sweep = auto; Detector function = peak; Trace = max hold.</li> <li>Set RBW = 1 MHz, VBW= 3MHz for <math>f \geq 1</math> GHz for peak measurement. For average measurement, refer as 1.1.4.</li> </ul> </li> </ul>	
<ul style="list-style-type: none"> <li>KDB 414788 Open-Field Test Sites and Chamber Correlation Justification.           <ul style="list-style-type: none"> <li>Based on FCC 15.31(f)(2): measurements may be performed at a distance closer than that specified in regulations; however, an attempt should be made to avoid making measurements in the near field.</li> <li>Open-field site and chamber correlation testing had been performed and chamber measured test result is the worst case test result.</li> </ul> </li> </ul>	


### 3.5.4 Measurement Results Calculation


The measured Level is calculated using:

Corrected Reading: Raw(Read Level) + AF(Antenna Factor) + CL(Cable Loss) - PA(Preamplifier Factor)



### 3.5.5 Test Setup

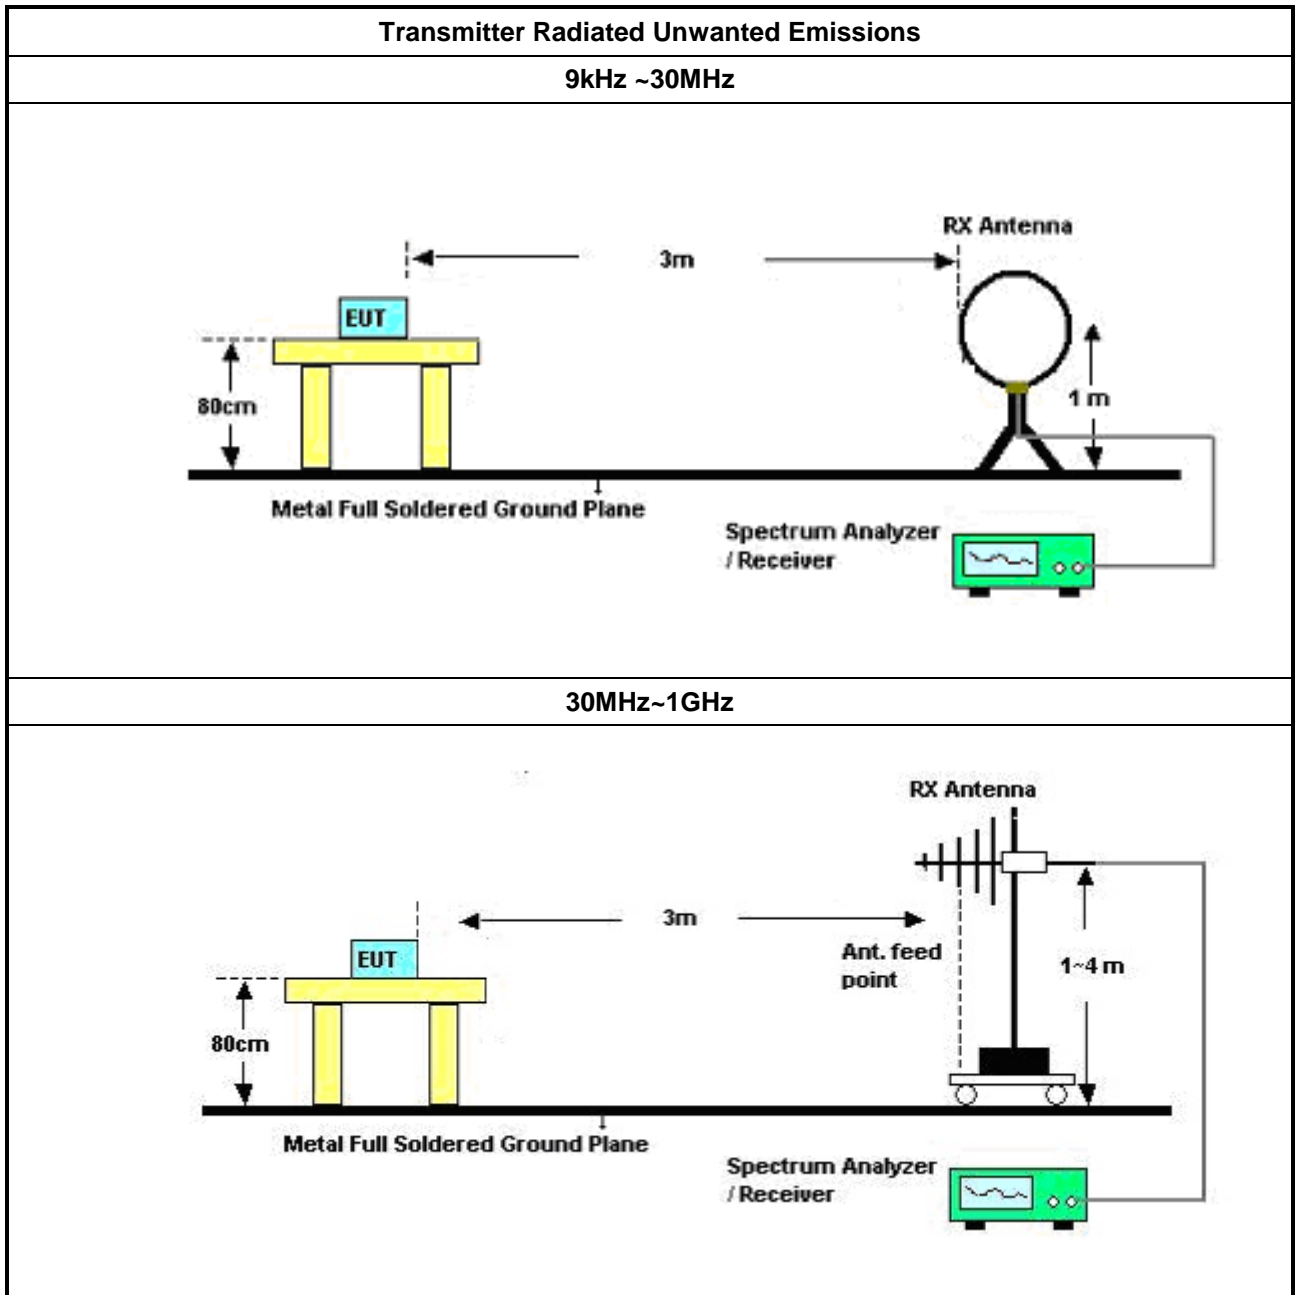

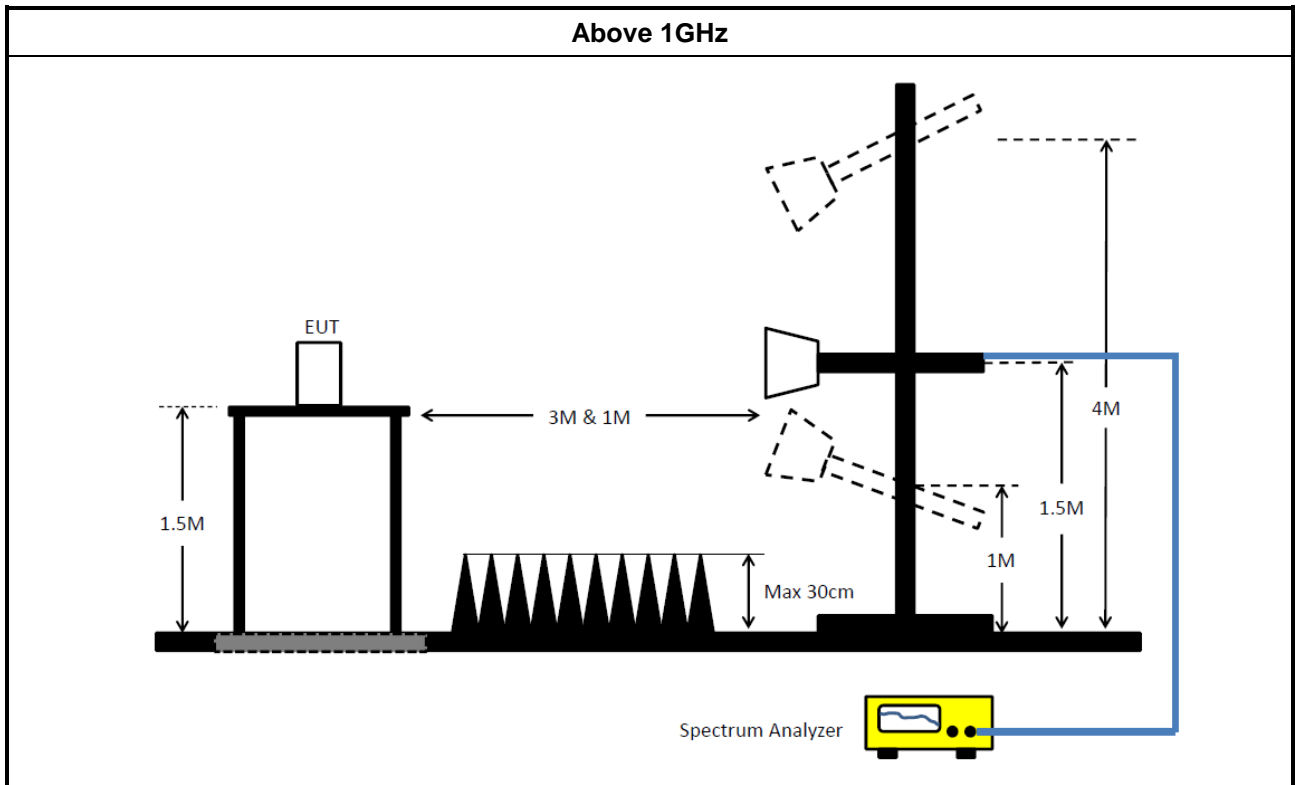

### 3.5.6 Transmitter Unwanted Emissions (Below 30MHz)

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

### 3.5.7 Test Result of Transmitter Unwanted Emissions

Refer as Appendix E

## 4 Test Equipment and Calibration Data

### Instrument for AC Conduction

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR	102051	9kHz ~ 3.6GHz	16/May/2023	15/May/2024
Two-Line V-Network	R&S	ENV 216	100003	9kHz ~ 30MHz	07/Sep/2023	06/Sep/2024
RF Cable 5m	TITAN	TITAN	CO04-cable-01	9 kHz~200MHz	28/Feb/2023	27/Feb/2024
Impuls Begrenzer Pulse Limiter	SCHWARZBECK	VTSD 9561-F	9561-F041	9kHz ~ 30MHz	18/Oct/2023	17/Oct/2024
Software	Sporton	SENSE-EMI	V5.11.3	-	NCR	NCR

NCR: No Calibration Required

### Instrument for Conducted Test

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
Signal Analyzer	R&S	FSV 40	101515	9kHz~40GHz	14/Feb/2023	13/Feb/2024
SMB100A Signal Generator	R&S	SMB100A	177785	1MHz~40GHz	19/Sep/2023	18/Sep/2024
Pulse Sensor	Anritsu	MA2411B	1339407	300MHz~40GHz	14/Dec/2022	13/Dec/2023
Power Meter	Anritsu	ML2495A	1517010	300MHz~40GHz	14/Dec/2022	13/Dec/2023
SENSE-15407_NII	Sporton	V5.11.13	N/A	N/A	N/A	N/A

### Instrument for Radiated Test (03CH02-HY)

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30MHz~1GHz 3m	29/Jul/2023	28/Jul/2024
EMI Test Receiver	R&S	ESR	102052	9kHz~3.6GHz	26/May/2023	25/May/2024
Signal Analyzer	R&S	FSP 40	100305	9kHz~40GHz	25/Mar/2023	24/Mar/2024
Loop Antenna	TESEQ	HLA 6120	31244	9kHz~30MHz	23/Mar/2023	22/Mar/2024
Bilog Antenna & 5dB Attenuator	SCHAFFNER / MTJ	CBL 6112B / MTJ6102-05	2723/2	30MHz~1GHz	27/Aug/2023	26/Aug/2024
RF Cable	MVE	400LL+SN 200207	03CH02-cable-02	9kHz~30MHz	20/Dec/2022	19/Dec/2023
RF Cable	MVE	400LL+SN 200207	03CH02-cable-02	30MHz~1GHz	20/Dec/2022	19/Dec/2023
Amplifier	Agilent	8447D	2944A11149	100kHz~1.3GHz	27/Jun/2023	26/Jun/2024
SENSE-15407-NII	Sporton	V5.11.13	NA	NA	NA	NA



**Instrument for Radiated Test (03CH24-HY)**

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH24-HY	1GHz~18GHz 3m	03/Aug/2023	02/Aug/2024
Signal Analyzer	ROHDE&SCHWARZ	FSV3044	101345	10Hz~44GHz	10/Aug/2023	09/Aug/2024
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	02744	1GHz~18GHz	17/Aug/2023	16/Aug/2024
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	01248	18GHz~40GHz	21/Aug/2023	20/Aug/2024
RF Cable	HUBER+SUHNER	SUOFLEX 104	CB002	1GHz~40GHz	21/Jul/2023	20/Jul/2024
Amplifier	EM	EM01G18G	060870	1GHz ~18GHz	10/Aug/2023	09/Aug/2024
Microwave Premplifier	EMC INSTRUMENTS	EM18G40G	060604	18GHz ~ 40GHz	16/Mar/2023	15/Mar/2024
SENSE-15407-NII	Sporton	V5.11.13	NA	NA	NA	NA

**Instrument for Radiated Test (03CH25-HY)**

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH25-HY	1GHz~18GHz 3m	09/Aug/2023	08/Aug/2024
Signal Analyzer	ROHDE&SCHWARZ	FSV40	101500	10Hz ~ 40 GHz	26/Oct/2023	25/Oct/2024
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	02876	1GHz~18GHz	12/Jul/2023	11/Jul/2024
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA 9170154	18GHz ~ 40GHz	01/Jun/2023	31/May/2024
RF Cable	HUBER+SUHNER	SUOFLEX 104	CB007	1GHz~40GHz	24/Apr/2023	23/Apr/2024
Preamplifier	SGH	PRAMP 118-H	20230515-3	1GHz ~18GHz	25/May/2023	24/May/2024
Microwave Premplifier	EMC INSTRUMENTS	EM18G40G	060604	18GHz ~ 40GHz	16/Mar/2023	15/Mar/2024
SENSE-EMI	Sporton	V5.11.6	NA	NA	NA	NA



## Conducted Emissions at Powerline\_Non-Beamforming\_Radio 2 Appendix A

---

### Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	QP	151.202k	48.95	65.92	-16.97	Neutral




**Conducted Emissions at Powerline\_Non-Beamforming\_Radio 2 Appendix A**

**Result**


Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	QP	158.622k	47.73	65.54	-17.81	Line
Mode 1	Pass	AV	158.622k	29.89	55.54	-25.65	Line
Mode 1	Pass	QP	265.468k	36.14	61.26	-25.12	Line
Mode 1	Pass	AV	265.468k	24.30	51.26	-26.96	Line
Mode 1	Pass	QP	408.557k	29.48	57.68	-28.20	Line
Mode 1	Pass	AV	408.557k	21.37	47.68	-26.31	Line
Mode 1	Pass	QP	649.178k	28.95	56.00	-27.05	Line
Mode 1	Pass	AV	649.178k	24.33	46.00	-21.67	Line
Mode 1	Pass	QP	2.754M	30.20	56.00	-25.80	Line
Mode 1	Pass	AV	2.754M	25.75	46.00	-20.25	Line
Mode 1	Pass	QP	13.761M	19.95	60.00	-40.05	Line
Mode 1	Pass	AV	13.761M	17.28	50.00	-32.72	Line
Mode 1	Pass	QP	151.202k	48.95	65.92	-16.97	Neutral
Mode 1	Pass	AV	151.202k	31.95	55.92	-23.97	Neutral
Mode 1	Pass	QP	201.551k	42.36	63.55	-21.19	Neutral
Mode 1	Pass	AV	201.551k	26.23	53.55	-27.32	Neutral
Mode 1	Pass	QP	473.588k	27.31	56.46	-29.15	Neutral
Mode 1	Pass	AV	473.588k	20.24	46.46	-26.22	Neutral
Mode 1	Pass	QP	611.446k	27.63	56.00	-28.37	Neutral
Mode 1	Pass	AV	611.446k	23.37	46.00	-22.63	Neutral
Mode 1	Pass	QP	3.019M	27.97	56.00	-28.03	Neutral
Mode 1	Pass	AV	3.019M	24.08	46.00	-21.92	Neutral
Mode 1	Pass	QP	20.35M	24.20	60.00	-35.80	Neutral
Mode 1	Pass	AV	20.35M	21.07	50.00	-28.93	Neutral

Conducted Emissions at Powerline\_Mode 1

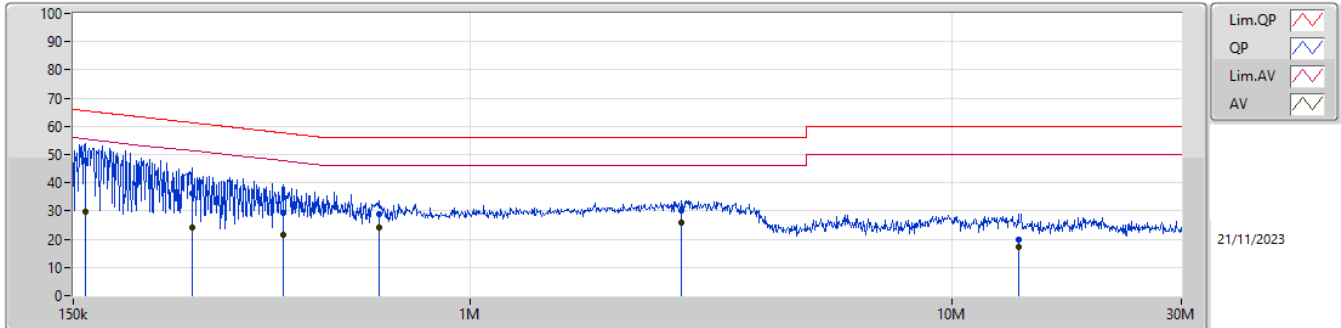

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)
QP	158.622k	47.73	65.54	-17.81	19.34	Line	-	28.39	9.57	0.03	9.74
AV	158.622k	29.89	55.54	-25.65	19.34	Line	-	10.55	9.57	0.03	9.74
QP	265.468k	36.14	61.26	-25.12	19.30	Line	-	16.84	9.56	0.03	9.71
AV	265.468k	24.30	51.26	-26.96	19.30	Line	-	5.00	9.56	0.03	9.71
QP	408.557k	29.48	57.68	-28.20	19.37	Line	-	10.11	9.57	0.04	9.76
AV	408.557k	21.37	47.68	-26.31	19.37	Line	-	2.00	9.57	0.04	9.76
QP	649.178k	28.95	56.00	-27.05	19.40	Line	-	9.55	9.57	0.05	9.78
AV	649.178k	24.33	46.00	-21.67	19.40	Line	-	4.93	9.57	0.05	9.78
QP	2.754M	30.20	56.00	-25.80	19.49	Line	-	10.71	9.59	0.10	9.80
AV	2.754M	25.75	46.00	-20.25	19.49	Line	-	6.26	9.59	0.10	9.80
QP	13.761M	19.95	60.00	-40.05	19.76	Line	-	0.19	9.71	0.23	9.82
AV	13.761M	17.28	50.00	-32.72	19.76	Line	-	-2.48	9.71	0.23	9.82

Conducted Emissions at Powerline\_Mode 1

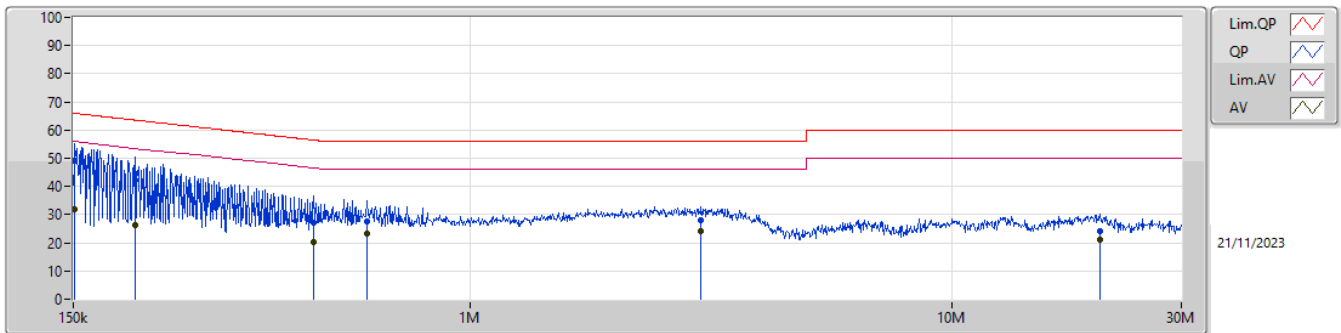

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)
QP	151.202k	48.95	65.92	-16.97	19.41	Neutral	-	29.54	9.62	0.03	9.76
AV	151.202k	31.95	55.92	-23.97	19.41	Neutral	-	12.54	9.62	0.03	9.76
QP	201.551k	42.36	63.55	-21.19	19.33	Neutral	-	23.03	9.62	0.03	9.68
AV	201.551k	26.23	53.55	-27.32	19.33	Neutral	-	6.90	9.62	0.03	9.68
QP	473.588k	27.31	56.46	-29.15	19.43	Neutral	-	7.88	9.62	0.04	9.77
AV	473.588k	20.24	46.46	-26.22	19.43	Neutral	-	0.81	9.62	0.04	9.77
QP	611.446k	27.63	56.00	-28.37	19.44	Neutral	-	8.19	9.62	0.04	9.78
AV	611.446k	23.37	46.00	-22.63	19.44	Neutral	-	3.93	9.62	0.04	9.78
QP	3.019M	27.97	56.00	-28.03	19.55	Neutral	-	8.42	9.65	0.11	9.79
AV	3.019M	24.08	46.00	-21.92	19.55	Neutral	-	4.53	9.65	0.11	9.79
QP	20.35M	24.20	60.00	-35.80	20.04	Neutral	-	4.16	9.94	0.27	9.83
AV	20.35M	21.07	50.00	-28.93	20.04	Neutral	-	1.03	9.94	0.27	9.83



Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	23.98M	17.305M	17M3D1D	21.23M	16.58M
802.11be EHT20_Nss1,(MCS0)_4TX	23.485M	19.115M	19M1D1D	21.23M	18.966M
802.11be EHT40_Nss1,(MCS0)_4TX	44.55M	37.981M	38M0D1D	40.04M	37.731M
802.11be EHT80_Nss1,(MCS0)_4TX	83.6M	77.561M	77M6D1D	81.4M	77.461M
5.725-5.85GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	16.61M	16.954M	17M0D1D	16.335M	16.602M
802.11be EHT20_Nss1,(MCS0)_4TX	19.14M	19.115M	19M1D1D	18.975M	18.966M
802.11be EHT40_Nss1,(MCS0)_4TX	38.17M	38.031M	38M0D1D	38.17M	37.881M
802.11be EHT80_Nss1,(MCS0)_4TX	78.1M	77.561M	77M6D1D	78.1M	77.461M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;  
Max-OBW = Maximum 99% occupied bandwidth;  
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;  
Min-OBW = Minimum 99% occupied bandwidth





Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	Inf	22M	16.668M	21.725M	16.58M	21.725M	16.778M	21.67M	16.712M
5200MHz	Pass	Inf	21.67M	16.712M	21.23M	16.69M	22.88M	16.822M	21.78M	16.646M
5240MHz	Pass	Inf	23.98M	16.778M	22.55M	16.58M	23.485M	17.305M	23.43M	17.019M
5745MHz	Pass	500k	16.555M	16.888M	16.61M	16.602M	16.39M	16.8M	16.445M	16.778M
5785MHz	Pass	500k	16.555M	16.668M	16.555M	16.646M	16.445M	16.954M	16.555M	16.602M
5825MHz	Pass	500k	16.555M	16.822M	16.555M	16.734M	16.39M	16.888M	16.335M	16.734M
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	Inf	22M	19.04M	21.89M	19.015M	21.34M	19.015M	21.835M	18.966M
5200MHz	Pass	Inf	21.23M	19.04M	21.505M	19.09M	21.45M	19.015M	21.945M	18.966M
5240MHz	Pass	Inf	23.485M	19.115M	21.78M	19.04M	22M	19.065M	22.33M	19.065M
5745MHz	Pass	500k	19.085M	18.991M	19.14M	19.065M	18.975M	18.991M	19.085M	18.966M
5785MHz	Pass	500k	19.14M	19.115M	19.14M	18.991M	19.14M	19.065M	19.14M	19.015M
5825MHz	Pass	500k	19.14M	19.015M	19.14M	18.991M	19.085M	19.04M	19.14M	18.991M
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	Inf	41.36M	37.831M	41.25M	37.781M	40.04M	37.881M	42.68M	37.781M
5230MHz	Pass	Inf	43.12M	37.881M	41.58M	37.731M	44.55M	37.981M	42.9M	37.881M
5755MHz	Pass	500k	38.17M	38.031M	38.17M	37.931M	38.17M	37.931M	38.17M	37.931M
5795MHz	Pass	500k	38.17M	37.981M	38.17M	37.881M	38.17M	37.881M	38.17M	37.931M
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	Inf	82.28M	77.561M	83.6M	77.561M	82.28M	77.461M	81.4M	77.461M
5775MHz	Pass	500k	78.1M	77.561M	78.1M	77.461M	78.1M	77.461M	78.1M	77.561M


Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band  
 Port X-OBW = Port X 99% occupied bandwidth

5.15-5.25GHz\_802.11a\_Nss1,(6Mbps)\_4TX

EBW

5180MHz

10/11/2023

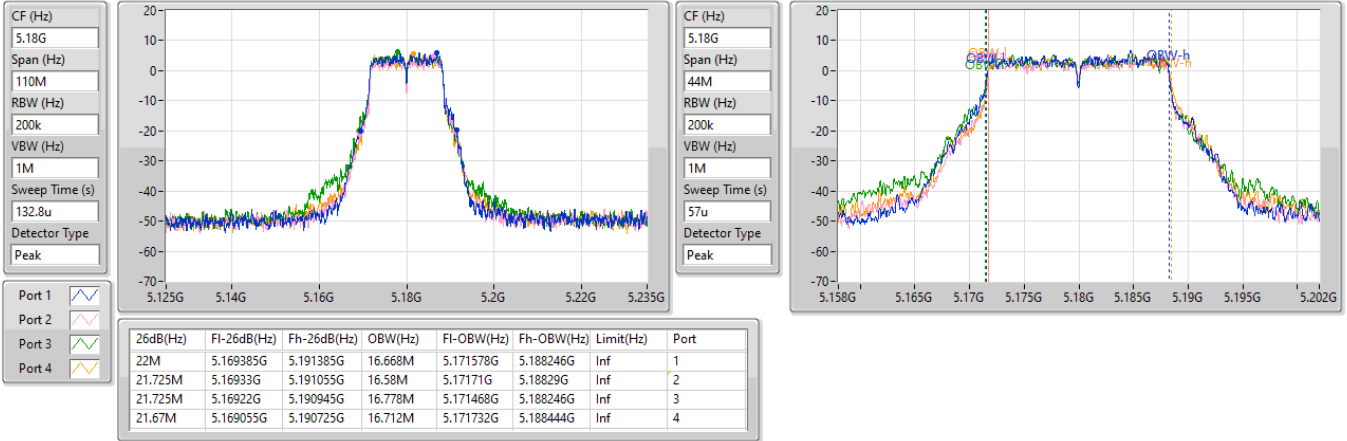


5.15-5.25GHz\_802.11a\_Nss1,(6Mbps)\_4TX

EBW

5200MHz

10/11/2023

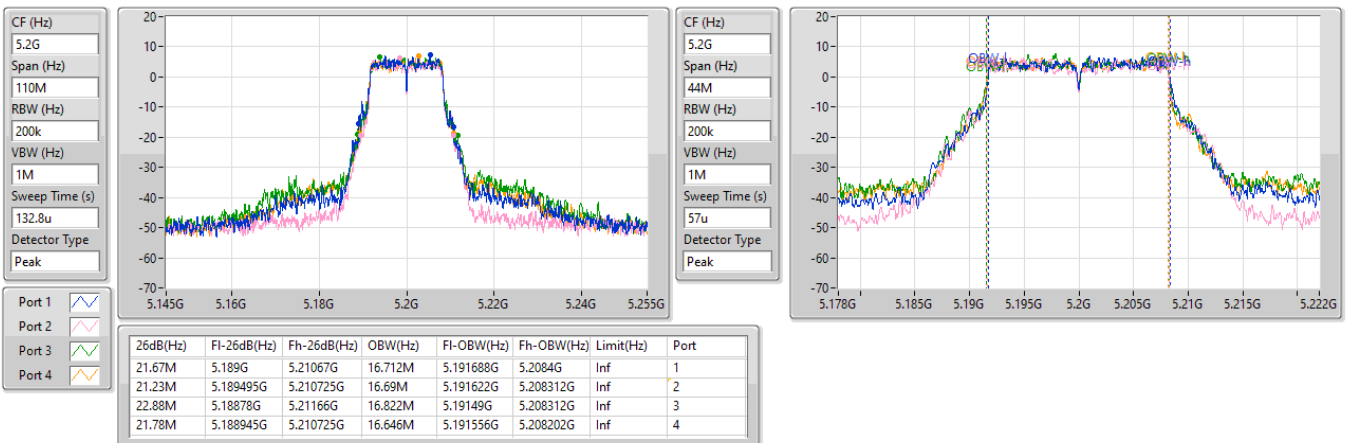

5.15-5.25GHz\_802.11a\_Nss1,(6Mbps)\_4TX

EBW

5240MHz

10/11/2023

CF (Hz)  
5.24G


Span (Hz)  
110M

RBW (Hz)  
200k

VBW (Hz)  
1M

Sweep Time (s)  
132.8u

Detector Type  
Peak

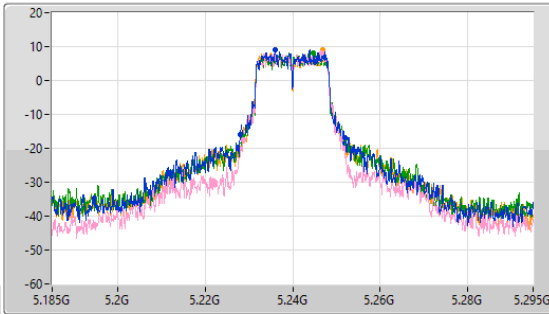

CF (Hz)  
5.24G


Span (Hz)  
44M

RBW (Hz)  
200k

VBW (Hz)  
1M

Sweep Time (s)  
57u

Detector Type  
Peak

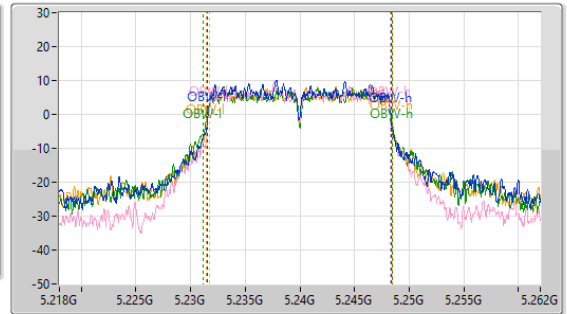

Port 1

Port 2

Port 3

Port 4

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
23.98M	5.22801G	5.25199G	16.778M	5.231578G	5.248356G	Inf	1
22.55M	5.228725G	5.251275G	16.58M	5.231688G	5.248268G	Inf	2
23.485M	5.22845G	5.251935G	17.305M	5.23116G	5.248466G	Inf	3
23.43M	5.228615G	5.252045G	17.019M	5.231468G	5.248488G	Inf	4

5.725-5.85GHz\_802.11a\_Nss1,(6Mbps)\_4TX

EBW

5745MHz

10/11/2023

CF (Hz)  
5.745G


Span (Hz)  
110M

RBW (Hz)  
100k

VBW (Hz)  
300k

Sweep Time (s)  
246.5u

Detector Type  
Peak

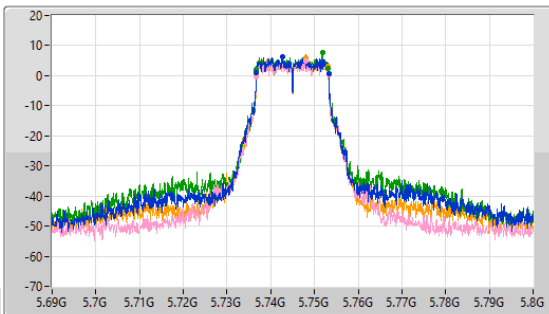

CF (Hz)  
5.745G


Span (Hz)  
44M

RBW (Hz)  
200k

VBW (Hz)  
1M

Sweep Time (s)  
57u

Detector Type  
Peak

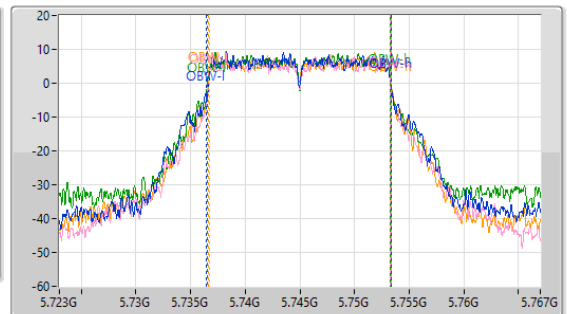



Port 1



Port 2

Port 3

Port 4

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
16.555M	5.736695G	5.75325G	16.888M	5.736468G	5.753356G	500k	1
16.61M	5.73664G	5.75325G	16.602M	5.736688G	5.75329G	500k	2
16.39M	5.73675G	5.75314G	16.8M	5.736512G	5.753312G	500k	3
16.445M	5.736695G	5.75314G	16.778M	5.7366G	5.753378G	500k	4

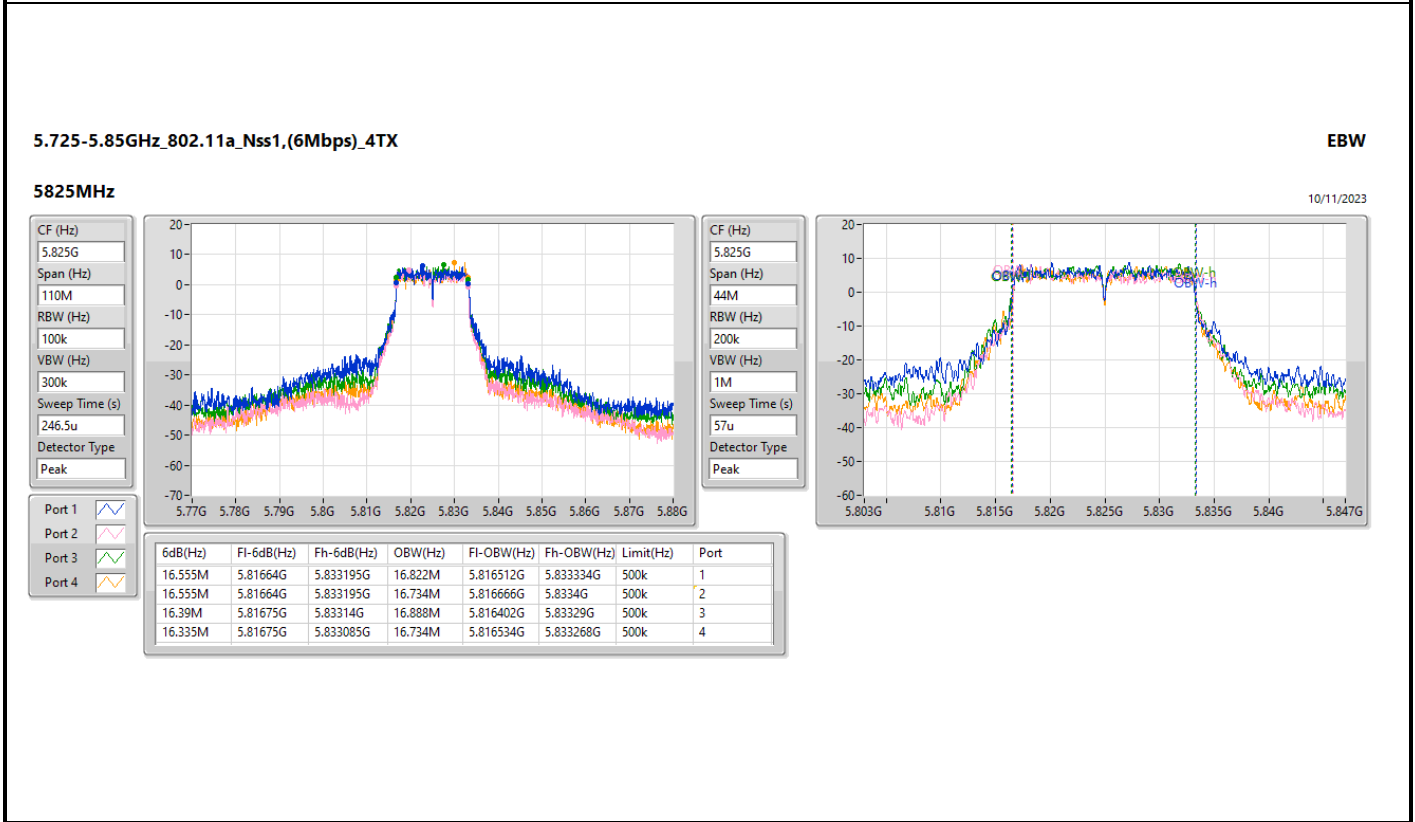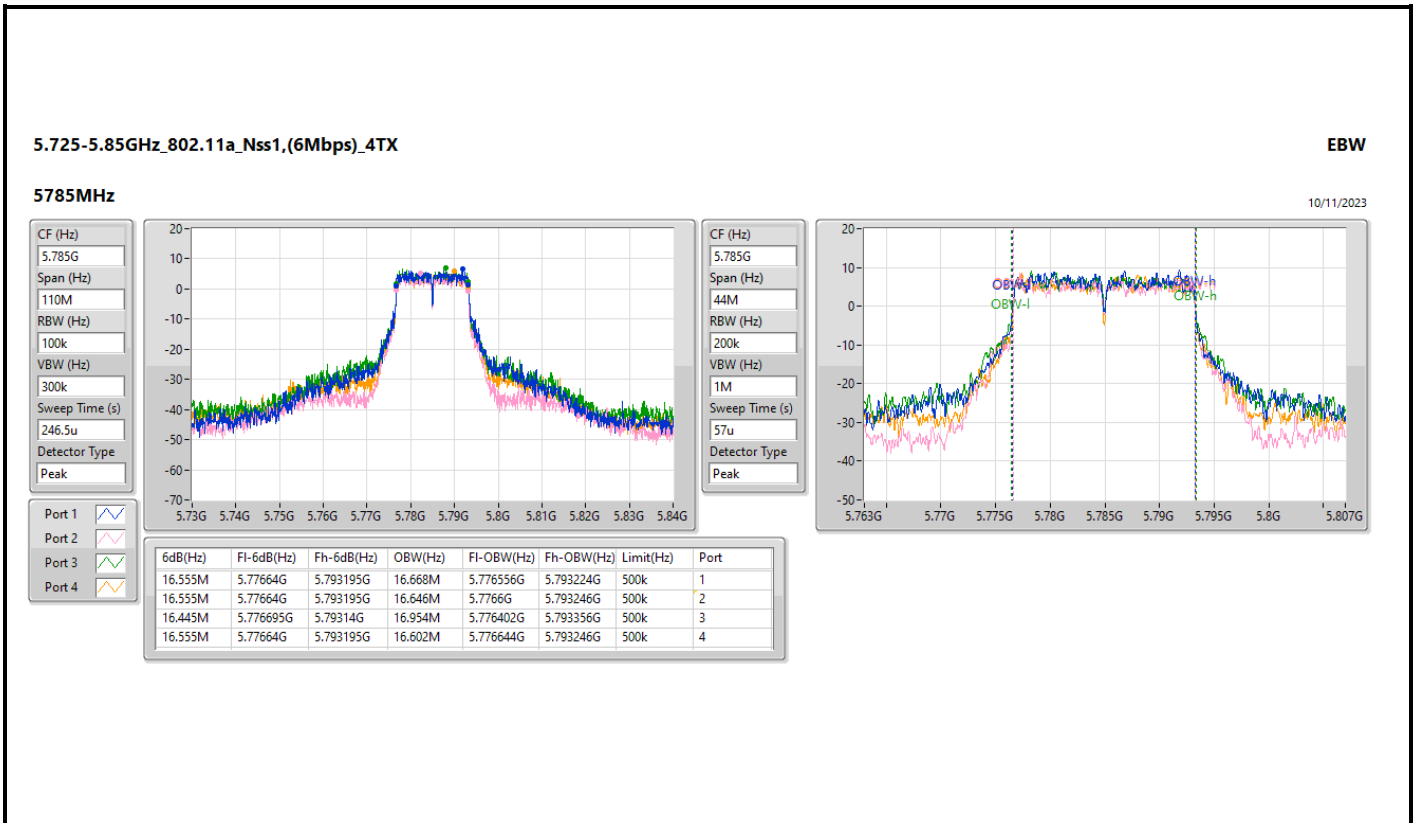

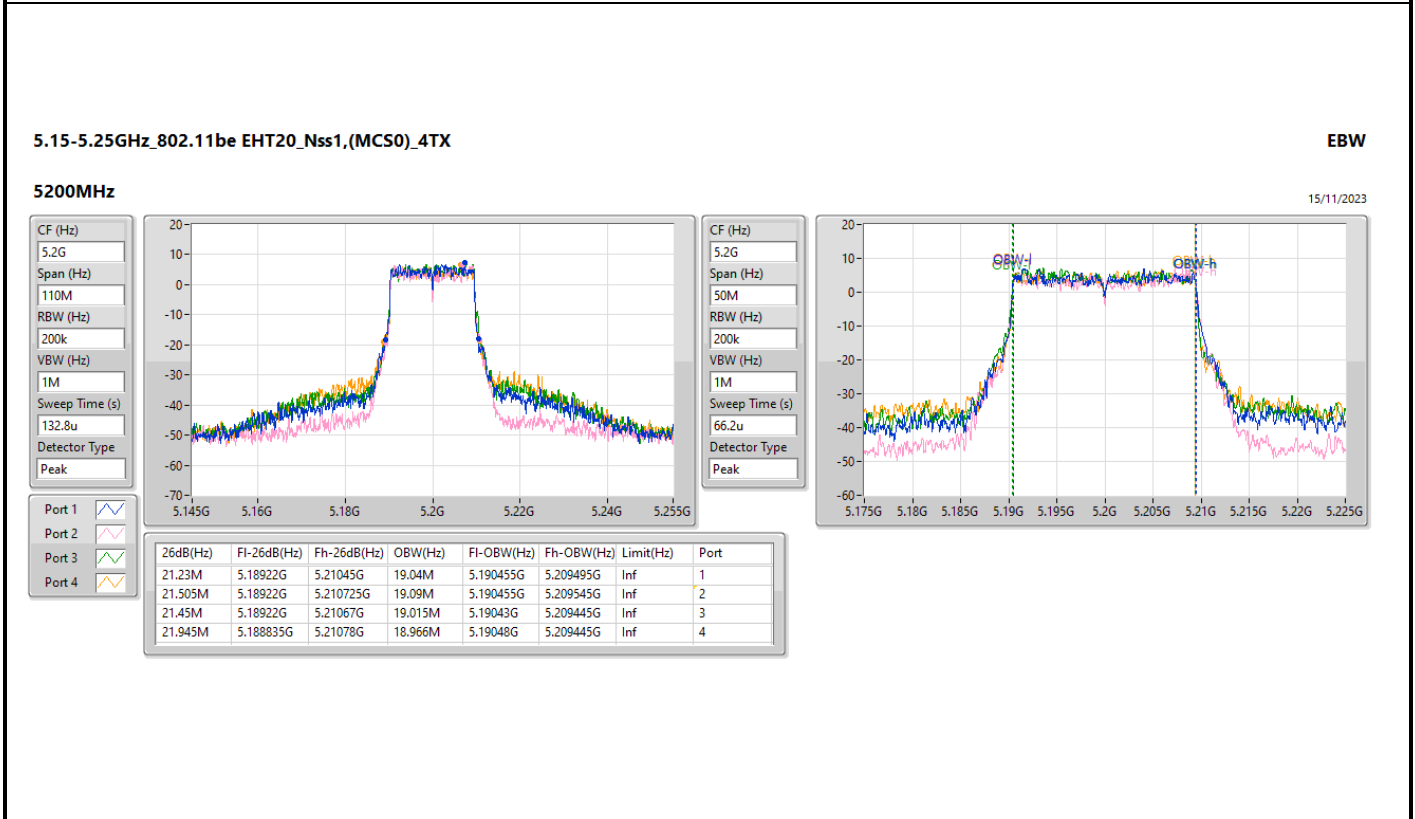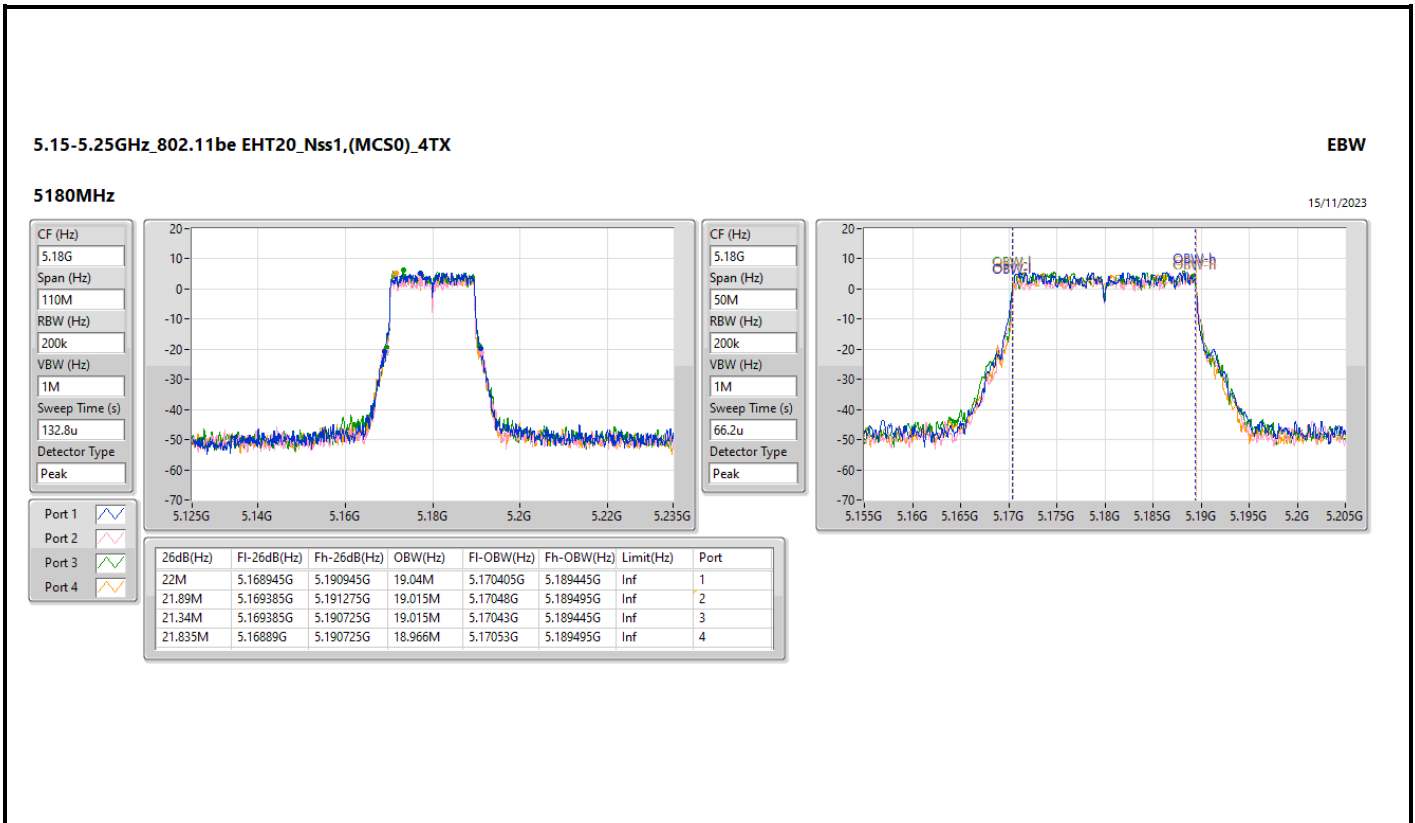


5.15-5.25GHz\_802.11be EHT20\_Nss1,(MCS0)\_4TX

EBW

5240MHz

15/11/2023

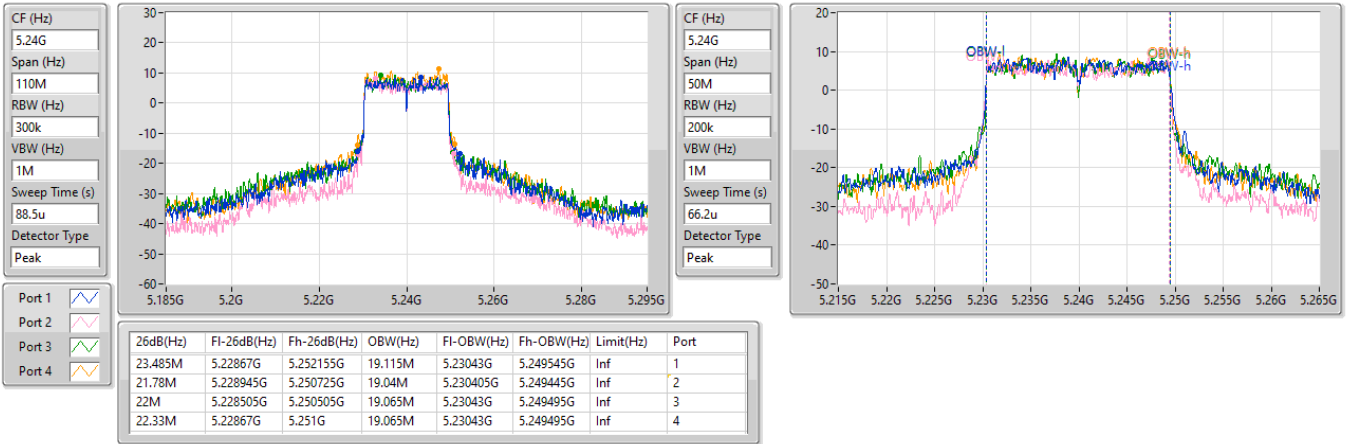




5.725-5.85GHz\_802.11be EHT20\_Nss1,(MCS0)\_4TX

EBW

5745MHz

15/11/2023

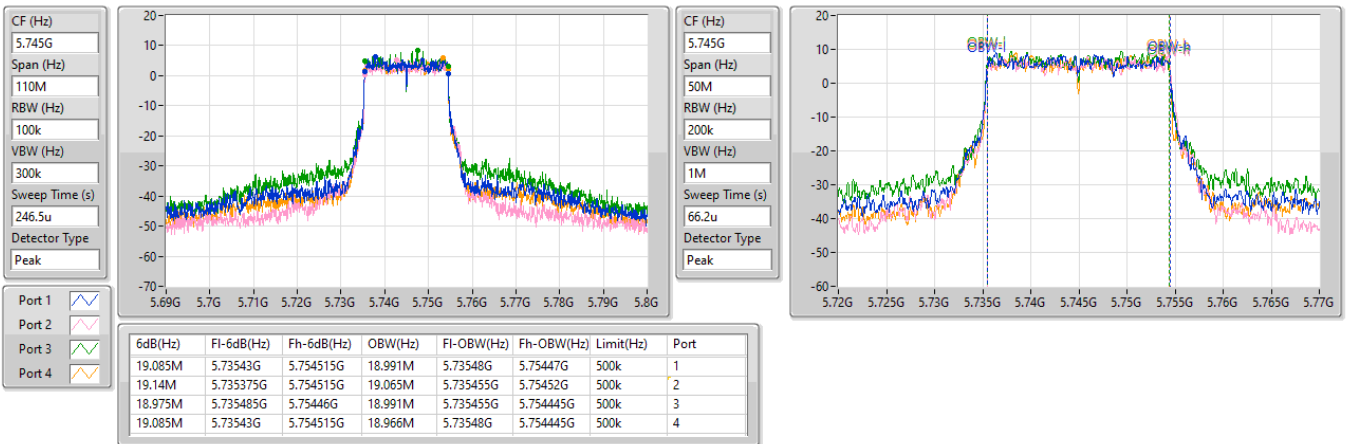

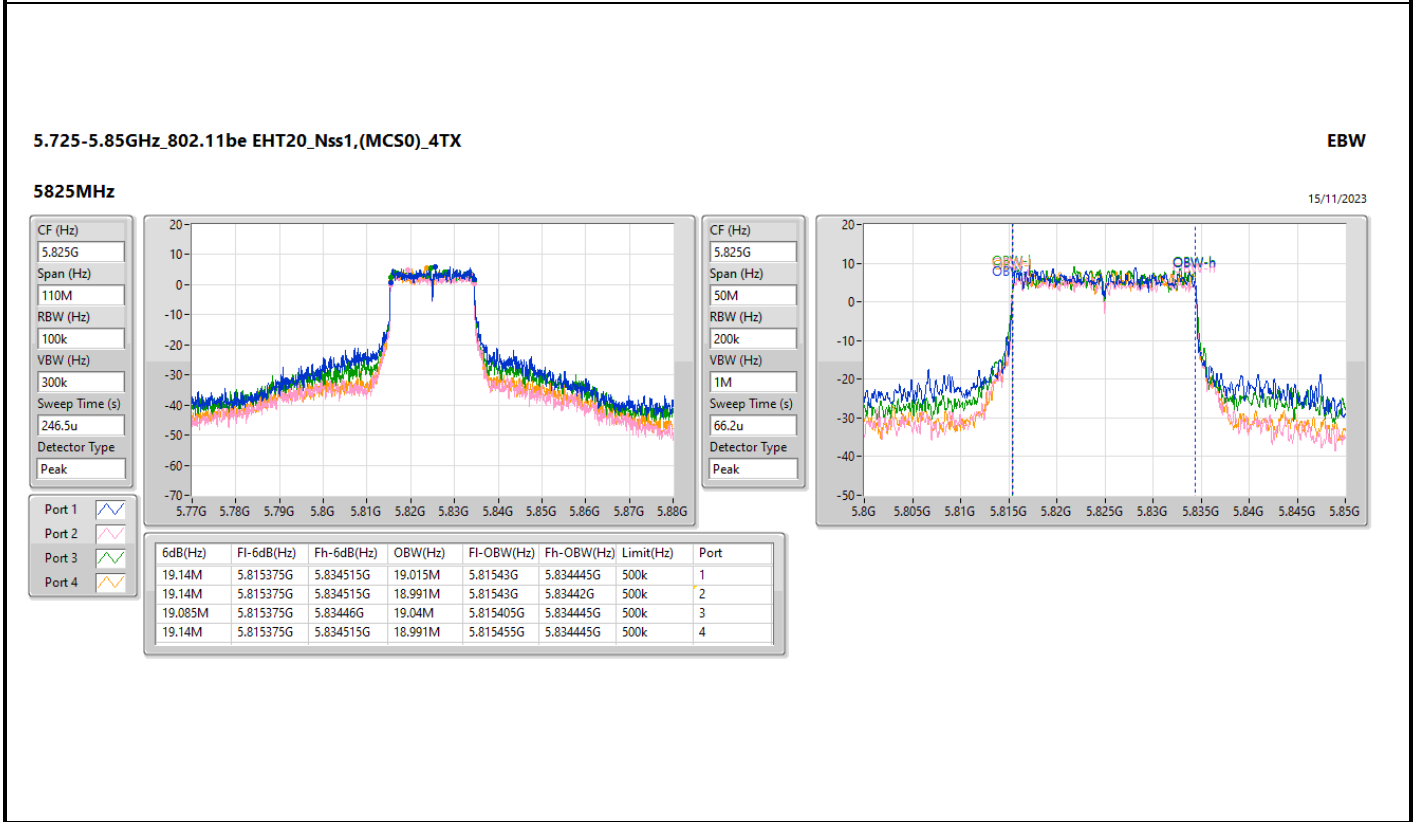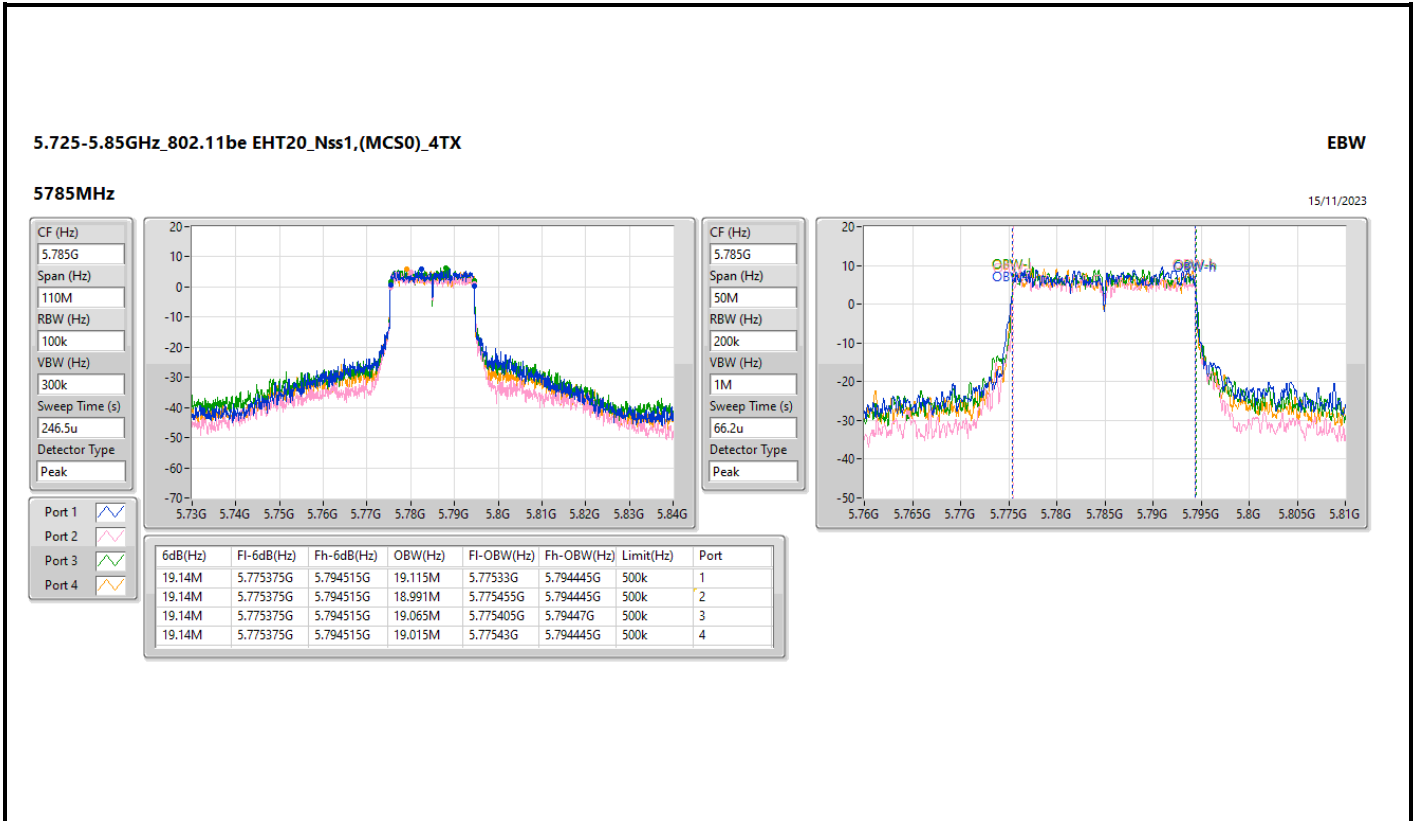


5.15-5.25GHz\_802.11be EHT40\_Nss1,(MCS0)\_4TX

EBW

5190MHz

15/11/2023

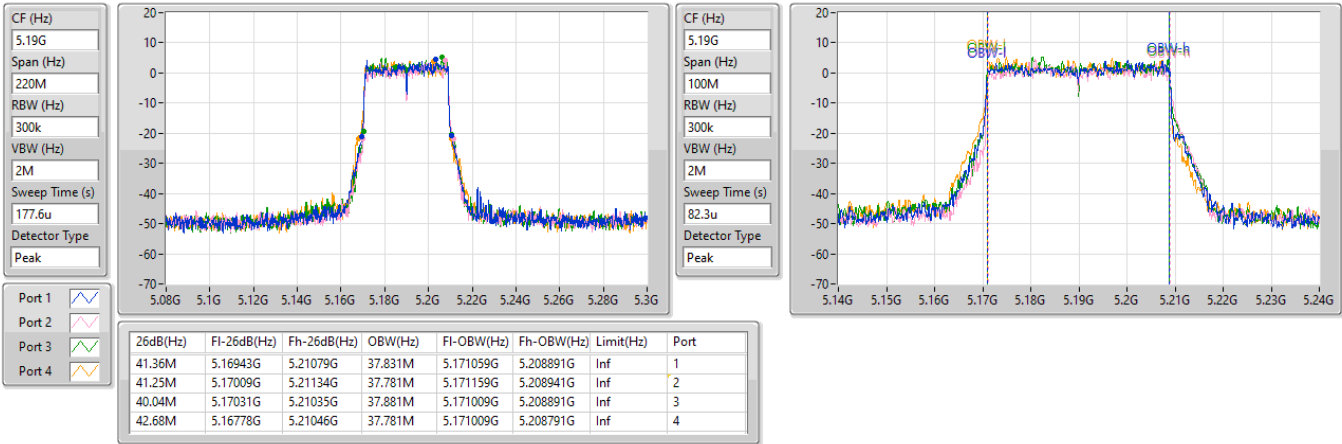


5.15-5.25GHz\_802.11be EHT40\_Nss1,(MCS0)\_4TX



EBW

5230MHz

15/11/2023

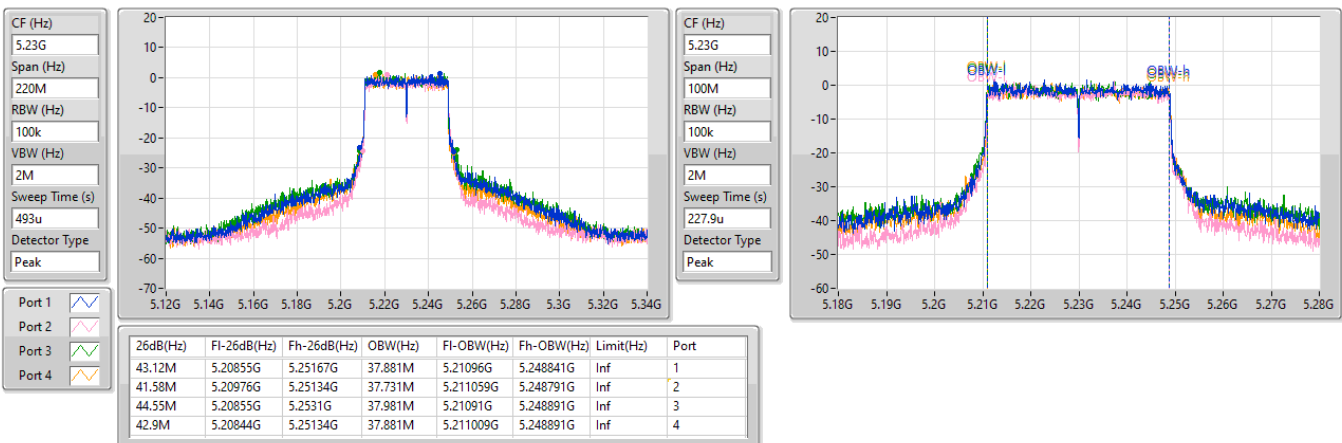



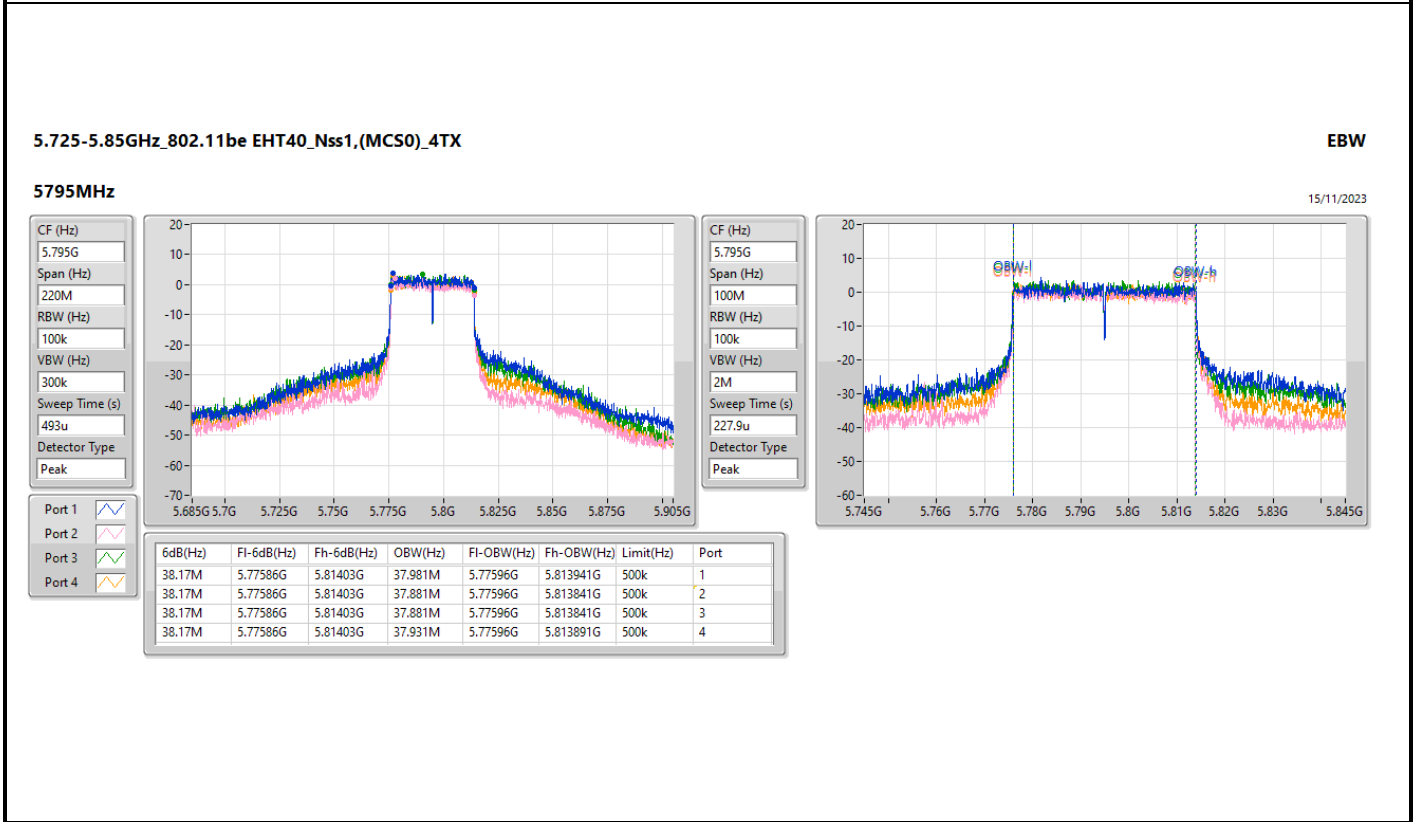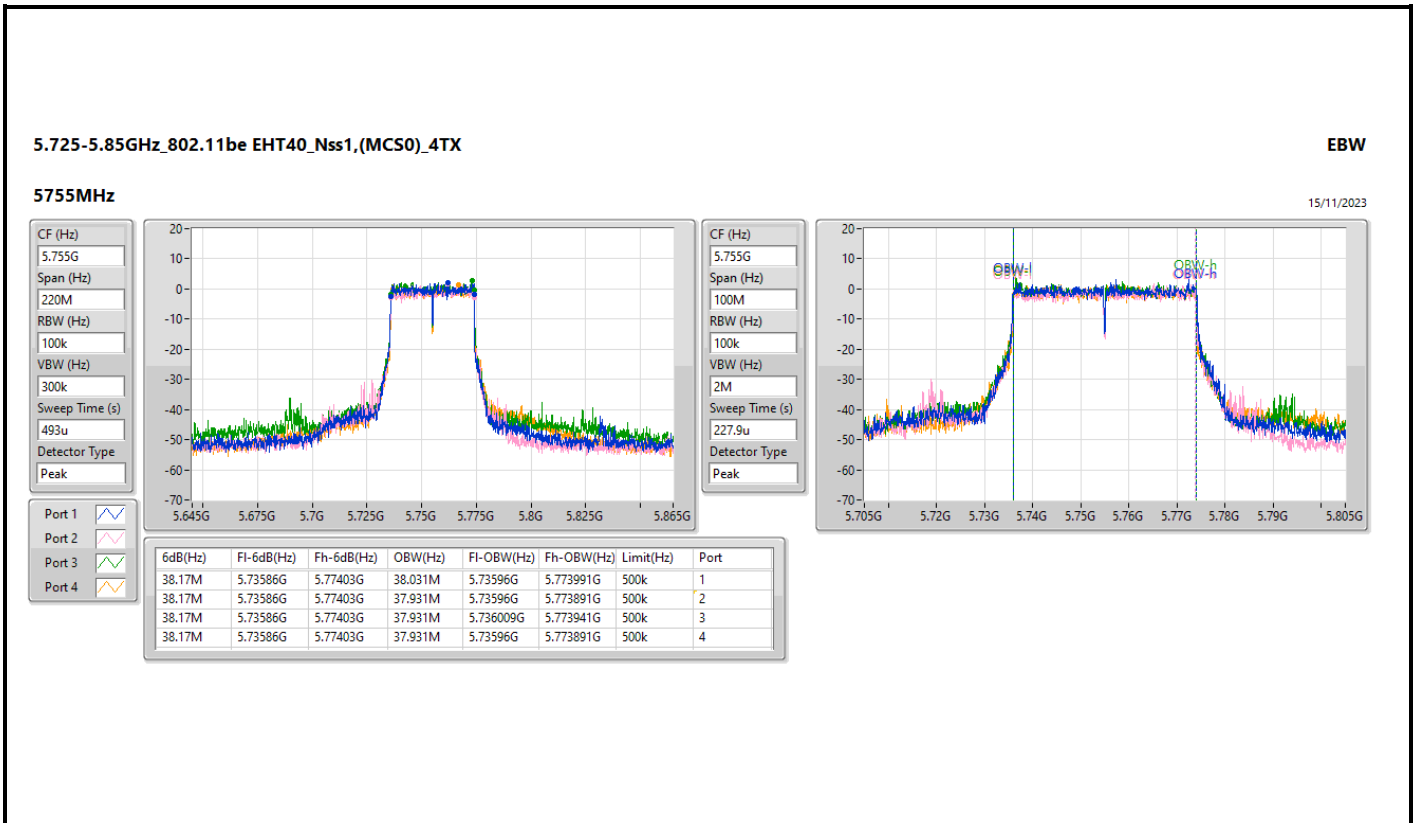


5.15-5.25GHz\_802.11be EHT80\_Nss1,(MCS0)\_4TX

EBW

5210MHz

15/11/2023

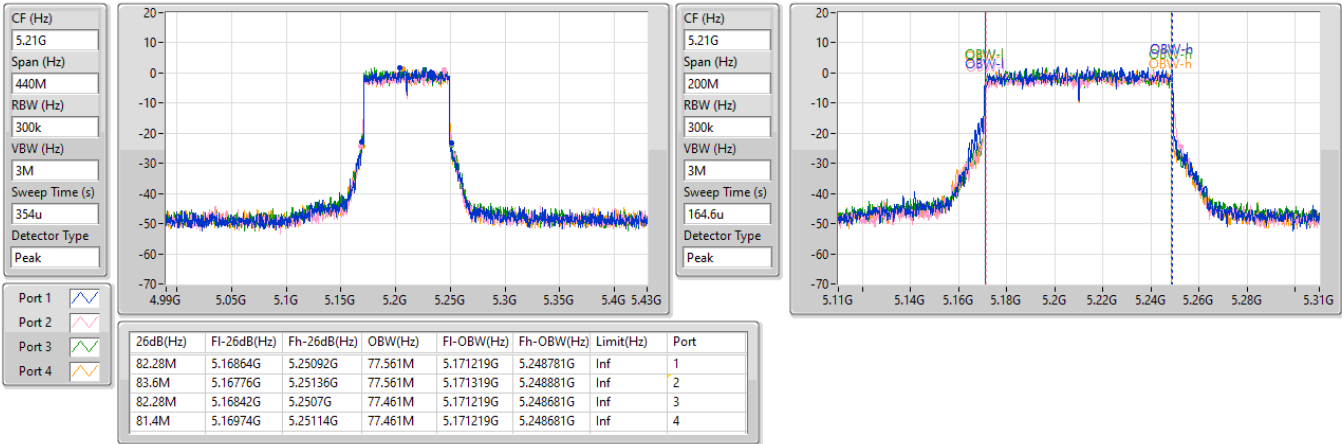


5.725-5.85GHz\_802.11be EHT80\_Nss1,(MCS0)\_4TX

EBW

5775MHz

15/11/2023

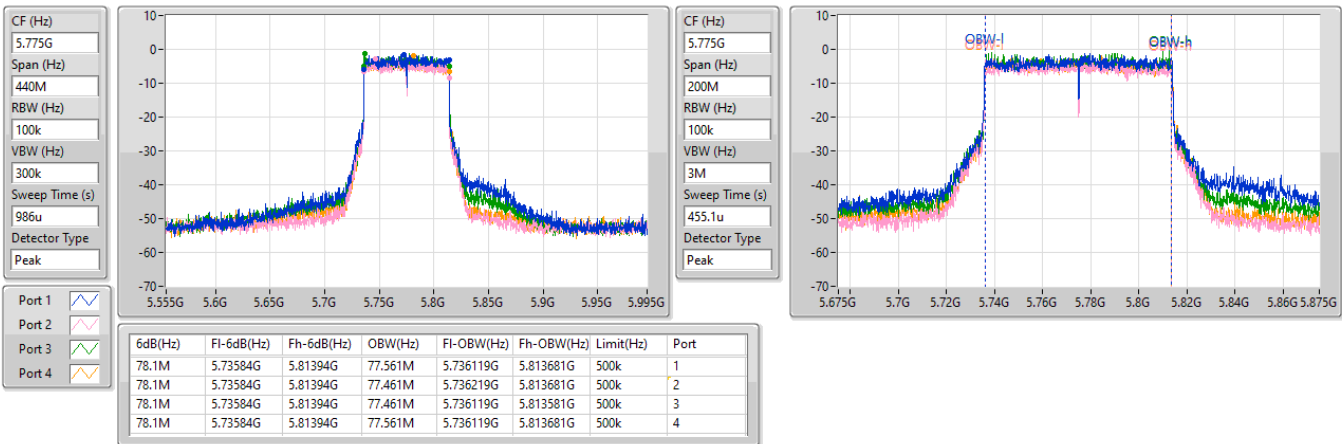



Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.15-5.25GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	26.12	0.40926	31.18	1.31220
802.11be EHT20_Nss1,(MCS0)_4TX	26.71	0.46881	31.77	1.50314
802.11be EHT40_Nss1,(MCS0)_4TX	24.74	0.29785	29.80	0.95499
802.11be EHT80_Nss1,(MCS0)_4TX	22.84	0.19231	27.90	0.61660
5.725-5.85GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	26.19	0.41591	31.36	1.36773
802.11be EHT20_Nss1,(MCS0)_4TX	26.88	0.48753	32.05	1.60325
802.11be EHT40_Nss1,(MCS0)_4TX	26.72	0.46989	31.89	1.54525
802.11be EHT80_Nss1,(MCS0)_4TX	24.57	0.28642	29.74	0.94189



Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	5.06	17.61	16.70	17.50	17.35	23.32	30.00	28.38	36.00
5200MHz	Pass	5.06	18.68	17.67	18.46	18.56	24.38	30.00	29.44	36.00
5240MHz	Pass	5.06	20.42	19.84	19.90	20.22	26.12	30.00	31.18	36.00
5745MHz	Pass	5.17	20.47	19.59	20.71	19.79	26.19	30.00	31.36	36.00
5785MHz	Pass	5.17	20.54	19.58	20.45	19.91	26.16	30.00	31.33	36.00
5825MHz	Pass	5.17	20.10	19.17	20.12	19.28	25.71	30.00	30.88	36.00
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	5.06	18.15	16.98	18.15	17.73	23.80	30.00	28.86	36.00
5200MHz	Pass	5.06	19.05	18.07	19.06	18.97	24.83	30.00	29.89	36.00
5240MHz	Pass	5.06	20.99	20.30	20.78	20.66	26.71	30.00	31.77	36.00
5745MHz	Pass	5.17	21.19	20.16	21.43	20.55	26.88	30.00	32.05	36.00
5785MHz	Pass	5.17	21.19	20.04	21.38	20.59	26.85	30.00	32.02	36.00
5825MHz	Pass	5.17	20.71	19.72	20.74	20.21	26.39	30.00	31.56	36.00
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	5.06	17.07	16.20	17.25	17.20	22.97	30.00	28.03	36.00
5230MHz	Pass	5.06	19.08	18.31	18.90	18.55	24.74	30.00	29.80	36.00
5755MHz	Pass	5.17	19.84	18.85	20.23	19.34	25.62	30.00	30.79	36.00
5795MHz	Pass	5.17	21.21	19.83	21.19	20.41	26.72	30.00	31.89	36.00
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	5.06	17.11	16.35	17.02	16.76	22.84	30.00	27.90	36.00
5775MHz	Pass	5.17	19.18	17.60	19.01	18.22	24.57	30.00	29.74	36.00

DG = Directional Gain; Port X = Port X output power



Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.15-5.25GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	26.58	0.45499	33.89	2.44906
802.11be EHT40-BF_Nss1,(MCS0)_4TX	24.61	0.28907	31.92	1.55597
802.11be EHT80-BF_Nss1,(MCS0)_4TX	22.71	0.18664	30.02	1.00462
5.725-5.85GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	26.26	0.42267	35.18	3.29610
802.11be EHT40-BF_Nss1,(MCS0)_4TX	26.09	0.40644	35.01	3.16957
802.11be EHT80-BF_Nss1,(MCS0)_4TX	24.44	0.27797	33.36	2.16770



Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	7.31	18.00	16.83	18.02	17.61	23.66	28.69	30.97	36.00
5200MHz	Pass	7.31	18.92	17.94	18.94	18.84	24.70	28.69	32.01	36.00
5240MHz	Pass	7.31	20.87	20.20	20.64	20.52	26.58	28.69	33.89	36.00
5745MHz	Pass	8.92	20.56	19.51	20.80	19.92	26.25	27.08	35.17	36.00
5785MHz	Pass	8.92	20.54	19.42	20.76	19.97	26.22	27.08	35.14	36.00
5825MHz	Pass	8.92	20.61	19.61	20.61	20.06	26.26	27.08	35.18	36.00
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	7.31	16.93	16.09	17.10	17.10	22.85	28.69	30.16	36.00
5230MHz	Pass	7.31	18.98	18.16	18.75	18.44	24.61	28.69	31.92	36.00
5755MHz	Pass	8.92	19.69	18.71	20.13	19.22	25.49	27.08	34.41	36.00
5795MHz	Pass	8.92	20.56	19.23	20.55	19.79	26.09	27.08	35.01	36.00
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	7.31	16.98	16.20	16.89	16.63	22.71	28.69	30.02	36.00
5775MHz	Pass	8.92	19.08	17.48	18.88	18.07	24.44	27.08	33.36	36.00

DG = Directional Gain; Port X = Port X output power



Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.15-5.25GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	13.22	20.53
802.11be EHT20_Nss1,(MCS0)_4TX	13.69	21.00
802.11be EHT40_Nss1,(MCS0)_4TX	8.88	16.19
802.11be EHT80_Nss1,(MCS0)_4TX	4.00	11.31
5.725-5.85GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	11.96	20.88
802.11be EHT20_Nss1,(MCS0)_4TX	12.41	21.33
802.11be EHT40_Nss1,(MCS0)_4TX	9.64	18.56
802.11be EHT80_Nss1,(MCS0)_4TX	3.90	12.82

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;






Result



Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	7.31	4.95	4.15	5.05	4.64	10.52	15.69	17.83	23.00
5200MHz	Pass	7.31	5.95	5.06	5.73	5.78	11.53	15.69	18.84	23.00
5240MHz	Pass	7.31	7.71	7.13	7.18	7.58	13.22	15.69	20.53	23.00
5745MHz	Pass	8.92	6.39	5.33	6.68	5.73	11.85	27.08	20.77	36.00
5785MHz	Pass	8.92	6.40	5.67	6.44	5.88	11.96	27.08	20.88	36.00
5825MHz	Pass	8.92	6.09	5.36	6.11	5.15	11.48	27.08	20.40	36.00
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	7.31	5.15	4.48	5.16	4.87	10.69	15.69	18.00	23.00
5200MHz	Pass	7.31	6.07	5.50	6.06	5.90	11.81	15.69	19.12	23.00
5240MHz	Pass	7.31	8.08	7.72	7.73	7.76	13.69	15.69	21.00	23.00
5745MHz	Pass	8.92	6.78	5.90	6.87	6.25	12.41	27.08	21.33	36.00
5785MHz	Pass	8.92	6.60	5.90	6.92	6.29	12.38	27.08	21.30	36.00
5825MHz	Pass	8.92	6.34	5.80	6.32	5.87	12.05	27.08	20.97	36.00
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	7.31	1.46	0.83	1.65	1.49	7.23	15.69	14.54	23.00
5230MHz	Pass	7.31	3.44	2.61	3.29	2.96	8.88	15.69	16.19	23.00
5755MHz	Pass	8.92	2.86	1.84	3.29	2.08	8.37	27.08	17.29	36.00
5795MHz	Pass	8.92	4.12	2.85	4.41	3.64	9.64	27.08	18.56	36.00
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	7.31	-1.37	-2.13	-1.67	-2.09	4.00	15.69	11.31	23.00
5775MHz	Pass	8.92	-0.90	-2.22	-0.87	-1.80	3.90	27.08	12.82	36.00


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;  
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;




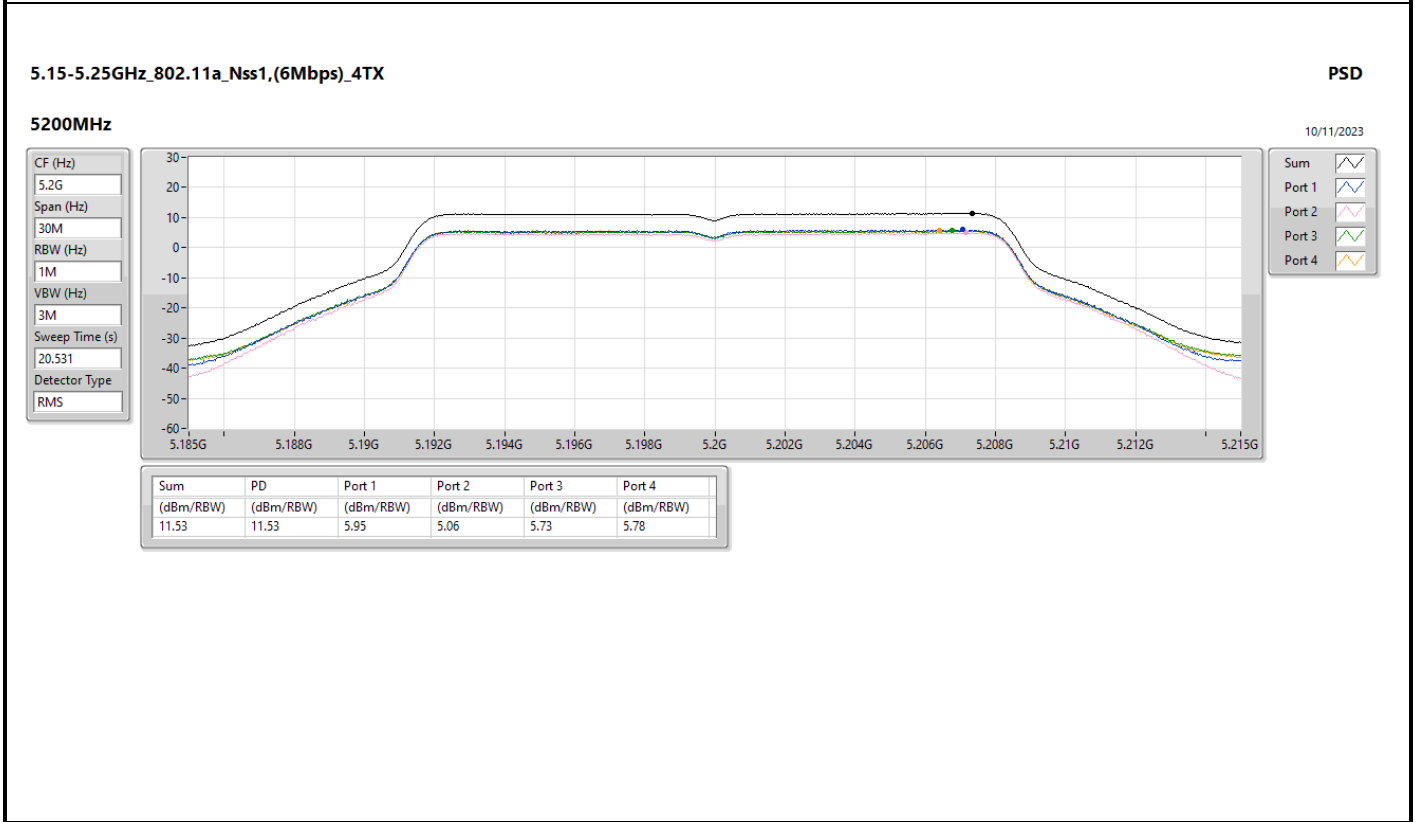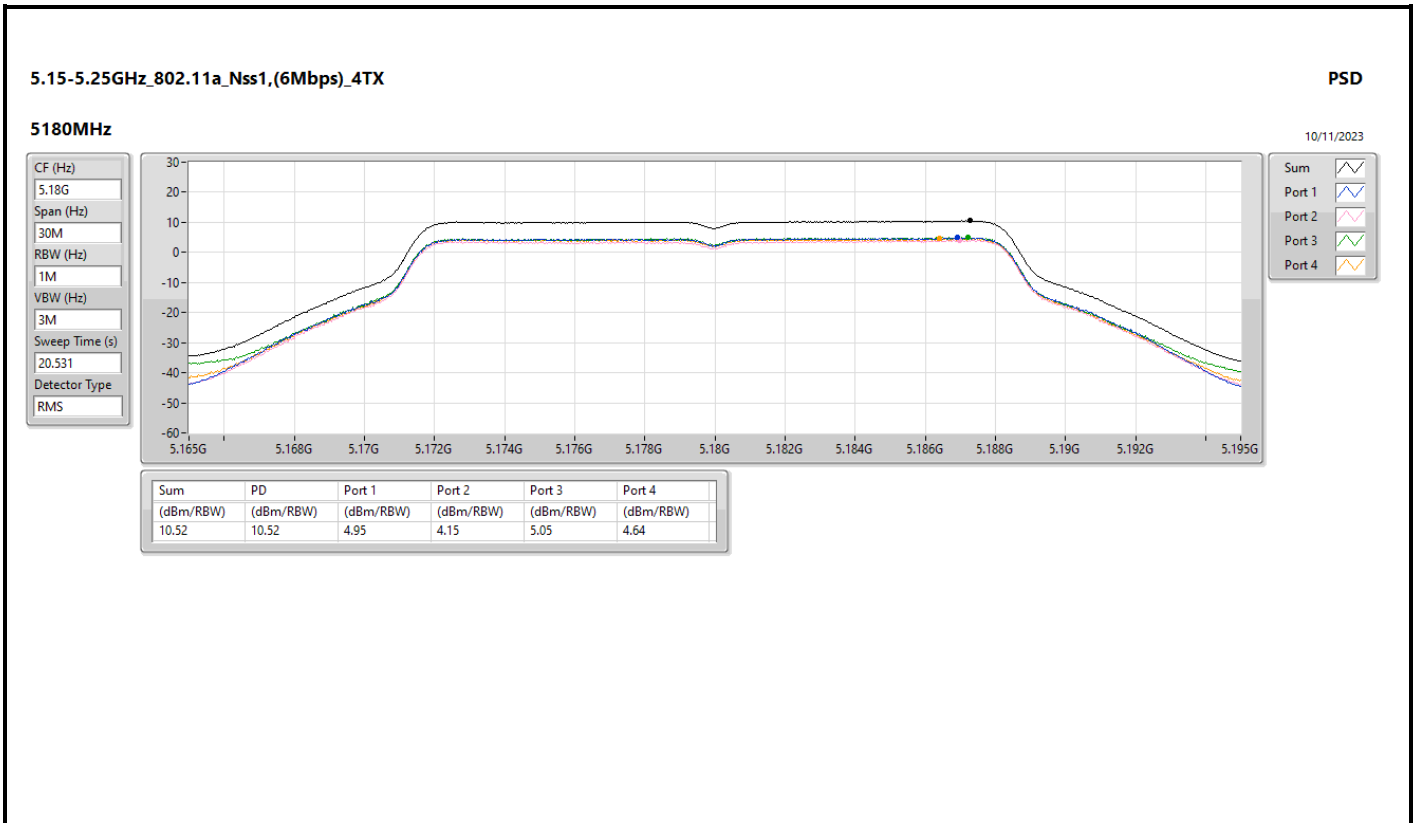


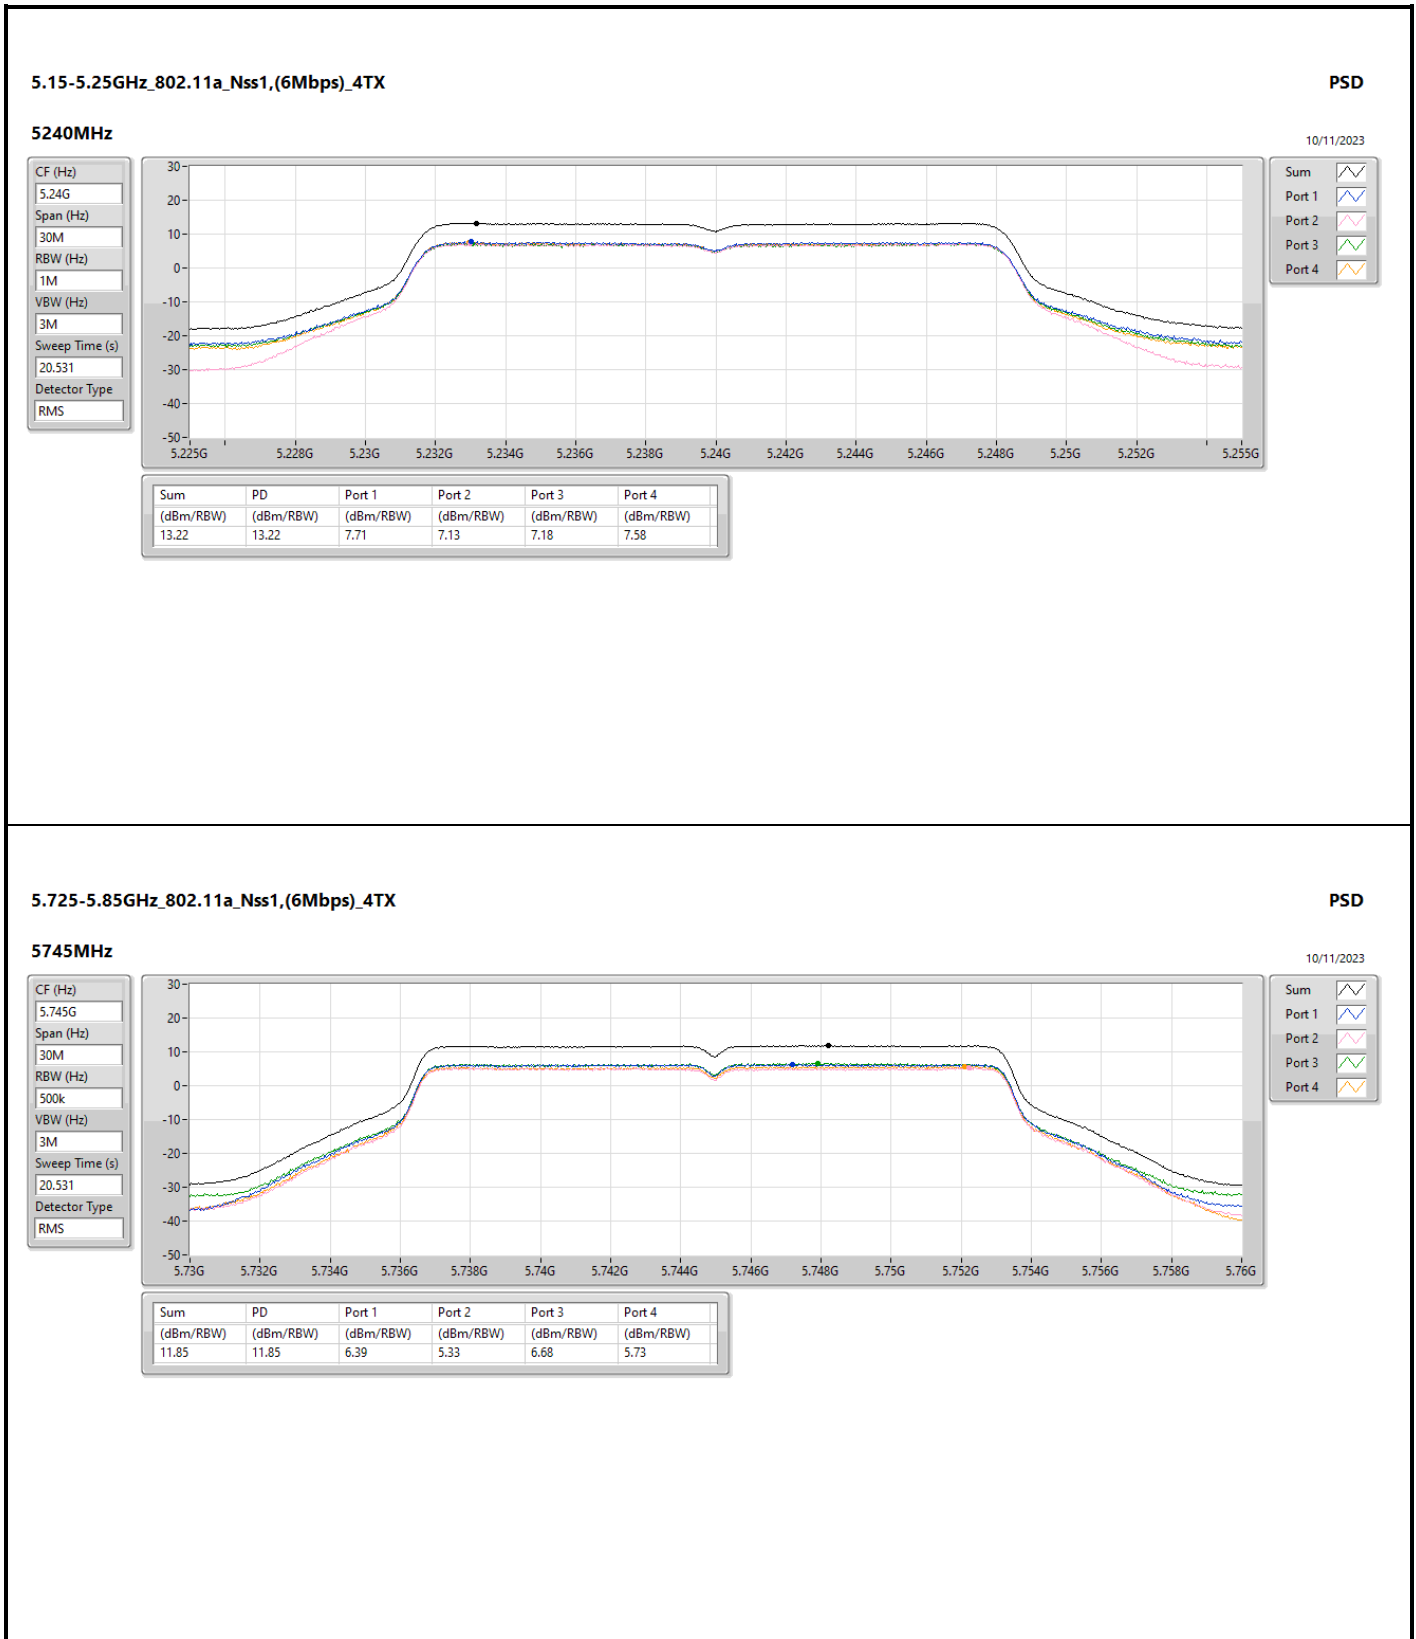

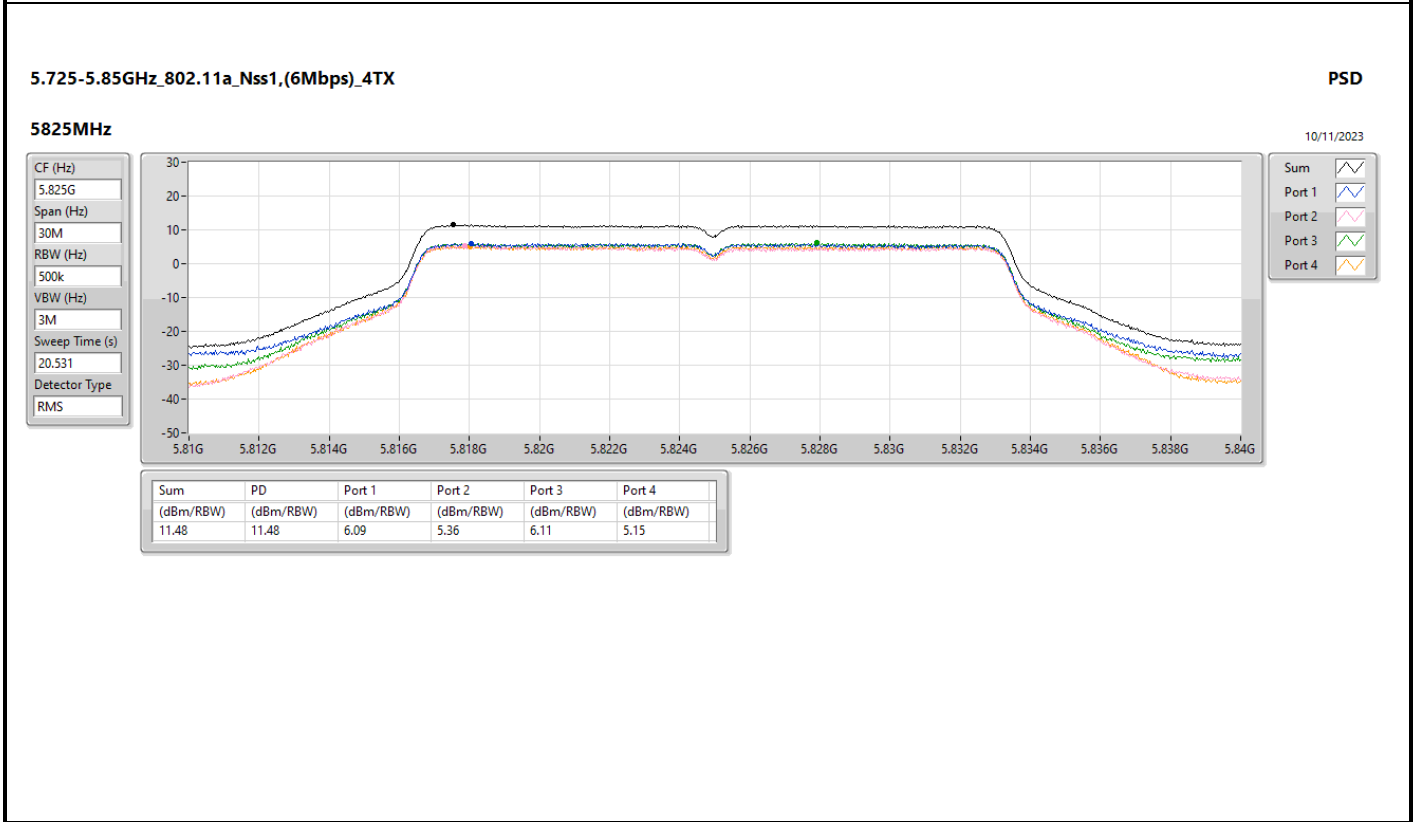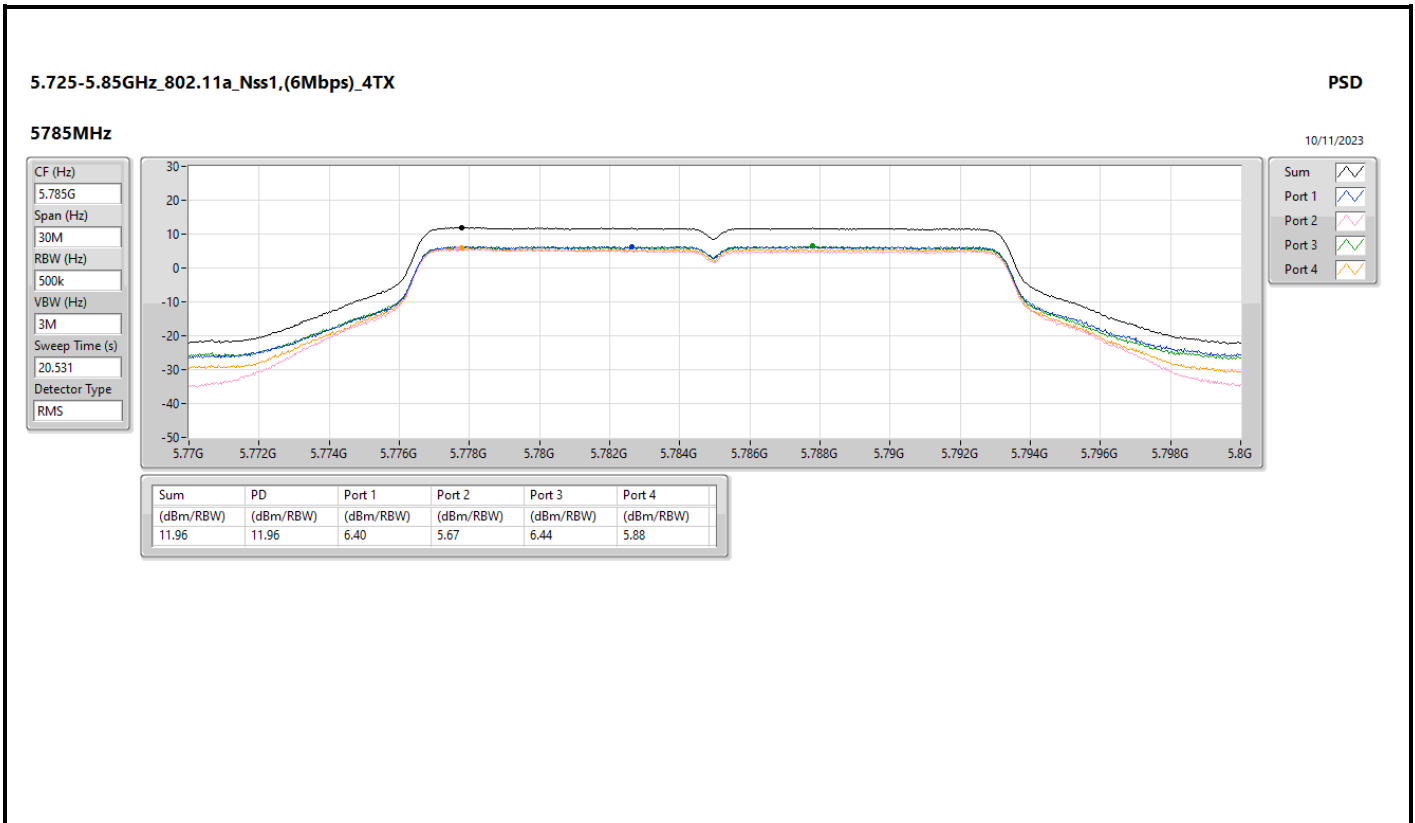

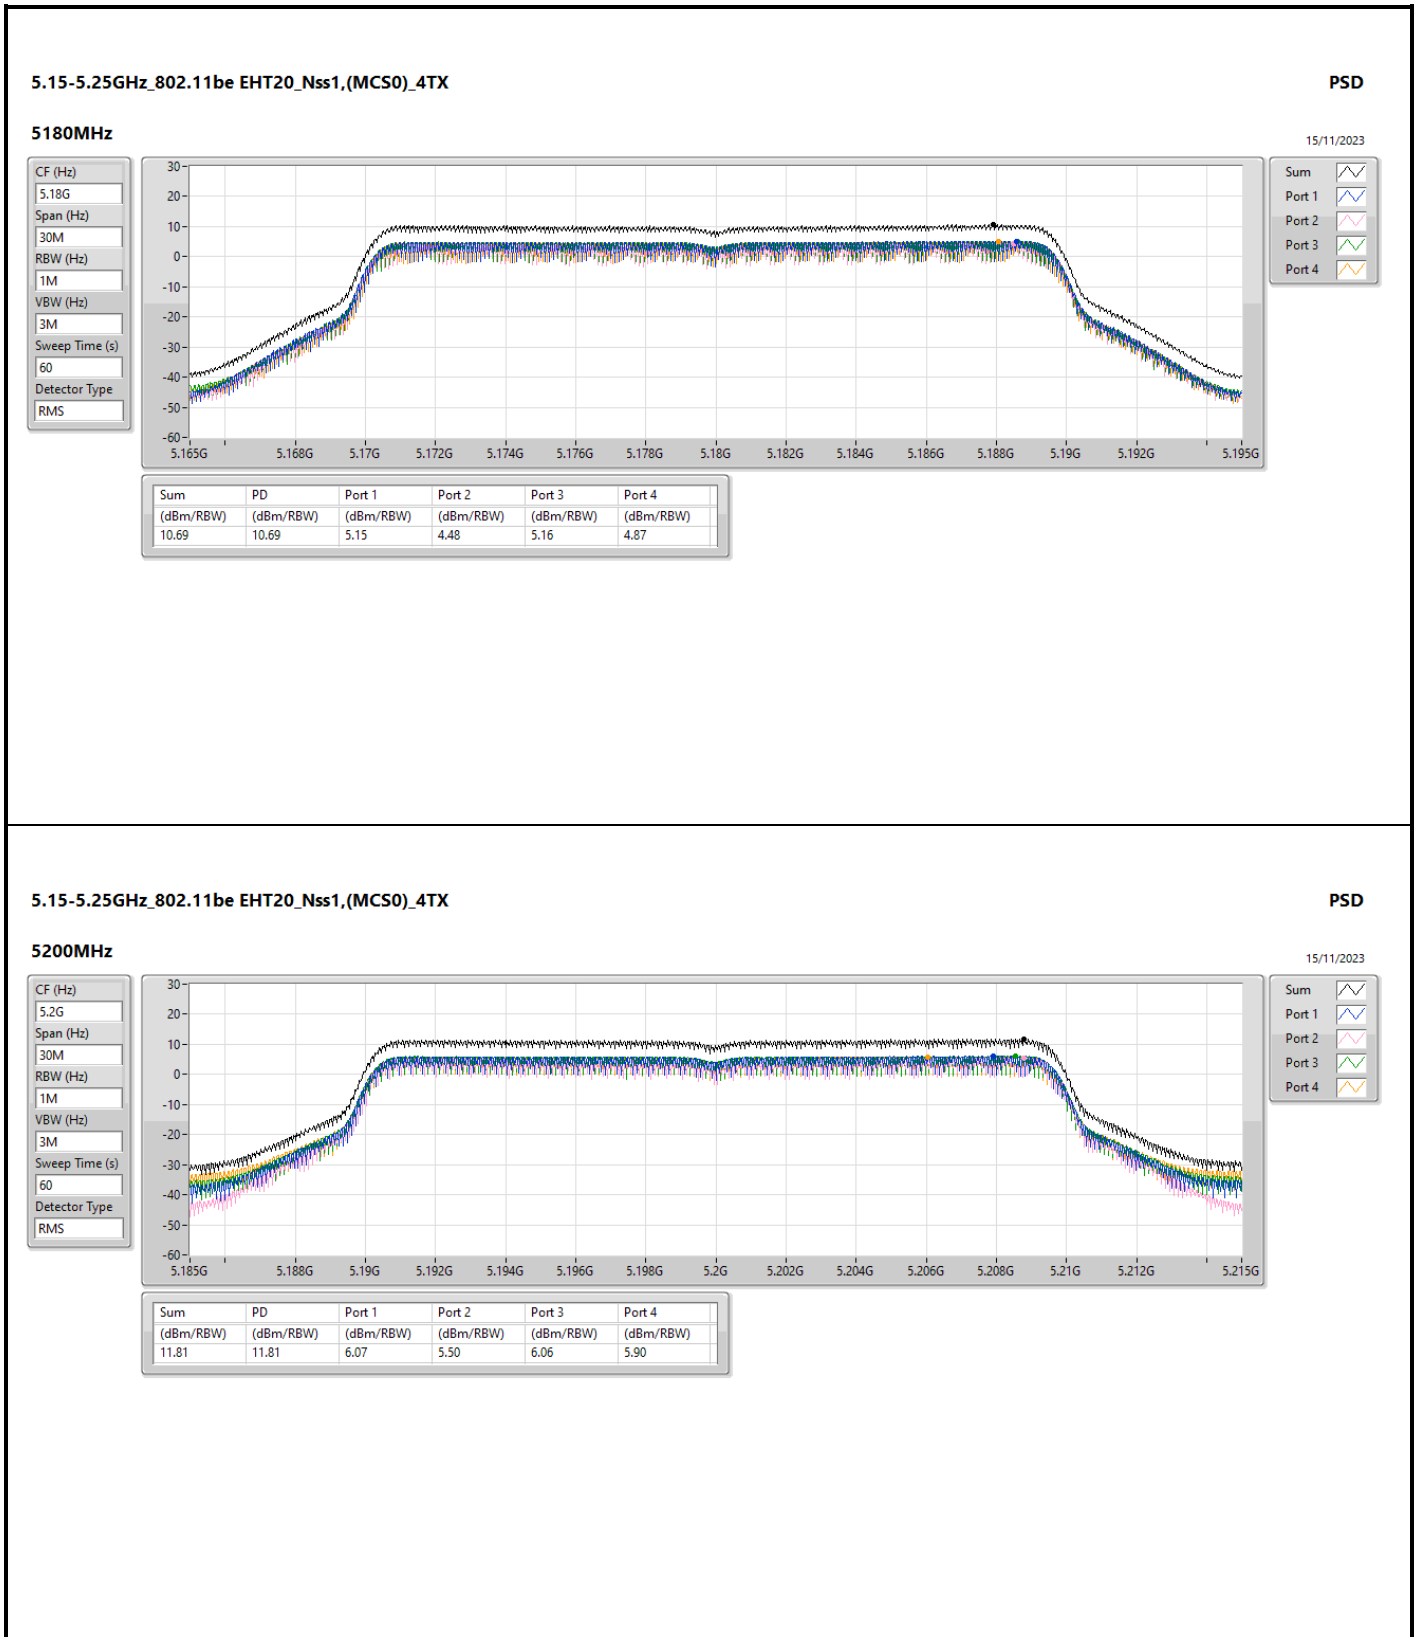

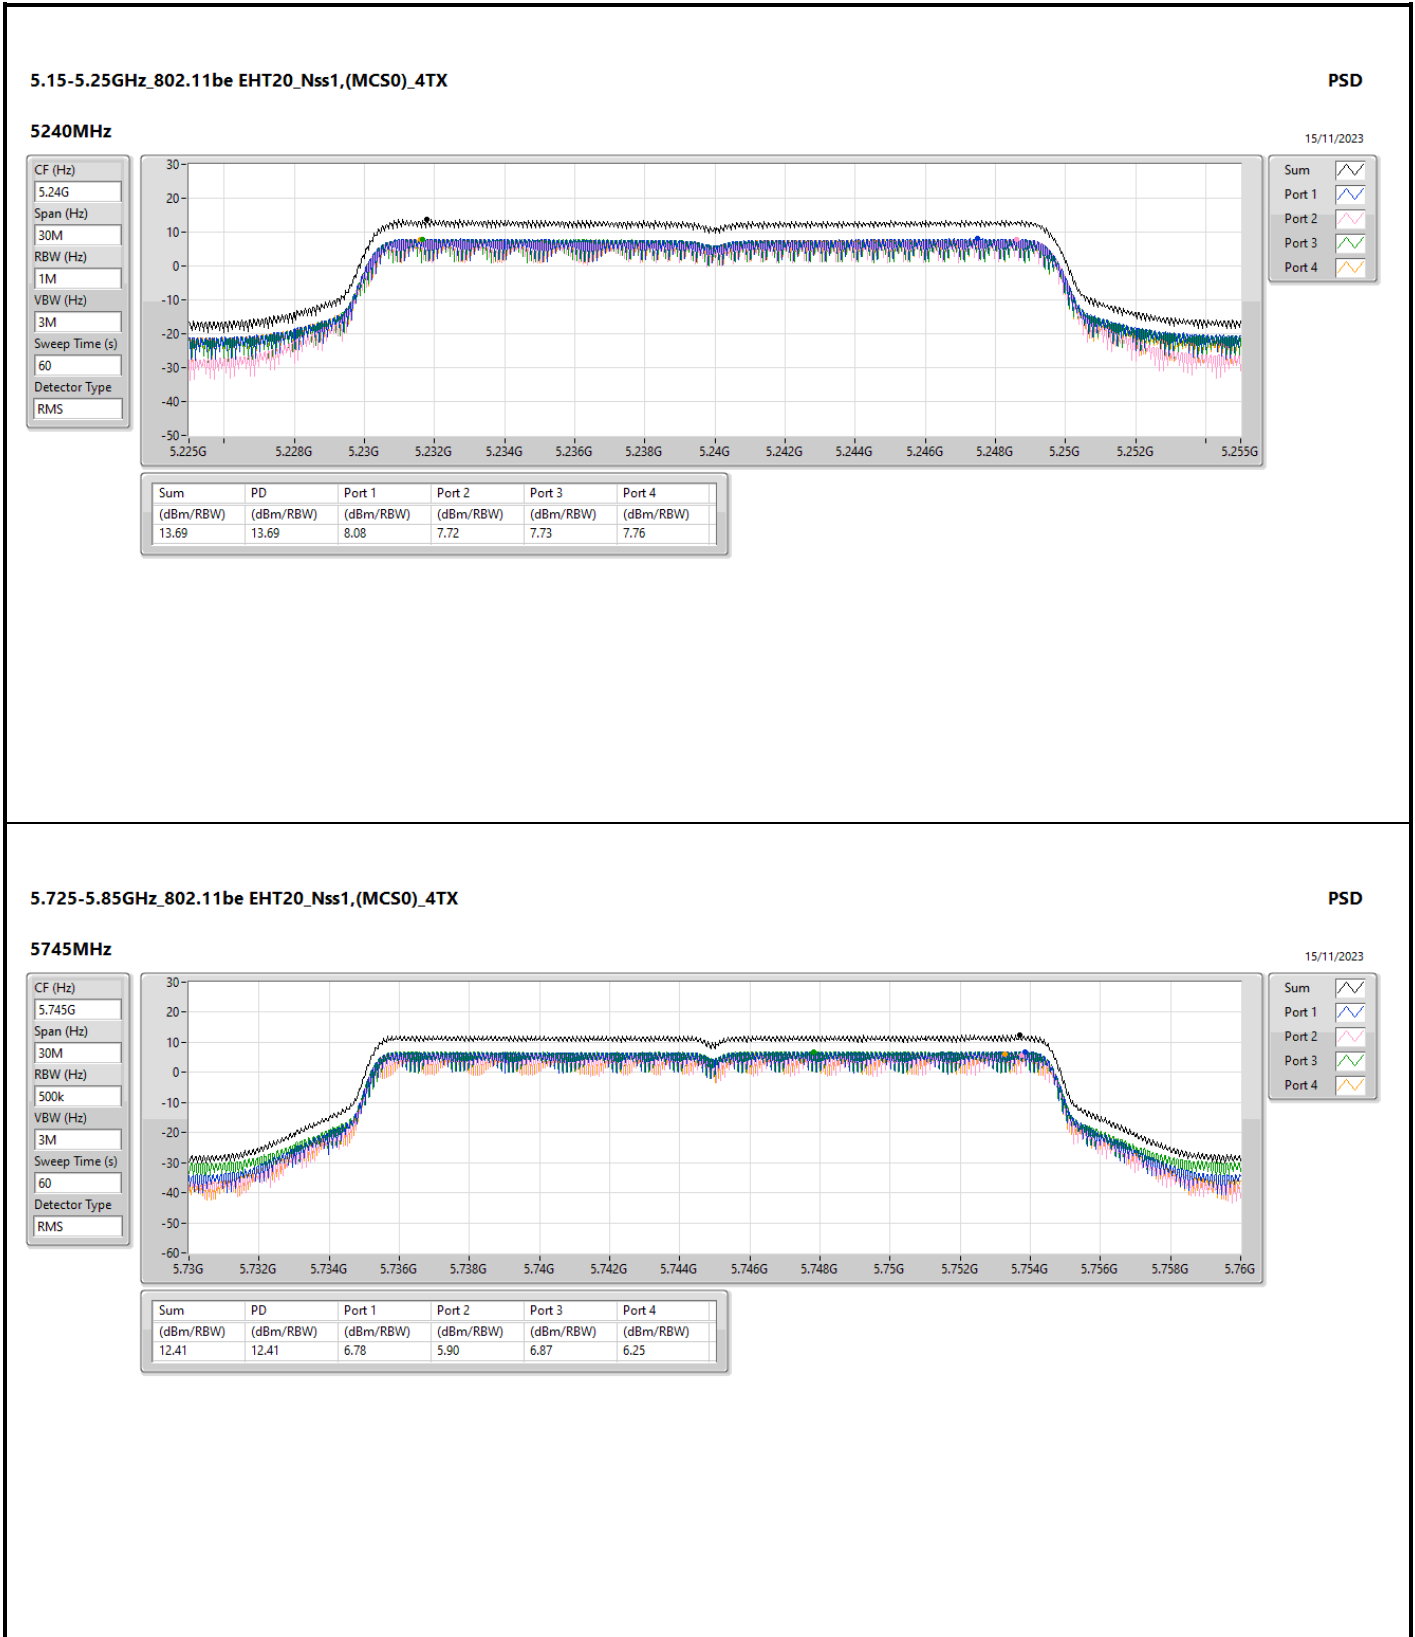

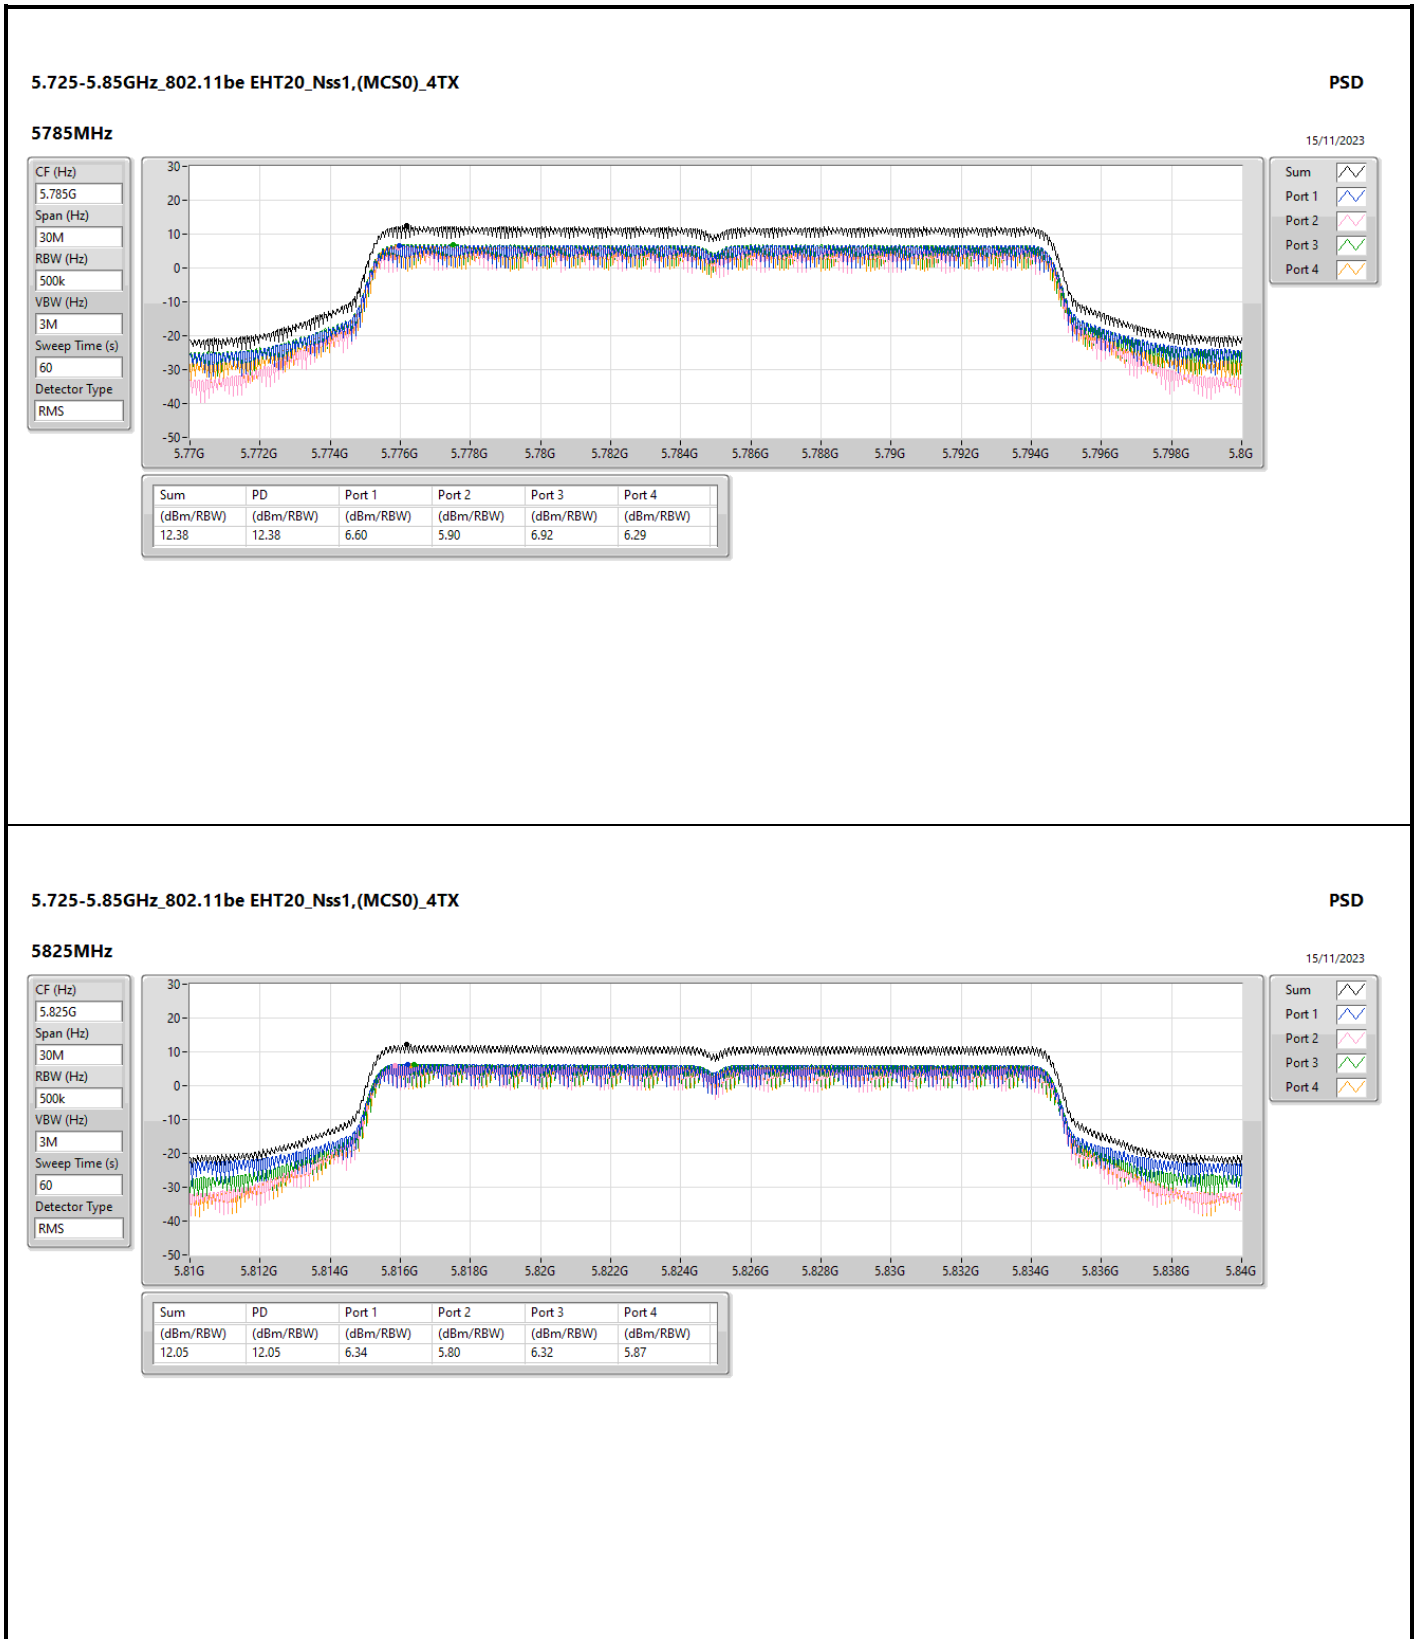

CF (Hz)  
5.825G

Span (Hz)  
30M

RBW (Hz)  
500k

VBW (Hz)  
3M

Sweep Time (s)  
60

Detector Type  
RMS


Sum


Port 1

Port 2

Port 3

Port 4

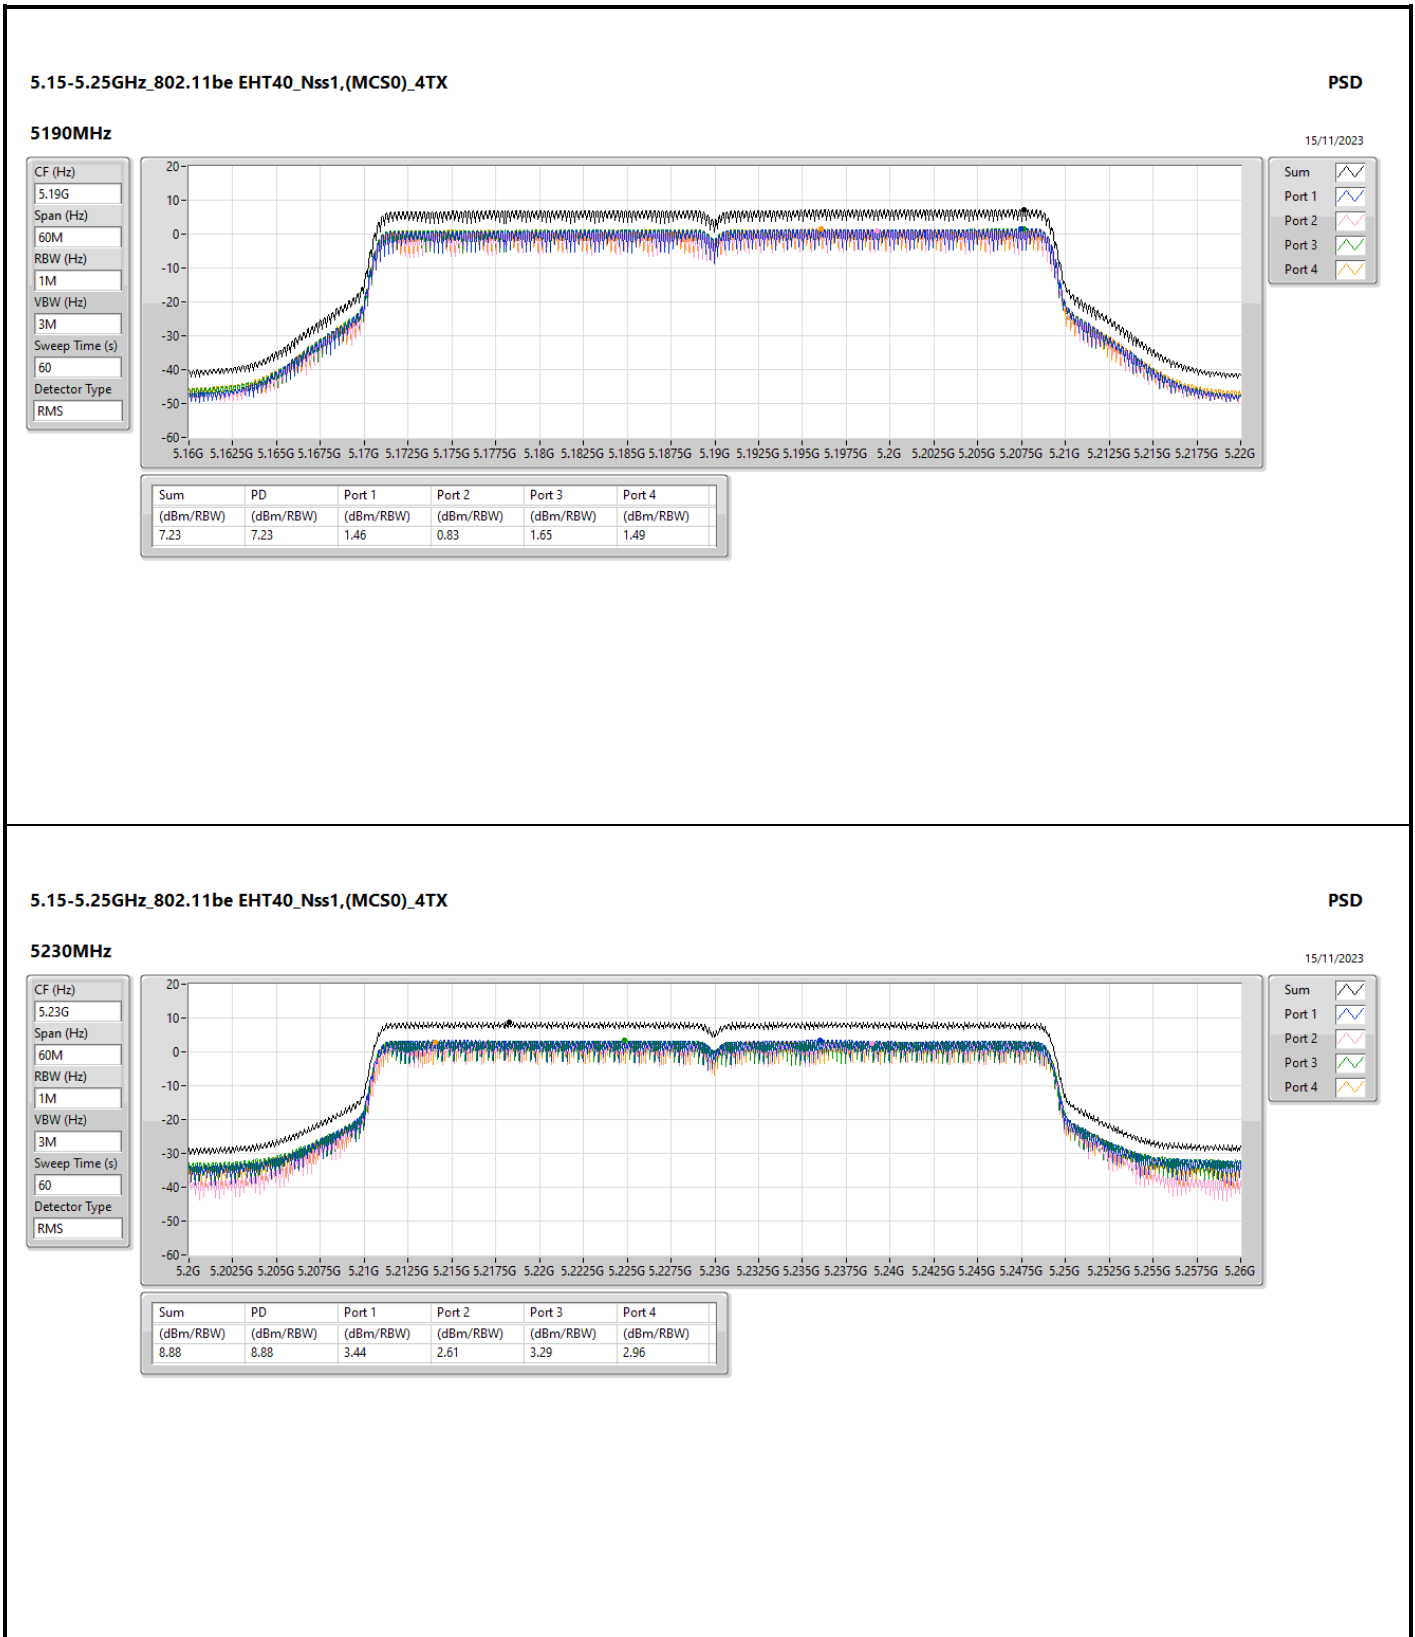

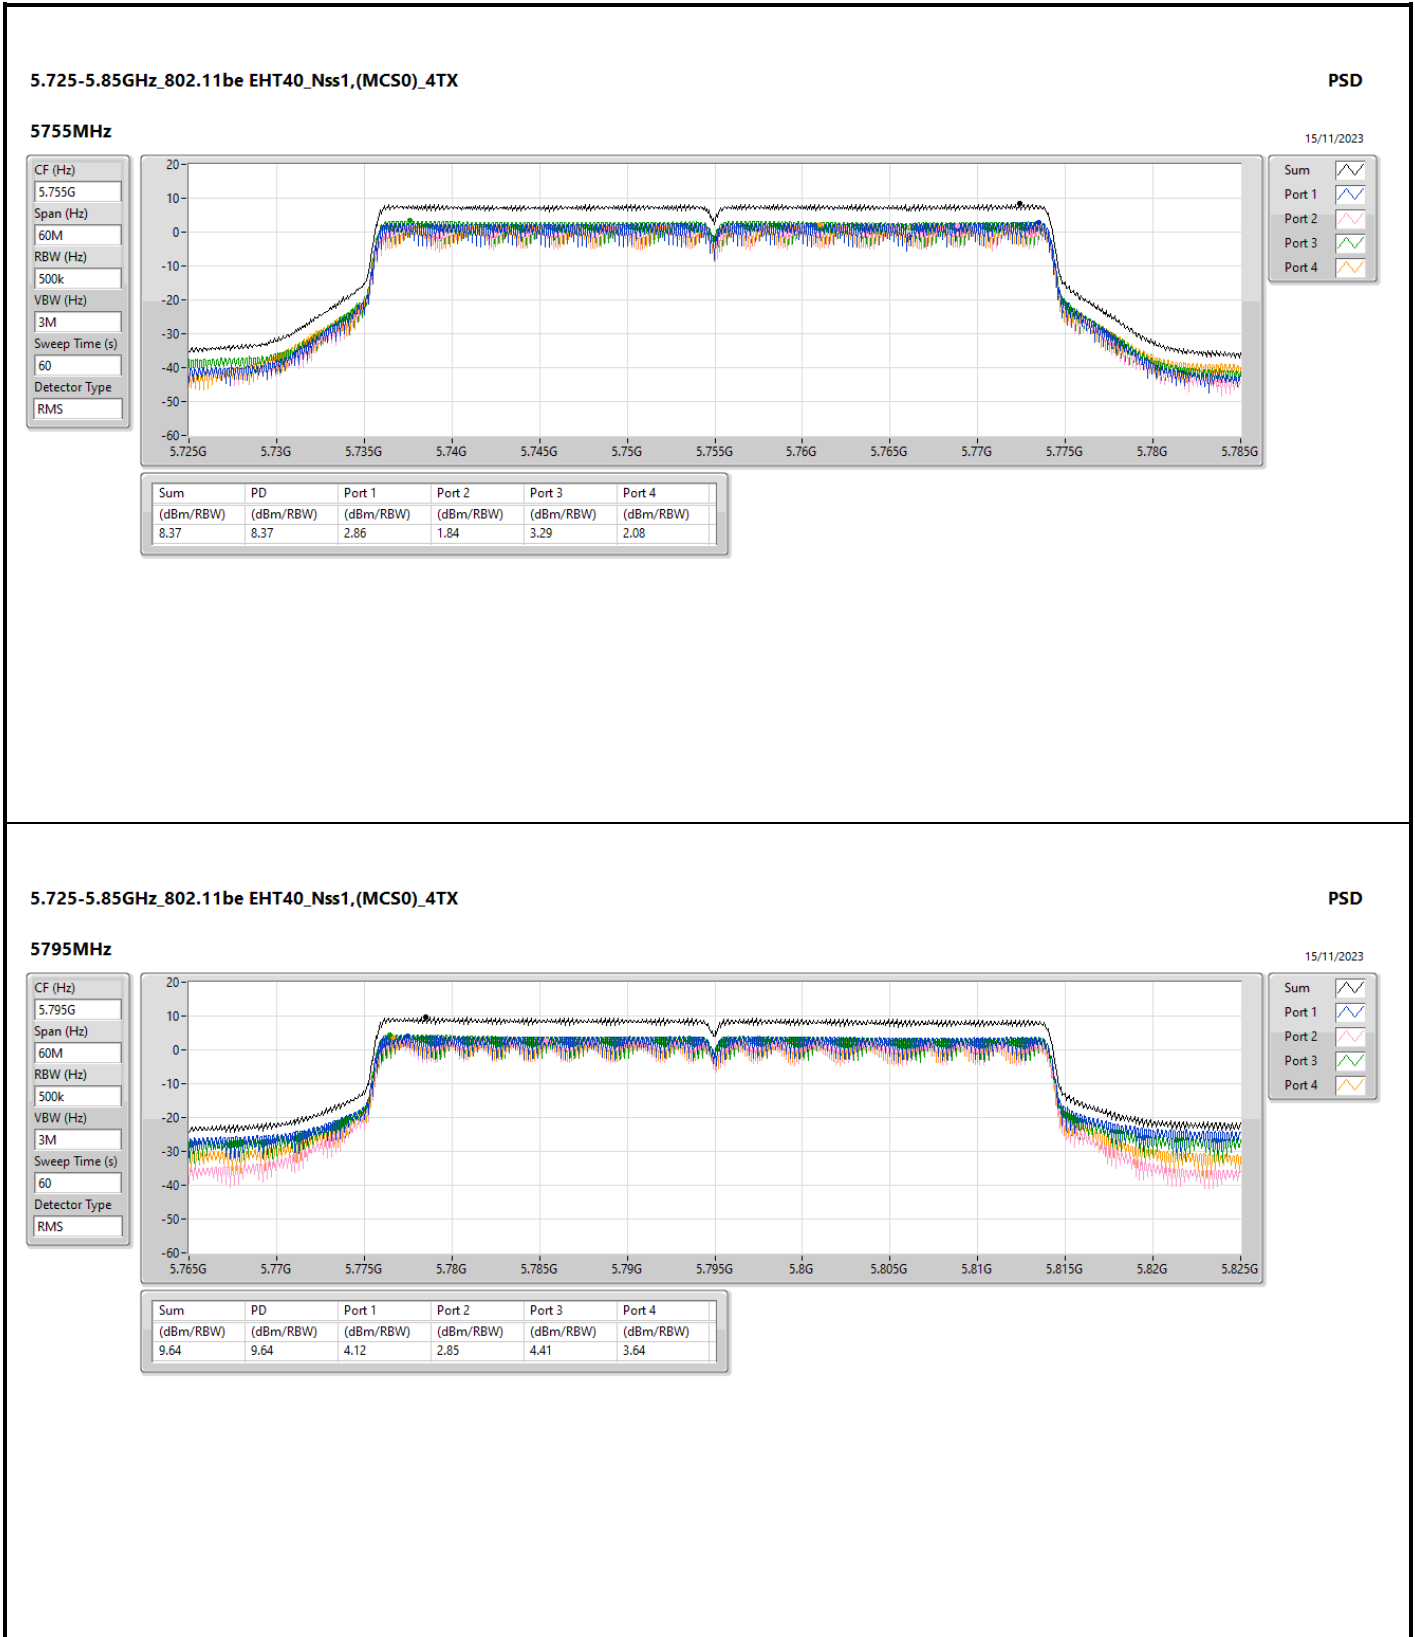

5.725-5.85GHz\_802.11be EHT40\_Nss1,(MCS0)\_4TX

PSD

15/11/2023

5795MHz

CF (Hz)  
5.795G

Span (Hz)  
60M

RBW (Hz)  
500k

VBW (Hz)  
3M

Sweep Time (s)  
60

Detector Type  
RMS



Sum

Port 1


Port 2

Port 3

Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.64	9.64	4.12	2.85	4.41	3.64



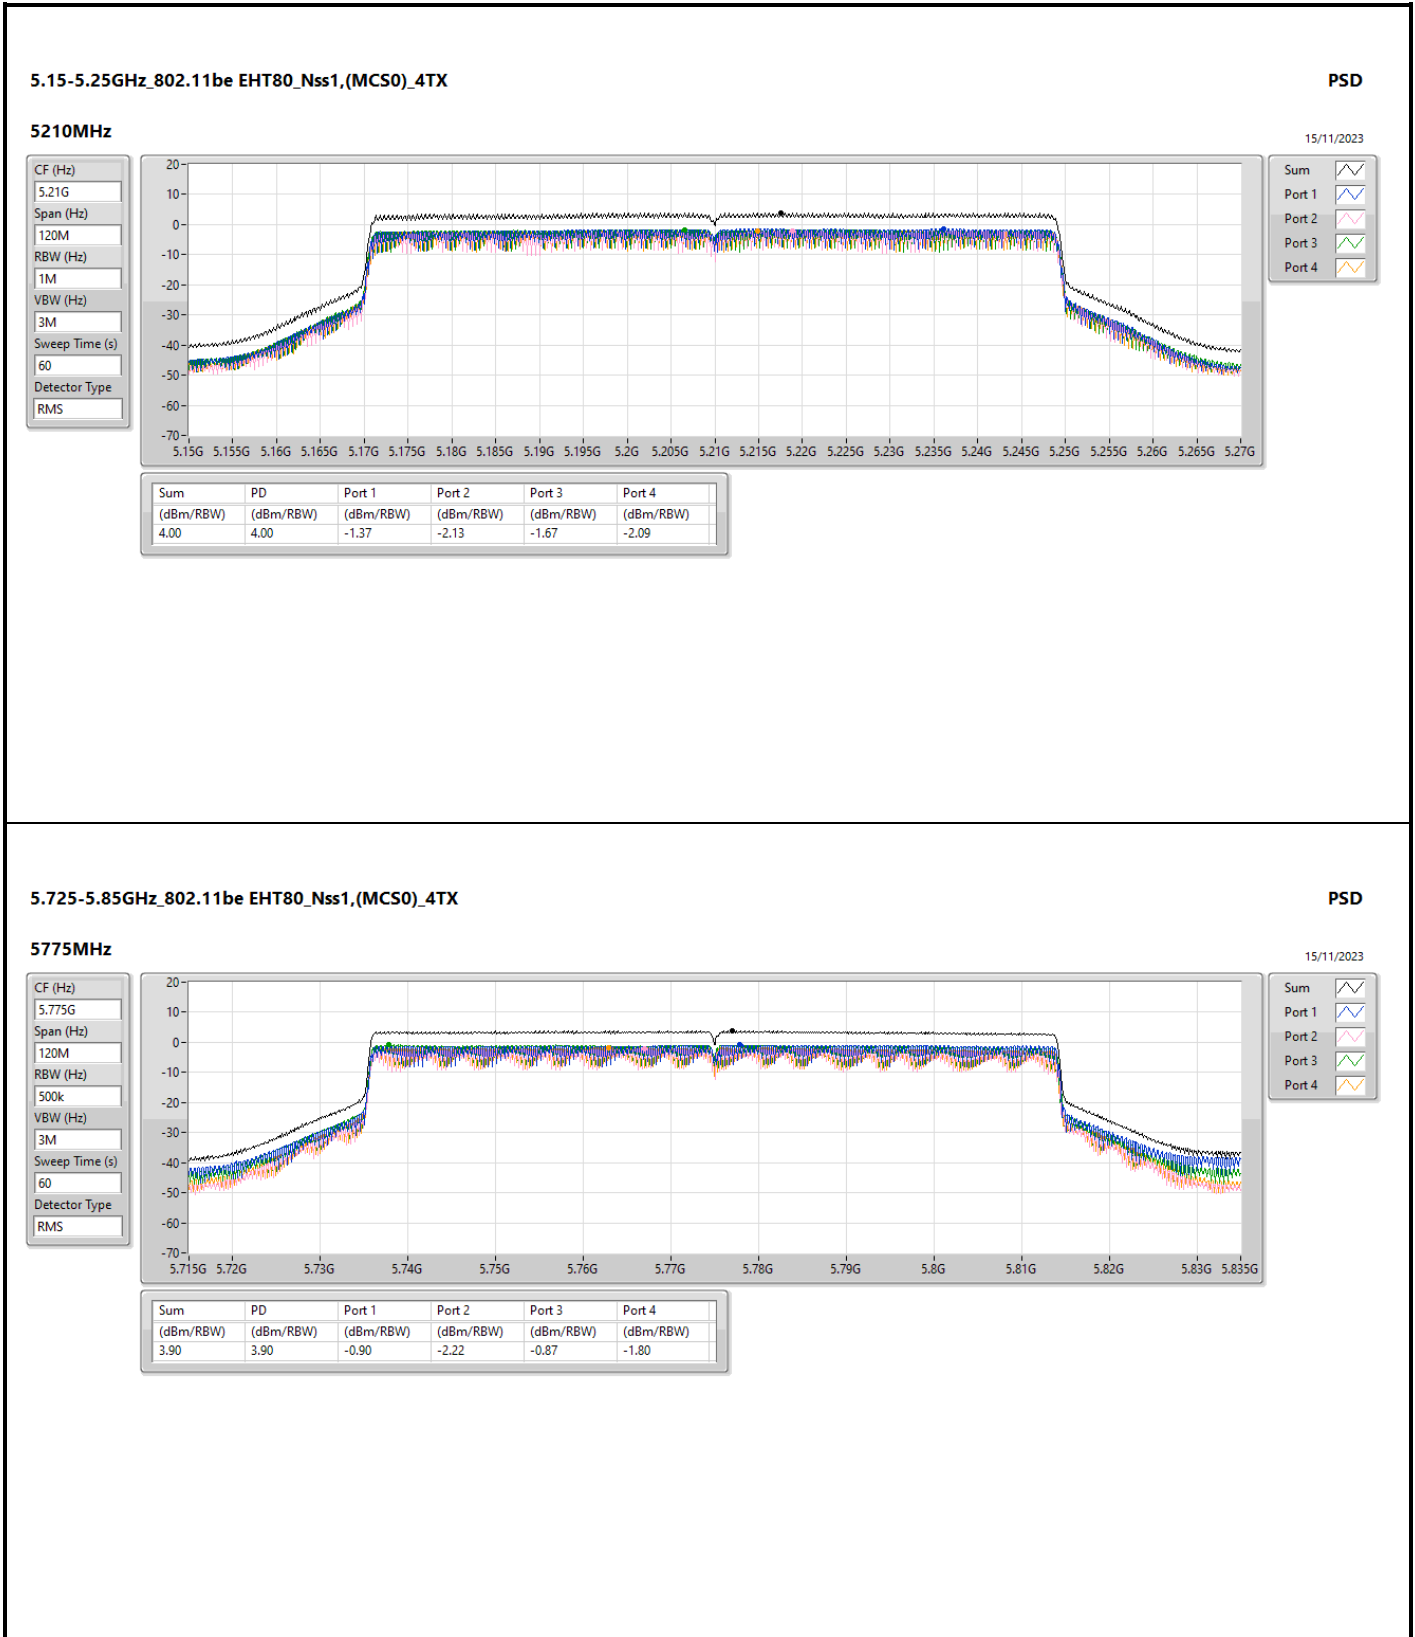



Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5.725-5.85GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT40_Nss1,(MCS0)_4TX	Pass	PK	30M	33.86	40.00	-6.14	3	Vertical	360	1.00




Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
802.11be EHT40_Nss1 (MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5795MHz	Pass	PK	30M	33.86	40.00	-6.14	3	Vertical	360	1.00
5795MHz	Pass	PK	152.22M	25.04	43.50	-18.46	3	Vertical	360	1.00
5795MHz	Pass	PK	191.02M	29.51	43.50	-13.99	3	Vertical	360	1.00
5795MHz	Pass	PK	266.68M	27.49	46.00	-18.51	3	Vertical	360	1.00
5795MHz	Pass	PK	450.98M	28.44	46.00	-17.56	3	Vertical	360	1.00
5795MHz	Pass	PK	544.1M	32.44	46.00	-13.56	3	Vertical	360	1.00
5795MHz	Pass	PK	134.76M	29.63	43.50	-13.87	3	Horizontal	0	1.00
5795MHz	Pass	PK	194.9M	32.91	43.50	-10.59	3	Horizontal	0	1.00
5795MHz	Pass	PK	272.5M	28.69	46.00	-17.31	3	Horizontal	0	1.00
5795MHz	Pass	PK	371.44M	30.52	46.00	-15.48	3	Horizontal	0	1.00
5795MHz	Pass	PK	497.54M	35.40	46.00	-10.60	3	Horizontal	0	1.00
5795MHz	Pass	QP	32.5M	18.13	40.00	-21.87	3	Horizontal	257	1.00

5.725-5.85GHz\_802.11be EHT40\_Nss1,(MCS0)\_4TX


5795MHz\_Adapter

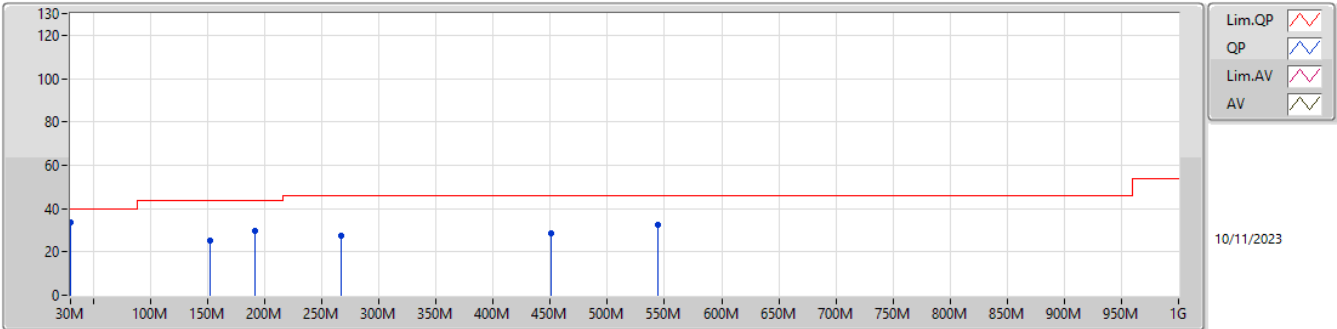

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	30M	33.86	40.00	-6.14	-3.21	3	Vertical	360	1.00	37.07	22.98	1.21	27.40
PK	152.22M	25.04	43.50	-18.46	-9.83	3	Vertical	360	1.00	34.87	15.47	2.42	27.72
PK	191.02M	29.51	43.50	-13.99	-10.59	3	Vertical	360	1.00	40.10	14.25	2.68	27.52
PK	266.68M	27.49	46.00	-18.51	-5.72	3	Vertical	360	1.00	33.21	18.40	3.12	27.24
PK	450.98M	28.44	46.00	-17.56	-2.15	3	Vertical	360	1.00	30.59	21.90	4.28	28.33
PK	544.1M	32.44	46.00	-13.56	-0.48	3	Vertical	360	1.00	32.92	23.68	4.51	28.67

5.725-5.85GHz\_802.11be EHT40\_Nss1,(MCS0)\_4TX

5795MHz\_Adapter

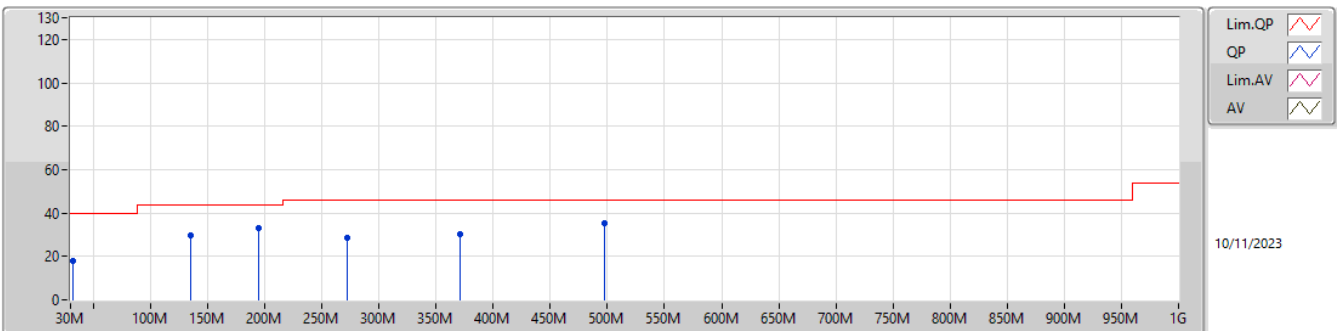

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	134.76M	29.63	43.50	-13.87	-8.81	3	Horizontal	0	1.00	38.44	16.70	2.27	27.78
PK	194.9M	32.91	43.50	-10.59	-10.39	3	Horizontal	0	1.00	43.30	14.38	2.73	27.50
PK	272.5M	28.69	46.00	-17.31	-6.11	3	Horizontal	0	1.00	34.80	17.99	3.15	27.25
PK	371.44M	30.52	46.00	-15.48	-3.95	3	Horizontal	0	1.00	34.47	20.02	3.76	27.73
PK	497.54M	35.40	46.00	-10.60	-1.43	3	Horizontal	0	1.00	36.83	22.58	4.40	28.41
QP	32.5M	18.13	40.00	-21.87	-4.40	3	Horizontal	257	1.00	22.53	21.53	1.27	27.20



Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5.15-5.25GHz	-	-	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	Pass	AV	5.15G	51.40	54.00	-2.60	3	Vertical	89	2.49
802.11be EHT20_Nss1,(MCS0)_4TX	Pass	AV	5.15G	53.44	54.00	-0.56	3	Vertical	86	2.42
802.11be EHT40_Nss1,(MCS0)_4TX	Pass	AV	5.15G	52.70	54.00	-1.30	3	Vertical	88	2.44
802.11be EHT80_Nss1,(MCS0)_4TX	Pass	AV	5.133G	53.54	54.00	-0.46	3	Vertical	84	2.55
5.725-5.85GHz	-	-	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_4TX	Pass	PK	5.485G	60.15	68.20	-8.05	3	Vertical	336	2.57
802.11be EHT20_Nss1,(MCS0)_4TX	Pass	PK	5.485G	61.59	68.20	-6.61	3	Vertical	336	2.58
802.11be EHT40_Nss1,(MCS0)_4TX	Pass	PK	5.6402G	64.04	68.20	-4.16	3	Vertical	335	2.62
802.11be EHT80_Nss1,(MCS0)_4TX	Pass	PK	5.6394G	65.61	68.20	-2.59	3	Vertical	297	2.87



Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
802.11a_Nss1_(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	AV	5.15G	51.40	54.00	-2.60	3	Vertical	89	2.49
5180MHz	Pass	AV	5.183G	110.30	Inf	-Inf	3	Vertical	89	2.49
5180MHz	Pass	PK	5.1496G	65.35	74.00	-8.65	3	Vertical	89	2.49
5180MHz	Pass	PK	5.1826G	119.99	Inf	-Inf	3	Vertical	89	2.49
5180MHz	Pass	AV	5.1496G	44.36	54.00	-9.64	3	Horizontal	52	2.44
5180MHz	Pass	AV	5.1722G	99.07	Inf	-Inf	3	Horizontal	52	2.44
5180MHz	Pass	PK	5.1448G	57.36	74.00	-16.64	3	Horizontal	52	2.44
5180MHz	Pass	PK	5.1724G	108.59	Inf	-Inf	3	Horizontal	52	2.44
5180MHz	Pass	PK	10.35886G	51.70	68.20	-16.50	3	Vertical	39	2.15
5180MHz	Pass	PK	10.348G	50.47	68.20	-17.73	3	Horizontal	226	1.50
5200MHz	Pass	AV	5.1496G	47.01	54.00	-6.99	3	Vertical	87	2.46
5200MHz	Pass	AV	5.2032G	111.18	Inf	-Inf	3	Vertical	87	2.46
5200MHz	Pass	PK	5.1488G	60.26	74.00	-13.74	3	Vertical	87	2.46
5200MHz	Pass	PK	5.2032G	120.52	Inf	-Inf	3	Vertical	87	2.46
5200MHz	Pass	AV	5.1492G	43.49	54.00	-10.51	3	Horizontal	354	2.70
5200MHz	Pass	AV	5.204G	100.10	Inf	-Inf	3	Horizontal	354	2.70
5200MHz	Pass	PK	5.1436G	55.97	74.00	-18.03	3	Horizontal	354	2.70
5200MHz	Pass	PK	5.2048G	109.72	Inf	-Inf	3	Horizontal	354	2.70
5200MHz	Pass	PK	10.38816G	52.47	68.20	-15.73	3	Vertical	175	3.00
5200MHz	Pass	PK	10.4464G	52.19	68.20	-16.01	3	Horizontal	164	2.56
5240MHz	Pass	AV	5.15G	50.51	54.00	-3.49	3	Vertical	85	2.60
5240MHz	Pass	AV	5.243G	112.42	Inf	-Inf	3	Vertical	85	2.60
5240MHz	Pass	AV	5.3522G	46.15	54.00	-7.85	3	Vertical	85	2.60
5240MHz	Pass	PK	5.15G	65.19	74.00	-8.81	3	Vertical	85	2.60
5240MHz	Pass	PK	5.243G	121.86	Inf	-Inf	3	Vertical	85	2.60
5240MHz	Pass	PK	5.3522G	58.66	74.00	-15.34	3	Vertical	85	2.60
5240MHz	Pass	AV	5.15G	44.28	54.00	-9.72	3	Horizontal	57	2.54
5240MHz	Pass	AV	5.2334G	103.55	Inf	-Inf	3	Horizontal	57	2.54
5240MHz	Pass	AV	5.3522G	43.52	54.00	-10.48	3	Horizontal	57	2.54
5240MHz	Pass	PK	5.1434G	56.85	74.00	-17.15	3	Horizontal	57	2.54
5240MHz	Pass	PK	5.2328G	112.82	Inf	-Inf	3	Horizontal	57	2.54
5240MHz	Pass	PK	5.3696G	55.88	74.00	-18.12	3	Horizontal	57	2.54
5240MHz	Pass	PK	10.4764G	51.07	68.20	-17.13	3	Vertical	171	1.80
5240MHz	Pass	PK	10.48052G	51.11	68.20	-17.09	3	Horizontal	168	2.21
5745MHz	Pass	AV	5.4462G	43.48	54.00	-10.52	3	Vertical	56	2.61
5745MHz	Pass	AV	5.7402G	113.85	Inf	-Inf	3	Vertical	56	2.61
5745MHz	Pass	PK	5.5878G	59.07	68.20	-9.13	3	Vertical	56	2.61
5745MHz	Pass	PK	5.7402G	123.41	Inf	-Inf	3	Vertical	56	2.61
5745MHz	Pass	PK	5.9994G	57.93	68.20	-10.27	3	Vertical	56	2.61
5745MHz	Pass	AV	5.445G	43.39	54.00	-10.61	3	Horizontal	131	2.47
5745MHz	Pass	AV	5.7474G	104.10	Inf	-Inf	3	Horizontal	131	2.47
5745MHz	Pass	PK	5.4894G	56.17	68.20	-12.03	3	Horizontal	131	2.47
5745MHz	Pass	PK	5.7474G	113.65	Inf	-Inf	3	Horizontal	131	2.47
5745MHz	Pass	PK	5.9262G	58.22	68.20	-9.98	3	Horizontal	131	2.47
5745MHz	Pass	AV	11.48984G	39.94	54.00	-14.06	3	Vertical	326	3.00
5745MHz	Pass	PK	11.48148G	52.78	74.00	-21.22	3	Vertical	326	3.00
5745MHz	Pass	AV	11.48616G	39.51	54.00	-14.49	3	Horizontal	323	2.95
5745MHz	Pass	PK	11.48908G	52.98	74.00	-21.02	3	Horizontal	323	2.95
5785MHz	Pass	AV	5.7922G	113.43	Inf	-Inf	3	Vertical	336	2.57
5785MHz	Pass	PK	5.485G	60.15	68.20	-8.05	3	Vertical	336	2.57
5785MHz	Pass	PK	5.7922G	123.27	Inf	-Inf	3	Vertical	336	2.57
5785MHz	Pass	PK	6.0226G	58.43	68.20	-9.77	3	Vertical	336	2.57
5785MHz	Pass	AV	5.7874G	103.63	Inf	-Inf	3	Horizontal	130	2.45
5785MHz	Pass	PK	5.6278G	56.59	68.20	-11.61	3	Horizontal	130	2.45
5785MHz	Pass	PK	5.7874G	113.11	Inf	-Inf	3	Horizontal	130	2.45
5785MHz	Pass	PK	6.0262G	58.00	68.20	-10.20	3	Horizontal	130	2.45
5785MHz	Pass	AV	11.5742G	39.25	54.00	-14.75	3	Vertical	123	2.75
5785MHz	Pass	PK	11.57084G	52.37	74.00	-21.63	3	Vertical	123	2.75
5785MHz	Pass	AV	11.57832G	39.19	54.00	-14.81	3	Horizontal	123	2.75
5785MHz	Pass	PK	11.57336G	52.43	74.00	-21.57	3	Horizontal	123	2.75



Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5825MHz	Pass	AV	5.8322G	113.14	Inf	-Inf	3	Vertical	336	2.68
5825MHz	Pass	PK	5.525G	59.90	68.20	-8.30	3	Vertical	336	2.68
5825MHz	Pass	PK	5.8322G	122.63	Inf	-Inf	3	Vertical	336	2.68
5825MHz	Pass	PK	6.0698G	58.63	68.20	-9.57	3	Vertical	336	2.68
5825MHz	Pass	AV	5.8274G	102.90	Inf	-Inf	3	Horizontal	130	2.69
5825MHz	Pass	PK	5.6126G	56.62	68.20	-11.58	3	Horizontal	130	2.69
5825MHz	Pass	PK	5.8274G	112.29	Inf	-Inf	3	Horizontal	130	2.69
5825MHz	Pass	PK	6.101G	57.89	68.20	-10.31	3	Horizontal	130	2.69
5825MHz	Pass	AV	11.65056G	39.64	54.00	-14.36	3	Vertical	192	1.55
5825MHz	Pass	PK	11.64316G	52.67	74.00	-21.33	3	Vertical	192	1.55
5825MHz	Pass	AV	11.6448G	39.44	54.00	-14.56	3	Horizontal	192	1.55
5825MHz	Pass	PK	11.64316G	52.82	74.00	-21.18	3	Horizontal	192	1.55
802.11be EHT20_Nss1.(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5180MHz	Pass	AV	5.15G	53.44	54.00	-0.56	3	Vertical	86	2.42
5180MHz	Pass	AV	5.1832G	109.28	Inf	-Inf	3	Vertical	86	2.42
5180MHz	Pass	PK	5.1496G	69.22	74.00	-4.78	3	Vertical	86	2.42
5180MHz	Pass	PK	5.1832G	122.41	Inf	-Inf	3	Vertical	86	2.42
5180MHz	Pass	AV	5.15G	46.45	54.00	-7.55	3	Horizontal	53	2.49
5180MHz	Pass	AV	5.1708G	99.69	Inf	-Inf	3	Horizontal	53	2.49
5180MHz	Pass	PK	5.1498G	62.48	74.00	-11.52	3	Horizontal	53	2.49
5180MHz	Pass	PK	5.1718G	111.76	Inf	-Inf	3	Horizontal	53	2.49
5180MHz	Pass	PK	10.36168G	52.52	68.20	-15.68	3	Vertical	192	1.55
5180MHz	Pass	PK	10.36168G	52.14	68.20	-16.06	3	Horizontal	192	1.55
5200MHz	Pass	AV	5.1416G	46.92	54.00	-7.08	3	Vertical	83	2.54
5200MHz	Pass	AV	5.2036G	109.65	Inf	-Inf	3	Vertical	83	2.54
5200MHz	Pass	PK	5.1396G	63.09	74.00	-10.91	3	Vertical	83	2.54
5200MHz	Pass	PK	5.202G	121.70	Inf	-Inf	3	Vertical	83	2.54
5200MHz	Pass	AV	5.15G	43.24	54.00	-10.76	3	Horizontal	54	2.66
5200MHz	Pass	AV	5.1912G	101.77	Inf	-Inf	3	Horizontal	54	2.66
5200MHz	Pass	PK	5.1488G	57.25	74.00	-16.75	3	Horizontal	54	2.66
5200MHz	Pass	PK	5.192G	113.72	Inf	-Inf	3	Horizontal	54	2.66
5200MHz	Pass	PK	10.40864G	52.70	68.20	-15.50	3	Vertical	192	1.55
5200MHz	Pass	PK	10.40216G	52.05	68.20	-16.15	3	Horizontal	192	1.55
5240MHz	Pass	AV	5.15G	51.38	54.00	-2.62	3	Vertical	87	2.59
5240MHz	Pass	AV	5.243G	111.36	Inf	-Inf	3	Vertical	87	2.59
5240MHz	Pass	AV	5.3528G	46.12	54.00	-7.88	3	Vertical	87	2.59
5240MHz	Pass	PK	5.15G	66.40	74.00	-7.60	3	Vertical	87	2.59
5240MHz	Pass	PK	5.2424G	122.99	Inf	-Inf	3	Vertical	87	2.59
5240MHz	Pass	PK	5.3534G	60.36	74.00	-13.64	3	Vertical	87	2.59
5240MHz	Pass	AV	5.15G	44.63	54.00	-9.37	3	Horizontal	55	2.54
5240MHz	Pass	AV	5.2328G	102.65	Inf	-Inf	3	Horizontal	55	2.54
5240MHz	Pass	AV	5.3534G	43.45	54.00	-10.55	3	Horizontal	55	2.54
5240MHz	Pass	PK	5.15G	57.82	74.00	-16.18	3	Horizontal	55	2.54
5240MHz	Pass	PK	5.2328G	115.09	Inf	-Inf	3	Horizontal	55	2.54
5240MHz	Pass	PK	5.3744G	57.37	74.00	-16.63	3	Horizontal	55	2.54
5240MHz	Pass	PK	10.483G	52.95	68.20	-15.25	3	Vertical	192	1.55
5240MHz	Pass	PK	10.47104G	53.16	68.20	-15.04	3	Horizontal	192	1.55
5745MHz	Pass	AV	5.4462G	43.27	54.00	-10.73	3	Vertical	237	2.91
5745MHz	Pass	AV	5.7378G	114.66	Inf	-Inf	3	Vertical	237	2.91
5745MHz	Pass	PK	5.6478G	59.86	68.20	-8.34	3	Vertical	237	2.91
5745MHz	Pass	PK	5.739G	126.75	Inf	-Inf	3	Vertical	237	2.91
5745MHz	Pass	PK	5.9898G	57.63	68.20	-10.57	3	Vertical	237	2.91
5745MHz	Pass	AV	5.4462G	43.72	54.00	-10.28	3	Horizontal	26	2.75
5745MHz	Pass	AV	5.7426G	102.97	Inf	-Inf	3	Horizontal	26	2.75
5745MHz	Pass	PK	5.5254G	56.51	68.20	-11.69	3	Horizontal	26	2.75
5745MHz	Pass	PK	5.7426G	115.30	Inf	-Inf	3	Horizontal	26	2.75
5745MHz	Pass	PK	5.9742G	58.12	68.20	-10.08	3	Horizontal	26	2.75
5745MHz	Pass	AV	11.48432G	38.96	54.00	-15.04	3	Vertical	192	1.55
5745MHz	Pass	PK	11.48968G	53.10	74.00	-20.90	3	Vertical	192	1.55
5745MHz	Pass	AV	11.49884G	38.97	54.00	-15.03	3	Horizontal	192	1.55
5745MHz	Pass	PK	11.48668G	52.79	74.00	-21.21	3	Horizontal	192	1.55
5785MHz	Pass	AV	5.791G	112.75	Inf	-Inf	3	Vertical	336	2.58



Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5785MHz	Pass	PK	5.485G	61.59	68.20	-6.61	3	Vertical	336	2.58
5785MHz	Pass	PK	5.791G	124.50	Inf	-Inf	3	Vertical	336	2.58
5785MHz	Pass	PK	6.0742G	57.79	68.20	-10.41	3	Vertical	336	2.58
5785MHz	Pass	AV	5.7838G	103.65	Inf	-Inf	3	Horizontal	58	2.92
5785MHz	Pass	PK	5.6374G	56.00	68.20	-12.20	3	Horizontal	58	2.92
5785MHz	Pass	PK	5.7838G	117.36	Inf	-Inf	3	Horizontal	58	2.92
5785MHz	Pass	PK	5.9482G	57.78	68.20	-10.42	3	Horizontal	58	2.92
5785MHz	Pass	AV	11.57476G	38.72	54.00	-15.28	3	Vertical	192	1.55
5785MHz	Pass	PK	11.56148G	52.95	74.00	-21.05	3	Vertical	192	1.55
5785MHz	Pass	AV	11.56344G	38.61	54.00	-15.39	3	Horizontal	192	1.55
5785MHz	Pass	PK	11.56992G	52.25	74.00	-21.75	3	Horizontal	192	1.55
5825MHz	Pass	AV	5.8322G	112.15	Inf	-Inf	3	Vertical	337	2.66
5825MHz	Pass	PK	5.525G	60.65	68.20	-7.55	3	Vertical	337	2.66
5825MHz	Pass	PK	5.831G	124.34	Inf	-Inf	3	Vertical	337	2.66
5825MHz	Pass	PK	5.981G	57.86	68.20	-10.34	3	Vertical	337	2.66
5825MHz	Pass	AV	5.8166G	102.64	Inf	-Inf	3	Horizontal	185	2.73
5825MHz	Pass	PK	5.6294G	56.45	68.20	-11.75	3	Horizontal	185	2.73
5825MHz	Pass	PK	5.8178G	114.20	Inf	-Inf	3	Horizontal	185	2.73
5825MHz	Pass	PK	6.1058G	58.14	68.20	-10.06	3	Horizontal	185	2.73
5825MHz	Pass	AV	11.6434G	38.90	54.00	-15.10	3	Vertical	192	1.55
5825MHz	Pass	PK	11.64208G	53.27	74.00	-20.73	3	Vertical	192	1.55
5825MHz	Pass	AV	11.64204G	38.91	54.00	-15.09	3	Horizontal	192	1.55
5825MHz	Pass	PK	11.6506G	53.16	74.00	-20.84	3	Horizontal	192	1.55
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5190MHz	Pass	AV	5.15G	52.70	54.00	-1.30	3	Vertical	88	2.44
5190MHz	Pass	AV	5.1932G	105.51	Inf	-Inf	3	Vertical	88	2.44
5190MHz	Pass	PK	5.15G	66.66	74.00	-7.34	3	Vertical	88	2.44
5190MHz	Pass	PK	5.1936G	117.94	Inf	-Inf	3	Vertical	88	2.44
5190MHz	Pass	AV	5.1496G	44.37	54.00	-9.63	3	Horizontal	52	2.61
5190MHz	Pass	AV	5.2016G	96.62	Inf	-Inf	3	Horizontal	52	2.61
5190MHz	Pass	PK	5.14G	58.85	74.00	-15.15	3	Horizontal	52	2.61
5190MHz	Pass	PK	5.2008G	109.81	Inf	-Inf	3	Horizontal	52	2.61
5190MHz	Pass	PK	10.38528G	52.39	68.20	-15.81	3	Vertical	192	1.55
5190MHz	Pass	PK	10.38432G	52.72	68.20	-15.48	3	Horizontal	192	1.55
5230MHz	Pass	AV	5.15G	50.95	54.00	-3.05	3	Vertical	87	2.55
5230MHz	Pass	AV	5.2132G	107.09	Inf	-Inf	3	Vertical	87	2.55
5230MHz	Pass	PK	5.15G	66.75	74.00	-7.25	3	Vertical	87	2.55
5230MHz	Pass	PK	5.212G	119.31	Inf	-Inf	3	Vertical	87	2.55
5230MHz	Pass	AV	5.1468G	45.72	54.00	-8.28	3	Horizontal	54	2.58
5230MHz	Pass	AV	5.222G	98.07	Inf	-Inf	3	Horizontal	54	2.58
5230MHz	Pass	PK	5.146G	63.32	74.00	-10.68	3	Horizontal	54	2.58
5230MHz	Pass	PK	5.2232G	110.82	Inf	-Inf	3	Horizontal	54	2.58
5230MHz	Pass	PK	10.45744G	51.78	68.20	-16.42	3	Vertical	192	1.55
5230MHz	Pass	PK	10.45436G	51.75	68.20	-16.45	3	Horizontal	192	1.55
5755MHz	Pass	AV	5.455G	45.10	54.00	-8.90	3	Vertical	300	2.91
5755MHz	Pass	AV	5.7586G	109.09	Inf	-Inf	3	Vertical	300	2.91
5755MHz	Pass	PK	5.6494G	62.31	68.20	-5.89	3	Vertical	300	2.91
5755MHz	Pass	PK	5.7574G	120.68	Inf	-Inf	3	Vertical	300	2.91
5755MHz	Pass	PK	5.9698G	58.24	68.20	-9.96	3	Vertical	300	2.91
5755MHz	Pass	AV	5.4598G	42.45	54.00	-11.55	3	Horizontal	57	2.66
5755MHz	Pass	AV	5.7538G	99.27	Inf	-Inf	3	Horizontal	57	2.66
5755MHz	Pass	PK	5.6458G	56.76	68.20	-11.44	3	Horizontal	57	2.66
5755MHz	Pass	PK	5.7538G	110.50	Inf	-Inf	3	Horizontal	57	2.66
5755MHz	Pass	PK	6.0502G	58.25	68.20	-9.95	3	Horizontal	57	2.66
5755MHz	Pass	AV	11.49888G	38.88	54.00	-15.12	3	Vertical	192	1.55
5755MHz	Pass	PK	11.49976G	51.71	74.00	-22.29	3	Vertical	192	1.55
5755MHz	Pass	AV	11.49232G	38.82	54.00	-15.18	3	Horizontal	192	1.55
5755MHz	Pass	PK	11.51568G	51.81	74.00	-22.19	3	Horizontal	192	1.55
5795MHz	Pass	AV	5.7818G	110.19	Inf	-Inf	3	Vertical	335	2.62
5795MHz	Pass	PK	5.6402G	64.04	68.20	-4.16	3	Vertical	335	2.62
5795MHz	Pass	PK	5.7806G	122.57	Inf	-Inf	3	Vertical	335	2.62
5795MHz	Pass	PK	6.0842G	58.11	68.20	-10.09	3	Vertical	335	2.62






Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5795MHz	Pass	AV	5.7986G	101.00	Inf	-Inf	3	Horizontal	69	2.77
5795MHz	Pass	PK	5.645G	62.41	68.20	-5.79	3	Horizontal	69	2.77
5795MHz	Pass	PK	5.7998G	113.52	Inf	-Inf	3	Horizontal	69	2.77
5795MHz	Pass	PK	6.035G	58.31	68.20	-9.89	3	Horizontal	69	2.77
5795MHz	Pass	AV	11.5956G	38.71	54.00	-15.29	3	Vertical	192	1.55
5795MHz	Pass	PK	11.59616G	52.25	74.00	-21.75	3	Vertical	192	1.55
5795MHz	Pass	AV	11.58008G	38.58	54.00	-15.42	3	Horizontal	192	1.55
5795MHz	Pass	PK	11.58408G	51.92	74.00	-22.08	3	Horizontal	192	1.55
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	AV	5.133G	53.54	54.00	-0.46	3	Vertical	84	2.55
5210MHz	Pass	AV	5.213G	102.02	Inf	-Inf	3	Vertical	84	2.55
5210MHz	Pass	AV	5.354G	46.62	54.00	-7.38	3	Vertical	84	2.55
5210MHz	Pass	PK	5.142G	66.27	74.00	-7.73	3	Vertical	84	2.55
5210MHz	Pass	PK	5.213G	114.62	Inf	-Inf	3	Vertical	84	2.55
5210MHz	Pass	PK	5.354G	59.97	74.00	-14.03	3	Vertical	84	2.55
5210MHz	Pass	AV	5.142G	47.06	54.00	-6.94	3	Horizontal	53	2.62
5210MHz	Pass	AV	5.202G	93.77	Inf	-Inf	3	Horizontal	53	2.62
5210MHz	Pass	AV	5.353G	43.23	54.00	-10.77	3	Horizontal	53	2.62
5210MHz	Pass	PK	5.141G	59.88	74.00	-14.12	3	Horizontal	53	2.62
5210MHz	Pass	PK	5.201G	106.24	Inf	-Inf	3	Horizontal	53	2.62
5210MHz	Pass	PK	5.443G	56.35	74.00	-17.65	3	Horizontal	53	2.62
5210MHz	Pass	PK	10.42672G	51.75	68.20	-16.45	3	Vertical	192	1.55
5210MHz	Pass	PK	10.44816G	52.04	68.20	-16.16	3	Horizontal	192	1.55
5775MHz	Pass	AV	5.7798G	105.43	Inf	-Inf	3	Vertical	297	2.87
5775MHz	Pass	PK	5.6394G	65.61	68.20	-2.59	3	Vertical	297	2.87
5775MHz	Pass	PK	5.7798G	116.81	Inf	-Inf	3	Vertical	297	2.87
5775MHz	Pass	PK	6.027G	58.02	68.20	-10.18	3	Vertical	297	2.87
5775MHz	Pass	AV	5.7738G	96.57	Inf	-Inf	3	Horizontal	54	2.51
5775MHz	Pass	PK	5.6502G	58.08	68.35	-10.27	3	Horizontal	54	2.51
5775MHz	Pass	PK	5.7738G	108.67	Inf	-Inf	3	Horizontal	54	2.51
5775MHz	Pass	PK	6.0474G	57.96	68.20	-10.24	3	Horizontal	54	2.51
5775MHz	Pass	AV	11.51784G	38.66	54.00	-15.34	3	Vertical	192	1.55
5775MHz	Pass	PK	11.58328G	51.62	74.00	-22.38	3	Vertical	192	1.55
5775MHz	Pass	AV	11.5204G	38.75	54.00	-15.25	3	Horizontal	192	1.55
5775MHz	Pass	PK	11.57192G	52.06	74.00	-21.94	3	Horizontal	192	1.55

5.15-5.25GHz\_802.11a\_Nss1,(6Mbps)\_4TX


5180MHz\_TX

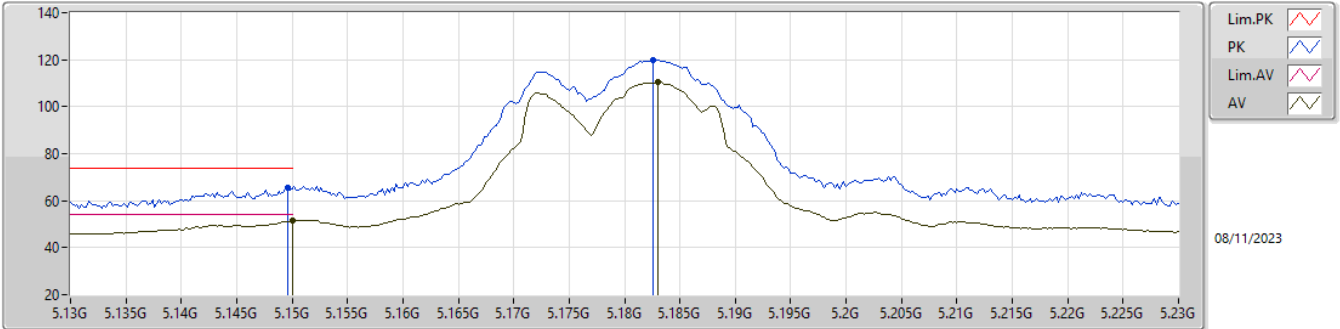

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.15G	51.40	54.00	-2.60	1.62	3	Vertical	89	2.49	49.78	33.40	5.46	37.24
AV	5.183G	110.30	Inf	-Inf	1.56	3	Vertical	89	2.49	108.74	33.33	5.48	37.25
PK	5.1496G	65.35	74.00	-8.65	1.62	3	Vertical	89	2.49	63.73	33.40	5.46	37.24
PK	5.1826G	119.99	Inf	-Inf	1.56	3	Vertical	89	2.49	118.43	33.33	5.48	37.25

5.15-5.25GHz\_802.11a\_Nss1,(6Mbps)\_4TX


5180MHz\_TX

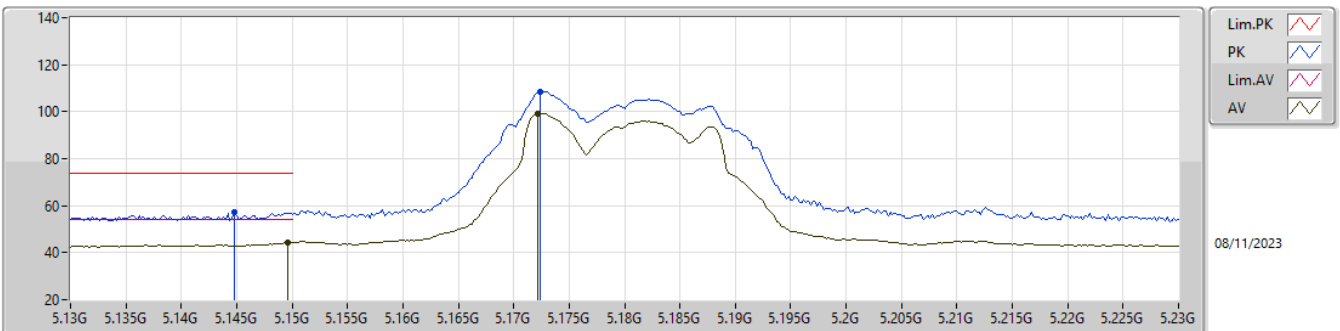

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.1496G	44.36	54.00	-9.64	1.62	3	Horizontal	52	2.44	42.74	33.40	5.46	37.24
AV	5.1722G	99.07	Inf	-Inf	1.58	3	Horizontal	52	2.44	97.49	33.36	5.47	37.25
PK	5.1448G	57.36	74.00	-16.64	1.62	3	Horizontal	52	2.44	55.74	33.40	5.46	37.24
PK	5.1724G	108.59	Inf	-Inf	1.58	3	Horizontal	52	2.44	107.01	33.36	5.47	37.25


5.15-5.25GHz\_802.11a\_Nss1,(6Mbps)\_4TX

5180MHz\_TX

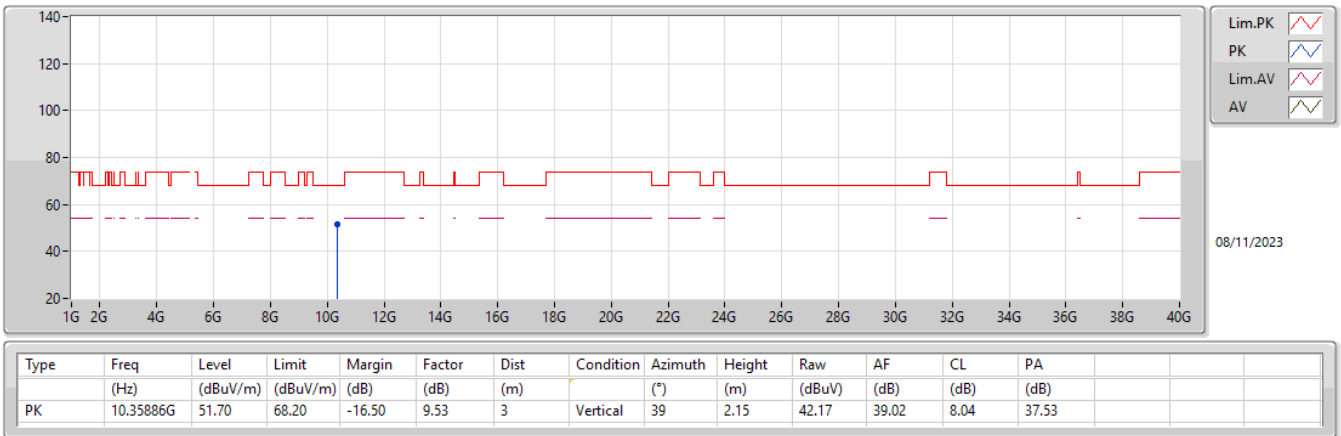


5.15-5.25GHz\_802.11a\_Nss1,(6Mbps)\_4TX

5180MHz\_TX

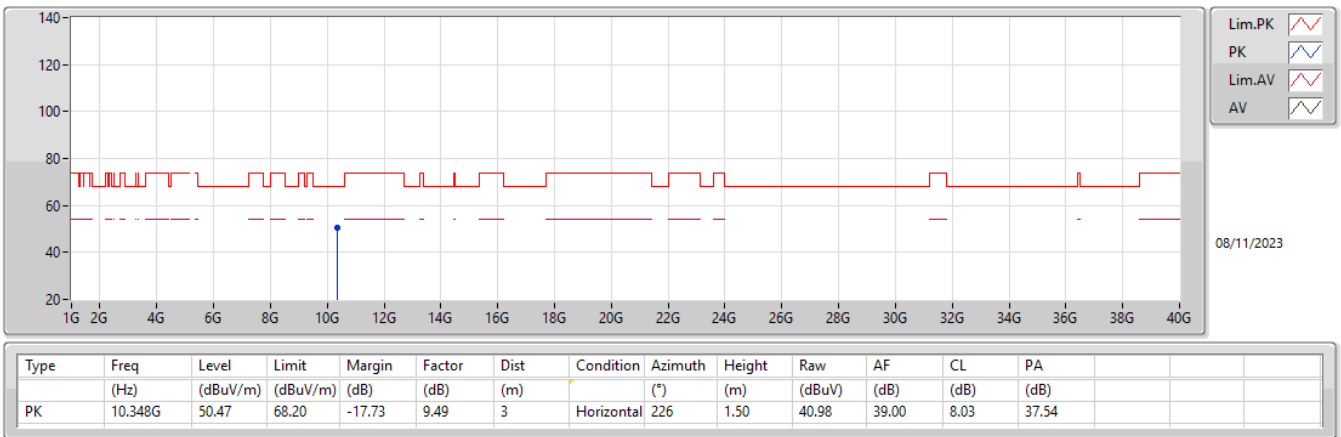

5.15-5.25GHz\_802.11a\_Nss1,(6Mbps)\_4TX


5200MHz\_TX

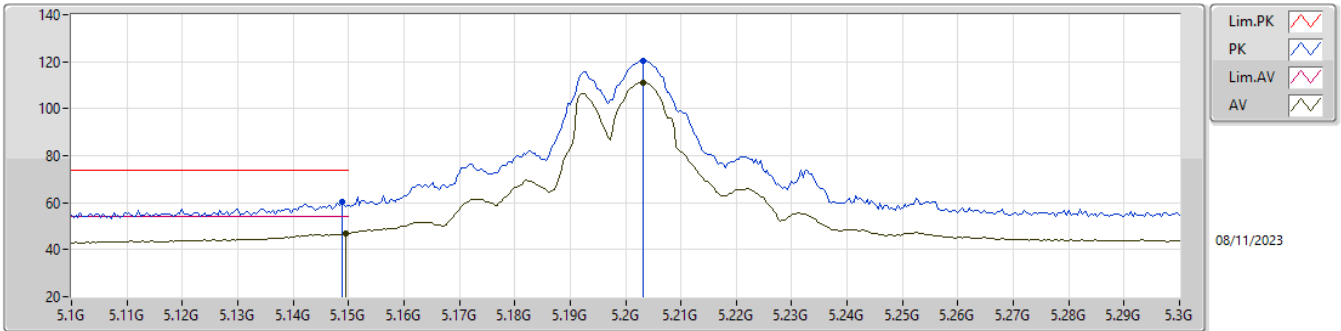

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.1496G	47.01	54.00	-6.99	1.62	3	Vertical	87	2.46	45.39	33.40	5.46	37.24
AV	5.2032G	111.18	Inf	-Inf	1.52	3	Vertical	87	2.46	109.66	33.29	5.49	37.26
PK	5.1488G	60.26	74.00	-13.74	1.62	3	Vertical	87	2.46	58.64	33.40	5.46	37.24
PK	5.2032G	120.52	Inf	-Inf	1.52	3	Vertical	87	2.46	119.00	33.29	5.49	37.26

5.15-5.25GHz\_802.11a\_Nss1,(6Mbps)\_4TX


5200MHz\_TX

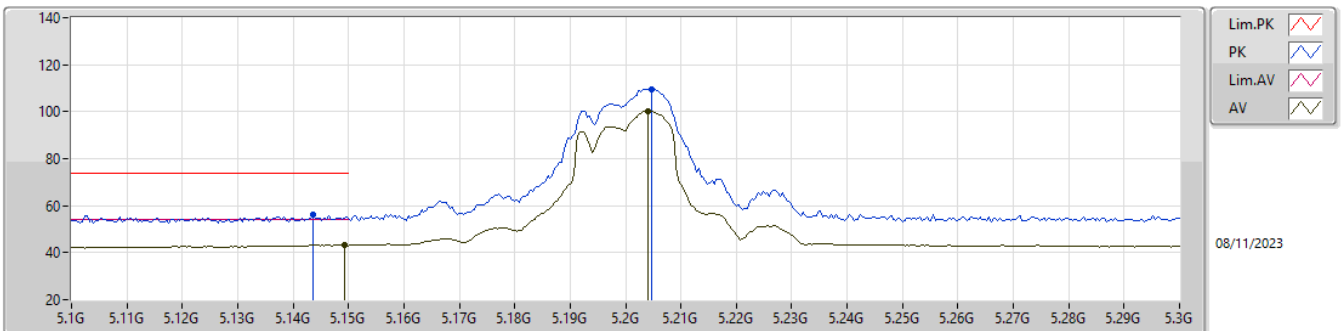

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.1492G	43.49	54.00	-10.51	1.62	3	Horizontal	354	2.70	41.87	33.40	5.46	37.24
AV	5.204G	100.10	Inf	-Inf	1.51	3	Horizontal	354	2.70	98.59	33.28	5.49	37.26
PK	5.1436G	55.97	74.00	-18.03	1.62	3	Horizontal	354	2.70	54.35	33.40	5.46	37.24
PK	5.2048G	109.72	Inf	-Inf	1.51	3	Horizontal	354	2.70	108.21	33.28	5.49	37.26


5.15-5.25GHz\_802.11a\_Nss1,(6Mbps)\_4TX

5200MHz\_TX

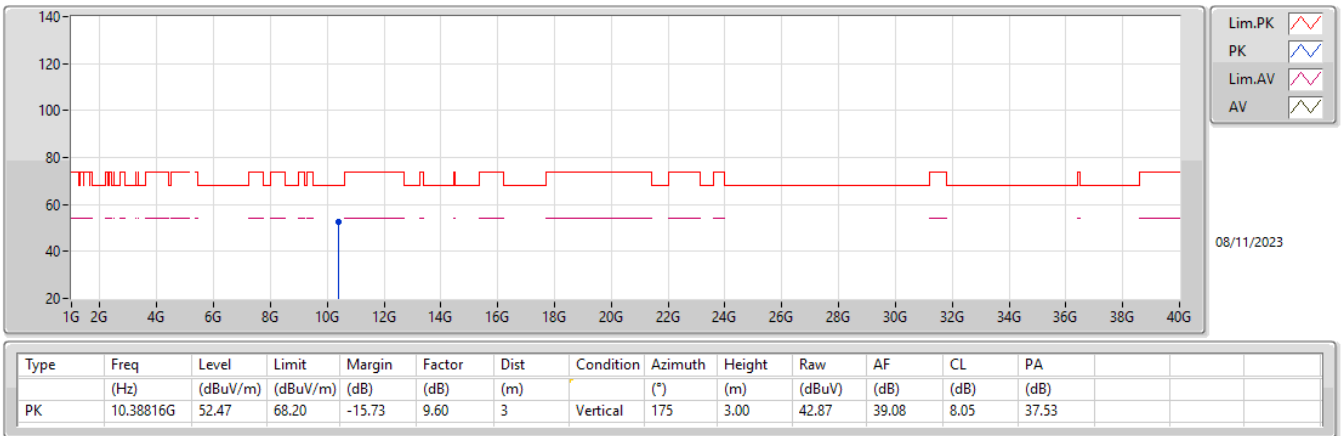


5.15-5.25GHz\_802.11a\_Nss1,(6Mbps)\_4TX

5200MHz\_TX

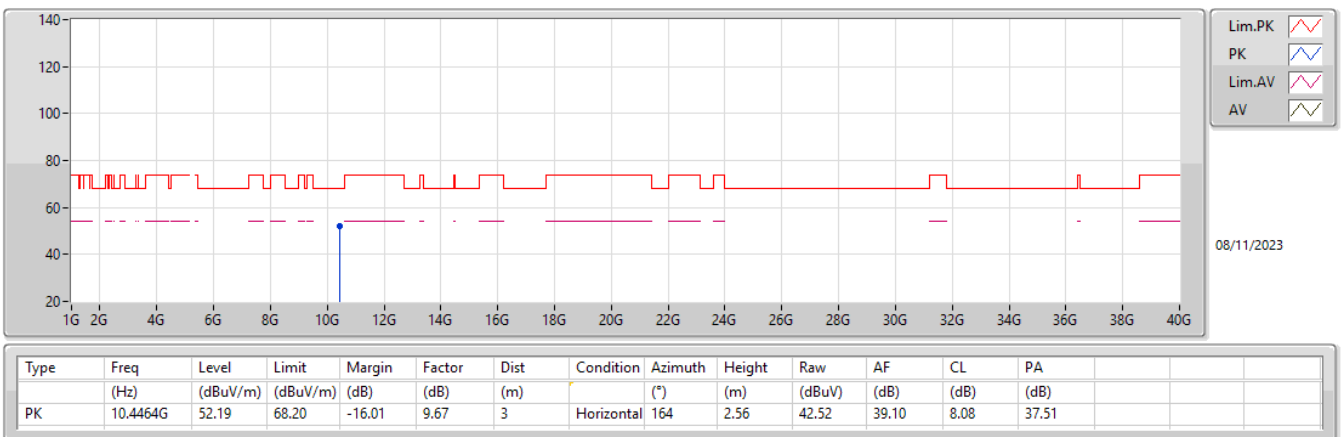

5.15-5.25GHz\_802.11a\_Nss1,(6Mbps)\_4TX


5240MHz\_TX

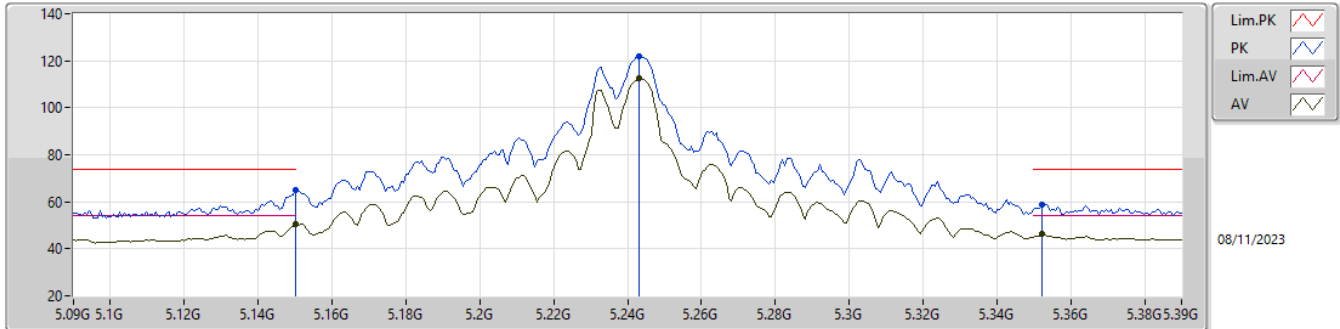

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.15G	50.51	54.00	-3.49	1.62	3	Vertical	85	2.60	48.89	33.40	5.46	37.24
AV	5.243G	112.42	Inf	-Inf	1.38	3	Vertical	85	2.60	111.04	33.13	5.52	37.27
AV	5.3522G	46.15	54.00	-7.85	1.28	3	Vertical	85	2.60	44.87	33.00	5.58	37.30
PK	5.15G	65.19	74.00	-8.81	1.62	3	Vertical	85	2.60	63.57	33.40	5.46	37.24
PK	5.243G	121.86	Inf	-Inf	1.38	3	Vertical	85	2.60	120.48	33.13	5.52	37.27
PK	5.3522G	58.66	74.00	-15.34	1.28	3	Vertical	85	2.60	57.38	33.00	5.58	37.30

5.15-5.25GHz\_802.11a\_Nss1,(6Mbps)\_4TX


5240MHz\_TX

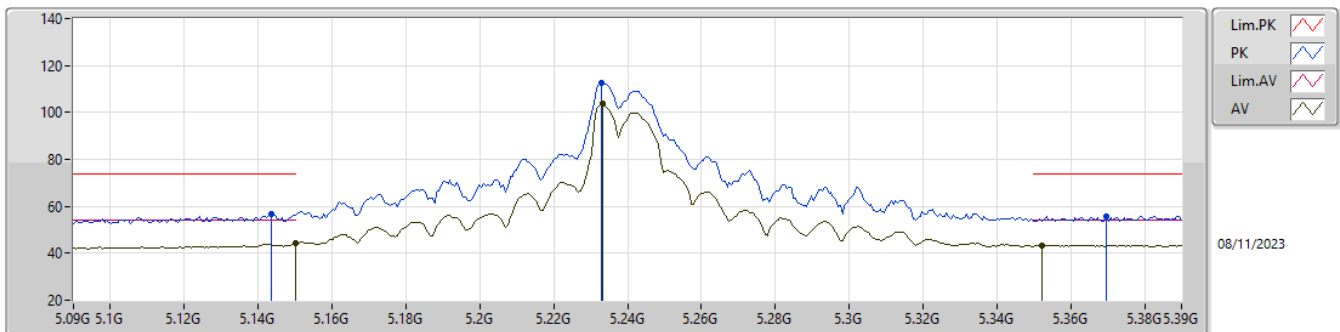

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.15G	44.28	54.00	-9.72	1.62	3	Horizontal	57	2.54	42.66	33.40	5.46	37.24
AV	5.2334G	103.55	Inf	-Inf	1.41	3	Horizontal	57	2.54	102.14	33.17	5.51	37.27
AV	5.3522G	43.52	54.00	-10.48	1.28	3	Horizontal	57	2.54	42.24	33.00	5.58	37.30
PK	5.1434G	56.85	74.00	-17.15	1.62	3	Horizontal	57	2.54	55.23	33.40	5.46	37.24
PK	5.2328G	112.82	Inf	-Inf	1.41	3	Horizontal	57	2.54	111.41	33.17	5.51	37.27
PK	5.3696G	55.88	74.00	-18.12	1.29	3	Horizontal	57	2.54	54.59	33.00	5.59	37.30

5.15-5.25GHz\_802.11a\_Nss1,(6Mbps)\_4TX


5240MHz\_TX

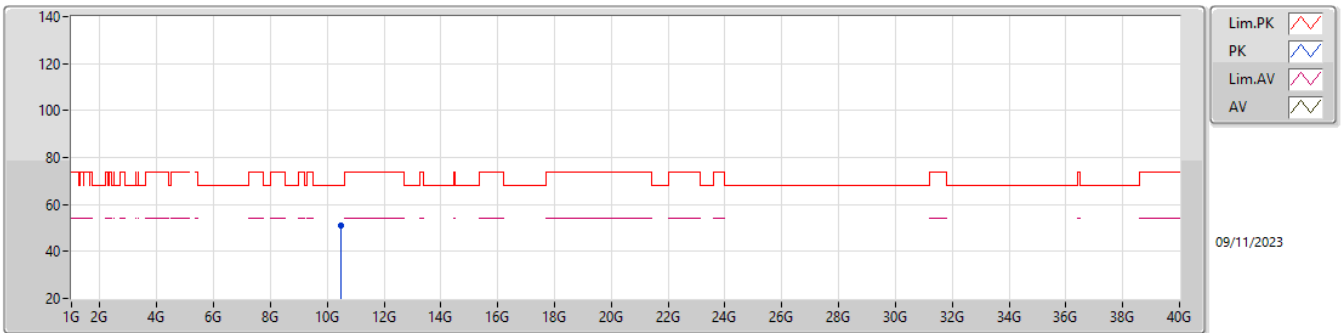

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	10.4764G	51.07	68.20	-17.13	9.63	3	Vertical	171	1.80	41.44	39.05	8.09	37.51

5.15-5.25GHz\_802.11a\_Nss1,(6Mbps)\_4TX


5240MHz\_TX

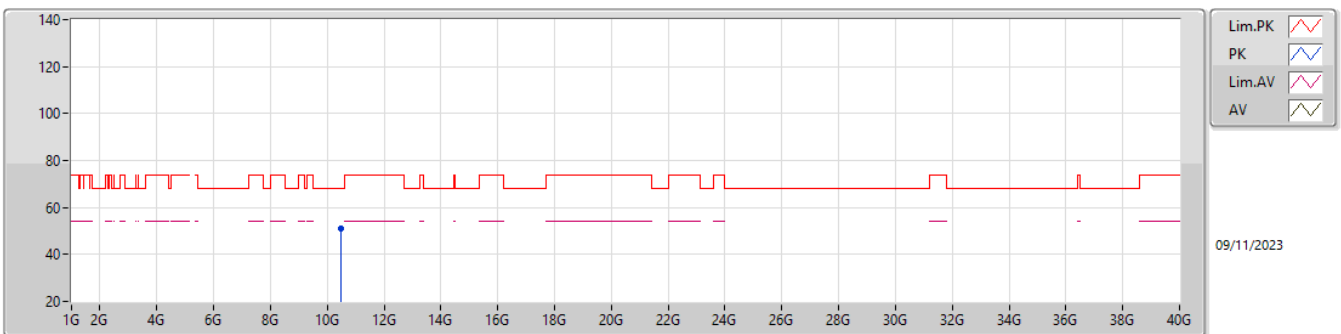

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	10.48052G	51.11	68.20	-17.09	9.64	3	Horizontal	168	2.21	41.47	39.04	8.10	37.50

5.725-5.85GHz\_802.11a\_Nss1,(6Mbps)\_4TX


5745MHz\_TX

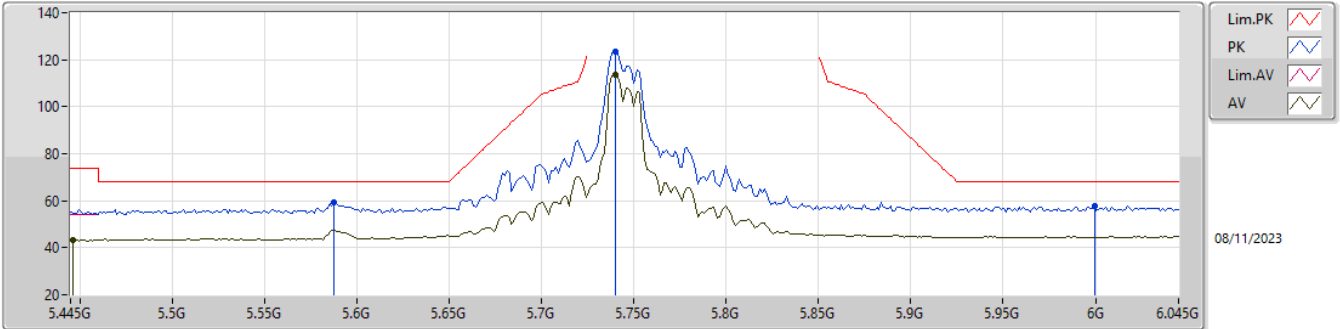

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.4462G	43.48	54.00	-10.52	1.40	3	Vertical	56	2.61	42.08	33.09	5.63	37.32
AV	5.7402G	113.85	Inf	-Inf	2.58	3	Vertical	56	2.61	111.27	33.96	5.78	37.16
PK	5.5878G	59.07	68.20	-9.13	1.59	3	Vertical	56	2.61	57.48	33.18	5.69	37.28
PK	5.7402G	123.41	Inf	-Inf	2.58	3	Vertical	56	2.61	120.83	33.96	5.78	37.16
PK	5.9994G	57.93	68.20	-10.27	3.45	3	Vertical	56	2.61	54.48	34.50	5.92	36.97

5.725-5.85GHz\_802.11a\_Nss1,(6Mbps)\_4TX

5745MHz\_TX

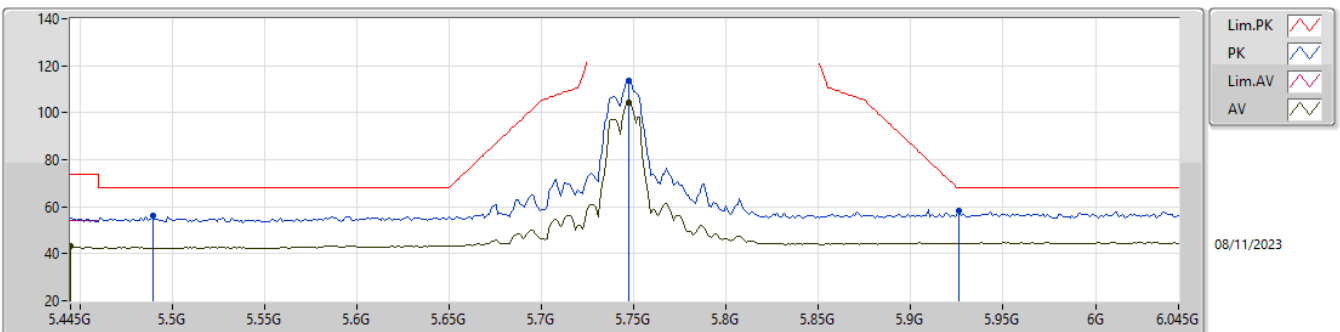


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.445G	43.39	54.00	-10.61	1.40	3	Horizontal	131	2.47	41.99	33.09	5.63	37.32
AV	5.7474G	104.10	Inf	-Inf	2.61	3	Horizontal	131	2.47	101.49	33.99	5.78	37.16
PK	5.4894G	56.17	68.20	-12.03	1.49	3	Horizontal	131	2.47	54.68	33.18	5.65	37.34
PK	5.7474G	113.65	Inf	-Inf	2.61	3	Horizontal	131	2.47	111.04	33.99	5.78	37.16
PK	5.9262G	58.22	68.20	-9.98	3.36	3	Horizontal	131	2.47	54.86	34.50	5.88	37.02



5.725-5.85GHz\_802.11a\_Nss1,(6Mbps)\_4TX


5745MHz\_TX

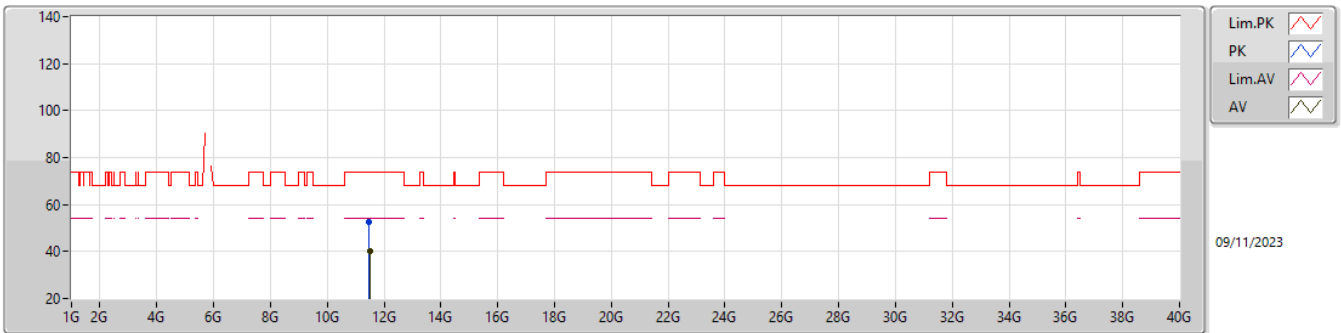

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	11.48984G	39.94	54.00	-14.06	10.04	3	Vertical	326	3.00	29.90	39.38	8.57	37.91
PK	11.48148G	52.78	74.00	-21.22	10.02	3	Vertical	326	3.00	42.76	39.36	8.57	37.91

5.725-5.85GHz\_802.11a\_Nss1,(6Mbps)\_4TX


5745MHz\_TX

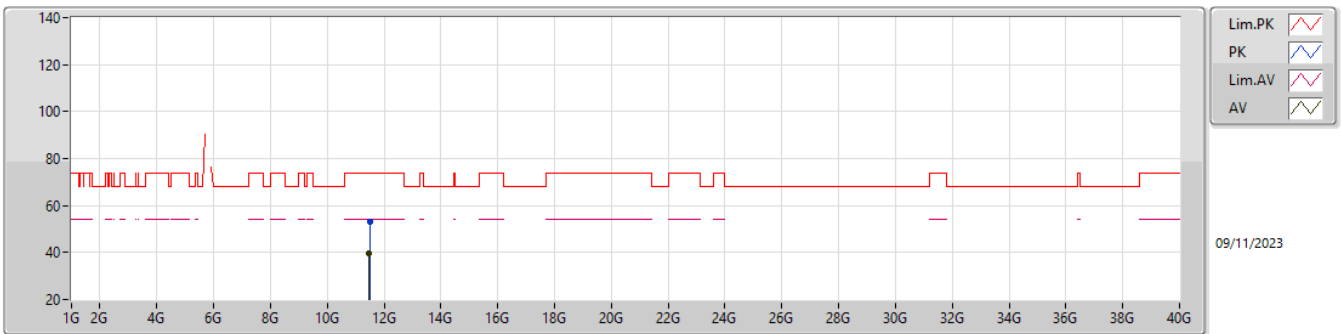

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	11.48616G	39.51	54.00	-14.49	10.03	3	Horizontal	323	2.95	29.48	39.37	8.57	37.91
PK	11.48908G	52.98	74.00	-21.02	10.04	3	Horizontal	323	2.95	42.94	39.38	8.57	37.91

5.725-5.85GHz\_802.11a\_Nss1,(6Mbps)\_4TX


5785MHz\_TX

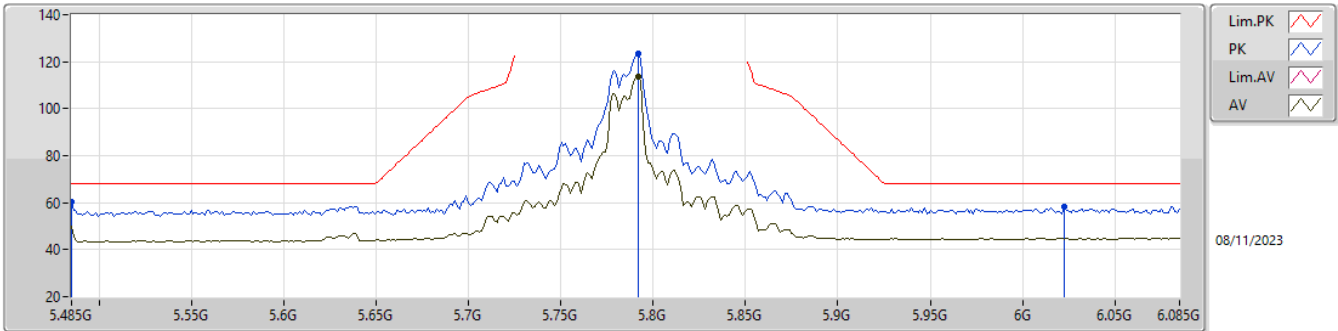

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.7922G	113.43	Inf	-Inf	2.94	3	Vertical	336	2.57	110.49	34.25	5.81	37.12
PK	5.485G	60.15	68.20	-8.05	1.48	3	Vertical	336	2.57	58.67	33.17	5.65	37.34
PK	5.7922G	123.27	Inf	-Inf	2.94	3	Vertical	336	2.57	120.33	34.25	5.81	37.12
PK	6.0226G	58.43	68.20	-9.77	3.47	3	Vertical	336	2.57	54.96	34.50	5.93	36.96

5.725-5.85GHz\_802.11a\_Nss1,(6Mbps)\_4TX


5785MHz\_TX

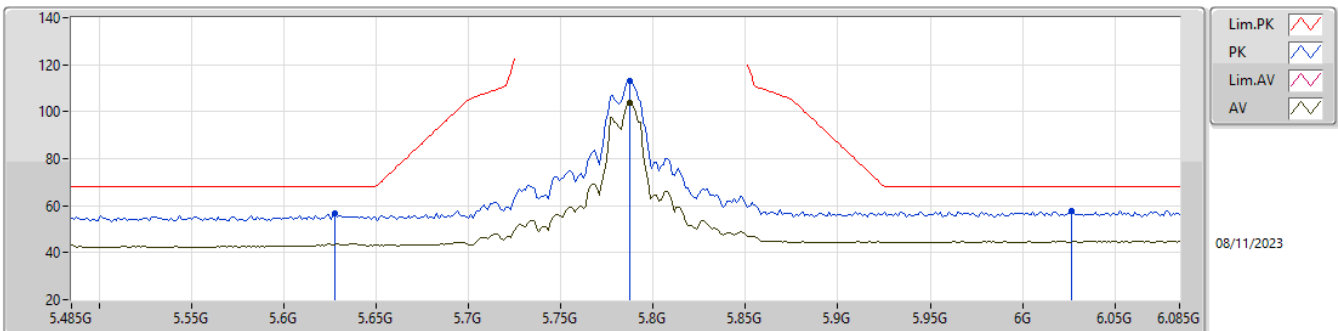

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.7874G	103.63	Inf	-Inf	2.89	3	Horizontal	130	2.45	100.74	34.22	5.80	37.13
PK	5.6278G	56.59	68.20	-11.61	1.78	3	Horizontal	130	2.45	54.81	33.31	5.72	37.25
PK	5.7874G	113.11	Inf	-Inf	2.89	3	Horizontal	130	2.45	110.22	34.22	5.80	37.13
PK	6.0262G	58.00	68.20	-10.20	3.47	3	Horizontal	130	2.45	54.53	34.50	5.93	36.96

5.725-5.85GHz\_802.11a\_Nss1,(6Mbps)\_4TX


5785MHz\_TX

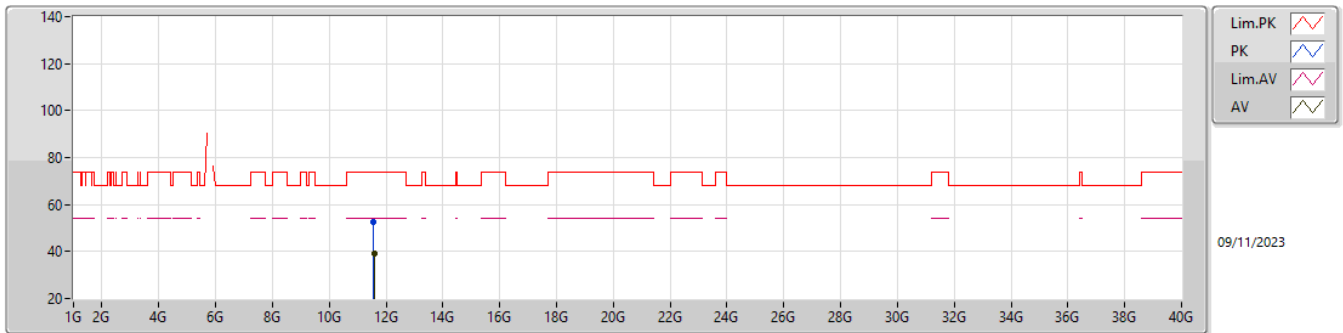

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	11.5742G	39.25	54.00	-14.75	9.79	3	Vertical	123	2.75	29.46	39.10	8.61	37.92
PK	11.57084G	52.37	74.00	-21.63	9.81	3	Vertical	123	2.75	42.56	39.12	8.61	37.92

5.725-5.85GHz\_802.11a\_Nss1,(6Mbps)\_4TX


5785MHz\_TX

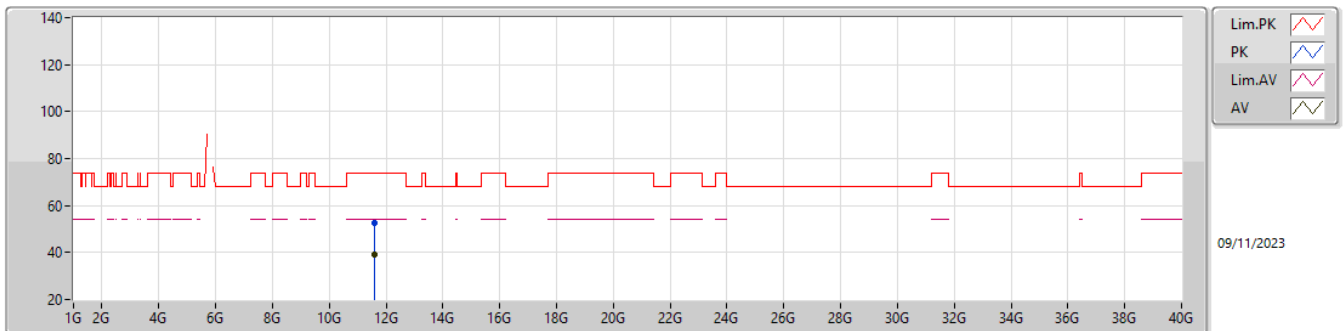

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	11.57832G	39.19	54.00	-14.81	9.78	3	Horizontal	123	2.75	29.41	39.09	8.61	37.92
PK	11.57336G	52.43	74.00	-21.57	9.80	3	Horizontal	123	2.75	42.63	39.11	8.61	37.92

5.725-5.85GHz\_802.11a\_Nss1,(6Mbps)\_4TX


5825MHz\_TX

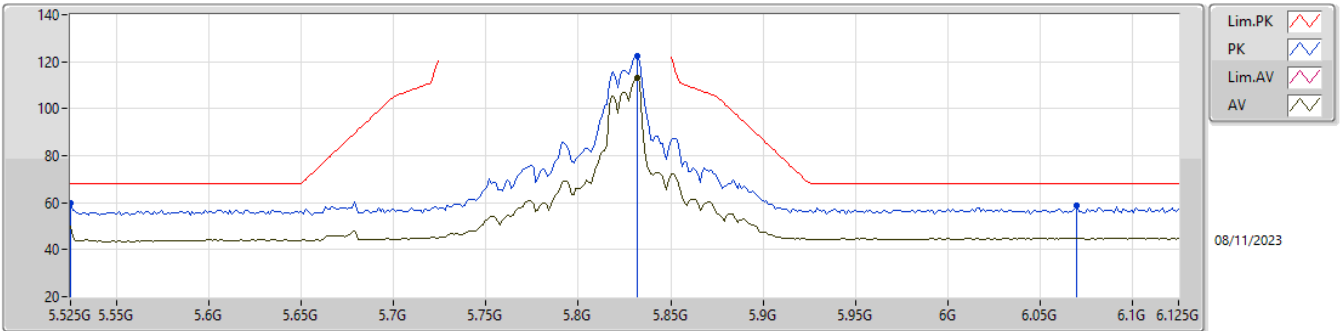

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.8322G	113.14	Inf	-Inf	3.04	3	Vertical	336	2.68	110.10	34.30	5.83	37.09
PK	5.525G	59.90	68.20	-8.30	1.50	3	Vertical	336	2.68	58.40	33.15	5.67	37.32
PK	5.8322G	122.63	Inf	-Inf	3.04	3	Vertical	336	2.68	119.59	34.30	5.83	37.09
PK	6.0698G	58.63	68.20	-9.57	3.47	3	Vertical	336	2.68	55.16	34.46	5.95	36.94

5.725-5.85GHz\_802.11a\_Nss1,(6Mbps)\_4TX


5825MHz\_TX

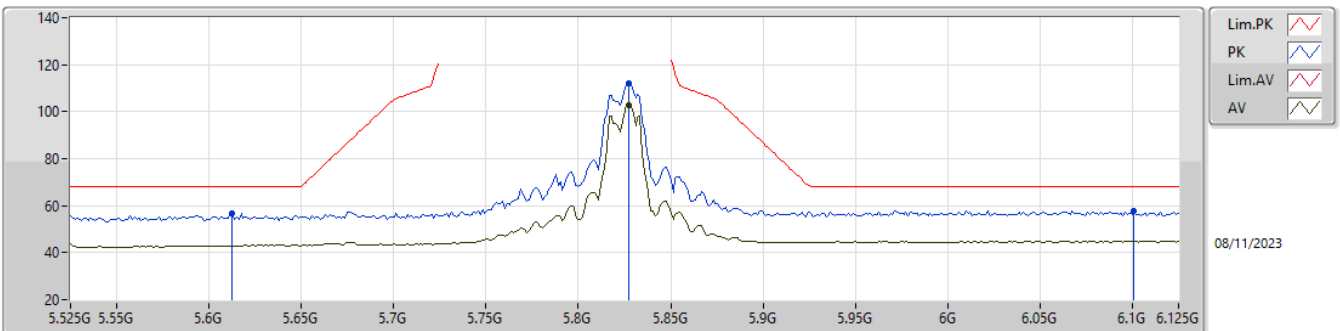

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.8274G	102.90	Inf	-Inf	3.03	3	Horizontal	130	2.69	99.87	34.30	5.83	37.10
PK	5.6126G	56.62	68.20	-11.58	1.70	3	Horizontal	130	2.69	54.92	33.25	5.71	37.26
PK	5.8274G	112.29	Inf	-Inf	3.03	3	Horizontal	130	2.69	109.26	34.30	5.83	37.10
PK	6.101G	57.89	68.20	-10.31	3.44	3	Horizontal	130	2.69	54.45	34.40	5.97	36.93

5.725-5.85GHz\_802.11a\_Nss1,(6Mbps)\_4TX


5825MHz\_TX

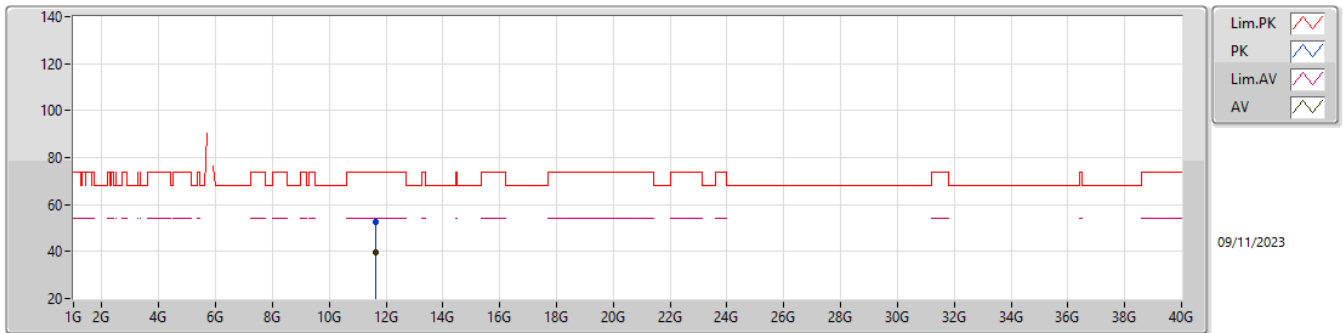

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	11.65056G	39.64	54.00	-14.36	9.62	3	Vertical	192	1.55	30.02	38.90	8.65	37.93
PK	11.64316G	52.67	74.00	-21.33	9.62	3	Vertical	192	1.55	43.05	38.91	8.64	37.93

5.725-5.85GHz\_802.11a\_Nss1,(6Mbps)\_4TX


5825MHz\_TX

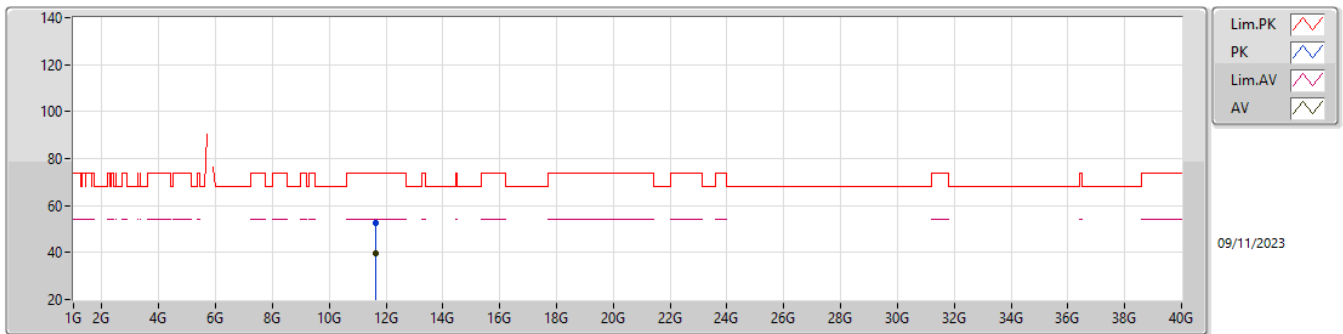

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	11.6448G	39.44	54.00	-14.56	9.62	3	Horizontal	192	1.55	29.82	38.91	8.64	37.93
PK	11.64316G	52.82	74.00	-21.18	9.62	3	Horizontal	192	1.55	43.20	38.91	8.64	37.93

5.15-5.25GHz\_802.11be EHT20\_Nss1,(MCS0)\_4TX


5180MHz\_TX

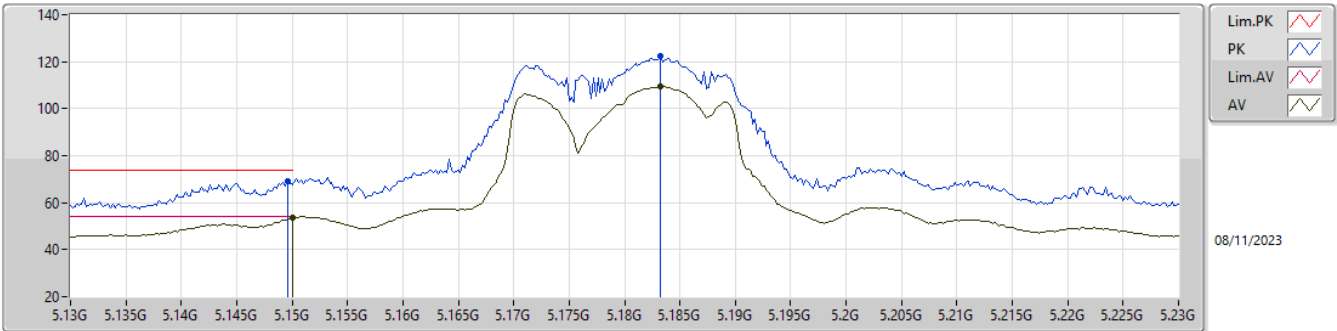

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.15G	53.44	54.00	-0.56	1.62	3	Vertical	86	2.42	51.82	33.40	5.46	37.24
AV	5.1832G	109.28	Inf	-Inf	1.56	3	Vertical	86	2.42	107.72	33.33	5.48	37.25
PK	5.1496G	69.22	74.00	-4.78	1.62	3	Vertical	86	2.42	67.60	33.40	5.46	37.24
PK	5.1832G	122.41	Inf	-Inf	1.56	3	Vertical	86	2.42	120.85	33.33	5.48	37.25

5.15-5.25GHz\_802.11be EHT20\_Nss1,(MCS0)\_4TX


5180MHz\_TX

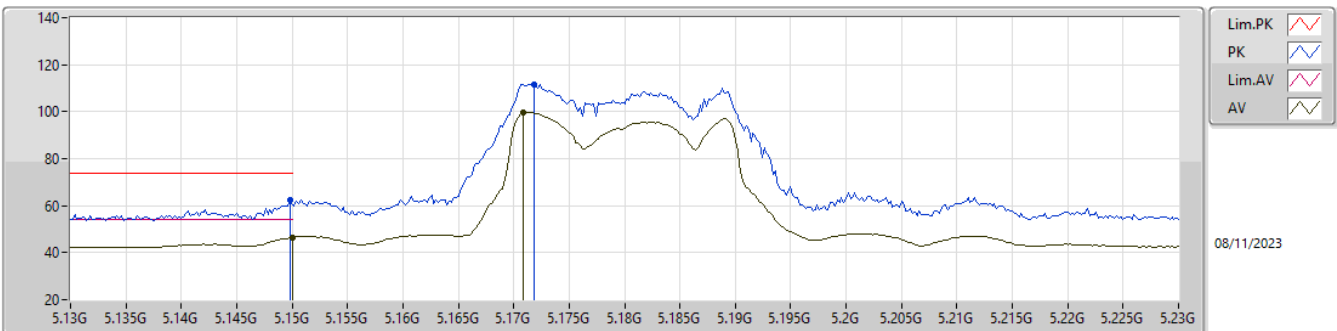

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.15G	46.45	54.00	-7.55	1.62	3	Horizontal	53	2.49	44.83	33.40	5.46	37.24
AV	5.1708G	99.69	Inf	-Inf	1.58	3	Horizontal	53	2.49	98.11	33.36	5.47	37.25
PK	5.1498G	62.48	74.00	-11.52	1.62	3	Horizontal	53	2.49	60.86	33.40	5.46	37.24
PK	5.1718G	111.76	Inf	-Inf	1.58	3	Horizontal	53	2.49	110.18	33.36	5.47	37.25


5.15-5.25GHz\_802.11be EHT20\_Nss1,(MCS0)\_4TX

5180MHz\_TX

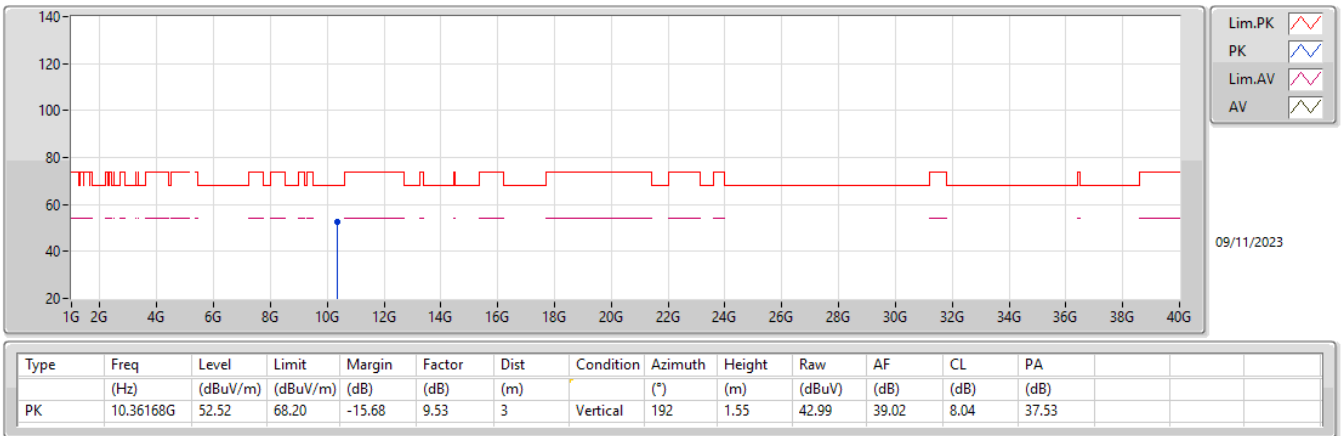


5.15-5.25GHz\_802.11be EHT20\_Nss1,(MCS0)\_4TX

5180MHz\_TX

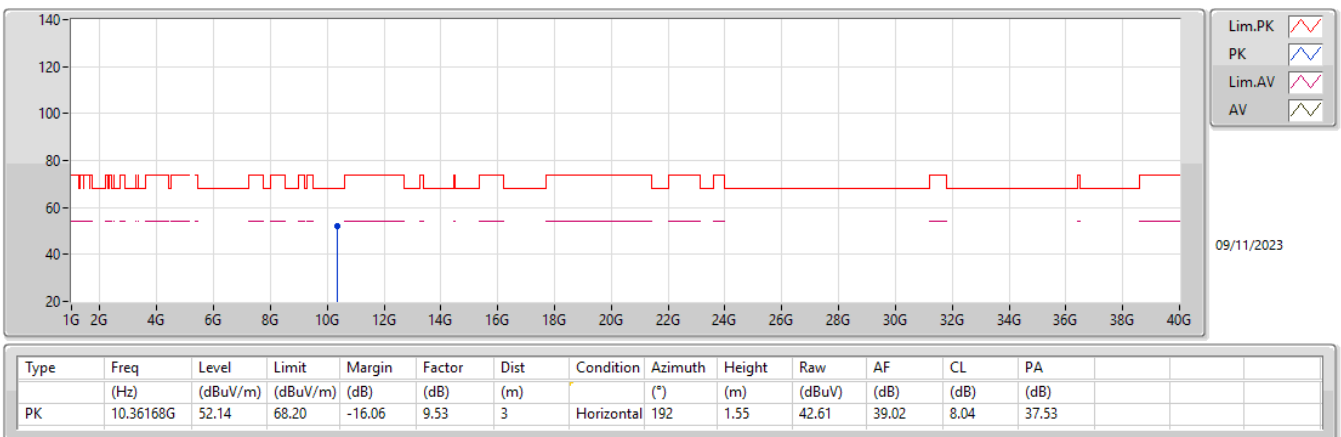

5.15-5.25GHz\_802.11be EHT20\_Nss1,(MCS0)\_4TX


5200MHz\_TX

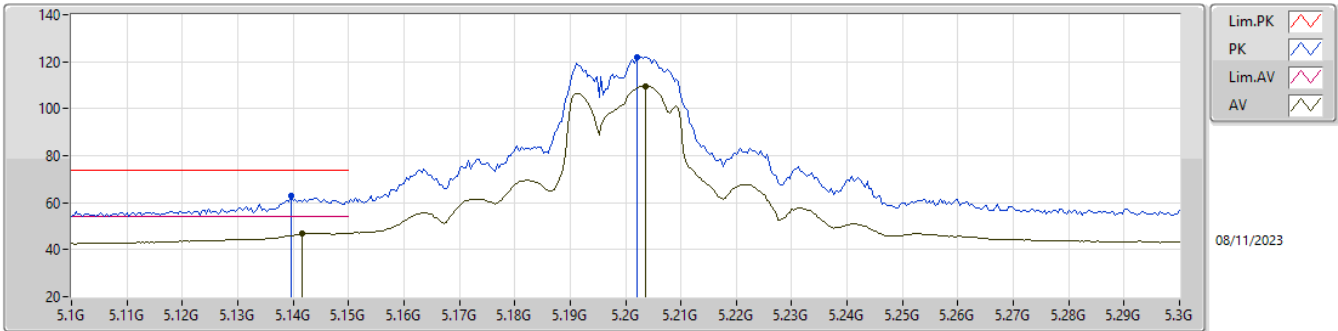

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.1416G	46.92	54.00	-7.08	1.62	3	Vertical	83	2.54	45.30	33.40	5.46	37.24
AV	5.2036G	109.65	Inf	-Inf	1.52	3	Vertical	83	2.54	108.13	33.29	5.49	37.26
PK	5.1396G	63.09	74.00	-10.91	1.62	3	Vertical	83	2.54	61.47	33.40	5.46	37.24
PK	5.202G	121.70	Inf	-Inf	1.52	3	Vertical	83	2.54	120.18	33.29	5.49	37.26

5.15-5.25GHz\_802.11be EHT20\_Nss1,(MCS0)\_4TX

5200MHz\_TX

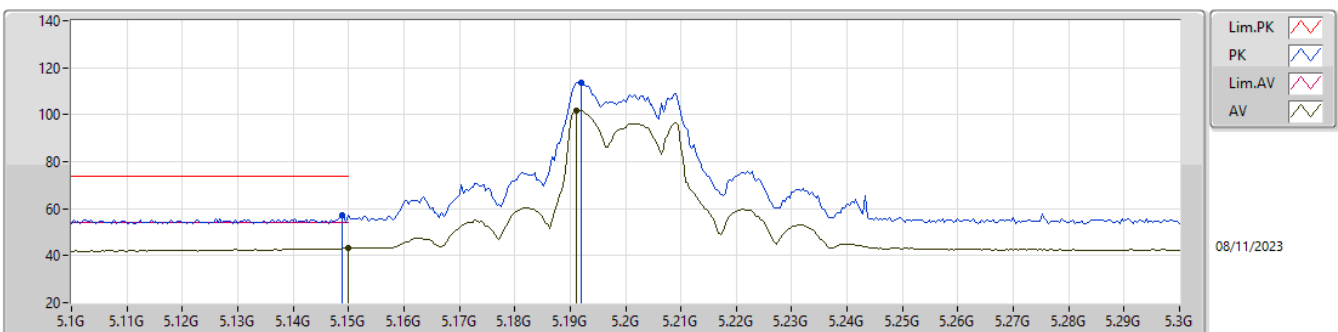


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.15G	43.24	54.00	-10.76	1.62	3	Horizontal	54	2.66	41.62	33.40	5.46	37.24
AV	5.1912G	101.77	Inf	-Inf	1.56	3	Horizontal	54	2.66	100.21	33.32	5.49	37.25
PK	5.1488G	57.25	74.00	-16.75	1.62	3	Horizontal	54	2.66	55.63	33.40	5.46	37.24
PK	5.192G	113.72	Inf	-Inf	1.56	3	Horizontal	54	2.66	112.16	33.32	5.49	37.25




5.15-5.25GHz\_802.11be EHT20\_Nss1,(MCS0)\_4TX

5200MHz\_TX

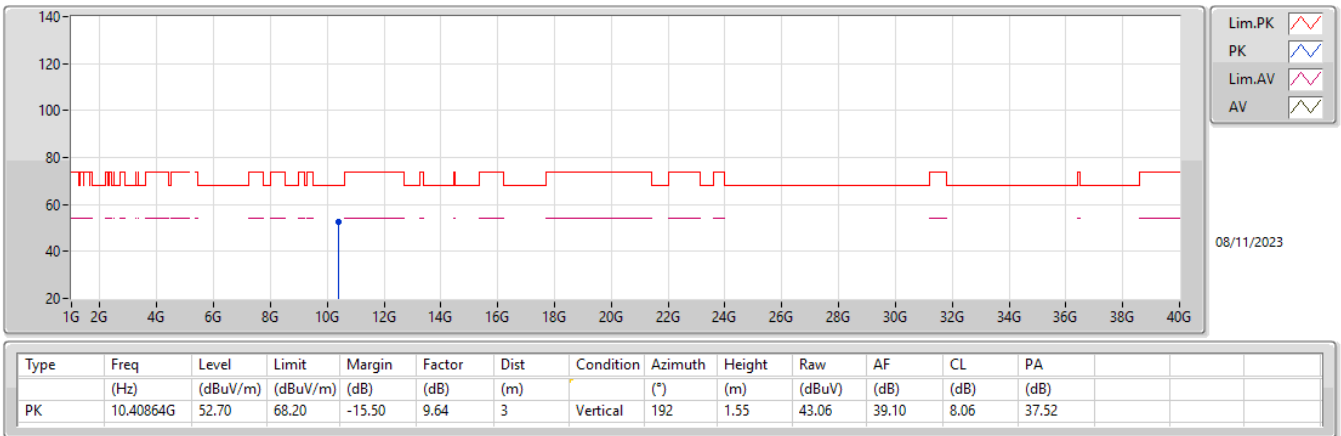


5.15-5.25GHz\_802.11be EHT20\_Nss1,(MCS0)\_4TX

5200MHz\_TX

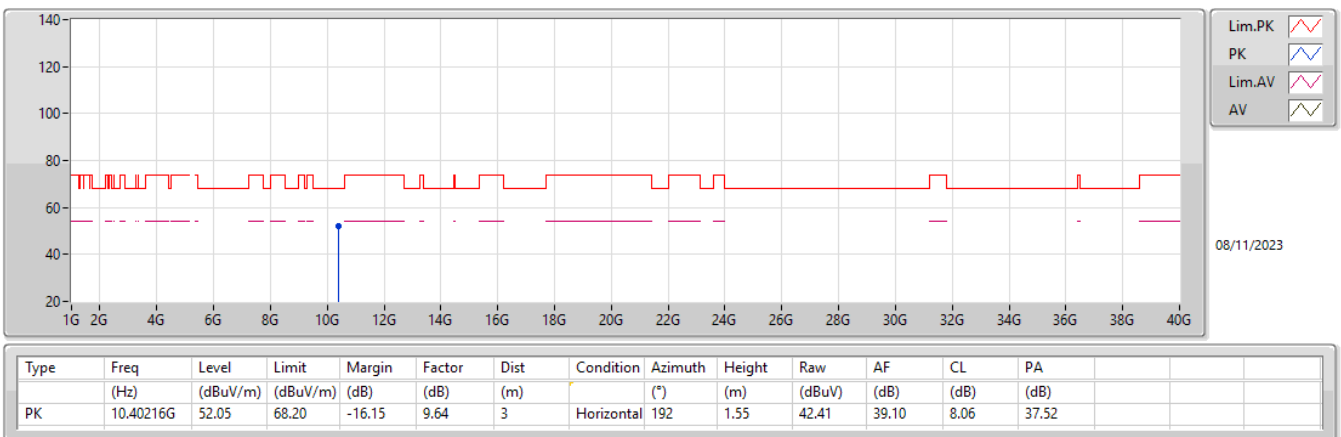

5.15-5.25GHz\_802.11be EHT20\_Nss1,(MCS0)\_4TX


5240MHz\_TX

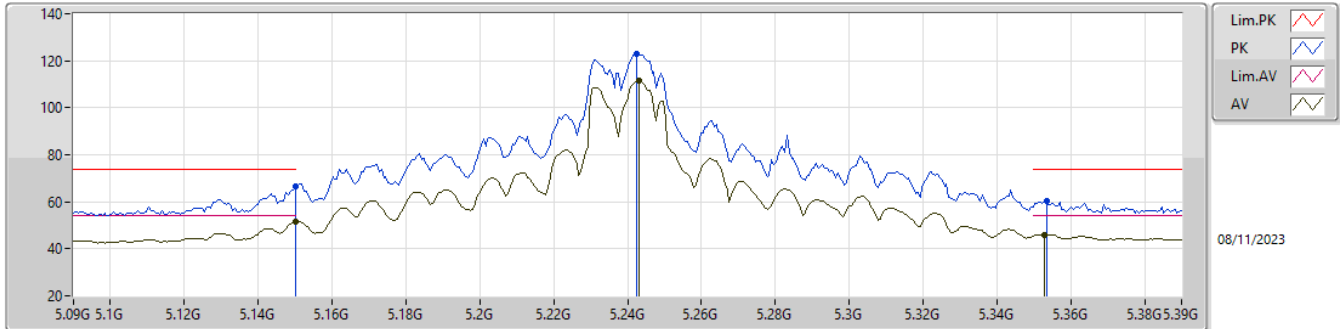

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.15G	51.38	54.00	-2.62	1.62	3	Vertical	87	2.59	49.76	33.40	5.46	37.24
AV	5.243G	111.36	Inf	-Inf	1.38	3	Vertical	87	2.59	109.98	33.13	5.52	37.27
AV	5.3528G	46.12	54.00	-7.88	1.28	3	Vertical	87	2.59	44.84	33.00	5.58	37.30
PK	5.15G	66.40	74.00	-7.60	1.62	3	Vertical	87	2.59	64.78	33.40	5.46	37.24
PK	5.2424G	122.99	Inf	-Inf	1.38	3	Vertical	87	2.59	121.61	33.13	5.52	37.27
PK	5.3534G	60.36	74.00	-13.64	1.28	3	Vertical	87	2.59	59.08	33.00	5.58	37.30

5.15-5.25GHz\_802.11be EHT20\_Nss1,(MCS0)\_4TX


5240MHz\_TX

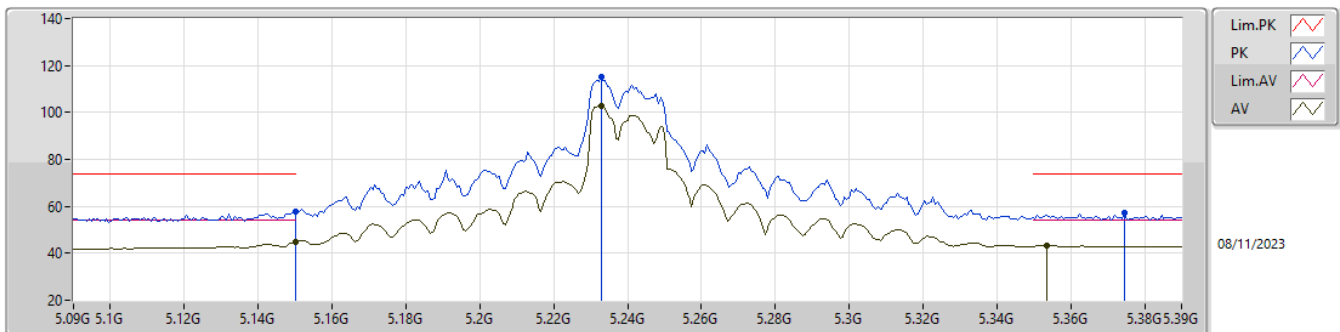

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.15G	44.63	54.00	-9.37	1.62	3	Horizontal	55	2.54	43.01	33.40	5.46	37.24
AV	5.2328G	102.65	Inf	-Inf	1.41	3	Horizontal	55	2.54	101.24	33.17	5.51	37.27
AV	5.3534G	43.45	54.00	-10.55	1.28	3	Horizontal	55	2.54	42.17	33.00	5.58	37.30
PK	5.15G	57.82	74.00	-16.18	1.62	3	Horizontal	55	2.54	56.20	33.40	5.46	37.24
PK	5.2328G	115.09	Inf	-Inf	1.41	3	Horizontal	55	2.54	113.68	33.17	5.51	37.27
PK	5.3744G	57.37	74.00	-16.63	1.29	3	Horizontal	55	2.54	56.08	33.00	5.59	37.30


5.15-5.25GHz\_802.11be EHT20\_Nss1,(MCS0)\_4TX

5240MHz\_TX

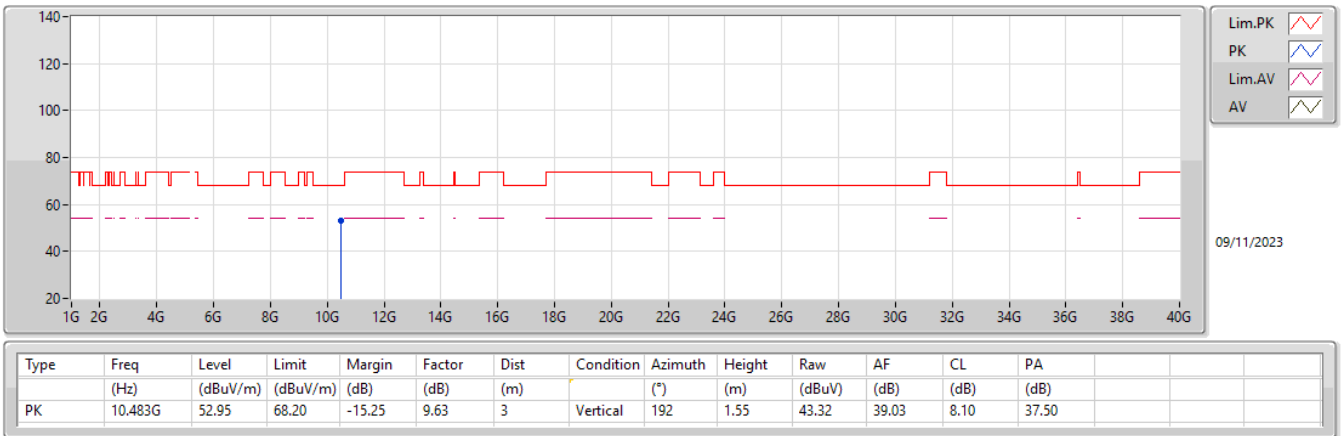


5.15-5.25GHz\_802.11be EHT20\_Nss1,(MCS0)\_4TX

5240MHz\_TX

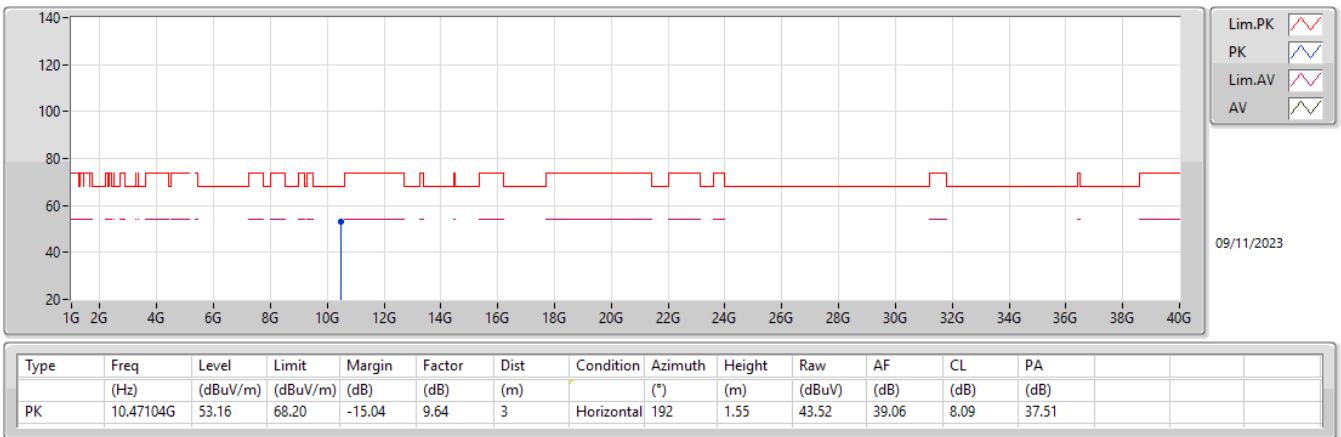

5.725-5.85GHz\_802.11be EHT20\_Nss1,(MCS0)\_4TX


5745MHz\_TX

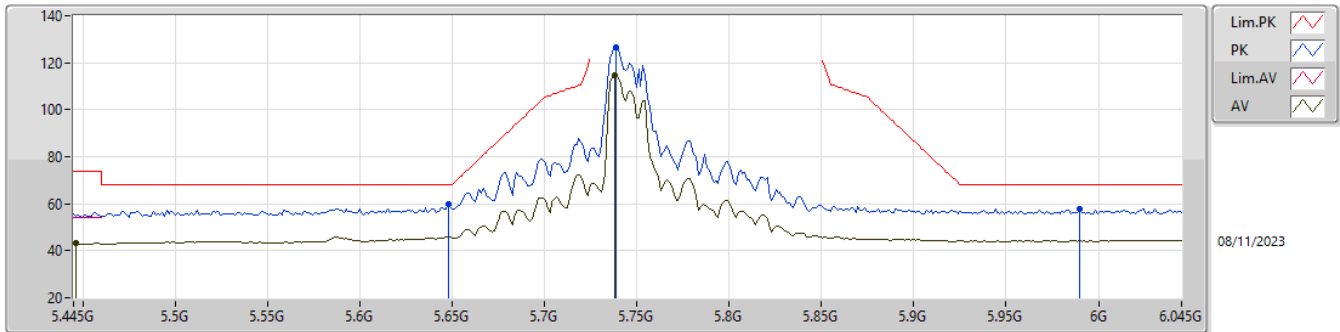

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.4462G	43.27	54.00	-10.73	1.40	3	Vertical	237	2.91	41.87	33.09	5.63	37.32
AV	5.7378G	114.66	Inf	-Inf	2.57	3	Vertical	237	2.91	112.09	33.95	5.78	37.16
PK	5.6478G	59.86	68.20	-8.34	1.89	3	Vertical	237	2.91	57.97	33.39	5.73	37.23
PK	5.739G	126.75	Inf	-Inf	2.58	3	Vertical	237	2.91	124.17	33.96	5.78	37.16
PK	5.9898G	57.63	68.20	-10.57	3.43	3	Vertical	237	2.91	54.20	34.50	5.91	36.98

5.725-5.85GHz\_802.11be EHT20\_Nss1,(MCS0)\_4TX


5745MHz\_TX

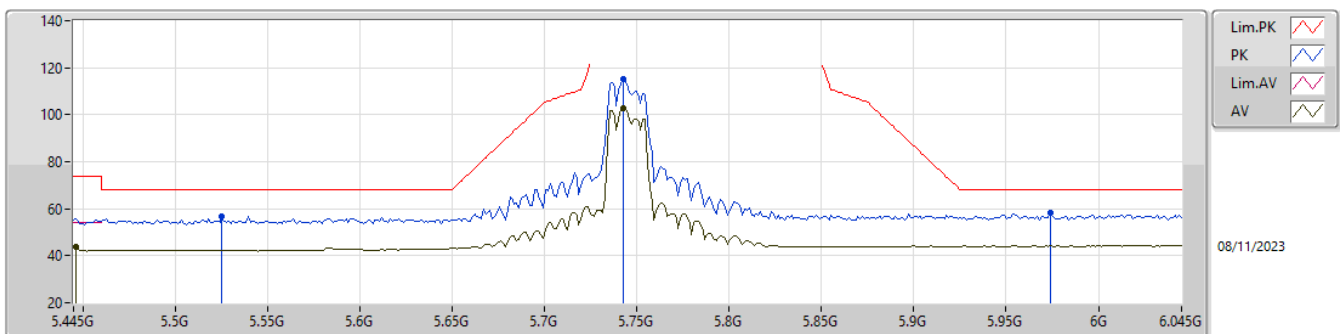

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.4462G	43.72	54.00	-10.28	1.40	3	Horizontal	26	2.75	42.32	33.09	5.63	37.32
AV	5.7426G	102.97	Inf	-Inf	2.59	3	Horizontal	26	2.75	100.38	33.97	5.78	37.16
PK	5.5254G	56.51	68.20	-11.69	1.50	3	Horizontal	26	2.75	55.01	33.15	5.67	37.32
PK	5.7426G	115.30	Inf	-Inf	2.59	3	Horizontal	26	2.75	112.71	33.97	5.78	37.16
PK	5.9742G	58.12	68.20	-10.08	3.42	3	Horizontal	26	2.75	54.70	34.50	5.91	36.99

5.725-5.85GHz\_802.11be EHT20\_Nss1,(MCS0)\_4TX


5745MHz\_TX

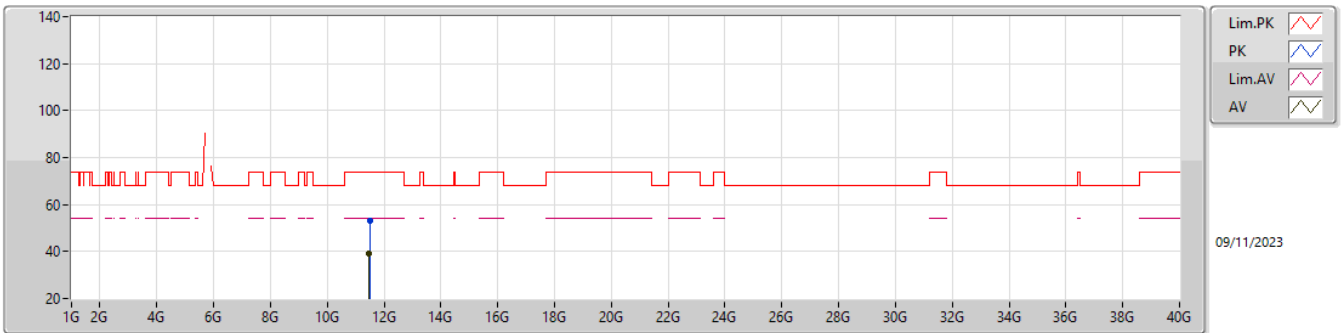

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	11.48432G	38.96	54.00	-15.04	10.03	3	Vertical	192	1.55	28.93	39.37	8.57	37.91
PK	11.48968G	53.10	74.00	-20.90	10.04	3	Vertical	192	1.55	43.06	39.38	8.57	37.91

5.725-5.85GHz\_802.11be EHT20\_Nss1,(MCS0)\_4TX


5745MHz\_TX

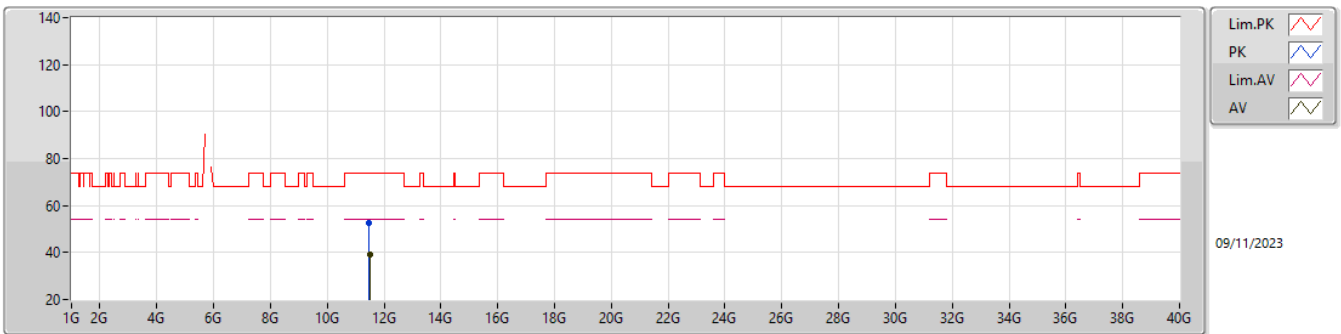

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	11.49884G	38.97	54.00	-15.03	10.05	3	Horizontal	192	1.55	28.92	39.40	8.57	37.92
PK	11.48668G	52.79	74.00	-21.21	10.03	3	Horizontal	192	1.55	42.76	39.37	8.57	37.91

5.725-5.85GHz\_802.11be EHT20\_Nss1,(MCS0)\_4TX


5785MHz\_TX

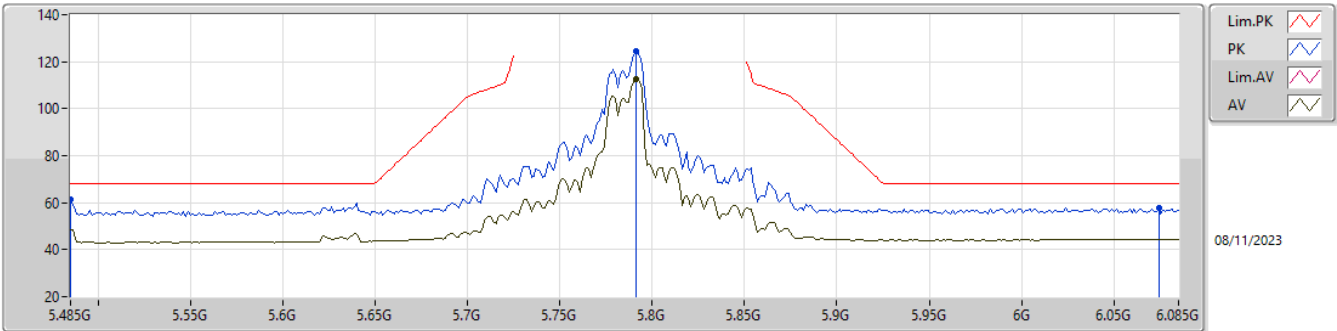

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.791G	112.75	Inf	-Inf	2.94	3	Vertical	336	2.58	109.81	34.25	5.81	37.12
PK	5.485G	61.59	68.20	-6.61	1.48	3	Vertical	336	2.58	60.11	33.17	5.65	37.34
PK	5.791G	124.50	Inf	-Inf	2.94	3	Vertical	336	2.58	121.56	34.25	5.81	37.12
PK	6.0742G	57.79	68.20	-10.41	3.46	3	Vertical	336	2.58	54.33	34.45	5.95	36.94

5.725-5.85GHz\_802.11be EHT20\_Nss1,(MCS0)\_4TX


5785MHz\_TX

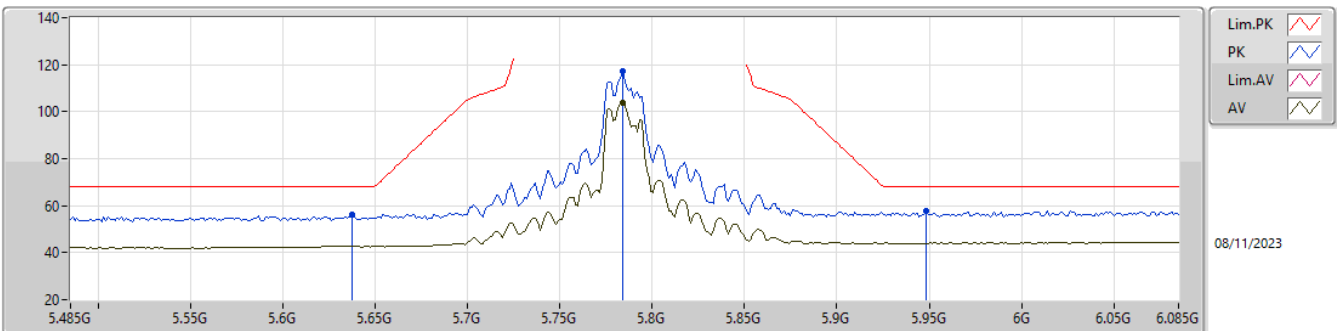

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.7838G	103.65	Inf	-Inf	2.87	3	Horizontal	58	2.92	100.78	34.20	5.80	37.13
PK	5.6374G	56.00	68.20	-12.20	1.83	3	Horizontal	58	2.92	54.17	33.35	5.72	37.24
PK	5.7838G	117.36	Inf	-Inf	2.87	3	Horizontal	58	2.92	114.49	34.20	5.80	37.13
PK	5.9482G	57.78	68.20	-10.42	3.38	3	Horizontal	58	2.92	54.40	34.50	5.89	37.01

5.725-5.85GHz\_802.11be EHT20\_Nss1,(MCS0)\_4TX


5785MHz\_TX

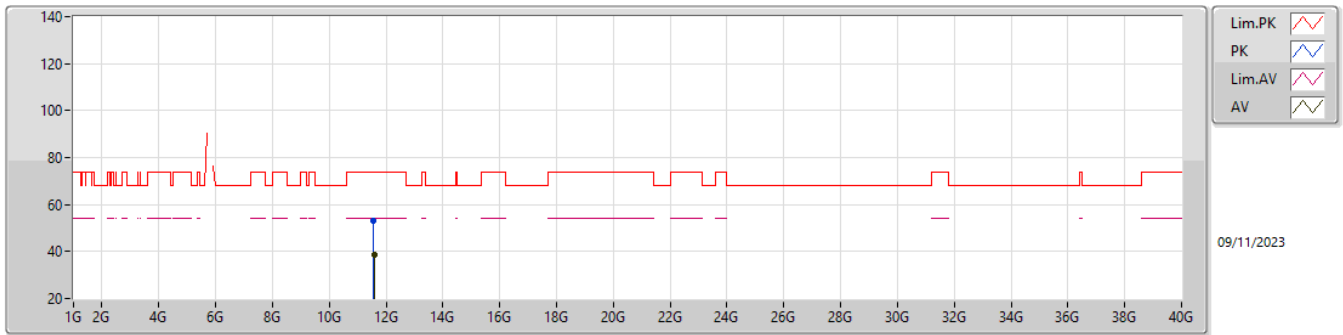

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	11.57476G	38.72	54.00	-15.28	9.79	3	Vertical	192	1.55	28.93	39.10	8.61	37.92
PK	11.56148G	52.95	74.00	-21.05	9.83	3	Vertical	192	1.55	43.12	39.15	8.60	37.92

5.725-5.85GHz\_802.11be EHT20\_Nss1,(MCS0)\_4TX


5785MHz\_TX

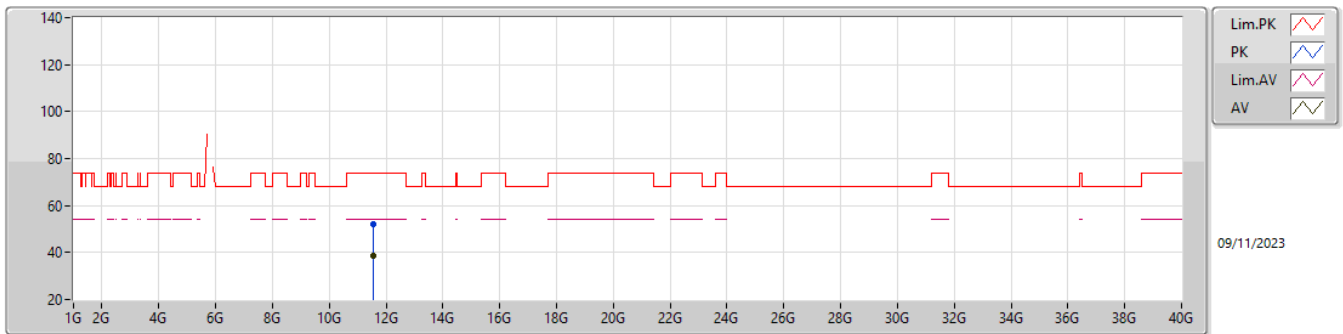

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	11.56344G	38.61	54.00	-15.39	9.83	3	Horizontal	192	1.55	28.78	39.15	8.60	37.92
PK	11.56992G	52.25	74.00	-21.75	9.81	3	Horizontal	192	1.55	42.44	39.12	8.61	37.92

5.725-5.85GHz\_802.11be EHT20\_Nss1,(MCS0)\_4TX


5825MHz\_TX

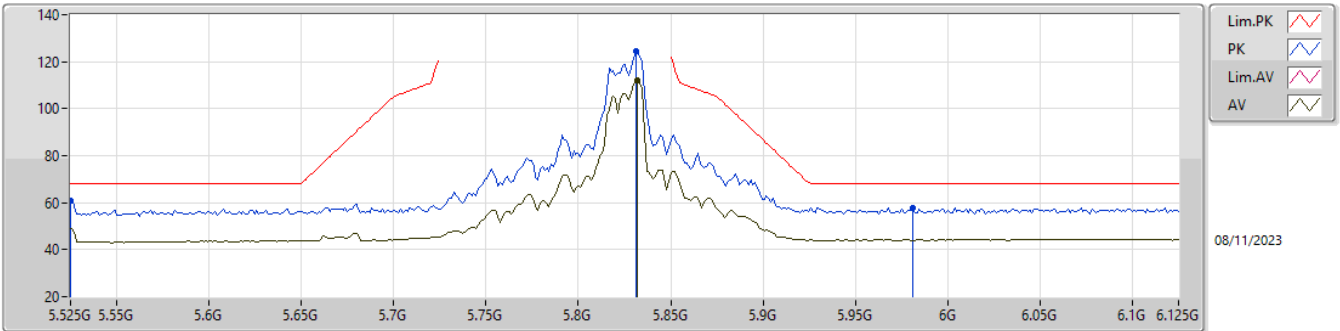

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.8322G	112.15	Inf	-Inf	3.04	3	Vertical	337	2.66	109.11	34.30	5.83	37.09
PK	5.525G	60.65	68.20	-7.55	1.50	3	Vertical	337	2.66	59.15	33.15	5.67	37.32
PK	5.831G	124.34	Inf	-Inf	3.03	3	Vertical	337	2.66	121.31	34.30	5.83	37.10
PK	5.981G	57.86	68.20	-10.34	3.43	3	Vertical	337	2.66	54.43	34.50	5.91	36.98

5.725-5.85GHz\_802.11be EHT20\_Nss1,(MCS0)\_4TX

5825MHz\_TX

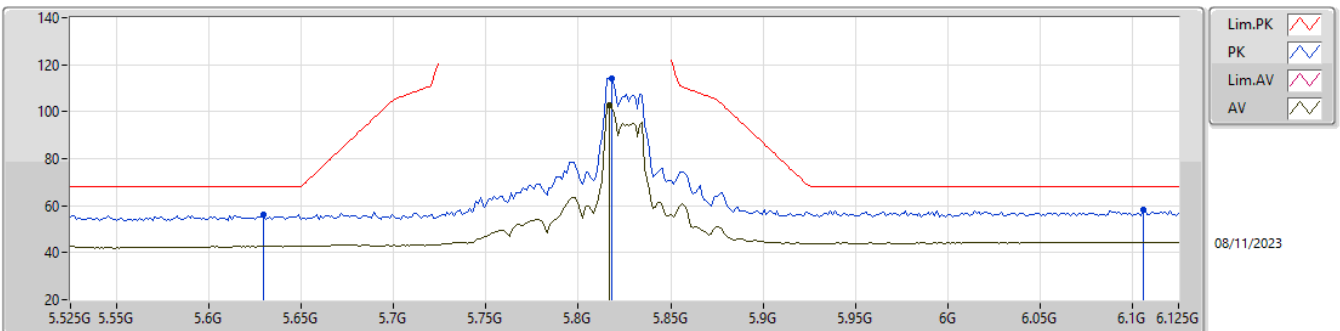


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.8166G	102.64	Inf	-Inf	3.01	3	Horizontal	185	2.73	99.63	34.30	5.82	37.11
PK	5.6294G	56.45	68.20	-11.75	1.80	3	Horizontal	185	2.73	54.65	33.32	5.72	37.24
PK	5.8178G	114.20	Inf	-Inf	3.02	3	Horizontal	185	2.73	111.18	34.30	5.82	37.10
PK	6.1058G	58.14	68.20	-10.06	3.44	3	Horizontal	185	2.73	54.70	34.40	5.97	36.93



5.725-5.85GHz\_802.11be EHT20\_Nss1,(MCS0)\_4TX


5825MHz\_TX

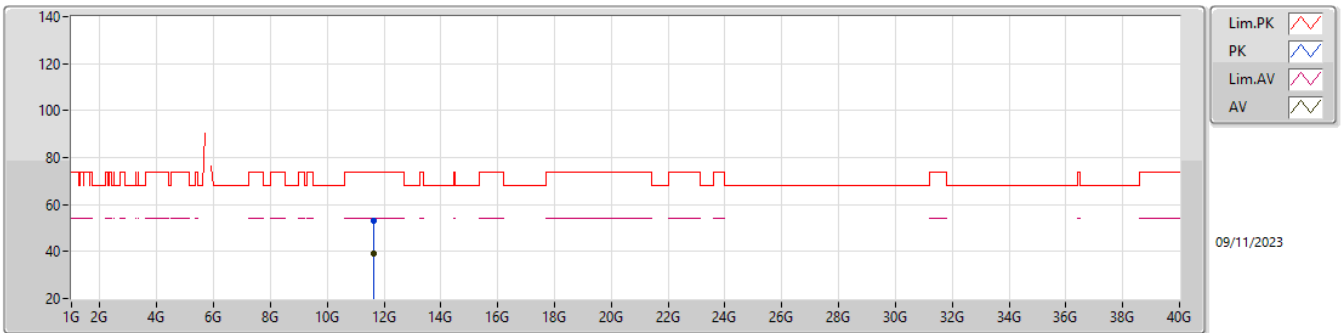

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	11.6434G	38.90	54.00	-15.10	9.62	3	Vertical	192	1.55	29.28	38.91	8.64	37.93
PK	11.64208G	53.27	74.00	-20.73	9.63	3	Vertical	192	1.55	43.64	38.92	8.64	37.93

5.725-5.85GHz\_802.11be EHT20\_Nss1,(MCS0)\_4TX


5825MHz\_TX

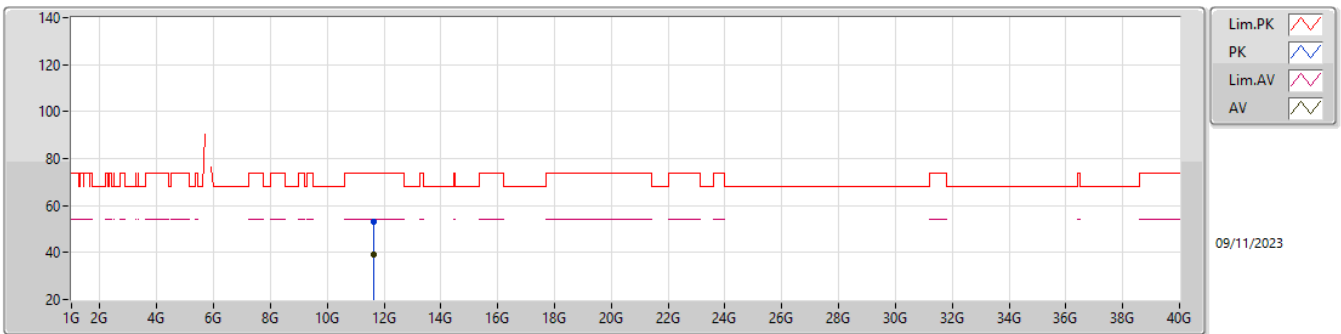

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	11.64204G	38.91	54.00	-15.09	9.63	3	Horizontal	192	1.55	29.28	38.92	8.64	37.93
PK	11.6506G	53.16	74.00	-20.84	9.62	3	Horizontal	192	1.55	43.54	38.90	8.65	37.93

5.15-5.25GHz\_802.11be EHT40\_Nss1,(MCS0)\_4TX


5190MHz\_TX

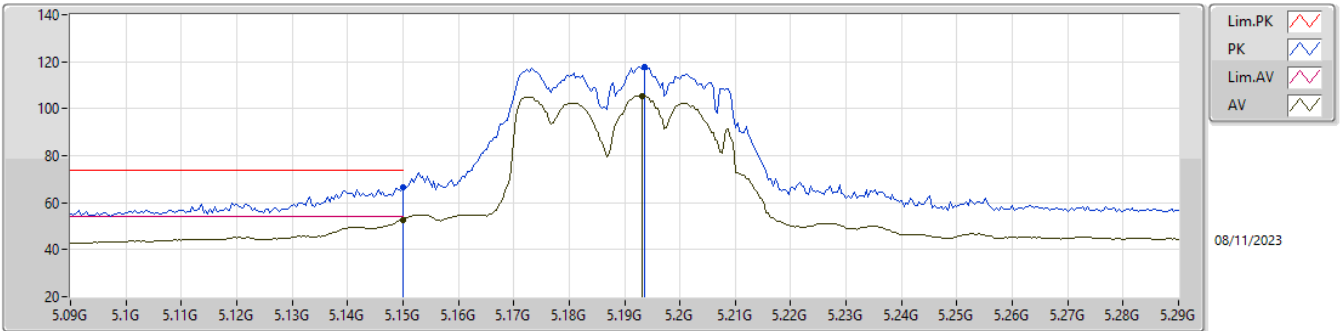

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.15G	52.70	54.00	-1.30	1.62	3	Vertical	88	2.44	51.08	33.40	5.46	37.24
AV	5.1932G	105.51	Inf	-Inf	1.55	3	Vertical	88	2.44	103.96	33.31	5.49	37.25
PK	5.15G	66.66	74.00	-7.34	1.62	3	Vertical	88	2.44	65.04	33.40	5.46	37.24
PK	5.1936G	117.94	Inf	-Inf	1.55	3	Vertical	88	2.44	116.39	33.31	5.49	37.25

5.15-5.25GHz\_802.11be EHT40\_Nss1,(MCS0)\_4TX


5190MHz\_TX

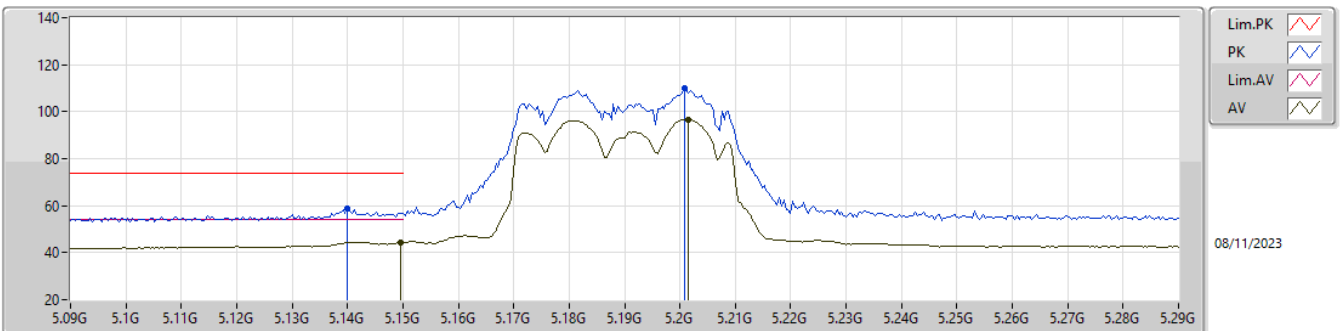

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.1496G	44.37	54.00	-9.63	1.62	3	Horizontal	52	2.61	42.75	33.40	5.46	37.24
AV	5.2016G	96.62	Inf	-Inf	1.52	3	Horizontal	52	2.61	95.10	33.29	5.49	37.26
PK	5.14G	58.85	74.00	-15.15	1.62	3	Horizontal	52	2.61	57.23	33.40	5.46	37.24
PK	5.2008G	109.81	Inf	-Inf	1.53	3	Horizontal	52	2.61	108.28	33.30	5.49	37.26


5.15-5.25GHz\_802.11be EHT40\_Nss1,(MCS0)\_4TX

5190MHz\_TX

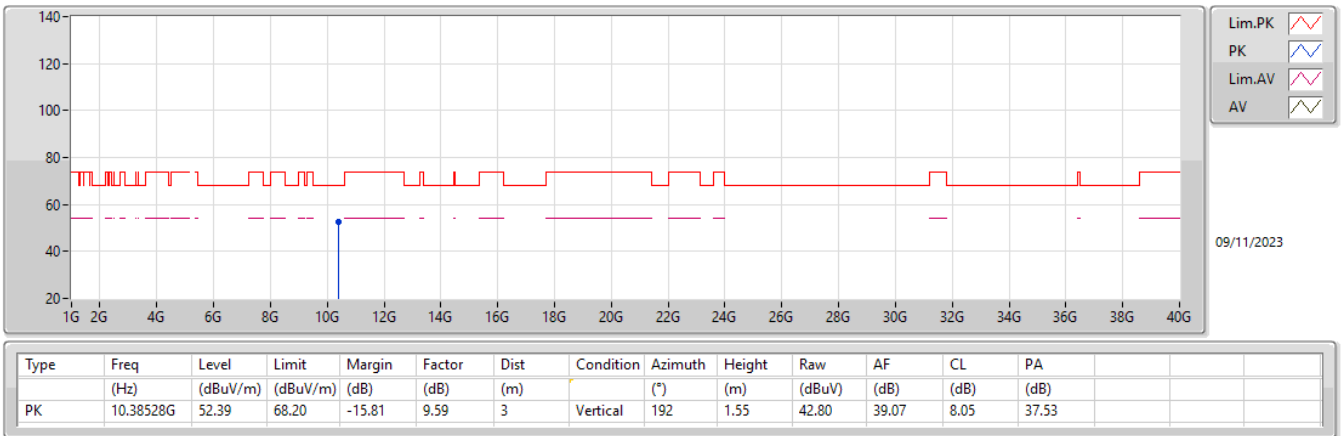


5.15-5.25GHz\_802.11be EHT40\_Nss1,(MCS0)\_4TX

5190MHz\_TX

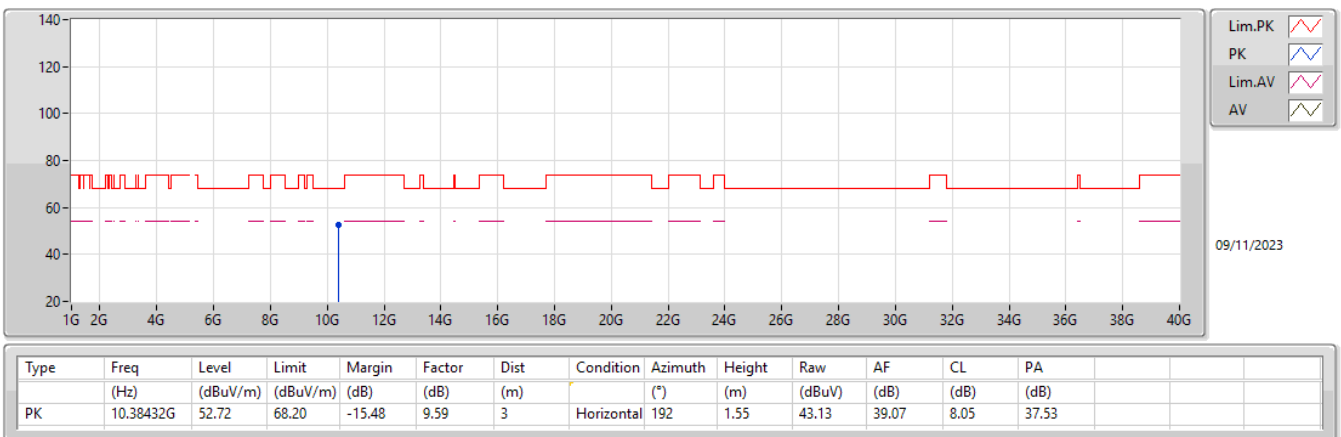

5.15-5.25GHz\_802.11be EHT40\_Nss1,(MCS0)\_4TX


5230MHz\_TX

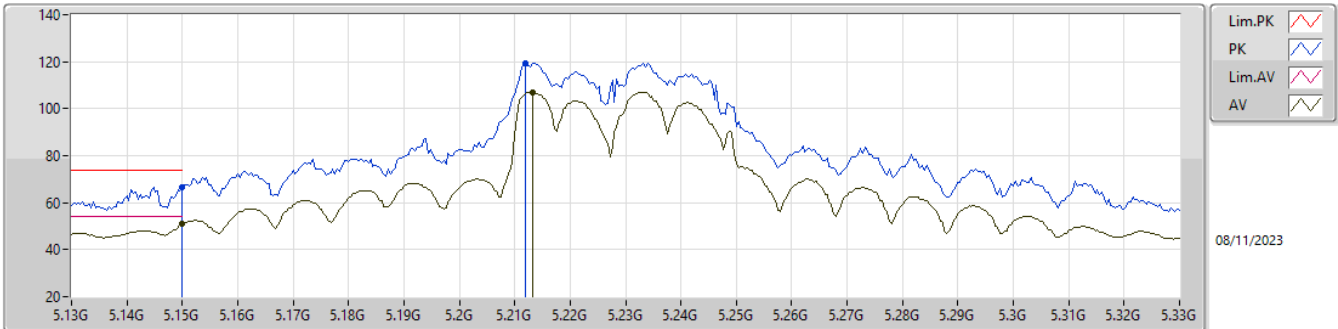

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.15G	50.95	54.00	-3.05	1.62	3	Vertical	87	2.55	49.33	33.40	5.46	37.24
AV	5.2132G	107.09	Inf	-Inf	1.49	3	Vertical	87	2.55	105.60	33.25	5.50	37.26
PK	5.15G	66.75	74.00	-7.25	1.62	3	Vertical	87	2.55	65.13	33.40	5.46	37.24
PK	5.212G	119.31	Inf	-Inf	1.49	3	Vertical	87	2.55	117.82	33.25	5.50	37.26

5.15-5.25GHz\_802.11be EHT40\_Nss1,(MCS0)\_4TX


5230MHz\_TX

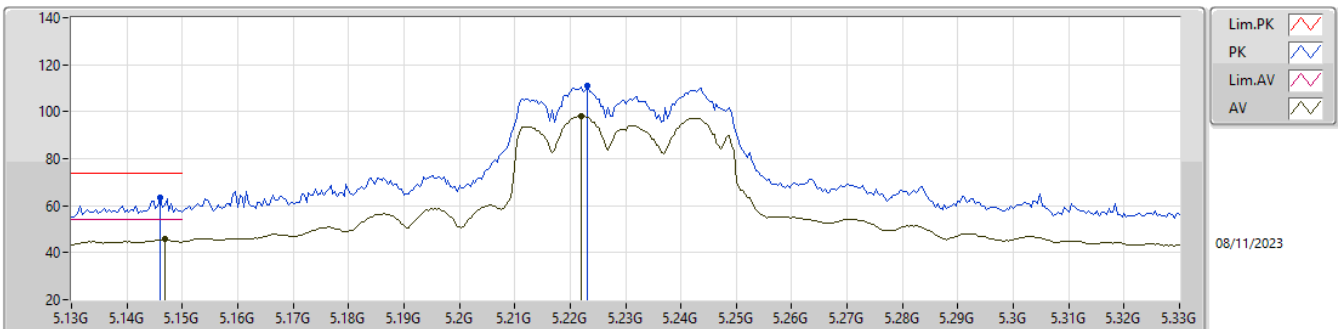

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.1468G	45.72	54.00	-8.28	1.62	3	Horizontal	54	2.58	44.10	33.40	5.46	37.24
AV	5.222G	98.07	Inf	-Inf	1.45	3	Horizontal	54	2.58	96.62	33.21	5.50	37.26
PK	5.146G	63.32	74.00	-10.68	1.62	3	Horizontal	54	2.58	61.70	33.40	5.46	37.24
PK	5.222G	110.82	Inf	-Inf	1.45	3	Horizontal	54	2.58	109.37	33.21	5.50	37.26


5.15-5.25GHz\_802.11be EHT40\_Nss1,(MCS0)\_4TX

5230MHz\_TX

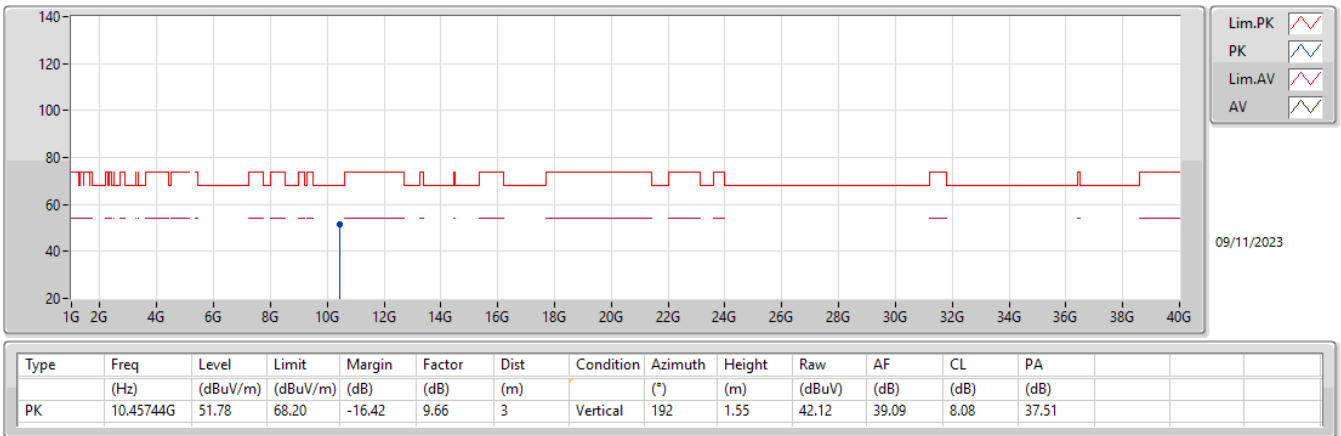


5.15-5.25GHz\_802.11be EHT40\_Nss1,(MCS0)\_4TX

5230MHz\_TX

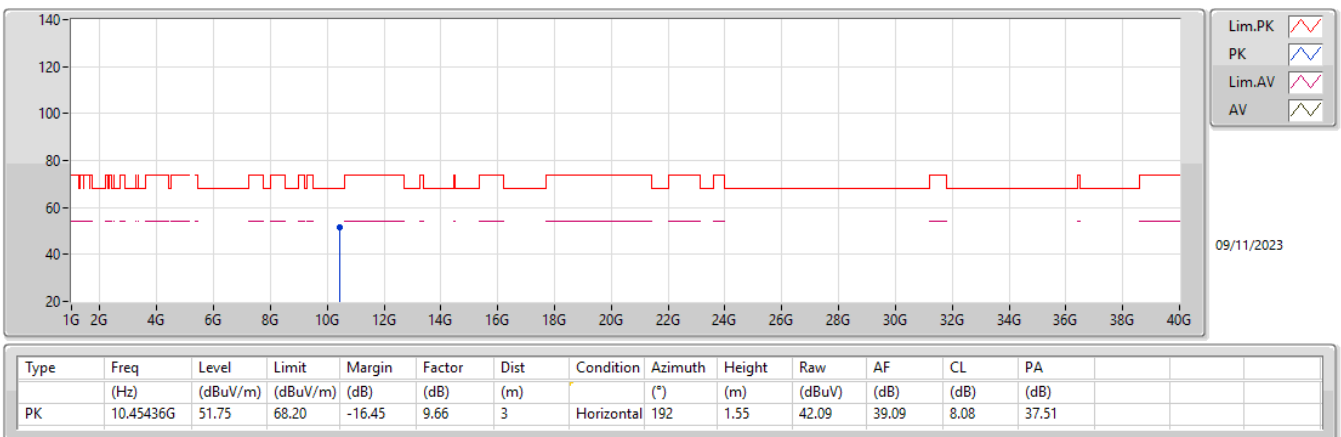

5.725-5.85GHz\_802.11be EHT40\_Nss1,(MCS0)\_4TX


5755MHz\_TX

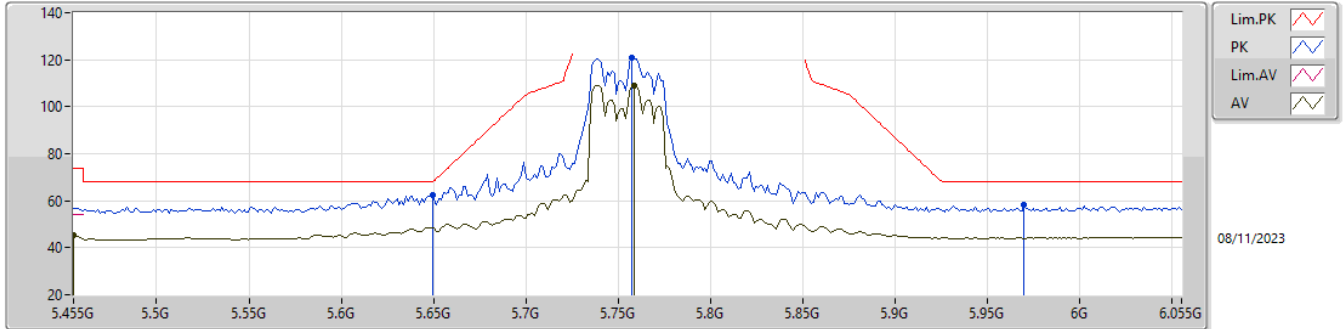

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.455G	45.10	54.00	-8.90	1.41	3	Vertical	300	2.91	43.69	33.11	5.63	37.33
AV	5.7586G	109.09	Inf	-Inf	2.69	3	Vertical	300	2.91	106.40	34.05	5.79	37.15
PK	5.6494G	62.31	68.20	-5.89	1.90	3	Vertical	300	2.91	60.41	33.40	5.73	37.23
PK	5.7574G	120.68	Inf	-Inf	2.68	3	Vertical	300	2.91	118.00	34.04	5.79	37.15
PK	5.9698G	58.24	68.20	-9.96	3.41	3	Vertical	300	2.91	54.83	34.50	5.90	36.99

5.725-5.85GHz\_802.11be EHT40\_Nss1,(MCS0)\_4TX


5755MHz\_TX

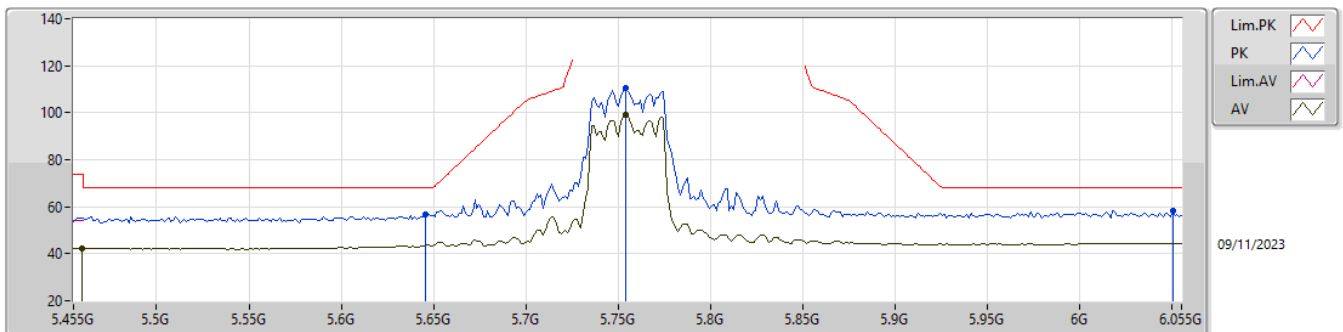

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.4598G	42.45	54.00	-11.55	1.43	3	Horizontal	57	2.66	41.02	33.12	5.64	37.33
AV	5.7538G	99.27	Inf	-Inf	2.65	3	Horizontal	57	2.66	96.62	34.02	5.78	37.15
PK	5.6458G	56.76	68.20	-11.44	1.88	3	Horizontal	57	2.66	54.88	33.38	5.73	37.23
PK	5.7538G	110.50	Inf	-Inf	2.65	3	Horizontal	57	2.66	107.85	34.02	5.78	37.15
PK	6.0502G	58.25	68.20	-9.95	3.49	3	Horizontal	57	2.66	54.76	34.50	5.94	36.95

5.725-5.85GHz\_802.11be EHT40\_Nss1,(MCS0)\_4TX


5755MHz\_TX

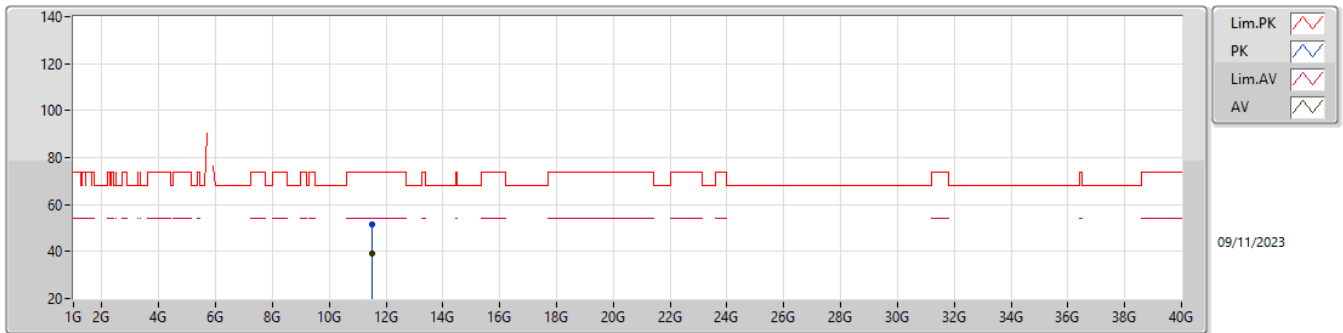

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	11.49888G	38.88	54.00	-15.12	10.05	3	Vertical	192	1.55	28.83	39.40	8.57	37.92
PK	11.49976G	51.71	74.00	-22.29	10.05	3	Vertical	192	1.55	41.66	39.40	8.57	37.92

5.725-5.85GHz\_802.11be EHT40\_Nss1,(MCS0)\_4TX


5755MHz\_TX

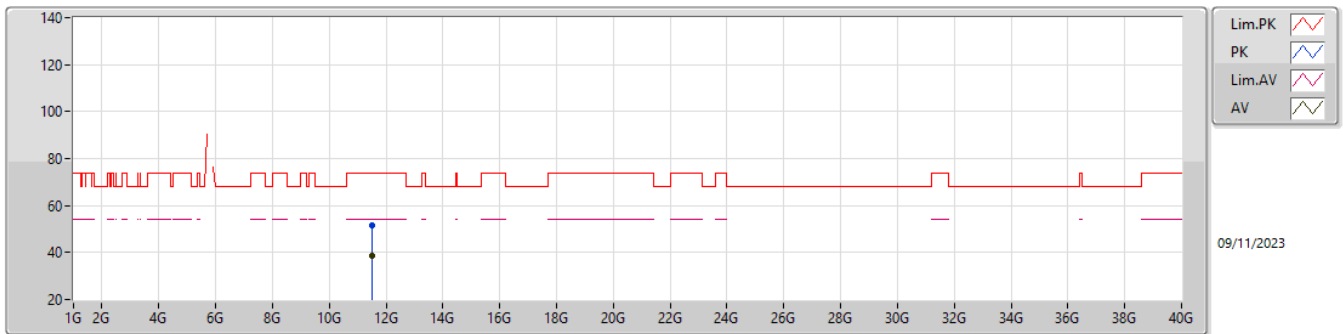

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	11.49232G	38.82	54.00	-15.18	10.04	3	Horizontal	192	1.55	28.78	39.38	8.57	37.91
PK	11.51568G	51.81	74.00	-22.19	10.00	3	Horizontal	192	1.55	41.81	39.34	8.58	37.92

5.725-5.85GHz\_802.11be EHT40\_Nss1,(MCS0)\_4TX


5795MHz\_TX

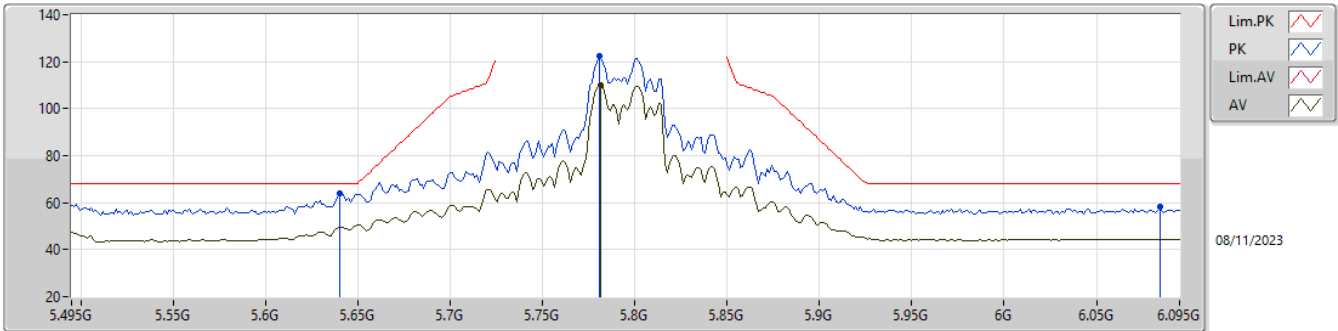

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.7818G	110.19	Inf	-Inf	2.86	3	Vertical	335	2.62	107.33	34.19	5.80	37.13
PK	5.6402G	64.04	68.20	-4.16	1.84	3	Vertical	335	2.62	62.20	33.36	5.72	37.24
PK	5.7806G	122.57	Inf	-Inf	2.85	3	Vertical	335	2.62	119.72	34.18	5.80	37.13
PK	6.0842G	58.11	68.20	-10.09	3.45	3	Vertical	335	2.62	54.66	34.43	5.96	36.94

5.725-5.85GHz\_802.11be EHT40\_Nss1,(MCS0)\_4TX

5795MHz\_TX

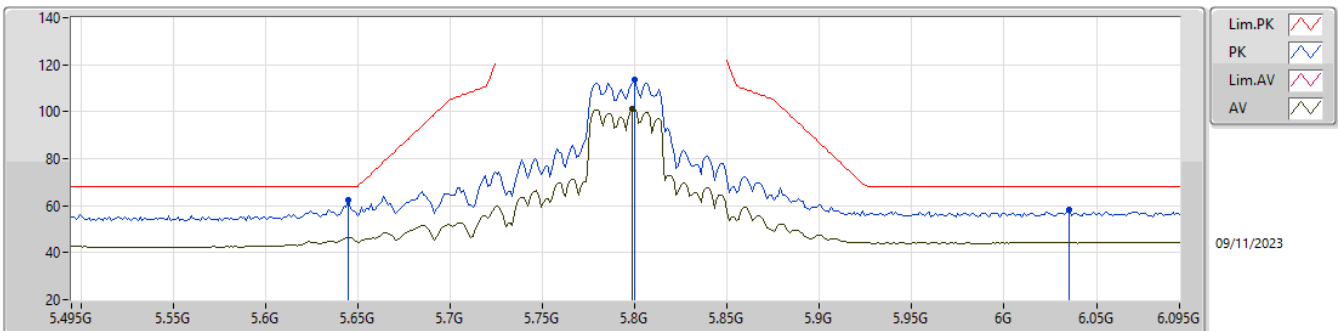


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.7986G	101.00	Inf	-Inf	2.98	3	Horizontal	69	2.77	98.02	34.29	5.81	37.12
PK	5.645G	62.41	68.20	-5.79	1.87	3	Horizontal	69	2.77	60.54	33.38	5.72	37.23
PK	5.7998G	113.52	Inf	-Inf	2.99	3	Horizontal	69	2.77	110.53	34.30	5.81	37.12
PK	6.035G	58.31	68.20	-9.89	3.48	3	Horizontal	69	2.77	54.83	34.50	5.94	36.96



5.725-5.85GHz\_802.11be EHT40\_Nss1,(MCS0)\_4TX


5795MHz\_TX

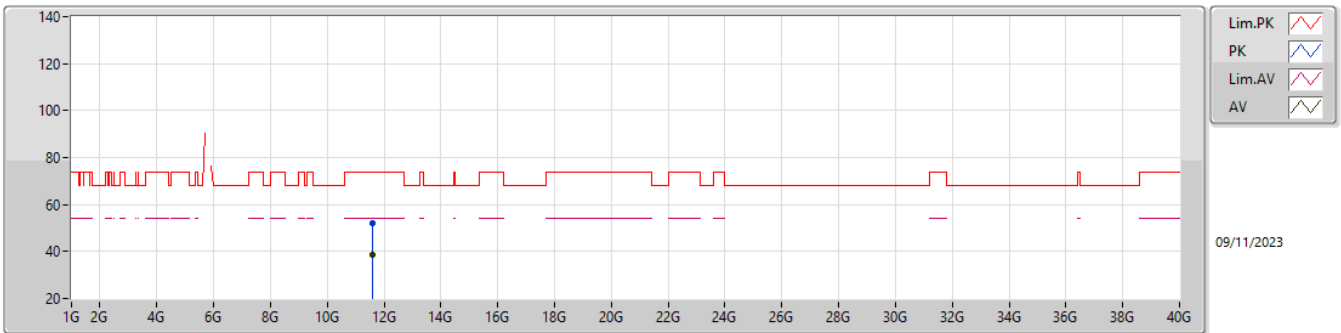

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	11.5956G	38.71	54.00	-15.29	9.72	3	Vertical	192	1.55	28.99	39.02	8.62	37.92
PK	11.59616G	52.25	74.00	-21.75	9.72	3	Vertical	192	1.55	42.53	39.02	8.62	37.92

5.725-5.85GHz\_802.11be EHT40\_Nss1,(MCS0)\_4TX


5795MHz\_TX

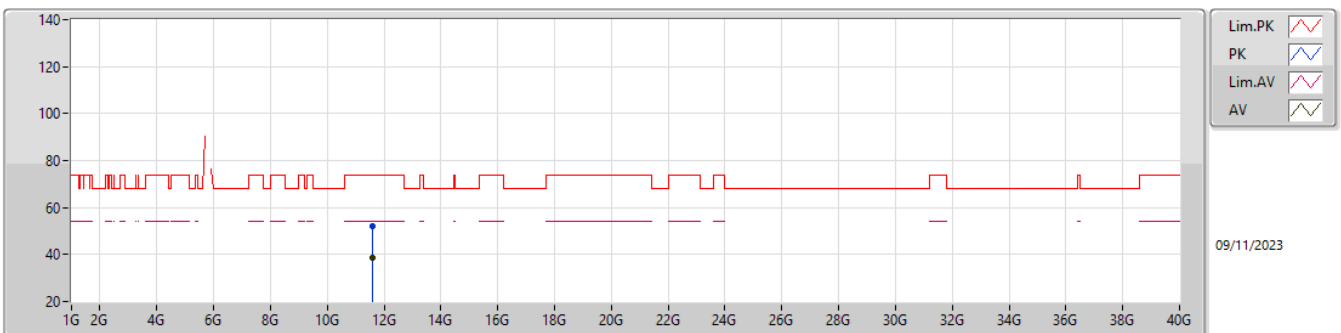

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	11.58008G	38.58	54.00	-15.42	9.77	3	Horizontal	192	1.55	28.81	39.08	8.61	37.92
PK	11.58408G	51.92	74.00	-22.08	9.75	3	Horizontal	192	1.55	42.17	39.06	8.61	37.92

5.15-5.25GHz\_802.11be EHT80\_Nss1,(MCS0)\_4TX


5210MHz\_TX

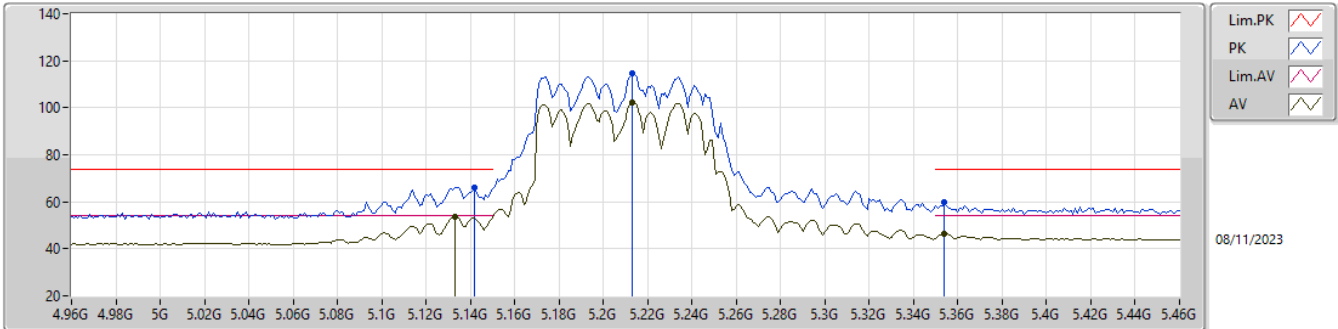

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.133G	53.54	54.00	-0.46	1.61	3	Vertical	84	2.55	51.93	33.40	5.45	37.24
AV	5.213G	102.02	Inf	-Inf	1.49	3	Vertical	84	2.55	100.53	33.25	5.50	37.26
AV	5.354G	46.62	54.00	-7.38	1.28	3	Vertical	84	2.55	45.34	33.00	5.58	37.30
PK	5.142G	66.27	74.00	-7.73	1.62	3	Vertical	84	2.55	64.65	33.40	5.46	37.24
PK	5.213G	114.62	Inf	-Inf	1.49	3	Vertical	84	2.55	113.13	33.25	5.50	37.26
PK	5.354G	59.97	74.00	-14.03	1.28	3	Vertical	84	2.55	58.69	33.00	5.58	37.30

5.15-5.25GHz\_802.11be EHT80\_Nss1,(MCS0)\_4TX


5210MHz\_TX

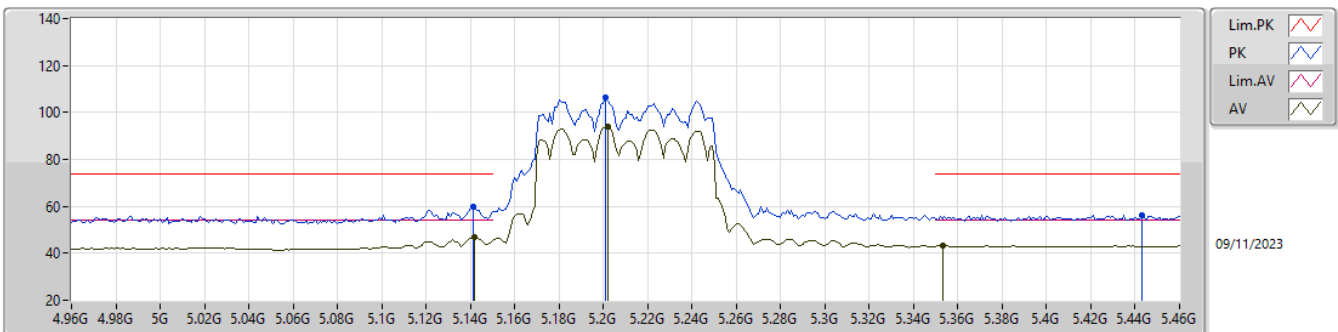

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.142G	47.06	54.00	-6.94	1.62	3	Horizontal	53	2.62	45.44	33.40	5.46	37.24
AV	5.202G	93.77	Inf	-Inf	1.52	3	Horizontal	53	2.62	92.25	33.29	5.49	37.26
AV	5.353G	43.23	54.00	-10.77	1.28	3	Horizontal	53	2.62	41.95	33.00	5.58	37.30
PK	5.141G	59.88	74.00	-14.12	1.62	3	Horizontal	53	2.62	58.26	33.40	5.46	37.24
PK	5.201G	106.24	Inf	-Inf	1.53	3	Horizontal	53	2.62	104.71	33.30	5.49	37.26
PK	5.443G	56.35	74.00	-17.65	1.40	3	Horizontal	53	2.62	54.95	33.09	5.63	37.32


5.15-5.25GHz\_802.11be EHT80\_Nss1,(MCS0)\_4TX

5210MHz\_TX

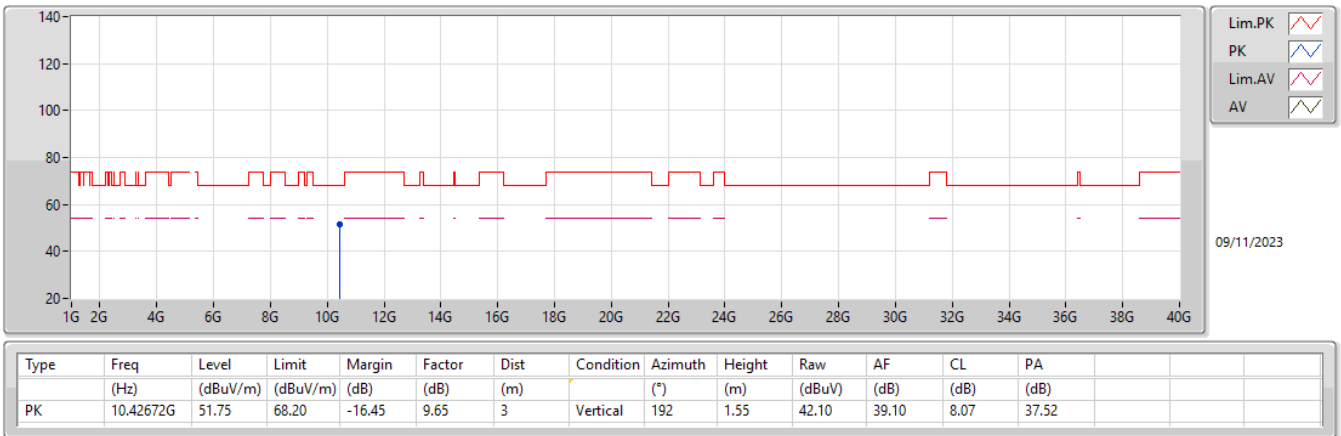


5.15-5.25GHz\_802.11be EHT80\_Nss1,(MCS0)\_4TX

5210MHz\_TX

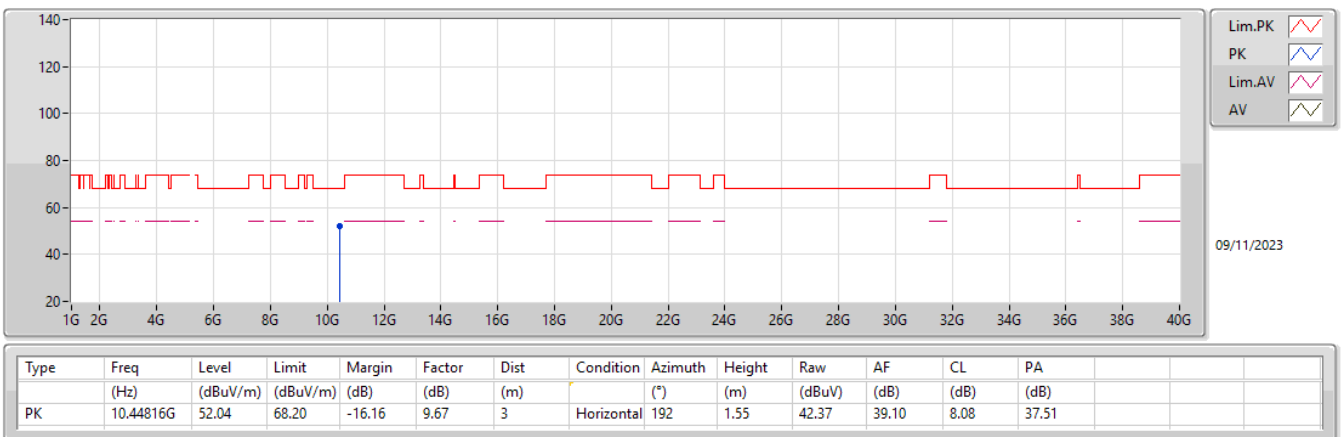

5.725-5.85GHz\_802.11be EHT80\_Nss1,(MCS0)\_4TX


5775MHz\_TX

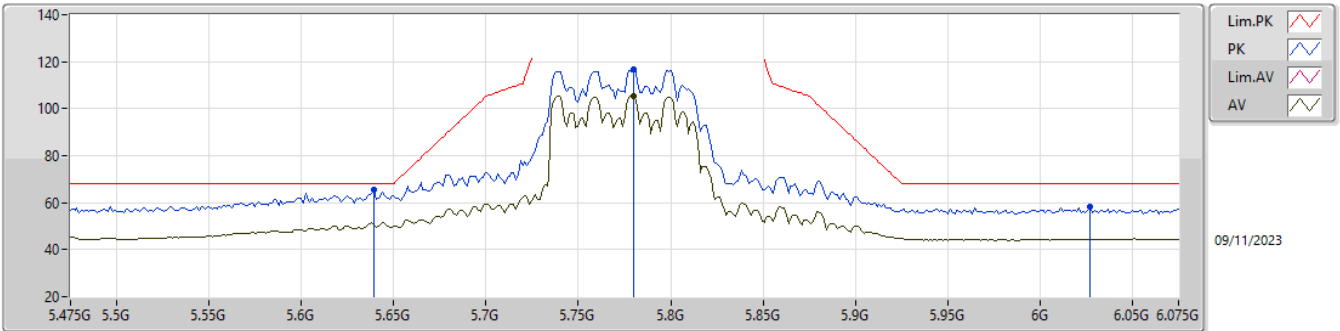

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.7798G	105.43	Inf	-Inf	2.85	3	Vertical	297	2.87	102.58	34.18	5.80	37.13
PK	5.6394G	65.61	68.20	-2.59	1.84	3	Vertical	297	2.87	63.77	33.36	5.72	37.24
PK	5.7798G	116.81	Inf	-Inf	2.85	3	Vertical	297	2.87	113.96	34.18	5.80	37.13
PK	6.027G	58.02	68.20	-10.18	3.47	3	Vertical	297	2.87	54.55	34.50	5.93	36.96

5.725-5.85GHz\_802.11be EHT80\_Nss1,(MCS0)\_4TX


5775MHz\_TX

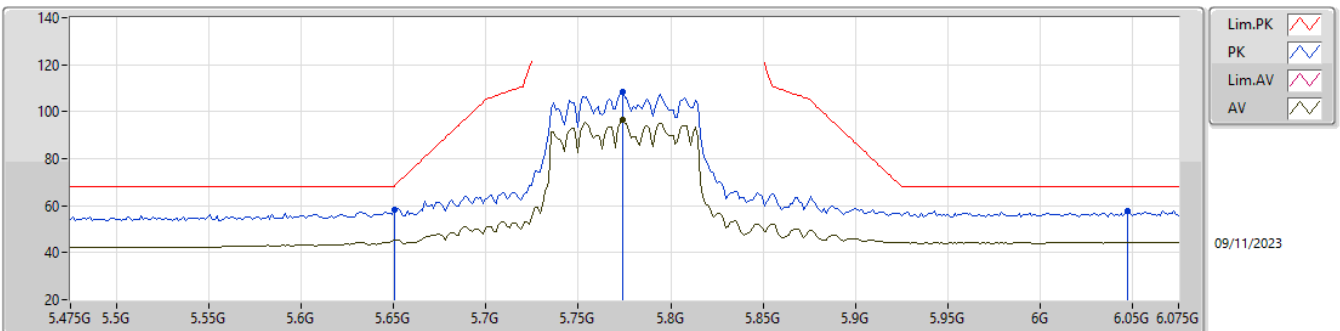

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.7738G	96.57	Inf	-Inf	2.80	3	Horizontal	54	2.51	93.77	34.14	5.80	37.14
PK	5.6502G	58.08	68.35	-10.27	1.90	3	Horizontal	54	2.51	56.18	33.40	5.73	37.23
PK	5.7738G	108.67	Inf	-Inf	2.80	3	Horizontal	54	2.51	105.87	34.14	5.80	37.14
PK	6.0474G	57.96	68.20	-10.24	3.49	3	Horizontal	54	2.51	54.47	34.50	5.94	36.95

5.725-5.85GHz\_802.11be EHT80\_Nss1,(MCS0)\_4TX


5775MHz\_TX

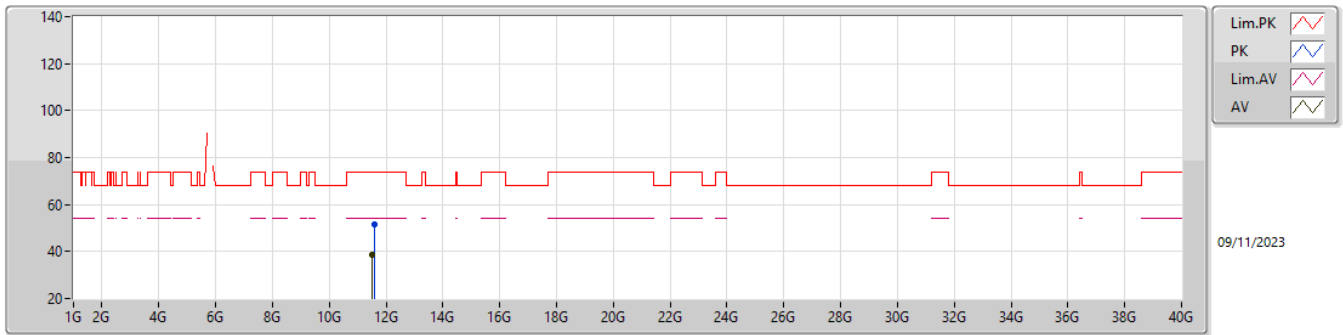

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	11.51784G	38.66	54.00	-15.34	9.99	3	Vertical	192	1.55	28.67	39.33	8.58	37.92
PK	11.58328G	51.62	74.00	-22.38	9.76	3	Vertical	192	1.55	41.86	39.07	8.61	37.92

5.725-5.85GHz\_802.11be EHT80\_Nss1,(MCS0)\_4TX

5775MHz\_TX

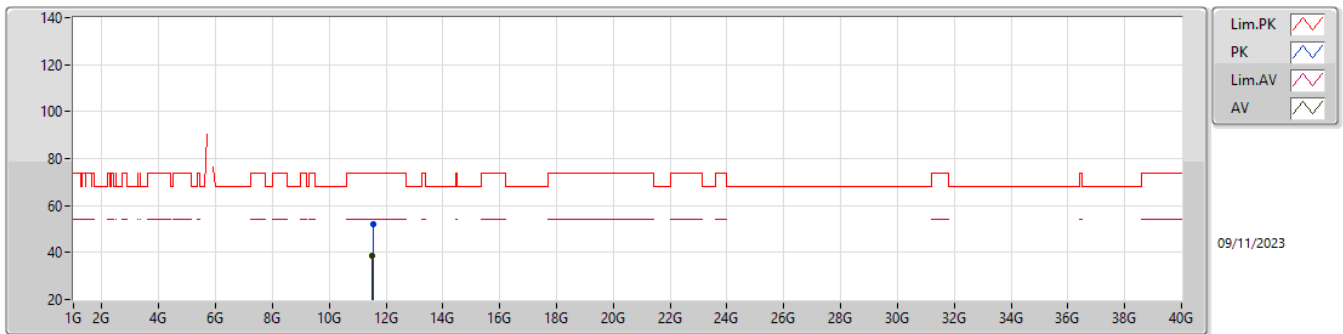

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	11.5204G	38.75	54.00	-15.25	9.98	3	Horizontal	192	1.55	28.77	39.32	8.58	37.92
PK	11.57192G	52.06	74.00	-21.94	9.80	3	Horizontal	192	1.55	42.26	39.11	8.61	37.92



**Summary**


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	AV	10.60469G	38.90	54.00	-15.10	Vertical



Result


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
Mode 1	Pass	AV	1.3515G	22.13	54.00	-31.87	3	Vertical	273	1.50
Mode 1	Pass	AV	2.20648G	27.80	54.00	-26.20	3	Vertical	225	1.50
Mode 1	Pass	AV	10.60469G	38.90	54.00	-15.10	3	Vertical	68	1.93
Mode 1	Pass	PK	1.3515G	36.26	74.00	-37.74	3	Vertical	273	1.50
Mode 1	Pass	PK	2.20648G	41.11	74.00	-32.89	3	Vertical	225	1.50
Mode 1	Pass	PK	10.60469G	51.95	74.00	-22.05	3	Vertical	68	1.93
Mode 1	Pass	AV	1.35012G	25.30	54.00	-28.70	3	Horizontal	222	1.20
Mode 1	Pass	AV	2.0395G	22.29	68.20	-45.91	3	Horizontal	162	2.40
Mode 1	Pass	AV	3.70771G	26.39	54.00	-27.61	3	Horizontal	208	1.76
Mode 1	Pass	PK	1.35012G	37.45	74.00	-36.55	3	Horizontal	222	1.20
Mode 1	Pass	PK	2.0395G	36.15	88.20	-52.05	3	Horizontal	162	2.40
Mode 1	Pass	PK	3.70771G	40.46	74.00	-33.54	3	Horizontal	208	1.76

**Radiated Emissions above 1GHz\_Mode 1**

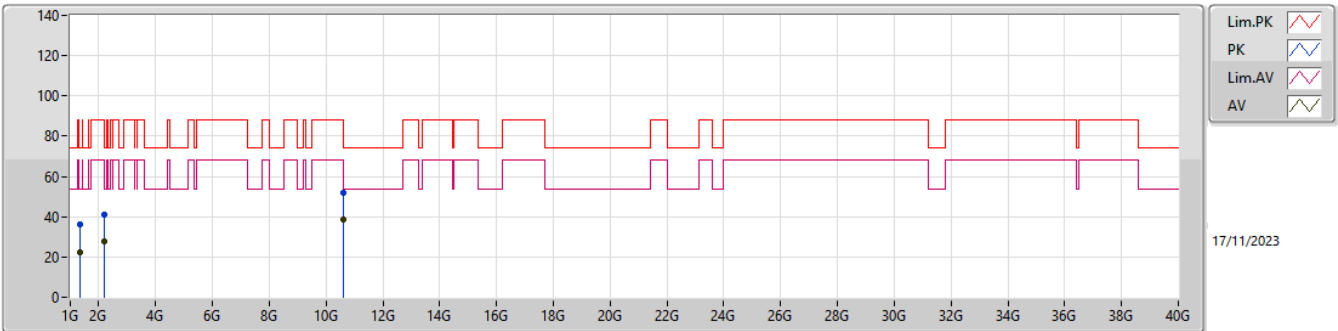

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV/m)	AF (dB/m)	CL (dB)	PA (dB)
AV	1.3515G	22.13	54.00	-31.87	-14.61	3	Vertical	273	1.50	36.74	25.68	2.54	42.83
AV	2.20648G	27.80	54.00	-26.20	-12.41	3	Vertical	225	1.50	40.21	27.44	3.24	43.09
AV	10.60469G	38.90	54.00	-15.10	5.10	3	Vertical	68	1.93	33.80	39.01	8.14	42.05
PK	1.3515G	36.26	74.00	-37.74	-14.61	3	Vertical	273	1.50	50.87	25.68	2.54	42.83
PK	2.20648G	41.11	74.00	-32.89	-12.41	3	Vertical	225	1.50	53.52	27.44	3.24	43.09
PK	10.60469G	51.95	74.00	-22.05	5.10	3	Vertical	68	1.93	46.85	39.01	8.14	42.05

**Radiated Emissions above 1GHz\_Mode 1**

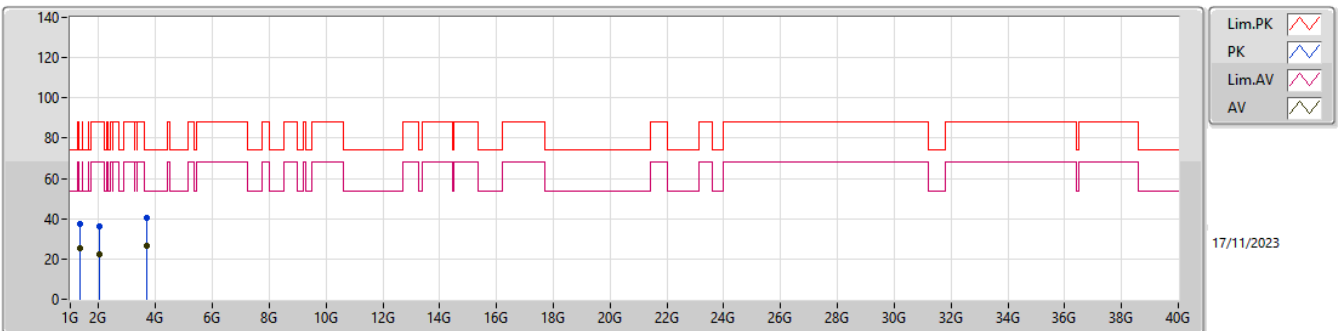

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV/m)	AF (dB/m)	CL (dB)	PA (dB)
AV	1.35012G	25.30	54.00	-28.70	-14.59	3	Horizontal	222	1.20	39.89	25.70	2.54	42.83
AV	2.0395G	22.29	68.20	-45.91	-12.70	3	Horizontal	162	2.40	34.99	27.20	3.12	43.02
AV	3.70771G	26.39	54.00	-27.61	-9.18	3	Horizontal	208	1.76	35.57	30.13	4.34	43.65
PK	1.35012G	37.45	74.00	-36.55	-14.59	3	Horizontal	222	1.20	52.04	25.70	2.54	42.83
PK	2.0395G	36.15	88.20	-52.05	-12.70	3	Horizontal	162	2.40	48.85	27.20	3.12	43.02
PK	3.70771G	40.46	74.00	-33.54	-9.18	3	Horizontal	208	1.76	49.64	30.13	4.34	43.65