


Appendix B. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	25°C	Humidity	55%
Test Engineer	Stim Sung	Configurations	2.4GHz + 5GHz

Horizontal

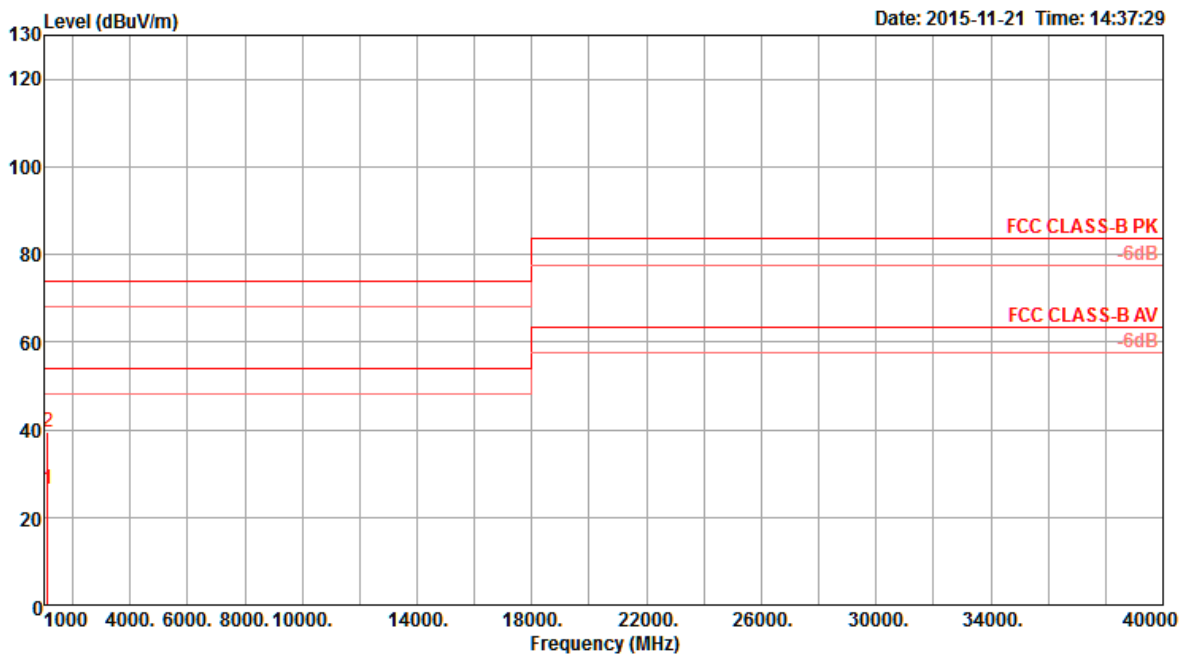

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	1124.95	26.53	54.00	-27.47	35.47	2.45	24.19	35.58	155	205	Average	HORIZONTAL
2	1127.82	39.51	74.00	-34.49	48.43	2.45	24.20	35.57	155	205	Peak	HORIZONTAL

Vertical

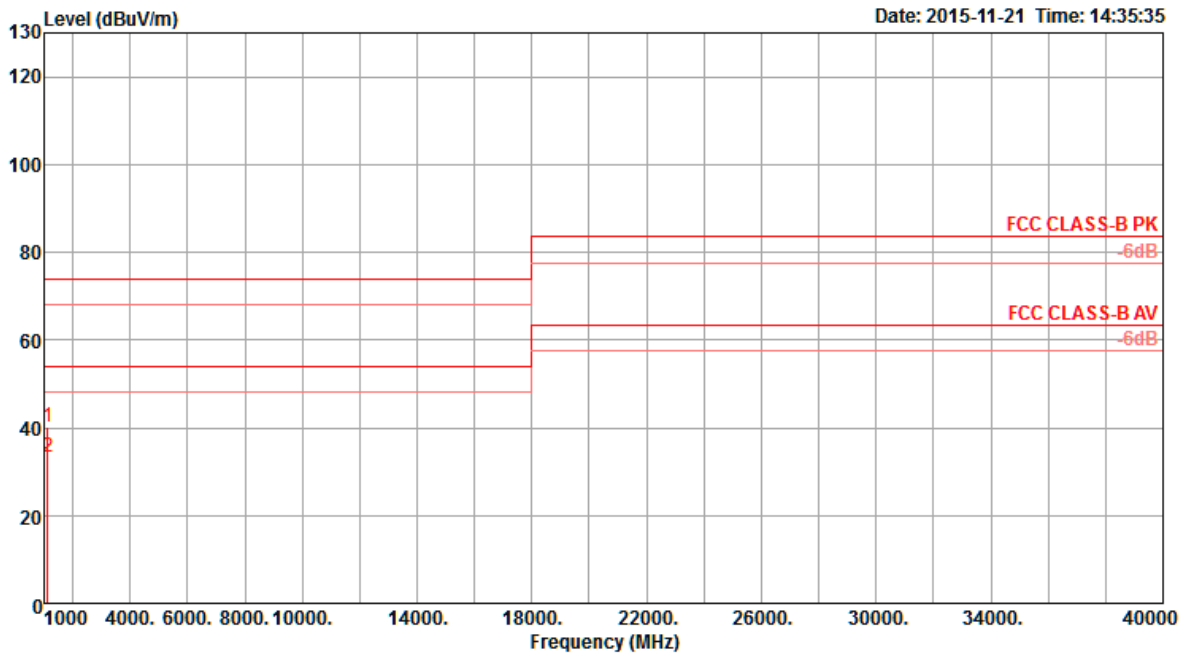

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	1123.10	40.19	74.00	-33.81	49.15	2.45	24.17	35.58	120	185	Peak	VERTICAL
2	1127.04	33.26	54.00	-20.74	42.20	2.45	24.19	35.58	120	185	Average	VERTICAL