



SPORTON International Inc.


No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

Project No: CB10412275

Maximum Permissible Exposure Report

Applicant's company	Senao Networks Inc.
Applicant Address	3F, No. 529, Chung Cheng Rd., Hsintien, Taipei, Taiwan
FCC ID	U2M-IAP8250AG
Manufacturer's company	Senao Networks Inc.
Manufacturer Address	3F, No. 529, Chung Cheng Rd., Hsintien, Taipei, Taiwan

Product Name	Indoor Wireless Access Point
Brand Name	SENAO
Model Name	IAP8250AG & IAP8251AG & EWS370AP & EWS371AP
Ref. Standard(s)	47 CFR FCC Part 2 Subpart J, section 2.1091
Received Date	Oct. 15, 2015
Final Test Date	Mar. 02, 2016
Submission Type	Original Equipment

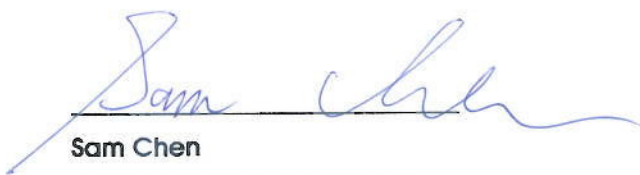

Sam Chen

SPORTON INTERNATIONAL INC.



Testing Laboratory
1190



Table of Contents

1. GENERAL DESCRIPTION.....	1
1.1. EUT General Information	1
1.2. Table for Multiple List.....	1
1.3. Testing Location.....	1
2. MAXIMUM PERMISSIBLE EXPOSURE.....	2
2.1. Limit of Maximum Permissible Exposure	2
2.2. MPE Calculation Method	2
2.3. Calculated Result and Limit.....	3



History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA541527AA	Rev. 01	Initial issue of report	May 24, 2016
FA541527AA	Rev. 02	Adding two model names: EWS370AP, EWS371AP	Jun. 07, 2016

1. GENERAL DESCRIPTION

1.1. EUT General Information

RF General Information			
Evaluation Mode	Frequency Range (MHz)	Operating Frequency (MHz)	Modulation Type
2.4GHz WLAN	2400-2483.5	2412-2462	802.11b: DSSS (DBPSK, DQPSK, CCK) 802.11g/n: OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)
5GHz WLAN	5150-5250 5725-5850	5180-5240 5745-5825	802.11a/n: OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)

1.2. Table for Multiple List

The model names are identical to each other in all aspects except for the following table:

Equipment	EUT	Model Name	Internal Antenna	External Antenna	Equipped Antenna
Indoor Wireless Access Point	1	IAP8251AG EWS371AP	X	V	Set 1~2
	2	IAP8250AG EWS370AP	V	X	Set 3

1.3. Testing Location

Testing Location		
<input type="checkbox"/>	HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-327-0973
<input checked="" type="checkbox"/>	JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

2. MAXIMUM PERMISSIBLE EXPOSURE

2.1. Limit of Maximum Permissible Exposure

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

2.2. MPE Calculation Method

The MPE was calculated at 25 cm to show compliance with the power density limit.

The following formula was used to calculate the Power Density:

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = Peak RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

2.3. Calculated Result and Limit

Exposure Environment: General Population / Uncontrolled Exposure

For EUT 1

For 5GHz Band:

Antenna Type : Dipole Antenna

Conducted Power for IEEE 802.11 ac MCS0/Nss1 (VHT20): 27.98dBm

Distance (cm)	Test Freq. (MHz)	Antenna Gain (dBi)	Antenna Gain (numeric)	The maximum combined Average Output Power		Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)	Test Result
				(dBm)	(mW)			
25	5785	4.67	2.9309	27.9778	627.7470	0.234377	1	Complies

For 2.4GHz Band:

Antenna Type : Dipole Antenna

Conducted Power for IEEE 802.11g: 28.08 dBm

Distance (cm)	Test Freq. (MHz)	Antenna Gain (dBi)	Antenna Gain (numeric)	The maximum combined Average Output Power		Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)	Test Result
				(dBm)	(mW)			
25	2437	4.66	2.9242	28.0825	643.0523	0.239539	1	Complies

Conclusion:

Both of the WLAN 2.4GHz Band and WLAN 5GHz Band can transmit simultaneously, the formula of calculated the MPE is:

$$CPD1 / LPD1 + CPD2 / LPD2 + \dots \text{etc.} < 1$$

CPD = Calculation power density

LPD = Limit of power density

Therefore, the worst-case situation is $0.239539 / 1 + 0.234377 / 1 = 0.473916$, which is less than "1". This confirmed that the device complies.

For EUT 2

For 5GHz Band:

Antenna Type : PIFA Antenna

Conducted Power for IEEE 802.11ac MCS0/Nss1 (VHT20): 28.82dBm

Distance (cm)	Test Freq. (MHz)	Antenna Gain (dBi)	Antenna Gain (numeric)	The maximum combined Average Output Power		Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)	Test Result
				(dBm)	(mW)			
25	5785	5.84	3.8371	28.8206	762.1921	0.372559	1	Complies

For 2.4GHz Band:

Antenna Type : PIFA Antenna

Conducted Power for IEEE 802.11g: 28.34 dBm

Distance (cm)	Test Freq. (MHz)	Antenna Gain (dBi)	Antenna Gain (numeric)	The maximum combined Average Output Power		Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)	Test Result
				(dBm)	(mW)			
25	2437	3.98	2.5003	28.3352	681.5782	0.217093	1	Complies

Conclusion:

Both of the WLAN 2.4GHz Band and WLAN 5GHz Band can transmit simultaneously, the formula of calculated the MPE is:

$$CPD1 / LPD1 + CPD2 / LPD2 + \dots \text{etc.} < 1$$

CPD = Calculation power density

LPD = Limit of power density

Therefore, the worst-case situation is $0.217093 / 1 + 0.372559 / 1 = 0.589652$, which is less than "1". This confirmed that the device complies.