



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

## FCC RADIO TEST REPORT

Applicant's company	Senao Networks Inc.
Applicant Address	3F, No. 529, Chung Cheng Rd., Hsintien, Taipei, Taiwan
FCC ID	U2M-OAP8250AG
Manufacturer's company	Senao Networks Inc.
Manufacturer Address	3F, No. 529, Chung Cheng Rd., Hsintien, Taipei, Taiwan

Product Name	Outdoor Wireless Access Point
Brand Name	SENAO EnGenius <sup>®</sup>
Model No.	OAP8250AG & OAP8251AG & EWS870AP & EWS871AP
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Nov. 10, 2015
Final Test Date	Jun. 02, 2016
Submission Type	Original Equipment

### Statement

**Test result included is only for the IEEE 802.11b/g, IEEE 802.11n and IEEE 802.11ac of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart C, KDB558074 D01 v03r05 and KDB 662911 D01 v02r01, KDB644545 D01 v01r02.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



## Table of Contents

<b>1. VERIFICATION OF COMPLIANCE</b> .....	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT</b> .....	<b>2</b>
<b>3. GENERAL INFORMATION</b> .....	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies .....	7
3.5. Table for Test Modes .....	8
3.6. Table for Testing Locations.....	10
3.7. Table for Multiple Listing.....	10
3.8. Table for Supporting Units .....	11
3.9. Table for Parameters of Test Software Setting .....	12
3.10. EUT Operation during Test .....	13
3.11. Duty Cycle.....	13
3.12. Test Configurations .....	14
<b>4. TEST RESULT</b> .....	<b>17</b>
4.1. AC Power Line Conducted Emissions Measurement.....	17
4.2. Maximum Conducted Output Power Measurement.....	21
4.3. Power Spectral Density Measurement .....	24
4.4. 6dB Spectrum Bandwidth Measurement .....	44
4.5. Radiated Emissions Measurement .....	56
4.6. Emissions Measurement .....	87
4.7. Antenna Requirements .....	121
<b>5. LIST OF MEASURING EQUIPMENTS</b> .....	<b>122</b>
<b>6. MEASUREMENT UNCERTAINTY</b> .....	<b>124</b>
<b>APPENDIX A. TEST PHOTOS</b> .....	<b>A1 ~ A5</b>
<b>APPENDIX B. RADIATED EMISSION CO-LOCATION REPORT</b> .....	<b>B1 ~ B3</b>




## History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR541521AA	Rev. 01	Initial issue of report	Aug. 17, 2016

## 1. VERIFICATION OF COMPLIANCE

Product Name : Outdoor Wireless Access Point  
Brand Name : SENAO EnGenius<sup>®</sup>  
Model No. : OAP8250AG & OAP8251AG & EWS870AP & EWS871AP  
Applicant : Senao Networks Inc.  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Nov. 10, 2015 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

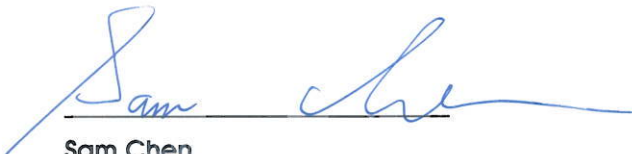

Sam Chen

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	7.84 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	0.92 dB
4.3	15.247(e)	Power Spectral Density	Complies	1.19 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	1.08 dB
4.6	15.247(d)	Band Edge Emissions	Complies	1.01 dB
4.7	15.203	Antenna Requirements	Complies	-

### 3. GENERAL INFORMATION

#### 3.1. Product Details

Items	Description
Product Type	WLAN (4TX, 4RX)
Radio Type	Intentional Transceiver
Power Type	From PoE
Modulation	IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n/ac: see the below table
Data Modulation	IEEE 802.11b: DSSS (BPSK / QPSK / CCK) IEEE 802.11g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) IEEE 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
Data Rate (Mbps)	IEEE 802.11b: DSSS (1/ 2/ 5.5/11) IEEE 802.11g: OFDM (6/9/12/18/24/36/48/54) IEEE 802.11n/ac: see the below table
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11 for 20MHz bandwidth ; 7 for 40MHz bandwidth
Channel Band Width (99%)	Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.5 dBi IEEE 802.11b: 14.15 MHz IEEE 802.11g: 23.62 MHz IEEE 802.11ac MCS0/Nss1 (VHT20): 23.79 MHz IEEE 802.11ac MCS0/Nss1 (VHT40): 34.73 MHz Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi IEEE 802.11b: 14.41 MHz IEEE 802.11g: 16.32 MHz IEEE 802.11ac MCS0/Nss1 (VHT20): 18.15 MHz IEEE 802.11ac MCS0/Nss1 (VHT40): 36.47 MHz
Maximum Conducted Output Power	Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.5 dBi IEEE 802.11b: 26.55 dBm IEEE 802.11g: 27.88 dBm IEEE 802.11ac MCS0/Nss1 (VHT20): 27.44 dBm IEEE 802.11ac MCS0/Nss1 (VHT40): 22.26 dBm Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi IEEE 802.11b: 26.84 dBm IEEE 802.11g: 27.45 dBm

	IEEE 802.11ac MCS0/Nss1 (VHT20): 28.63 dBm IEEE 802.11ac MCS0/Nss1 (VHT40): 22.19 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

### Antenna and Band width

Antenna	Four (TX)	
	20 MHz	40 MHz
Band width Mode	20 MHz	40 MHz
IEEE 802.11b	V	X
IEEE 802.11g	V	X
IEEE 802.11n	V	V
IEEE 802.11ac	V	V

### IEEE 11n/ac Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	4	MCS 0-31
802.11n (HT40)	4	MCS 0-31
802.11ac (VHT20)	4	MCS 0-9/Nss1-4
802.11ac (VHT40)	4	MCS 0-9/Nss1-4

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).  
Then EUT supports HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT supports VHT20 and VHT40 in 2.4GHz.

Note 3: Modulation modes consist of below configuration:  
HT20/HT40: IEEE 802.11n, VHT20/VHT40: IEEE 802.11ac

## 3.2. Accessories

N/A

### 3.3. Table for Filed Antenna

Set.	Brand Holder	Model Number (Part No.)	Antenna Type	Connector	Polarized Antenna	Gain (dBi)	
						2.4GHz	5GHz
1	Senao Networks, Inc.	DA2105	Dipole Antenna	N-type plug	X	4.5	-
2	Senao Networks, Inc.	DA5107	Dipole Antenna	N-type plug	X	-	6.01
3	Senao Networks, Inc.	AP3965i	PIFA Antenna	MMCX	X	Note 1	

Note1:

Set.	Antenna Gain (dBi)							
	2.4GHz				5GHz			
	Chain 1	Chain 2	Chain 3	Chain 4	Chain 1	Chain 2	Chain 3	Chain 4
3	6.25	5.77	6.45	5.60	5.96	5.97	6.25	6.08

Note2:

The EUT has three sets of antennas.

<For 2.4GHz Function>

For IEEE 802.11b/g/n/ac mode (4TX, 4RX):

Chain 1, Chain 2, Chain 3 and Chain 4 could transmit/receive simultaneously.

<For 5GHz Function>

For IEEE 802.11a/n/ac mode (4TX, 4RX):


Chain 1, Chain 2, Chain 3 and Chain 4 could transmit/receive simultaneously.



**For EUT 1:**



**For EUT 2:**

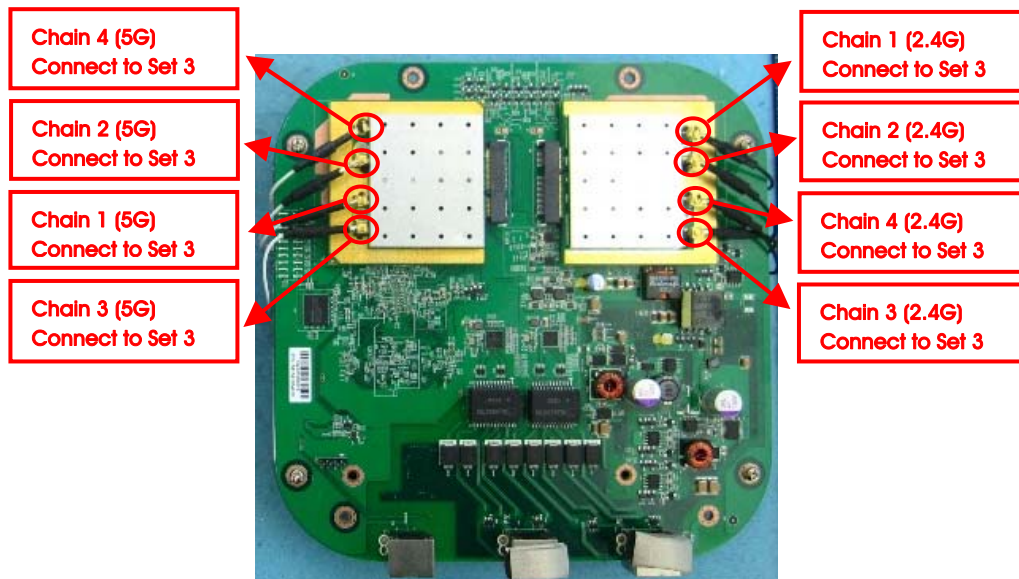

### 3.4. Table for Carrier Frequencies

There are two bandwidth systems.

For 20MHz bandwidth systems, use Channel 1~Channel 11.

For 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Chain
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	11b/CCK	1 Mbps	1/6/11	1+2+3+4
	11g/BPSK	6 Mbps	1/6/11	1+2+3+4
	11ac VHT20	MCS0/Nss1	1/6/11	1+2+3+4
	11ac VHT40	MCS0/Nss1	3/6/9	1+2+3+4
Power Spectral Density	11b/CCK	1 Mbps	1/6/11	1+2+3+4
	11g/BPSK	6 Mbps	1/6/11	1+2+3+4
	11ac VHT20	MCS0/Nss1	1/6/11	1+2+3+4
	11ac VHT40	MCS0/Nss1	3/6/9	1+2+3+4
6dB Spectrum Bandwidth	11b/CCK	1 Mbps	1/6/11	1+2+3+4
	11g/BPSK	6 Mbps	1/6/11	1+2+3+4
	11ac VHT20	MCS0/Nss1	1/6/11	1+2+3+4
	11ac VHT40	MCS0/Nss1	3/6/9	1+2+3+4
Radiated Emissions 9kHz~1GHz	Normal Link	-	-	-
Radiated Emissions 1GHz~10 <sup>th</sup> Harmonic	11b/CCK	1 Mbps	1/6/11	1+2+3+4
	11g/BPSK	6 Mbps	1/6/11	1+2+3+4
	11ac VHT20	MCS0/Nss1	1/6/11	1+2+3+4
	11ac VHT40	MCS0/Nss1	3/6/9	1+2+3+4
Band Edge Emissions	11b/CCK	1 Mbps	1/6/11	1+2+3+4
	11g/BPSK	6 Mbps	1/6/11	1+2+3+4
	11ac VHT20	MCS0/Nss1	1/6/11	1+2+3+4
	11ac VHT40	MCS0/Nss1	3/6/9	1+2+3+4

Note1: VHT20/VHT40 covers HT20/HT40, due to same modulation. The power setting for 802.11n HT20 and HT40 are the same or lower than 802.11ac VHT20 and VHT40.

Note2:

The PoE is for measurement only, would not be marketed.

The PoE information as below:

Power	Brand	Model
PoE 1	Microsemi	PD-9001GR
PoE 2	Powertron Electronics Corp	EPE-4818GO

Note: The power supply does not affect the test result of RF tests, so only PoE 1 was tested and recorded in this report for radiated emission above 1GHz test.

Note3: All the specification of test configurations and test modes were based on customer's request.

Note4: The console port can not be used by end user. It is generally used for updating FW by professional installer.

The following test modes were performed for all tests:

**For Conducted Emission test:**

Mode 1. Normal Link - EUT 1 + Set 1 + Set 2 + PoE 1

Mode 2. Normal Link - EUT 1 + Set 1 + Set 2 + PoE 2

Mode 3. Normal Link - EUT 2 + Set 3 + PoE 1

Mode 4. Normal Link - EUT 2 + Set 3 + PoE 2

Mode 3 is the worst case, so it was selected to record in this test report.

**For Radiated Emission Below 1GHz test:**

Mode 1. Place EUT 1 in Y axis + Set 1 + Set 2 + PoE 1

Mode 2. Place EUT 1 in Z axis + Set 1 + Set 2 + PoE 1

Mode 2 has been evaluated to be the worst case between Mode 1~2, thus measurement for Mode 3 ~ 5 will follow this same test mode.

Mode 3. Place EUT 1 in Z axis + Set 1 + Set 2 + PoE 2

Mode 4. Place EUT 2 in Z axis + Set 3 + PoE 1

Mode 5. Place EUT 2 in Z axis + Set 3 + PoE 2

Mode 2 is the worst case, so it was selected to record in this test report.

**For Radiated Emission Above 1GHz test:**

The EUT 1 was performed at Y axis and Z axis position. Z axis has been evaluated to be the worst case, thus measurement will follow this same test mode.

The EUT 2 was performed at Y axis and Z axis position. Y axis has been evaluated to be the worst case, thus measurement will follow this same test mode.

Mode 1. Place EUT 1 in Z axis + Set 1 + PoE 1

Mode 2. Place EUT 2 in Y axis + Set 3 + PoE 1

**For Co-location MPE and Radiated Emission Co-location Test:**

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to FA541521) and Radiated Emission Co-location (please refer to Appendix B) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

### 3.6. Table for Testing Locations

Test Site Location				
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.			
TEL:	886-3-656-9065			
FAX:	886-3-656-9085			
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

### 3.7. Table for Multiple Listing

The model names are identical to each other in all aspects except for the following table:

Equipment	EUT	Model Name	Internal Antenna	External Antenna	Equipped Antenna
Outdoor Wireless Access Point	1	OAP8251AG EWS871AP	X	V	Set 1~2
	2	OAP8250AG EWS870AP	V	X	Set 3

### 3.8. Table for Supporting Units

For Test Site No: 03CH01-CB (For Below 1GHz)

Support Unit	Brand	Model	FCC ID
NB*4	DELL	E4300	DoC
PoE Load	Senao	LT4321UF	N/A
PoE 1	Microsemi	PD-9001GR	N/A

For Test Site No: 03CH01-CB (For Above 1GHz)

Support Unit	Brand	Model	FCC ID
NB	DELL	E4300	DoC
PoE 1	Microsemi	PD-9001GR	N/A

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
NB*4	DELL	E6430	DoC
PoE Load	Senao	LT4321UF	N/A
PoE 1	Microsemi	PD-9001GR	N/A

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	E4300	DoC
PoE 1	Microsemi	PD-9001GR	N/A

### 3.9. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

#### Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.5 dBi

Test Software Version	QCAMSL 3.0.144.0					
Mode	Test Frequency (MHz)					
	NCB: 20MHz			NCB: 40MHz		
	2412 MHz	2437 MHz	2462 MHz	2422 MHz	2437 MHz	2452 MHz
802.11b	20.5	20	20	-	-	-
802.11g	16	23	15.5	-	-	-
802.11ac MCS0/Nss1 VHT20	17	22.5	14.5	-	-	-
802.11ac MCS0/Nss1 VHT40	-	-	-	14	16	14

#### Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi

Test Software Version	QCAMSL 3.0.144.0					
Mode	Test Frequency (MHz)					
	NCB: 20MHz			NCB: 40MHz		
	2412 MHz	2437 MHz	2462 MHz	2422 MHz	2437 MHz	2452 MHz
802.11b	20.5	21	20	-	-	-
802.11g	15	22.5	14.5	-	-	-
802.11ac MCS0/Nss1 VHT20	13.5	23	14.5	-	-	-
802.11ac MCS0/Nss1 VHT40	-	-	-	11	16	12

### 3.10. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

### 3.11. Duty Cycle

#### Mode 1

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11b	1.000	1.000	100	0.00	0.01
802.11g	2.068	2.129	97.14	0.13	0.48
802.11ac MCS0/Nss1 VHT20	5.022	5.065	99.14	0.04	0.01
802.11ac MCS0/Nss1 VHT40	2.419	2.500	96.75	0.14	0.41


#### Mode 2

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11b	1.000	1.000	100	0.00	0.01
802.11g	2.064	2.128	96.99	0.13	0.48
802.11ac MCS0/Nss1 VHT20	5.004	5.088	98.35	0.07	0.01
802.11ac MCS0/Nss1 VHT40	2.432	2.528	96.20	0.17	0.41



### 3.12. Test Configurations


#### 3.12.1. AC Power Line Conduction Emissions Test Configuration

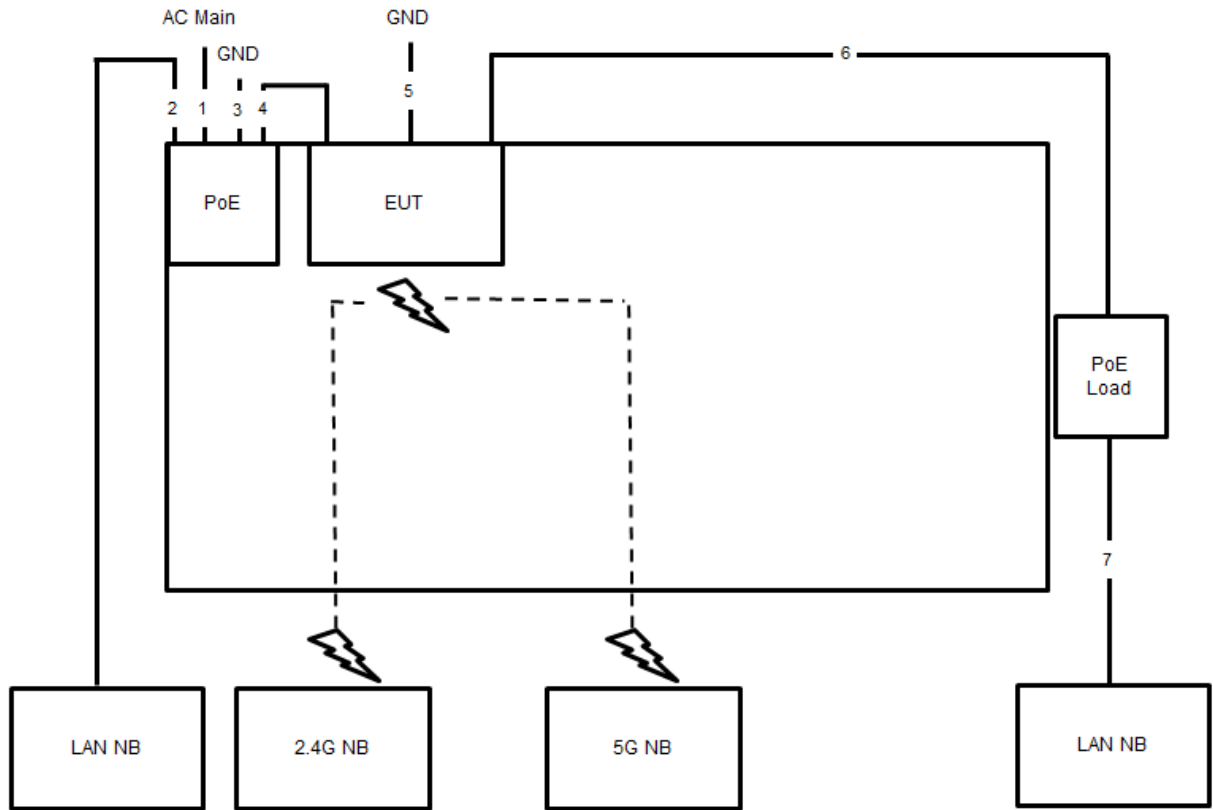

Item	Connection	Shielded	Length
1	Power cable	No	4.6m
2	RJ-45 cable	No	10m
3	Ground cable	No	1.5m
4	RJ-45 cable	No	1.5m
5	Ground cable	No	1.5m
6	RJ-45 cable	No	10m
7	RJ-45 cable	No	1.5m


### 3.12.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz~1GHz

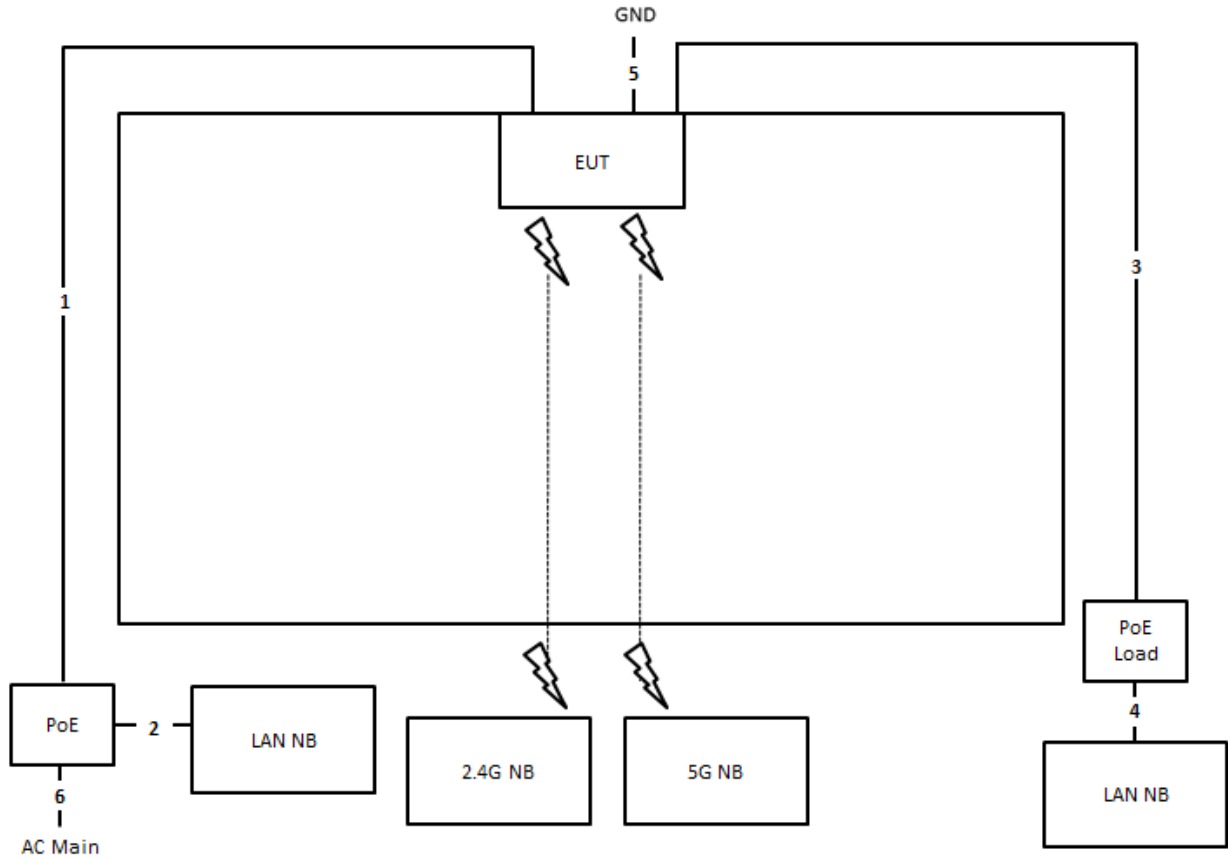

Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	RJ-45 cable	No	1.5m
3	RJ-45 cable	No	10m
4	RJ-45 cable	No	1.5m
5	Ground cable	No	1.5m
6	Power cable	No	4.6m

Test Configuration: above 1GHz

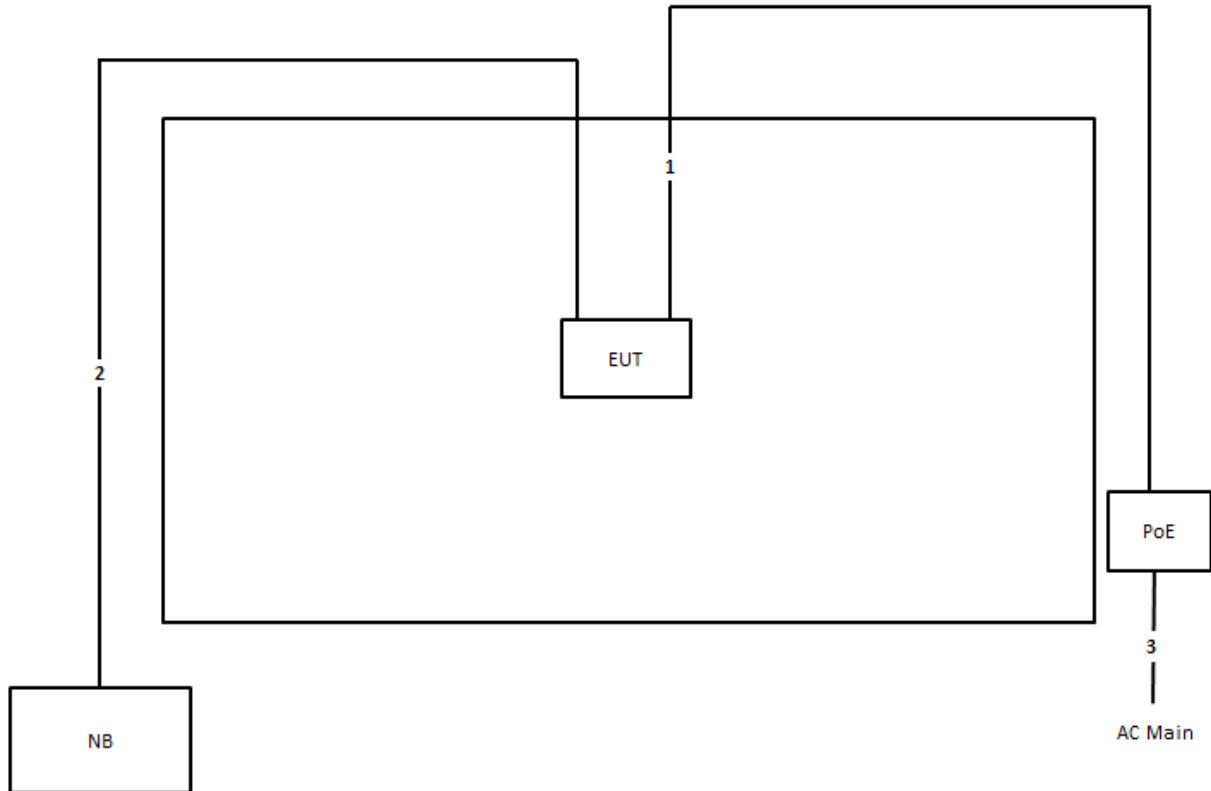

Item	Connection	Shielded	Length
1	RJ-45 cable	No	10m
2	RJ-45 cable	No	10m
3	Power cable	No	4.6m

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.




4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	23°C	Humidity	60%
Test Engineer	Sollo Luo	Phase	Line
Configuration	Normal Link	Test Mode	Mode 3

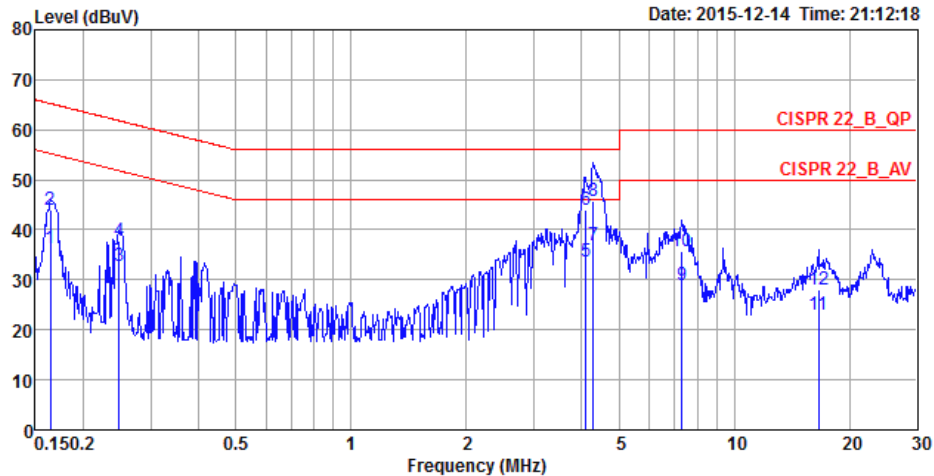

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1641	36.34	-18.91	55.25	26.39	9.93	0.02	LINE	Average
2	0.1641	43.85	-21.40	65.25	33.90	9.93	0.02	LINE	QP
3	0.2481	32.78	-19.04	51.82	22.82	9.93	0.03	LINE	Average
4	0.2481	37.73	-24.09	61.82	27.77	9.93	0.03	LINE	QP
5	4.0920	33.78	-12.22	46.00	23.69	10.02	0.07	LINE	Average
6	4.0920	44.06	-11.94	56.00	33.97	10.02	0.07	LINE	QP
7	4.2918	37.04	-8.96	46.00	26.93	10.03	0.08	LINE	Average
8	4.2918	45.77	-10.23	56.00	35.66	10.03	0.08	LINE	QP
9	7.2903	29.01	-20.99	50.00	18.75	10.12	0.14	LINE	Average
10	7.2903	35.78	-24.22	60.00	25.52	10.12	0.14	LINE	QP
11	16.5732	22.93	-27.07	50.00	12.30	10.37	0.26	LINE	Average
12	16.5732	28.06	-31.94	60.00	17.43	10.37	0.26	LINE	QP

Temperature	23°C	Humidity	60%
Test Engineer	Sollo Luo	Phase	Neutral
Configuration	Normal Link	Test Mode	Mode 3

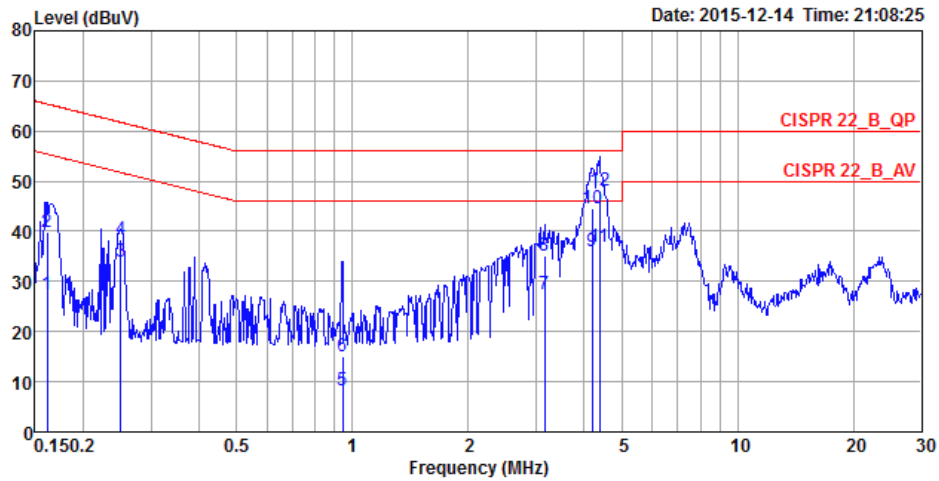

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1616	27.50	-27.88	55.38	17.70	9.78	0.02	NEUTRAL	Average
2	0.1616	39.84	-25.54	65.38	30.04	9.78	0.02	NEUTRAL	QP
3	0.2508	33.97	-17.76	51.73	24.15	9.79	0.03	NEUTRAL	Average
4	0.2508	38.38	-23.35	61.73	28.56	9.79	0.03	NEUTRAL	QP
5	0.9431	8.40	-37.60	46.00	-1.46	9.81	0.05	NEUTRAL	Average
6	0.9431	15.01	-40.99	56.00	5.15	9.81	0.05	NEUTRAL	QP
7	3.1563	27.50	-18.50	46.00	17.59	9.86	0.05	NEUTRAL	Average
8	3.1563	35.27	-20.73	56.00	25.36	9.86	0.05	NEUTRAL	QP
9	4.2018	36.12	-9.88	46.00	26.17	9.88	0.07	NEUTRAL	Average
10	4.2018	44.47	-11.53	56.00	34.52	9.88	0.07	NEUTRAL	QP
11	4.3838	36.83	-9.17	46.00	26.87	9.88	0.08	NEUTRAL	Average
12	4.3838	48.16	-7.84	56.00	38.20	9.88	0.08	NEUTRAL	QP

Note:

Level = Read Level + LISN Factor + Cable Loss.

## 4.2. Maximum Conducted Output Power Measurement

### 4.2.1. Limit

The limit for output power is 30dBm.

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Average

### 4.2.3. Test Procedures

1. Test procedures refer KDB558074 D01 v03r05 section 9.2.3.2 Measurement using a power meter (PM).
2. Multiple antenna systems was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

### 4.2.4. Test Setup Layout

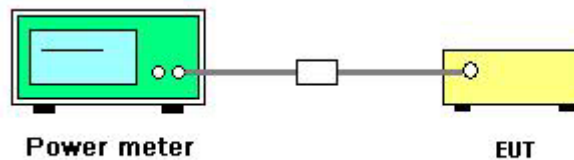

### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



#### 4.2.7. Test Result of Maximum Conducted Output Power

<b>Temperature</b>	25°C	<b>Humidity</b>	45%
<b>Test Engineer</b>	Roki Liu	<b>Test Date</b>	Dec. 06, 2015
<b>Test Mode</b>	Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.5 dBi		

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11b	2412 MHz	20.82	21.23	19.06	20.71	26.55	30.00	Complies
	2437 MHz	20.45	20.61	19.38	20.06	26.17	30.00	Complies
	2462 MHz	20.41	20.43	20.03	19.87	26.21	30.00	Complies
802.11g	2412 MHz	15.87	15.82	14.88	15.45	21.54	30.00	Complies
	2437 MHz	22.38	22.43	21.25	21.24	27.88	30.00	Complies
	2462 MHz	15.19	15.33	14.28	14.96	20.98	30.00	Complies
802.11ac MCS0/Nss1 VHT20	2412 MHz	16.57	16.58	15.76	16.09	22.28	30.00	Complies
	2437 MHz	21.62	21.88	20.77	21.33	27.44	30.00	Complies
	2462 MHz	14.10	14.21	13.21	13.26	19.74	30.00	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	14.35	14.68	13.74	13.82	20.19	30.00	Complies
	2437 MHz	16.43	16.72	15.77	15.99	22.26	30.00	Complies
	2452 MHz	14.32	14.55	13.99	14.02	20.25	30.00	Complies

<b>Temperature</b>	25°C	<b>Humidity</b>	45%
<b>Test Engineer</b>	Roki Liu	<b>Test Date</b>	Dec. 07, 2015
<b>Test Mode</b>	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi		

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11b	2412 MHz	20.46	20.45	19.55	21.23	26.48	29.55	Complies
	2437 MHz	20.97	20.77	19.67	21.65	26.84	29.55	Complies
	2462 MHz	20.03	19.70	19.12	20.78	25.97	29.55	Complies
802.11g	2412 MHz	14.34	14.61	13.96	14.55	20.39	29.55	Complies
	2437 MHz	21.72	21.86	20.74	21.32	27.45	29.55	Complies
	2462 MHz	14.13	14.25	13.42	14.05	19.99	29.55	Complies
802.11ac MCS0/Nss1 VHT20	2412 MHz	12.72	12.96	12.28	12.94	18.75	29.55	Complies
	2437 MHz	21.83	23.44	23.20	21.68	28.63	29.55	Complies
	2462 MHz	13.71	13.97	12.81	13.95	19.66	29.55	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	10.91	10.69	10.88	11.38	16.99	29.55	Complies
	2437 MHz	16.05	16.19	15.97	16.44	22.19	29.55	Complies
	2452 MHz	12.06	12.05	11.94	12.56	18.18	29.55	Complies

Note: Antenna gain=6.45dBi > 6dBi, So Limit =30-(6.45-6)=29.55dBm.

### 4.3. Power Spectral Density Measurement

#### 4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS channel bandwidth.
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100\text{kHz}$
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple

#### 4.3.3. Test Procedures

1. Test was performed in accordance with KDB558074 D01 v03r05 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 10.2 Method PKPSD (peak PSD) and KDB 662911 D01 v02r01 section In-Band Power Spectral Density (PSD) Measurements option (b) Measure and sum spectral maximal across the outputs.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$  (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The resulting PSD level must be  $\leq 8 \text{ dBm}$ .

#### 4.3.4. Test Setup Layout

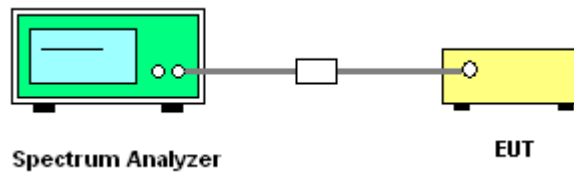

#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Test Result of Power Spectral Density

Temperature	25°C	Humidity	45%
Test Engineer	Roki Liu		
Test Mode	Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.5 dBi		

Mode	Frequency	Power Density (dBm/3kHz)					Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11b	2412 MHz	-11.12	-12.05	-10.51	-10.93	-5.10	3.48	Complies
	2437 MHz	-11.17	-11.12	-12.06	-11.41	-5.40	3.48	Complies
	2462 MHz	-10.95	-11.85	-10.97	-11.83	-5.36	3.48	Complies
802.11g	2412 MHz	-10.76	-10.86	-11.01	-11.33	-4.96	3.48	Complies
	2437 MHz	-3.47	-3.19	-3.90	-4.49	2.29	3.48	Complies
	2462 MHz	-11.05	-12.25	-11.59	-11.79	-5.63	3.48	Complies
802.11ac MCS0/Nss1 VHT20	2412 MHz	-10.95	-11.77	-10.71	-10.58	-4.96	3.48	Complies
	2437 MHz	-5.26	-6.99	-4.04	-4.85	0.86	3.48	Complies
	2462 MHz	-11.97	-11.56	-12.63	-12.50	-6.12	3.48	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	-14.38	-14.18	-14.83	-14.65	-8.48	3.48	Complies
	2437 MHz	-11.97	-11.81	-12.56	-12.32	-6.13	3.48	Complies
	2452 MHz	-15.11	-15.86	-15.26	-15.85	-9.49	3.48	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 10.52\text{dBi} > 6\text{dBi}$ , So Limit =  $8 - (10.52 - 6) = 3.48\text{dBm}/3\text{kHz}$ .

<b>Temperature</b>	25°C	<b>Humidity</b>	45%
<b>Test Engineer</b>	Roki Liu		
<b>Test Mode</b>	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi		

Mode	Frequency	Power Density (dBm/3kHz)					Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11b	2412 MHz	-12.26	-10.14	-10.85	-11.77	-5.16	1.96	Complies
	2437 MHz	-11.52	-11.78	-13.01	-12.30	-6.10	1.96	Complies
	2462 MHz	-12.51	-13.20	-12.53	-12.36	-6.62	1.96	Complies
802.11g	2412 MHz	-14.89	-15.64	-15.04	-14.28	-8.91	1.96	Complies
	2437 MHz	-6.84	-7.62	-4.64	-7.01	-0.35	1.96	Complies
	2462 MHz	-15.08	-14.49	-15.57	-13.84	-8.68	1.96	Complies
802.11ac MCS0/Nss1 VHT20	2412 MHz	-16.16	-15.11	-15.80	-15.65	-9.64	1.96	Complies
	2437 MHz	-10.71	-7.06	-6.37	-5.94	-1.15	1.96	Complies
	2462 MHz	-15.29	-14.22	-15.68	-14.59	-8.89	1.96	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	-21.03	-20.33	-20.27	-20.52	-14.51	1.96	Complies
	2437 MHz	-15.43	-16.12	-14.63	-13.31	-8.72	1.96	Complies
	2452 MHz	-14.58	-14.60	-15.33	-15.34	-8.93	1.96	Complies


Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 12.04\text{dBi} > 6\text{dBi}$ , So Limit =  $8 - (12.04 - 6) = 1.96\text{dBm}/3\text{kHz}$ .

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.


**Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.5 dBi**

**Power Density Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 1**

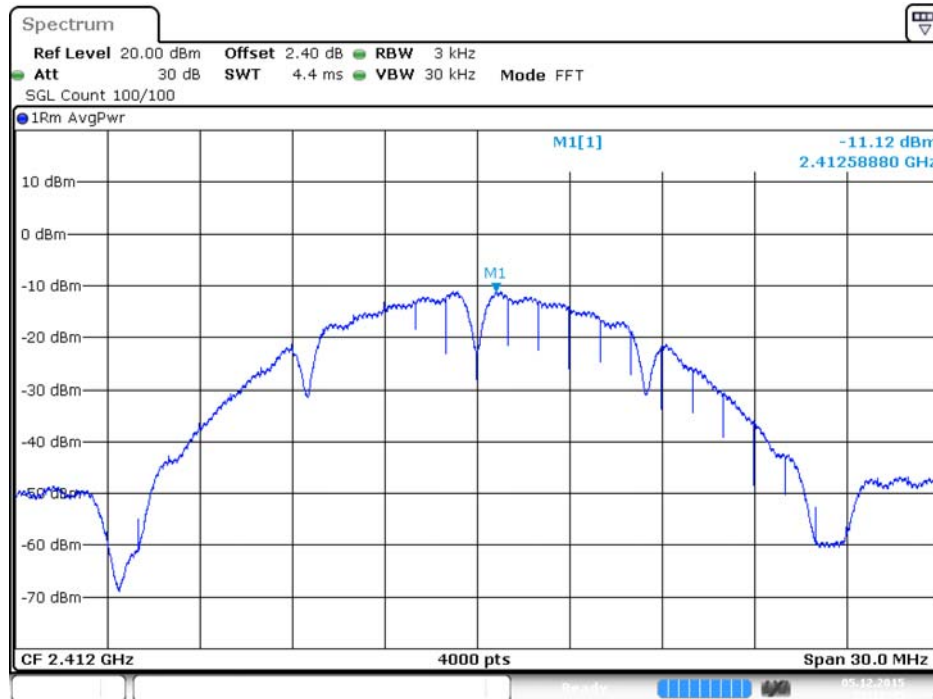


Date: 5.DEC.2015 23:12:45

**Power Density Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 2**

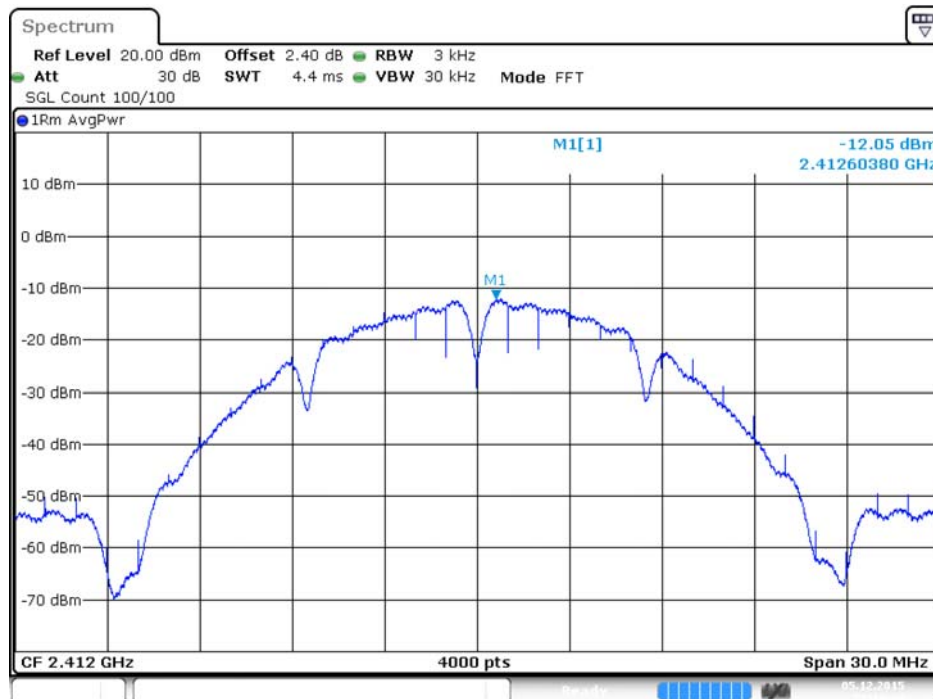

Date: 5.DEC.2015 23:14:34

Power Density Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 3

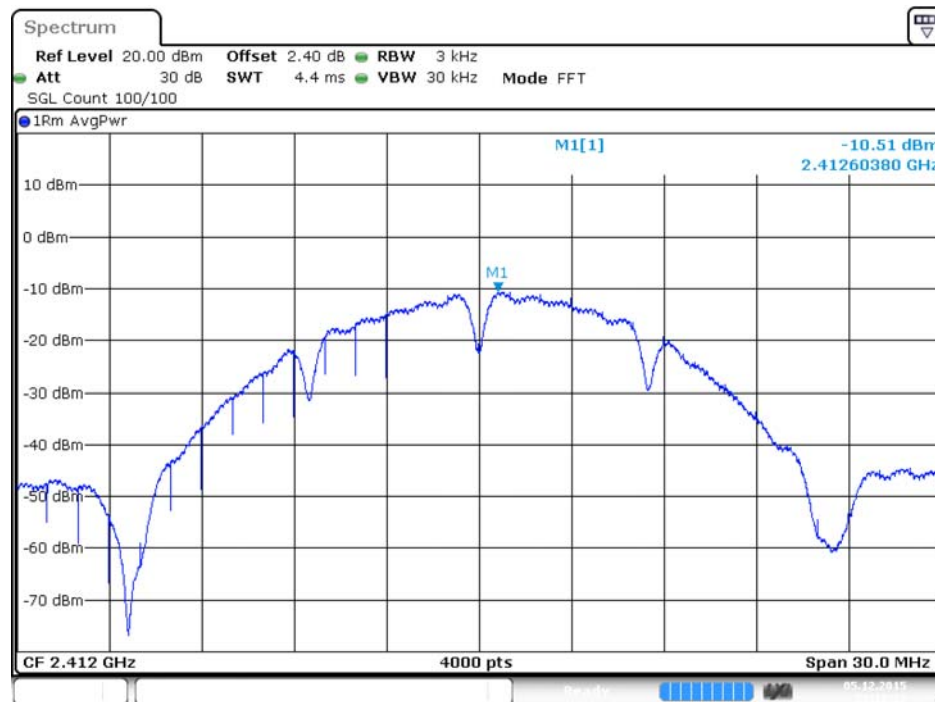


Power Density Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 4







**Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1**

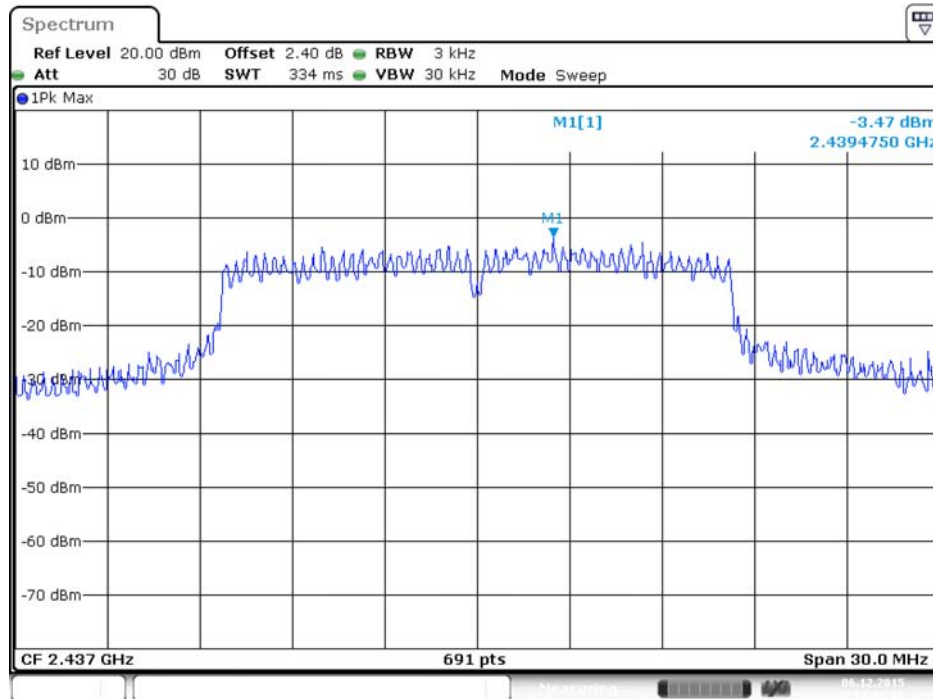


**P Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 2**

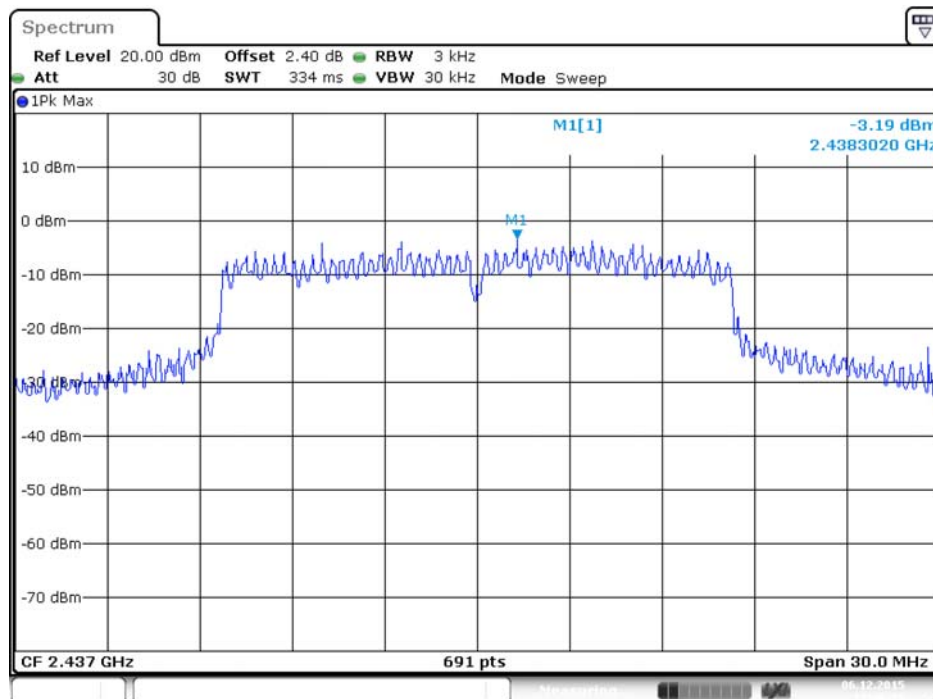


**Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 3**

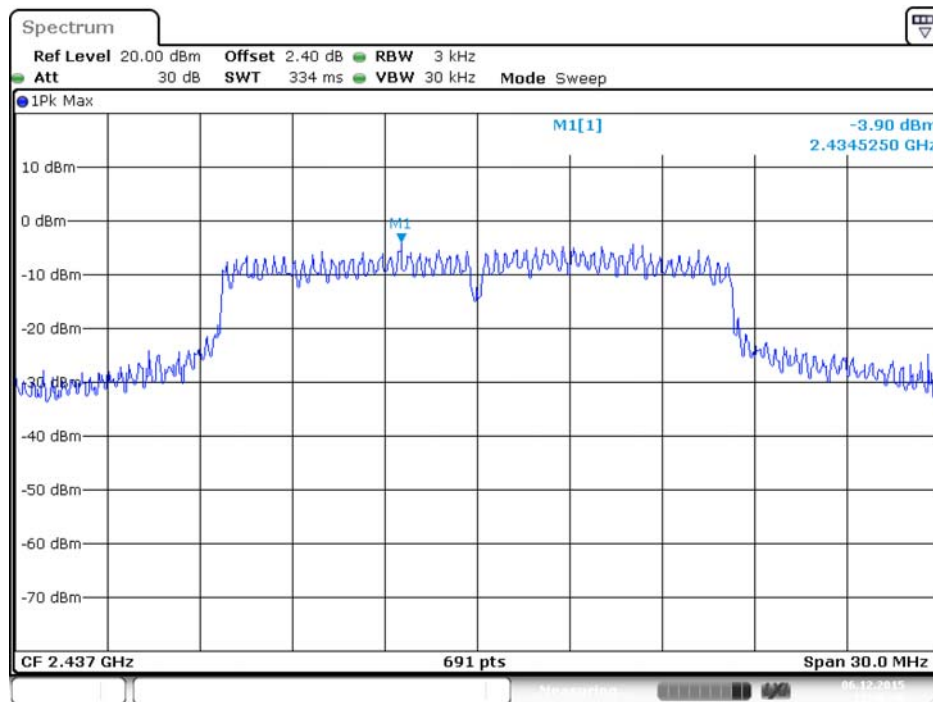

**Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 4**

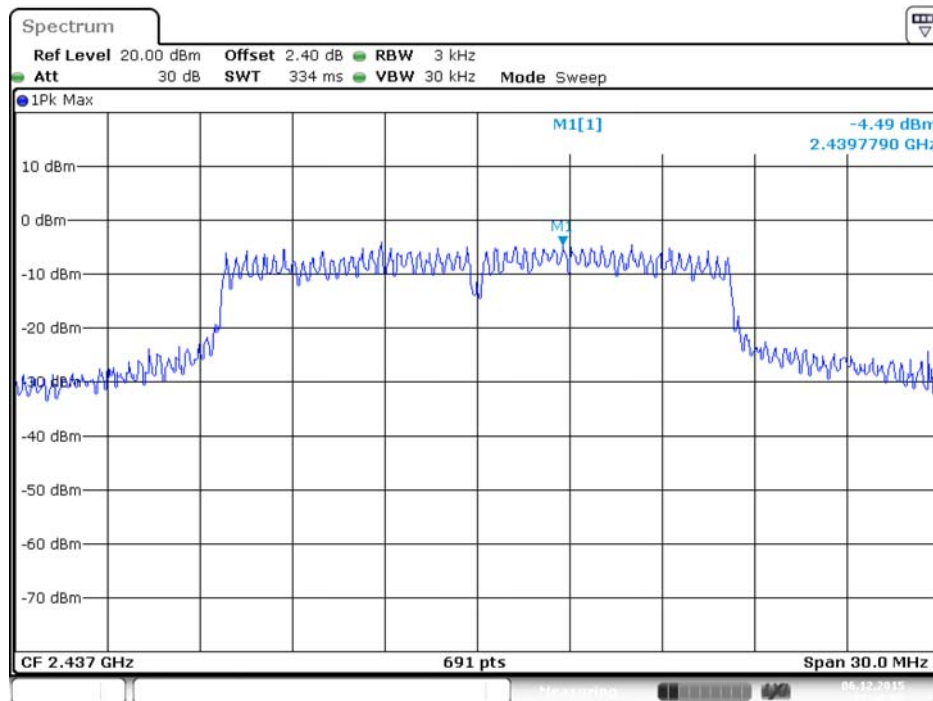


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 1

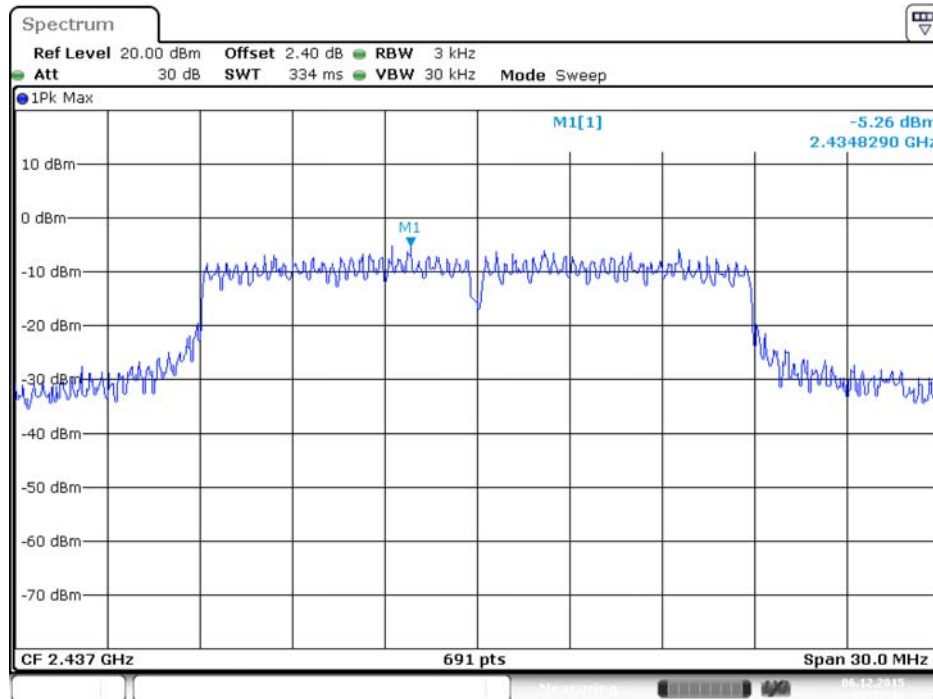


Date: 6.DEC.2015 03:21:42

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 2

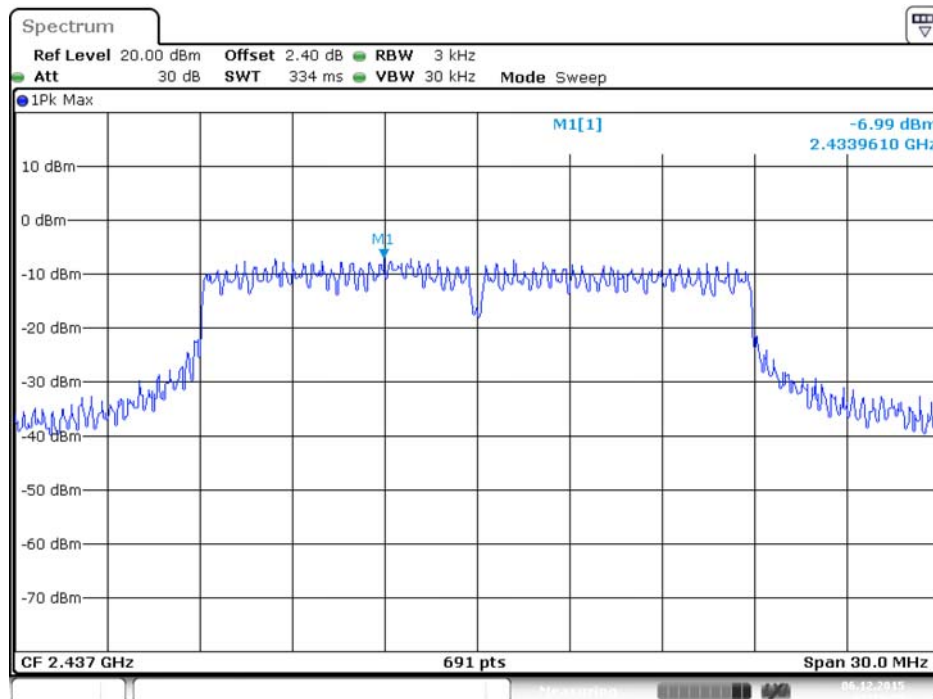


Date: 6.DEC.2015 03:19:53


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 3

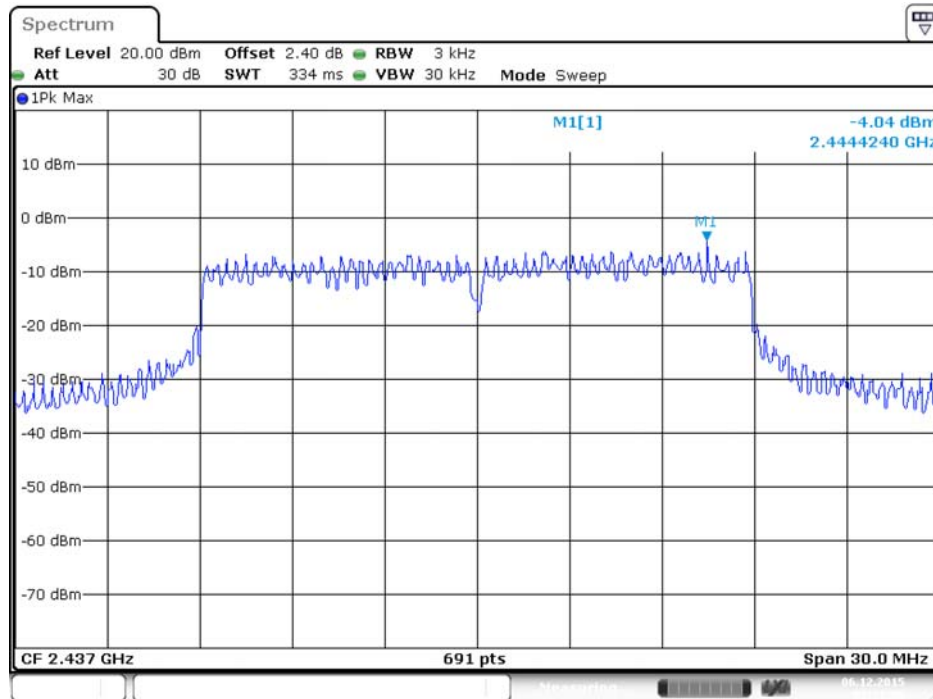


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 4

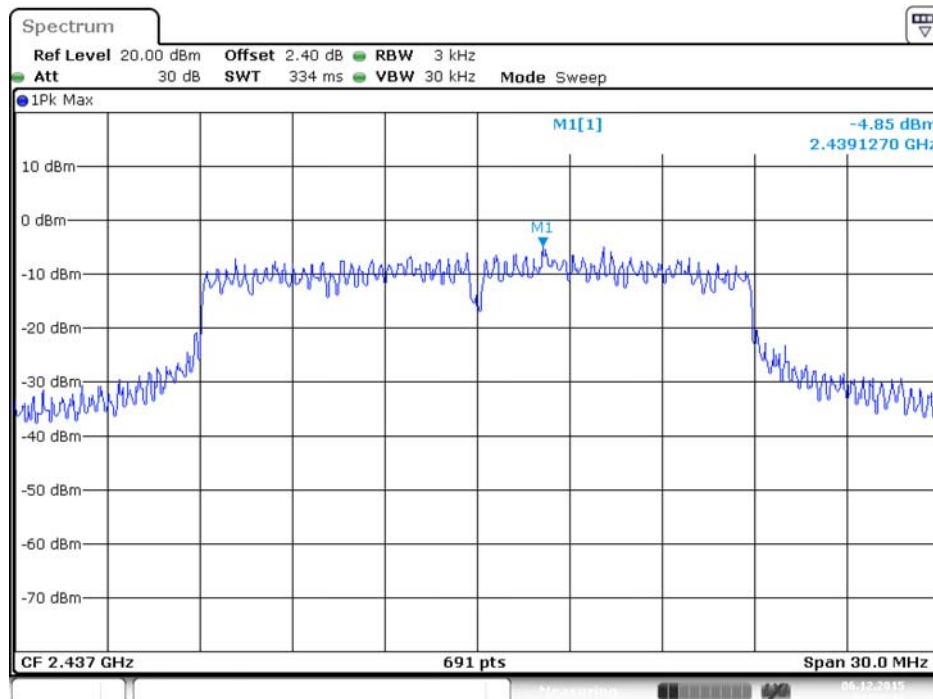


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 1

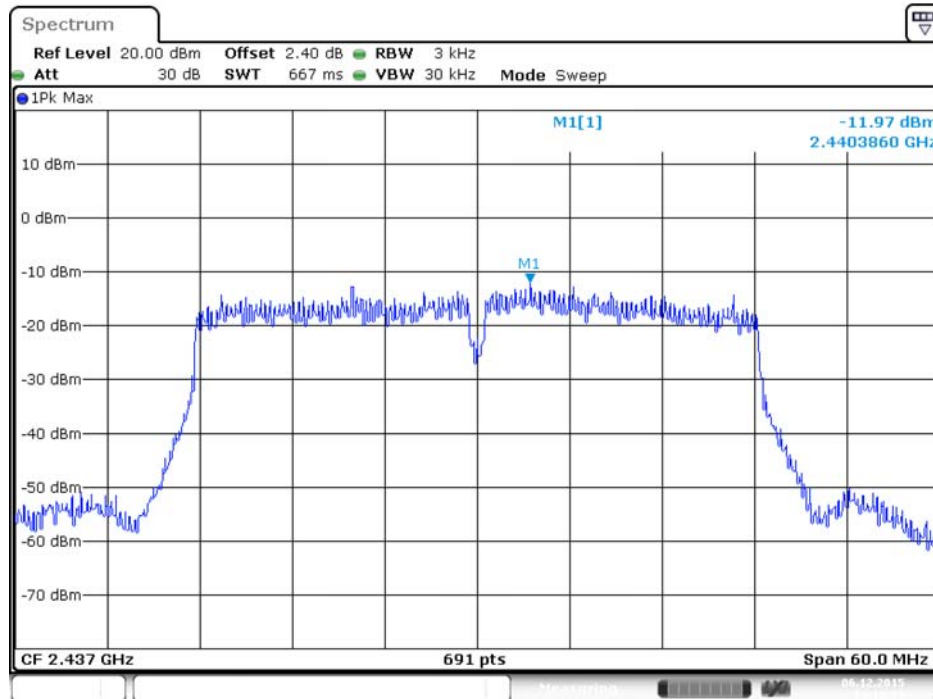


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 2

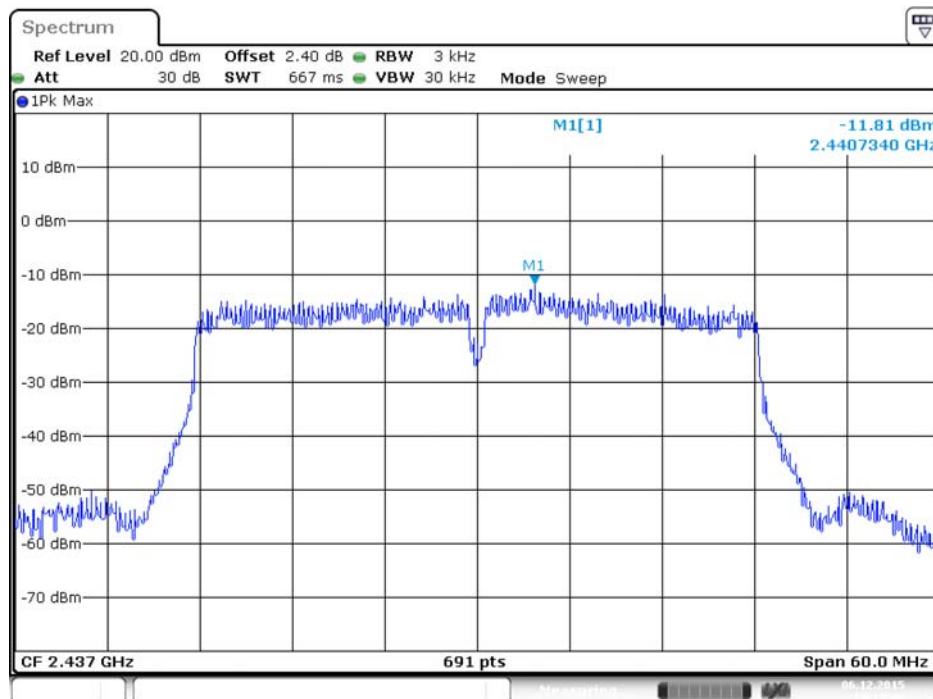

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 3

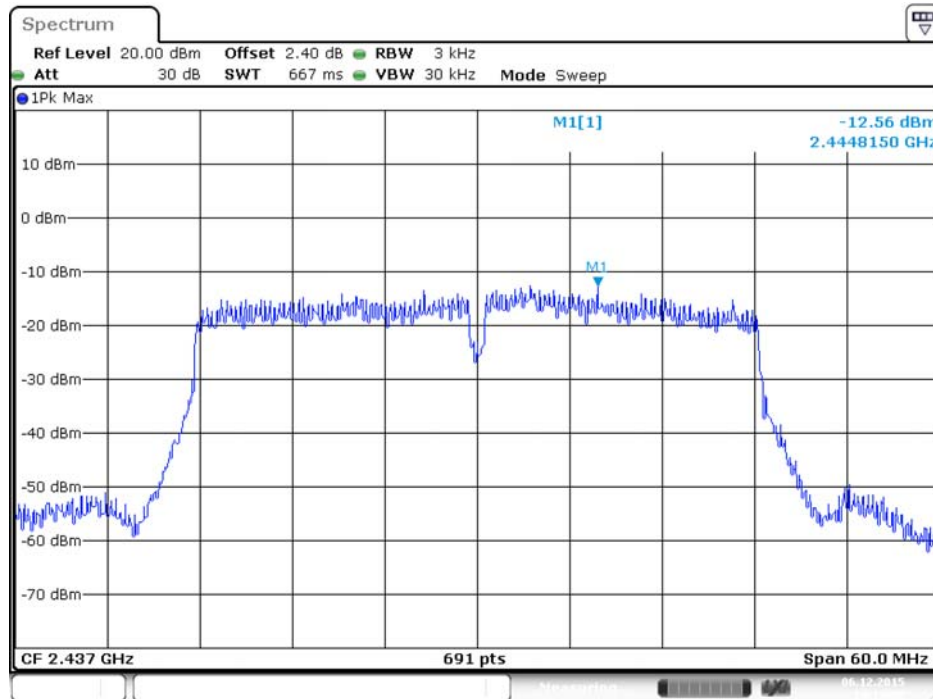

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 4

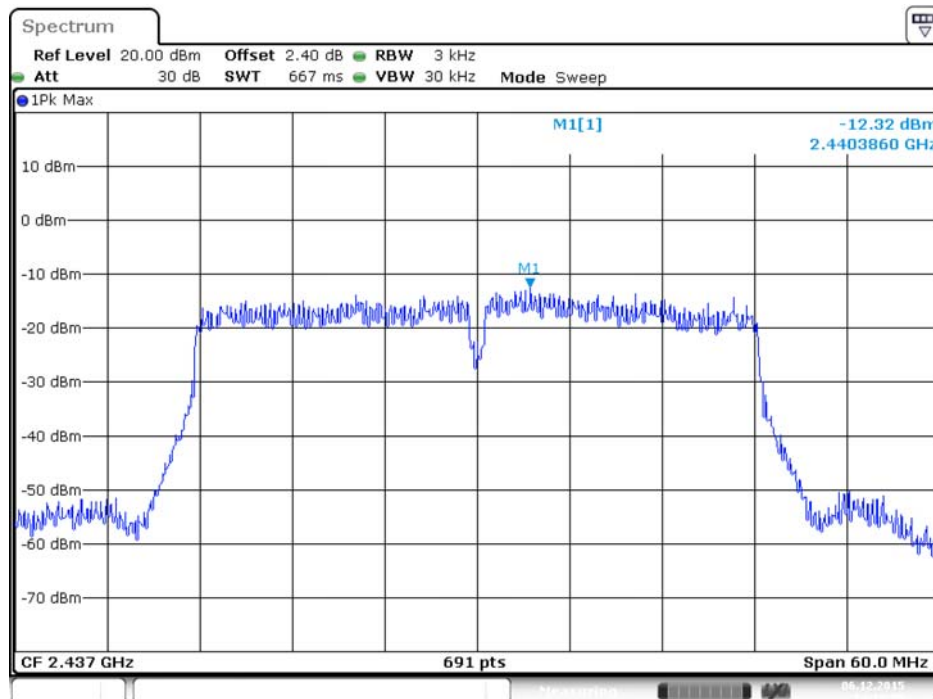


Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi

Power Density Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 1



Date: 7.DEC.2015 19:54:51


Power Density Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 2

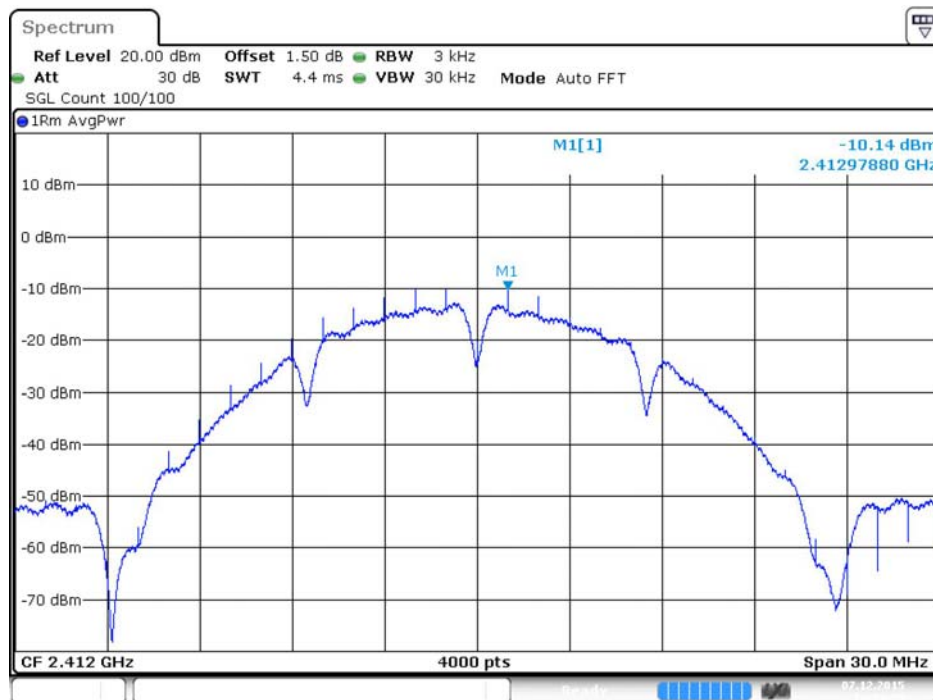

Date: 7.DEC.2015 19:54:35




Power Density Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 3

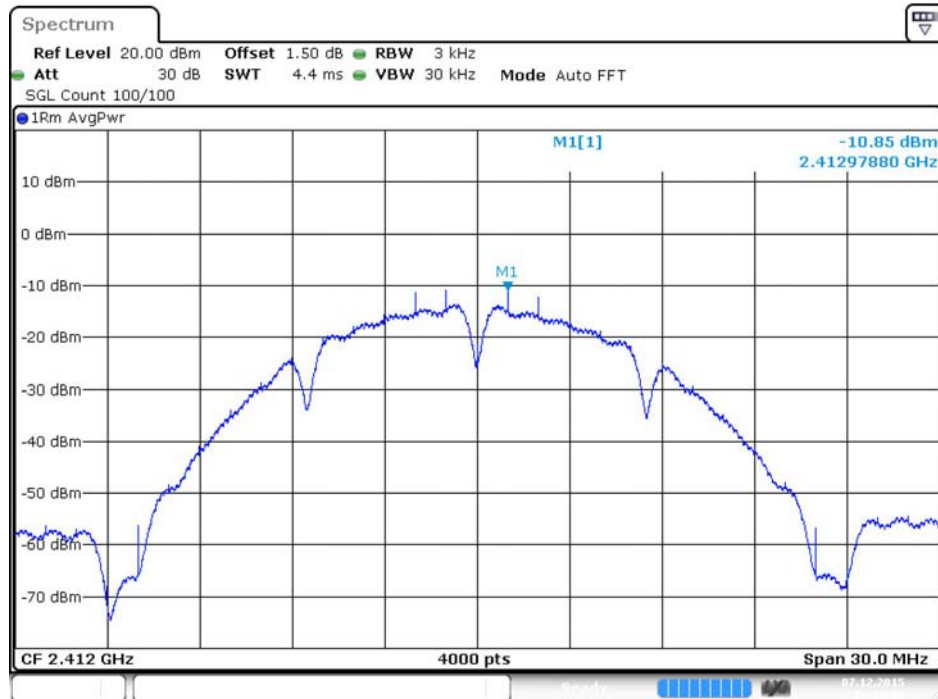

Date: 7.DEC.2015 19:55:01


Power Density Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 4

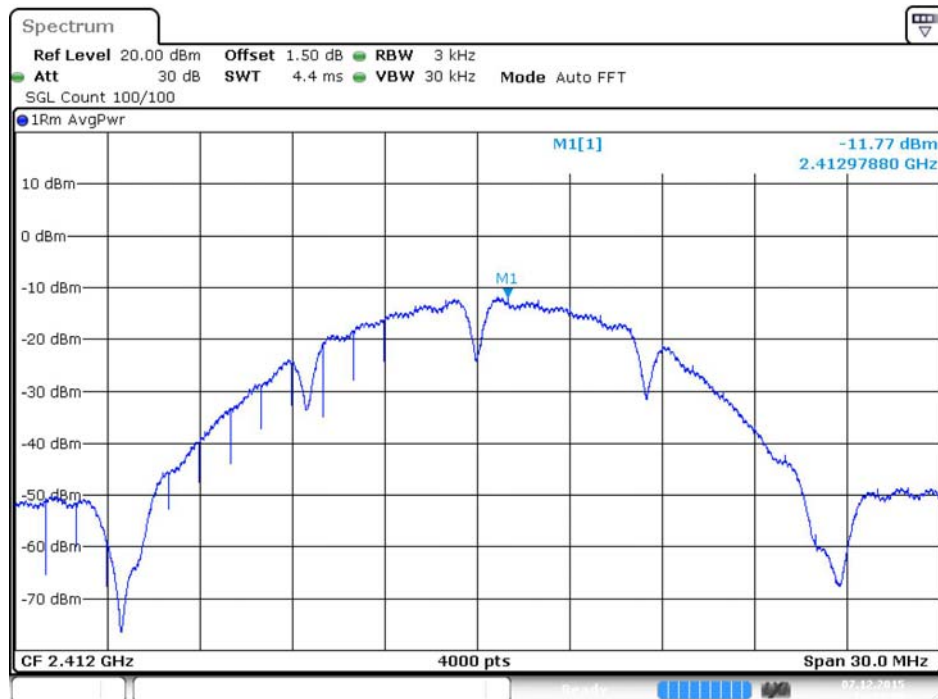


Date: 7.DEC.2015 19:55:10




**Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1**

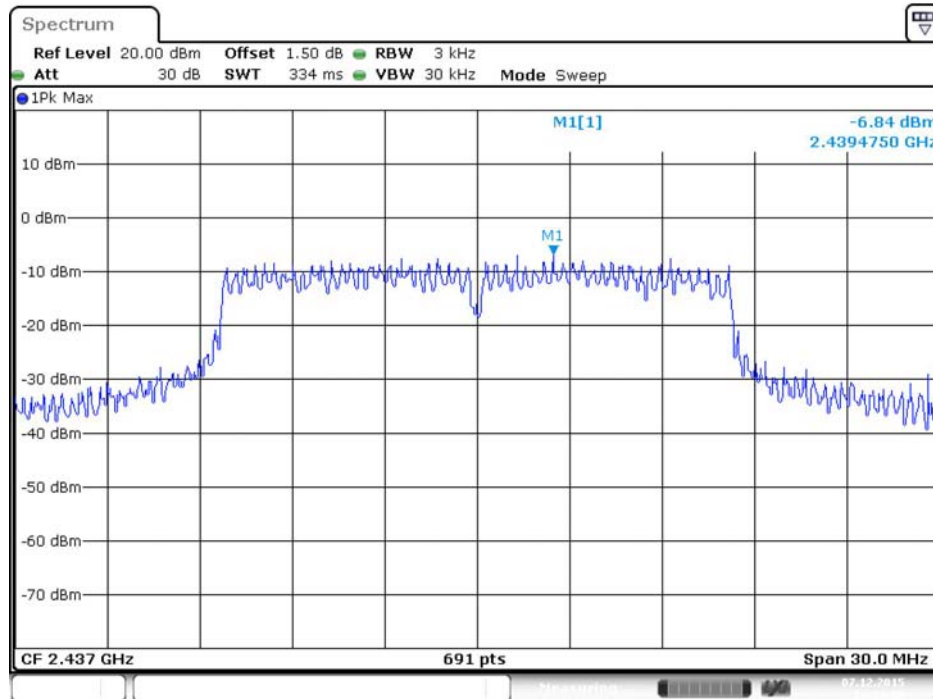


**P Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 2**

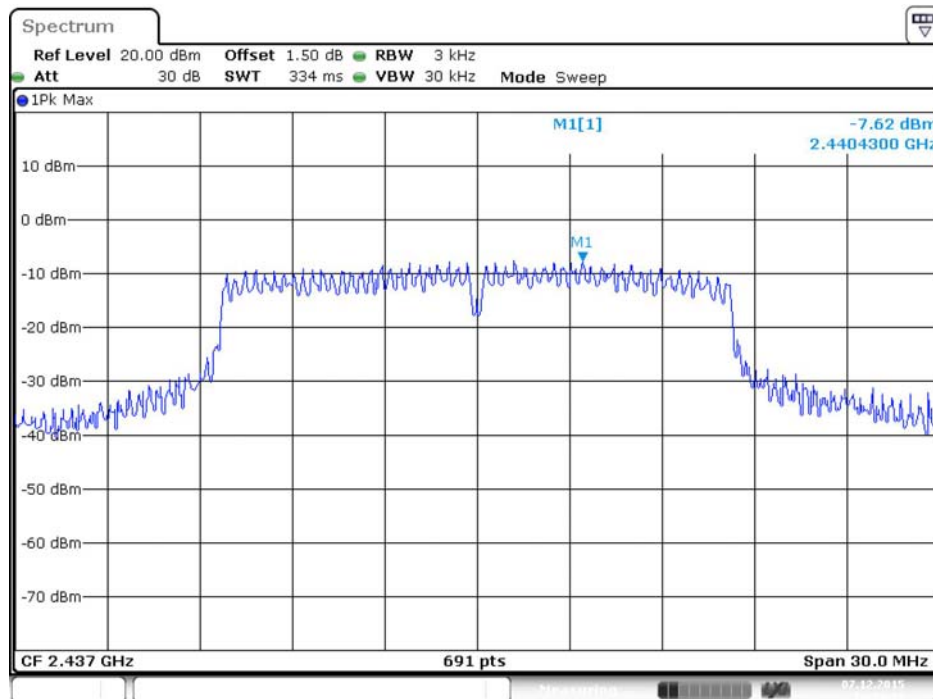


**Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 3**

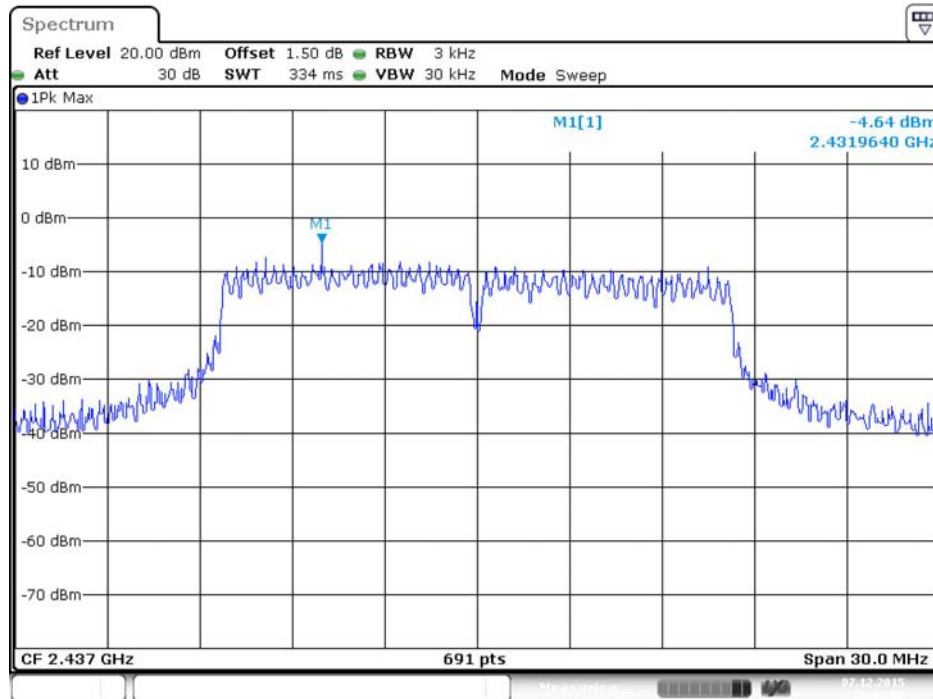


**Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 4**

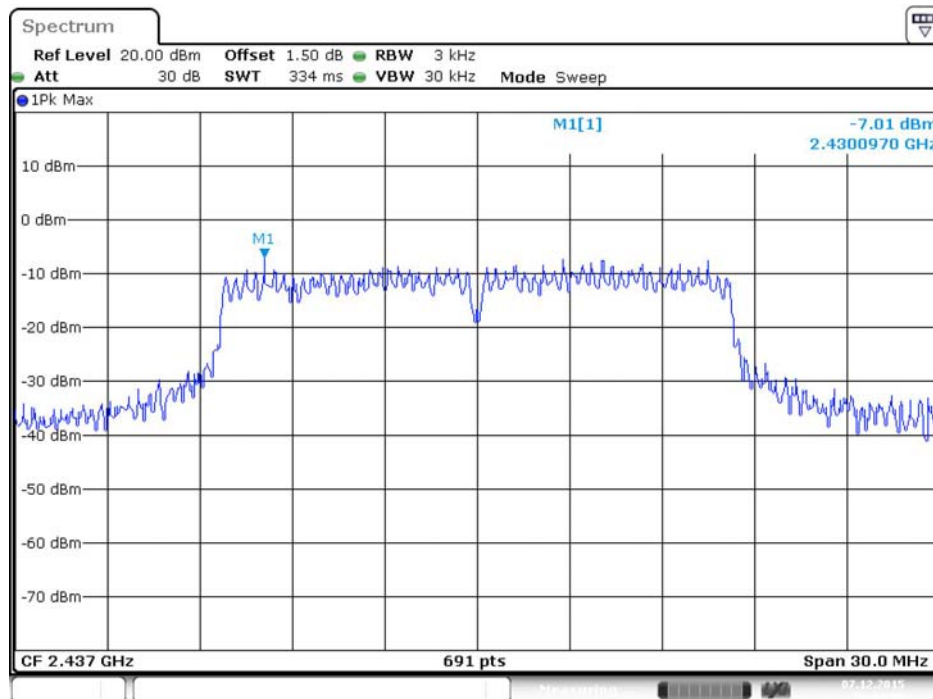


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 1

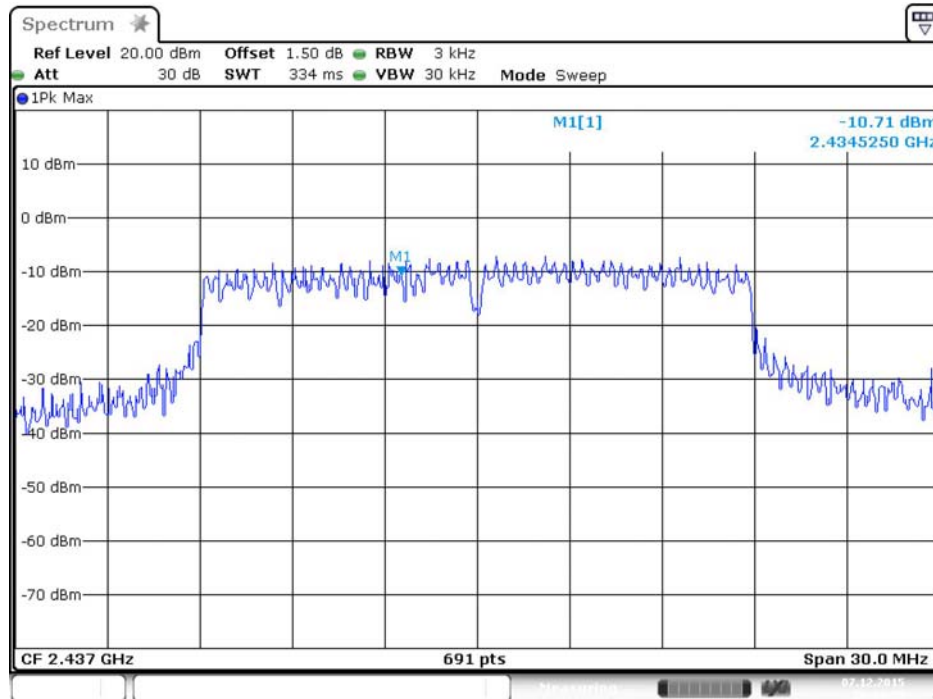


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 2

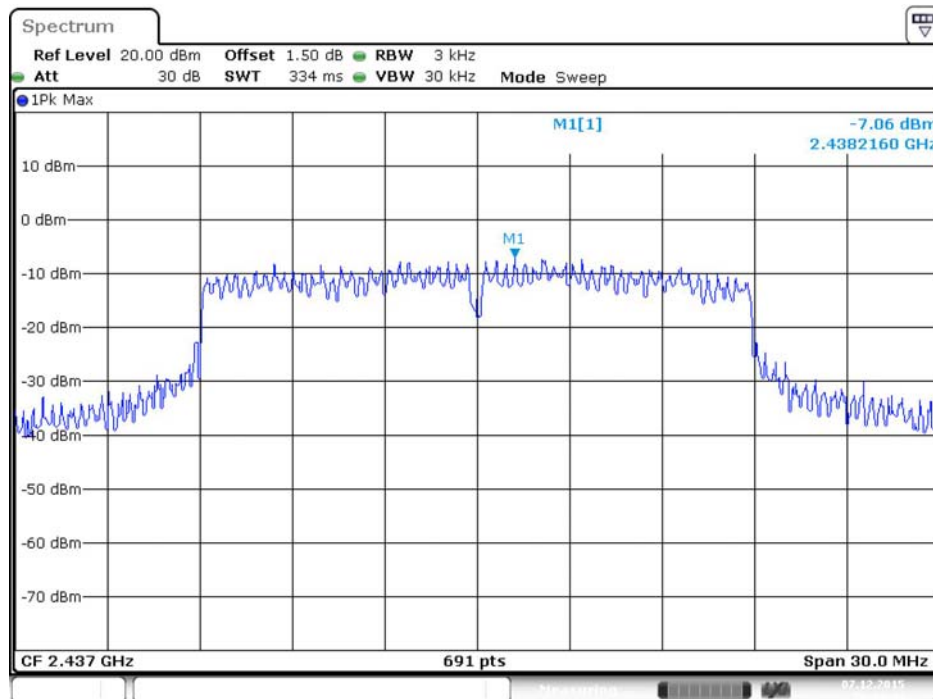


**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 3**

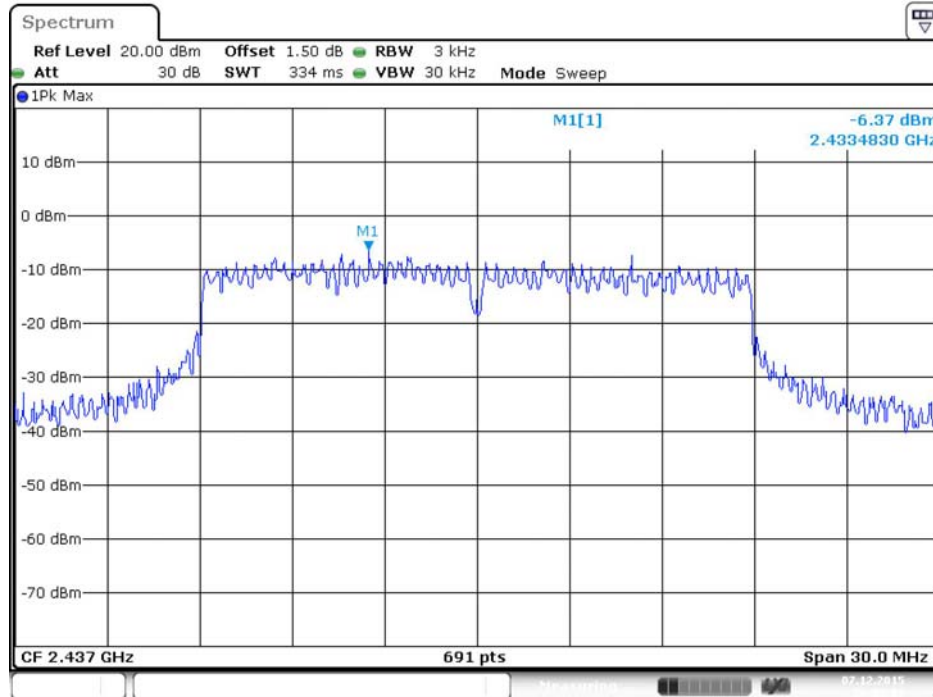

**Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 4**

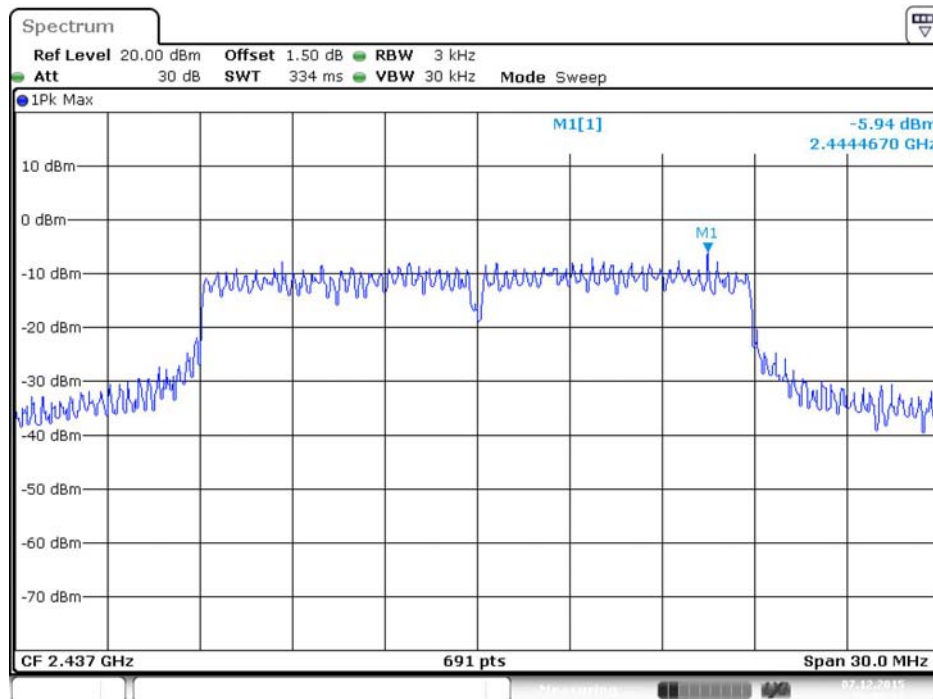


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 1

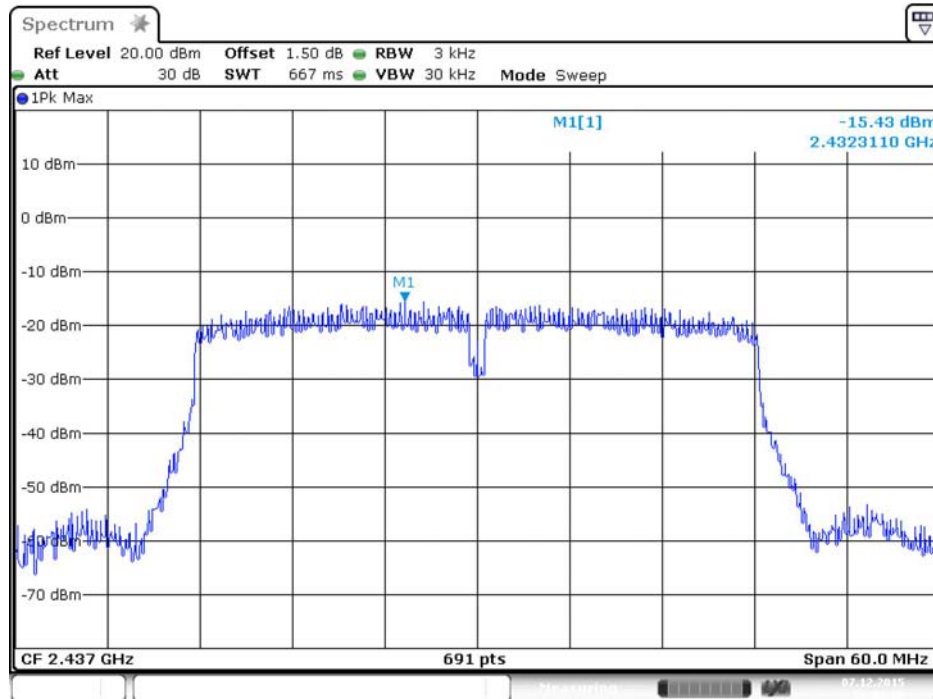


Date: 7.DEC.2015 20:08:06

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 2

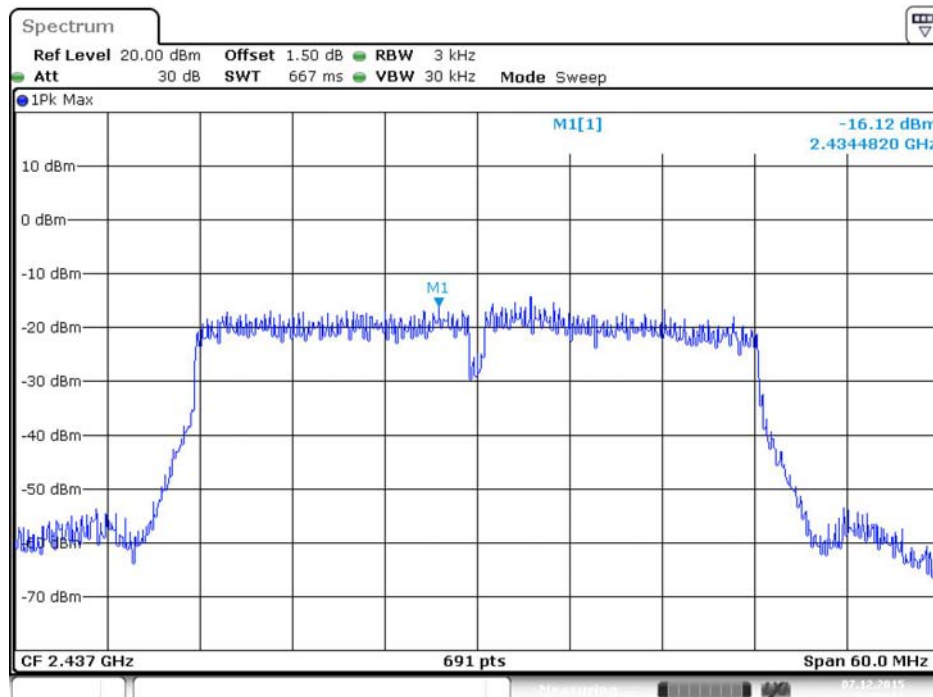


Date: 7.DEC.2015 20:08:12

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 3

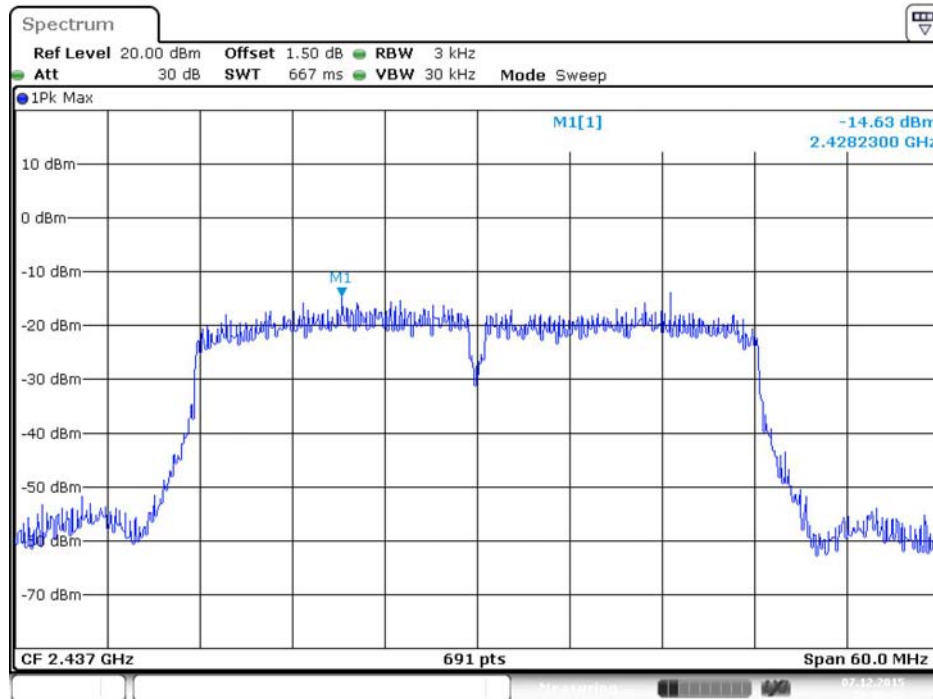

Date: 7.DEC.2015 20:08:22

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 4

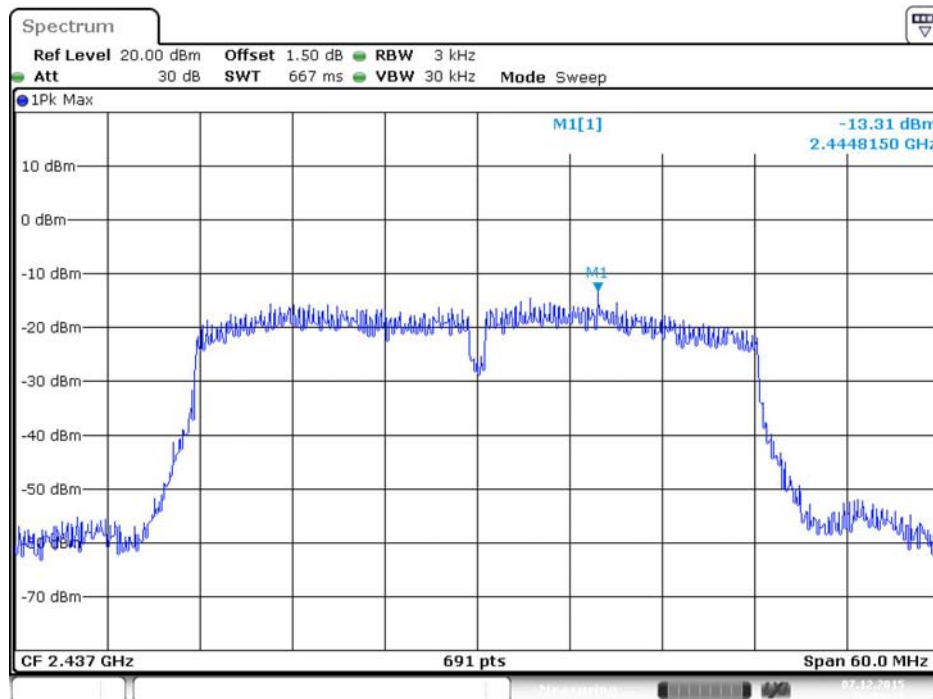

Date: 7.DEC.2015 20:08:32

## 4.4. 6dB Spectrum Bandwidth Measurement

### 4.4.1. Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

### 4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

6dB Spectrum Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

### 4.4.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB558074 D01 v03r05 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 8.0 DTS bandwidth => 8.1 Option 1.
3. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

#### 4.4.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

#### 4.4.5. Test Deviation

There is no deviation with the original standard.

#### 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



#### 4.4.7. Test Result of 6dB Spectrum Bandwidth

<b>Temperature</b>	25°C	<b>Humidity</b>	45%
<b>Test Engineer</b>	Roki Liu		
<b>Test Mode</b>	Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.5 dBi		

Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11b	2412 MHz	7.07	14.15	500	Complies
	2437 MHz	8.64	13.20	500	Complies
	2462 MHz	8.64	14.07	500	Complies
802.11g	2412 MHz	15.71	17.11	500	Complies
	2437 MHz	16.35	23.62	500	Complies
	2462 MHz	16.35	16.93	500	Complies
802.11ac MCS0/Nss1 VHT20	2412 MHz	17.80	17.89	500	Complies
	2437 MHz	17.80	23.79	500	Complies
	2462 MHz	17.80	17.97	500	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	25.04	34.73	500	Complies
	2437 MHz	23.54	34.44	500	Complies
	2452 MHz	23.77	34.73	500	Complies

<b>Temperature</b>	25°C	<b>Humidity</b>	45%
<b>Test Engineer</b>	Roki Liu		
<b>Test Mode</b>	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi		


Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11b	2412 MHz	11.65	14.41	500	Complies
	2437 MHz	11.71	14.41	500	Complies
	2462 MHz	10.09	14.15	500	Complies
802.11g	2412 MHz	4.99	15.98	500	Complies
	2437 MHz	3.83	16.32	500	Complies
	2462 MHz	10.67	15.54	500	Complies
802.11ac MCS0/Nss1 VHT20	2412 MHz	6.03	16.67	500	Complies
	2437 MHz	5.45	18.15	500	Complies
	2462 MHz	4.41	16.32	500	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	22.49	36.47	500	Complies
	2437 MHz	23.19	36.32	500	Complies
	2452 MHz	22.96	36.32	500	Complies

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.


**Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.5 dBi**

**6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4**

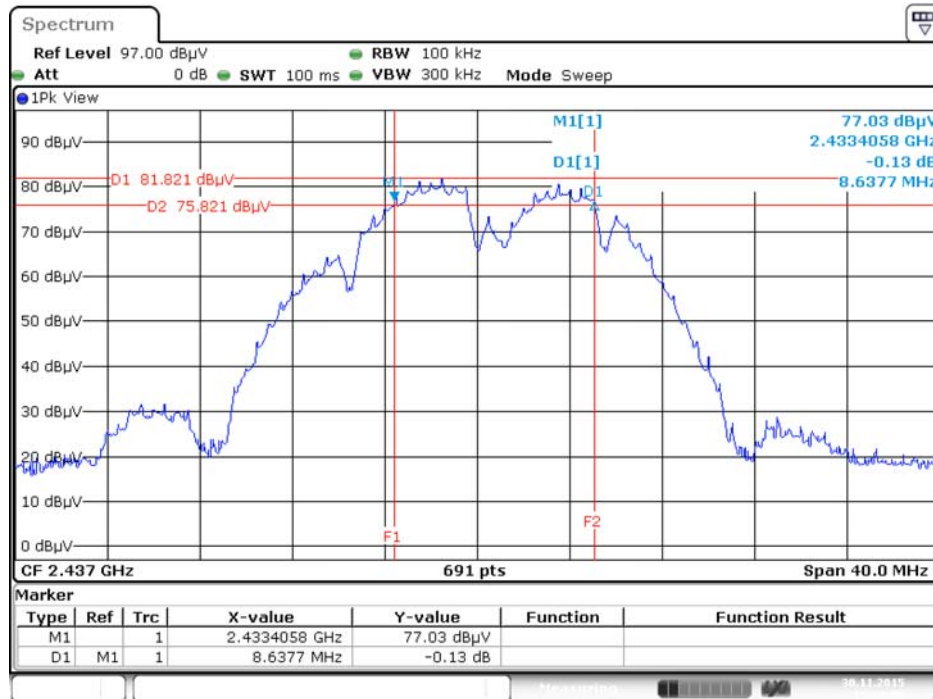


Date: 30.NOV.2015 15:20:58

**99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4**

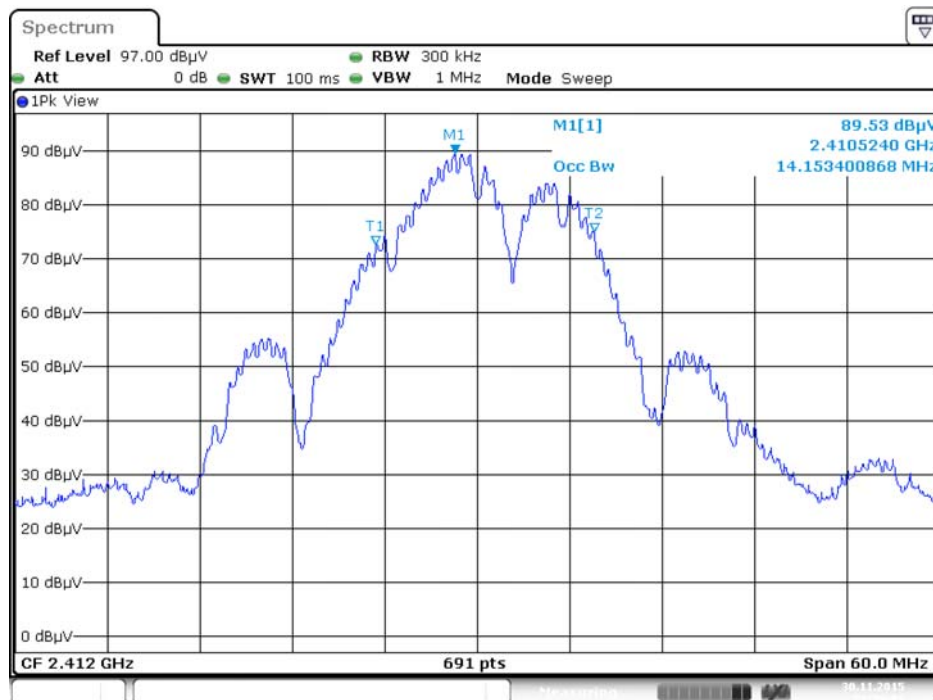


Date: 30.NOV.2015 21:29:01


6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2412 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

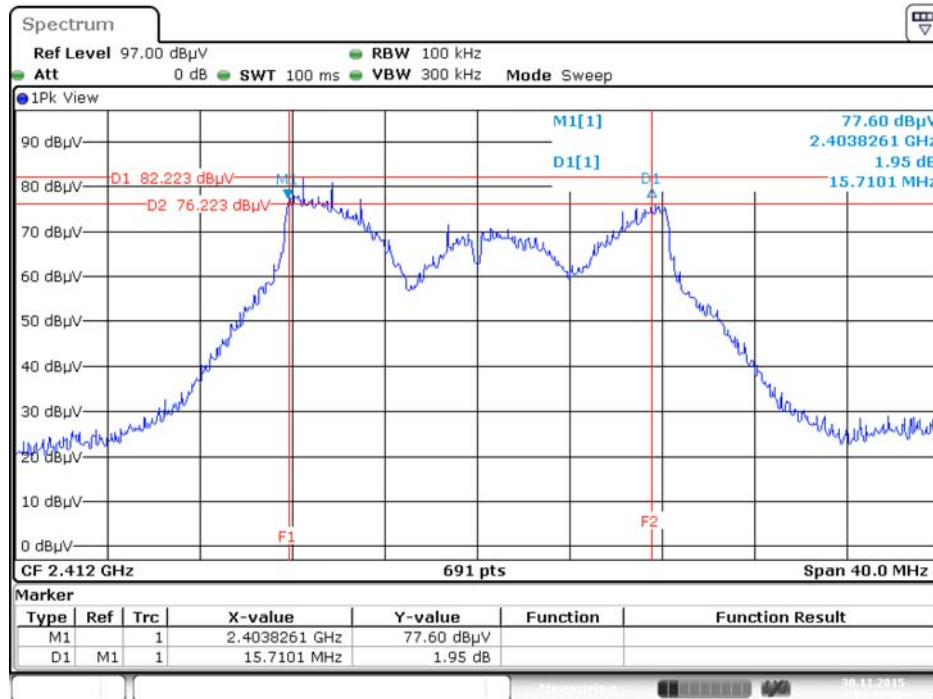

99% Occupied Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

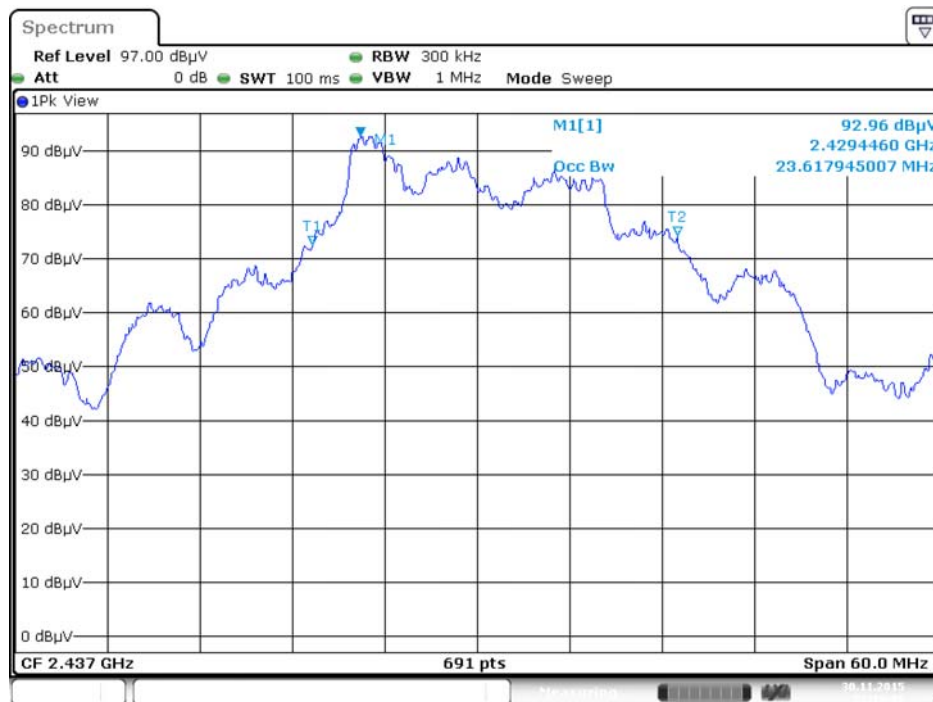


6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2412 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

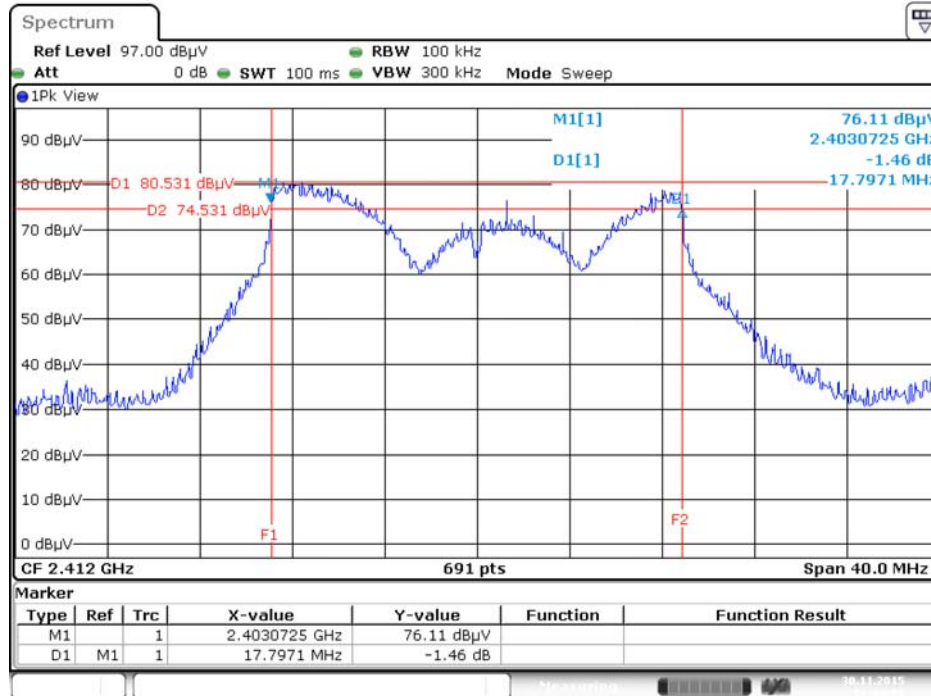


Date: 30.NOV.2015 16:34:01

99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

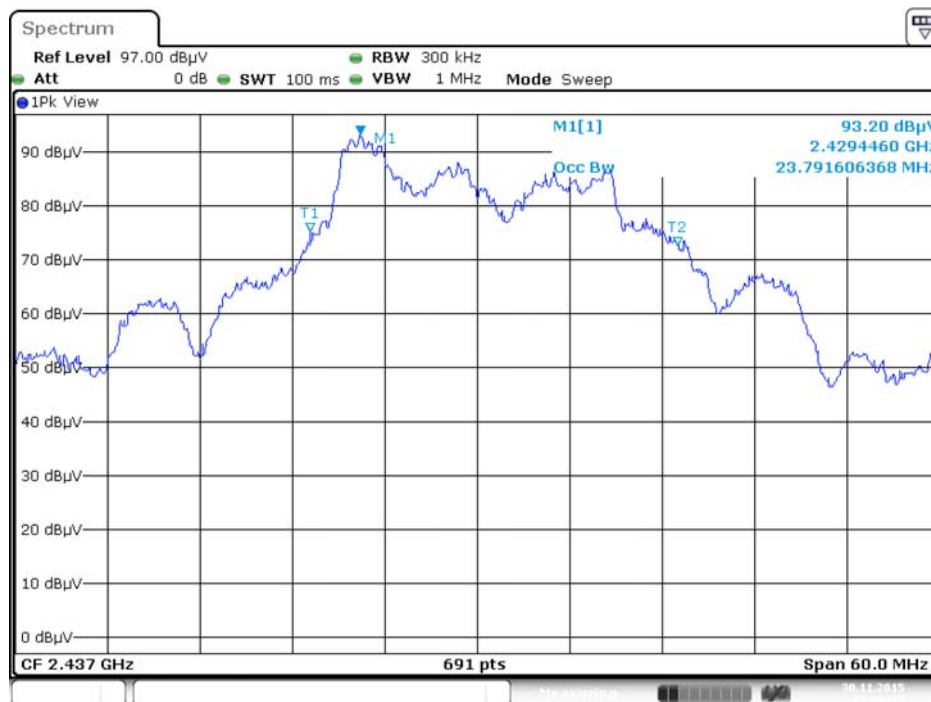


Date: 30.NOV.2015 23:36:14

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

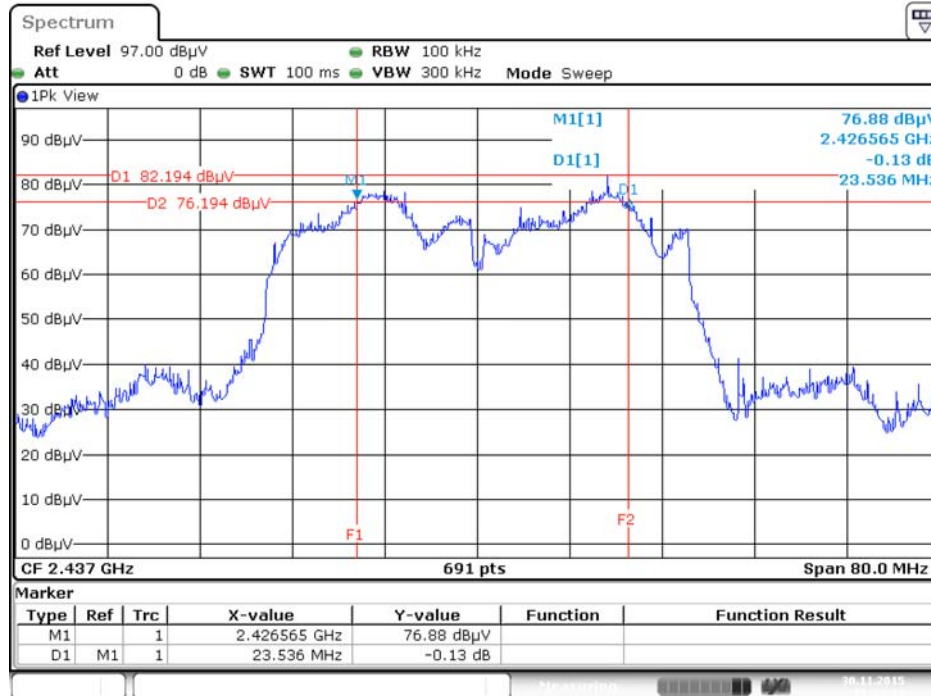

Date: 30.NOV.2015 18:22:11


99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2422 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

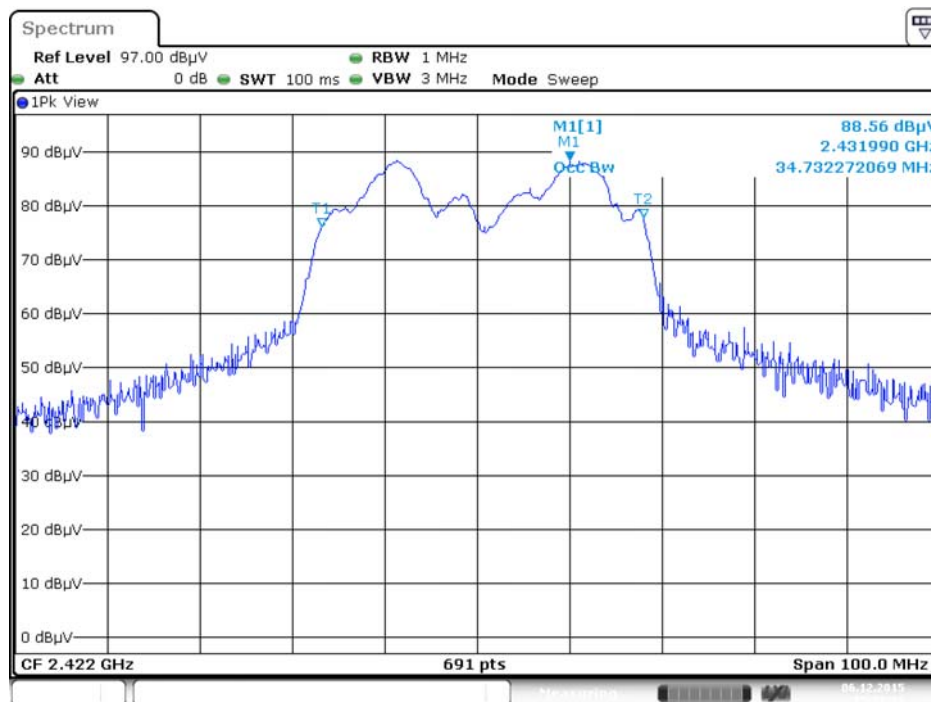

Date: 6.DEC.2015 15:31:12


Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2462 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

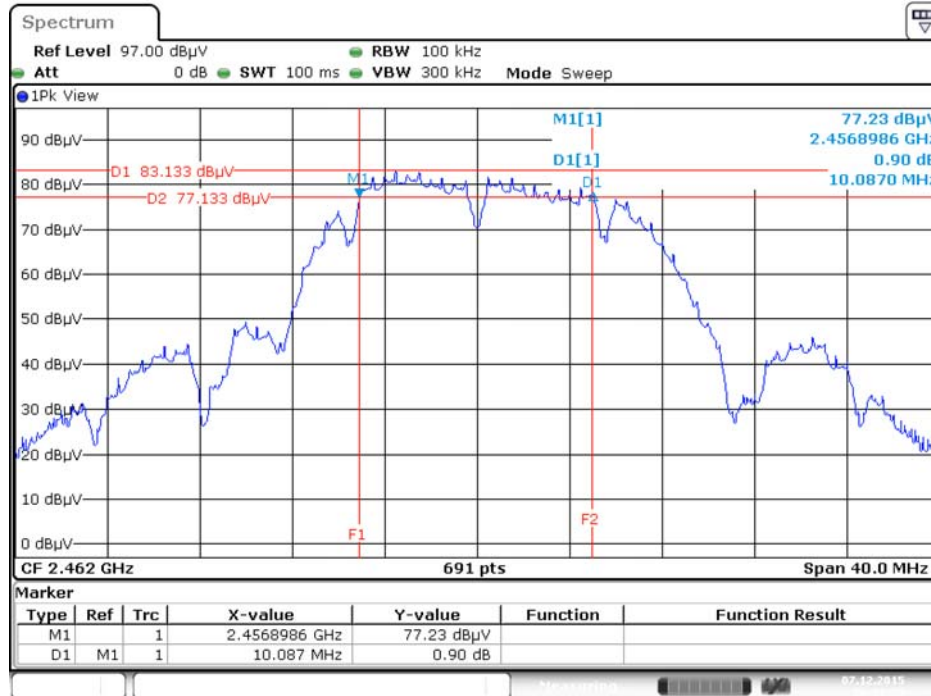

Date: 7.DEC.2015 20:32:23


99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

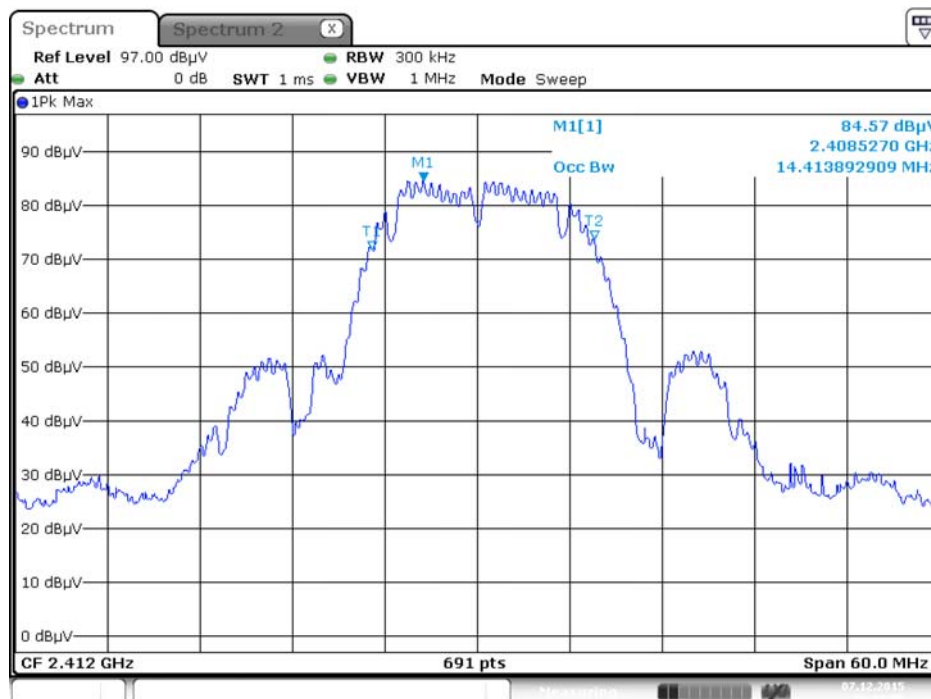

Date: 7.DEC.2015 20:38:57



6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

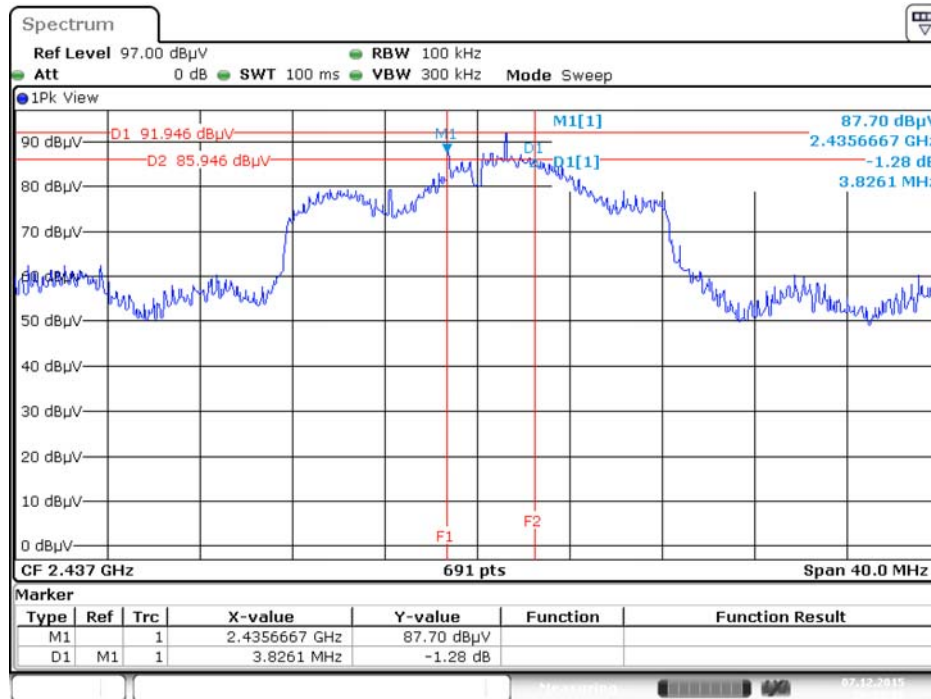

Date: 7.DEC.2015 20:33:16


99% Occupied Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4



Date: 7.DEC.2015 20:40:49



6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2462 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

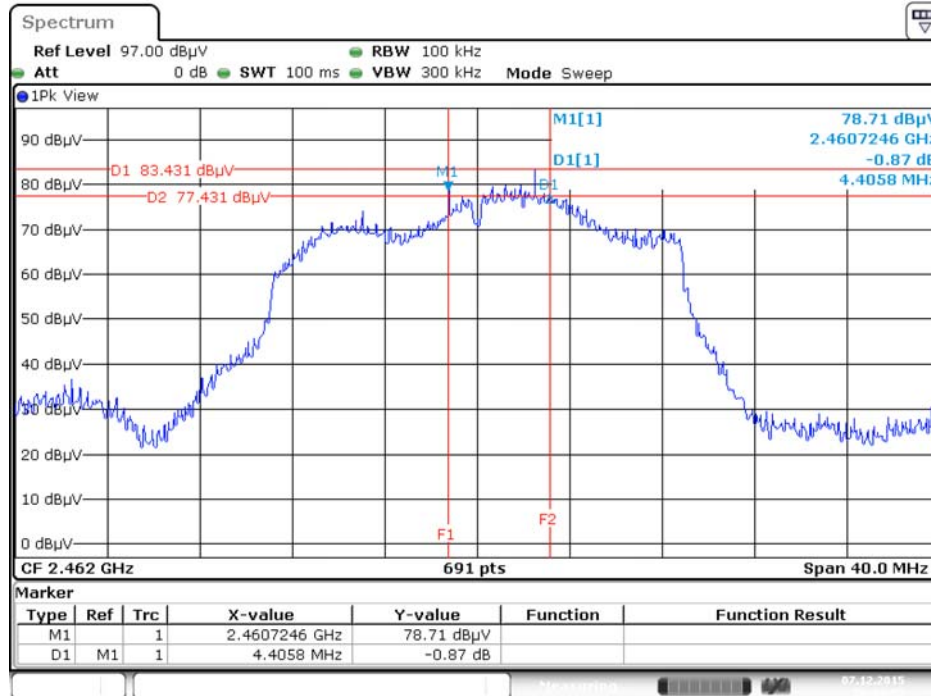


Date: 7.DEC.2015 20:34:53

99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4




Date: 7.DEC.2015 20:42:16

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2422 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

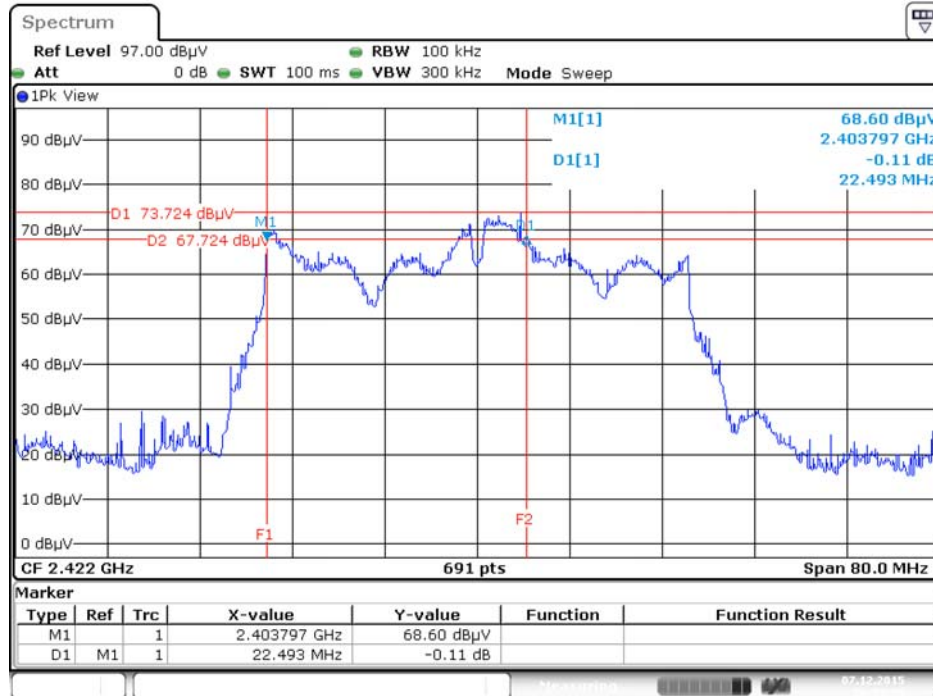

Date: 7.DEC.2015 20:35:25

99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2422 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

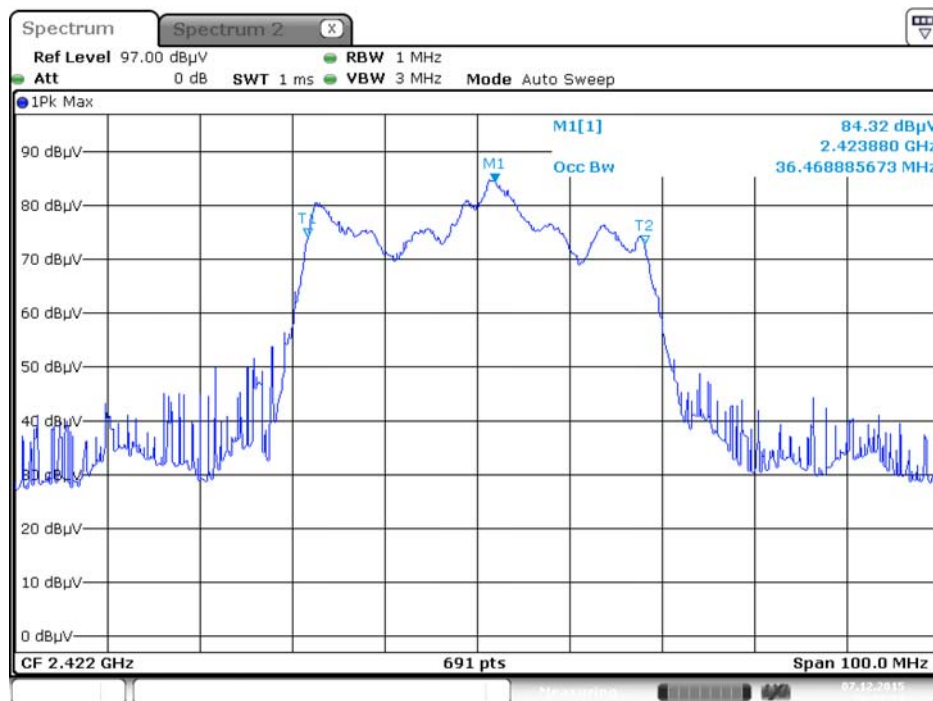

Date: 7.DEC.2015 20:38:10

## 4.5. Radiated Emissions Measurement

### 4.5.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	100kHz / 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

#### 4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

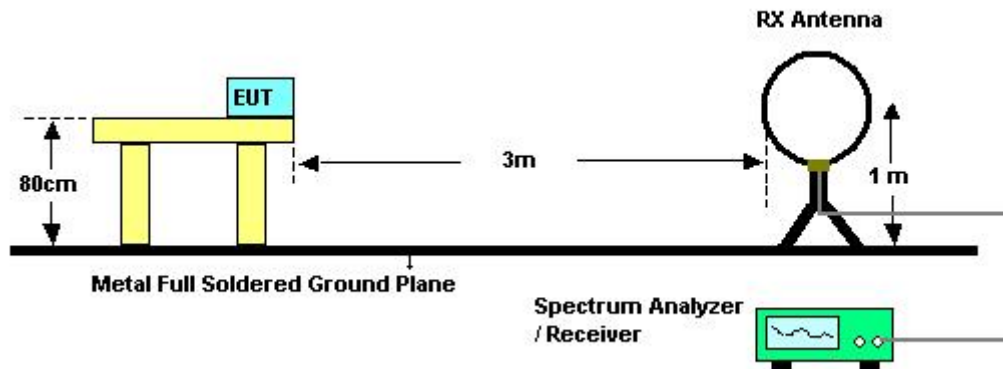

For Radiated Emissions: 30MHz~1GHz

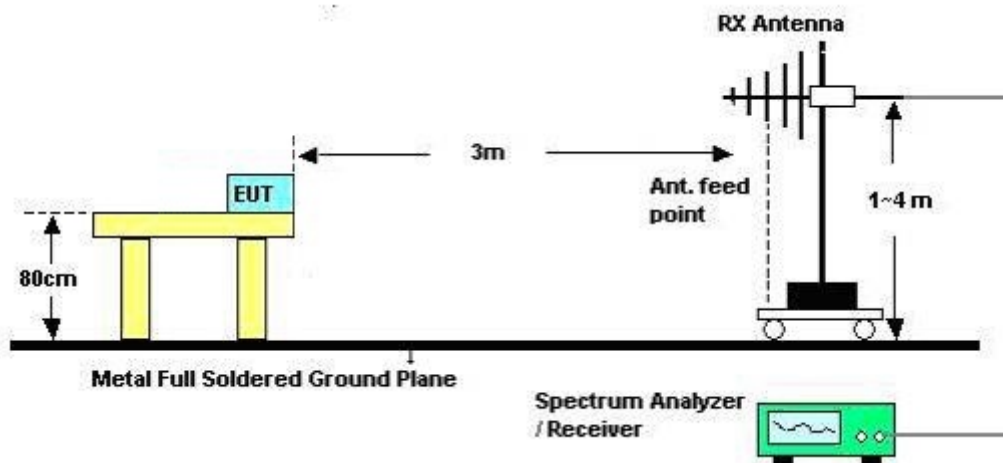

For Radiated Emissions: Above 1GHz

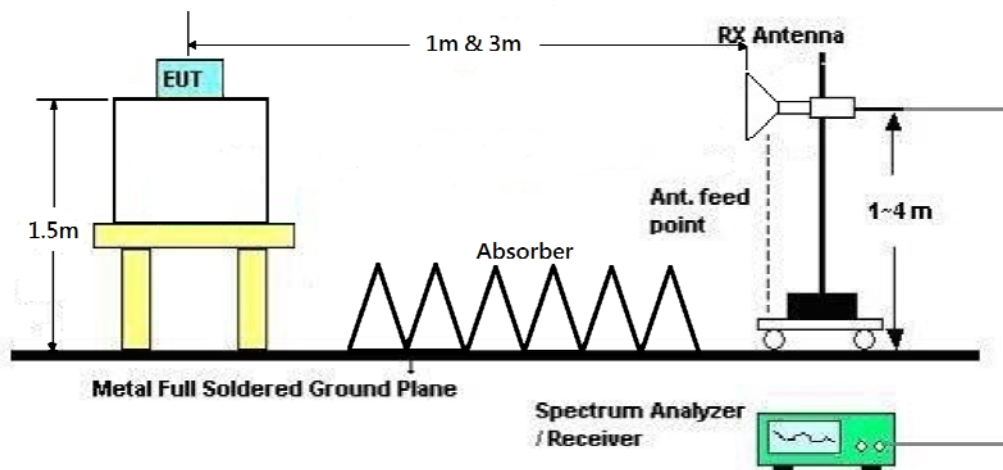

#### **4.5.5. Test Deviation**

There is no deviation with the original standard.

#### **4.5.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

#### 4.5.7. Results of Radiated Emissions (9kHz~30MHz)

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung & Owen Hsu	<b>Configurations</b>	Normal Link
<b>Test Date</b>	Nov. 18, 2015	<b>Test Mode</b>	Mode 2

<b>Freq. (MHz)</b>	<b>Level (dBuV)</b>	<b>Over Limit (dB)</b>	<b>Limit Line (dBuV)</b>	<b>Remark</b>
-	-	-	-	See Note

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)

Temperature	22°C	Humidity	55%
Test Engineer	Stim Sung & Owen Hsu	Configurations	Normal Link
Test Mode	Mode 2		


Horizontal

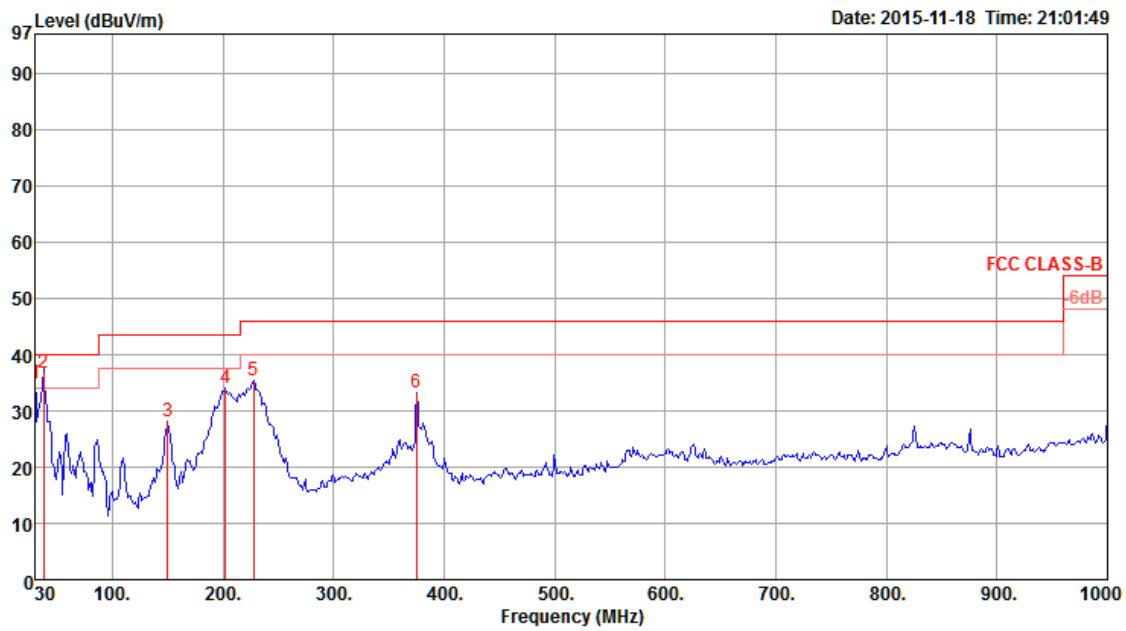

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	30.00	34.93	40.00	-5.07	44.42	0.20	19.80	29.49	360	100	Peak	HORIZONTAL
2	37.76	36.66	40.00	-3.34	50.87	0.26	15.01	29.48	245	122	QP	HORIZONTAL
3	150.28	28.15	43.50	-15.35	45.07	0.92	11.17	29.01	360	100	Peak	HORIZONTAL
4	202.66	34.13	43.50	-9.37	51.27	1.14	10.53	28.81	360	100	Peak	HORIZONTAL
5	227.88	35.32	46.00	-10.68	51.59	1.24	11.16	28.67	360	100	Peak	HORIZONTAL
6	375.32	33.18	46.00	-12.82	44.36	1.73	15.98	28.89	360	100	Peak	HORIZONTAL



**Vertical**

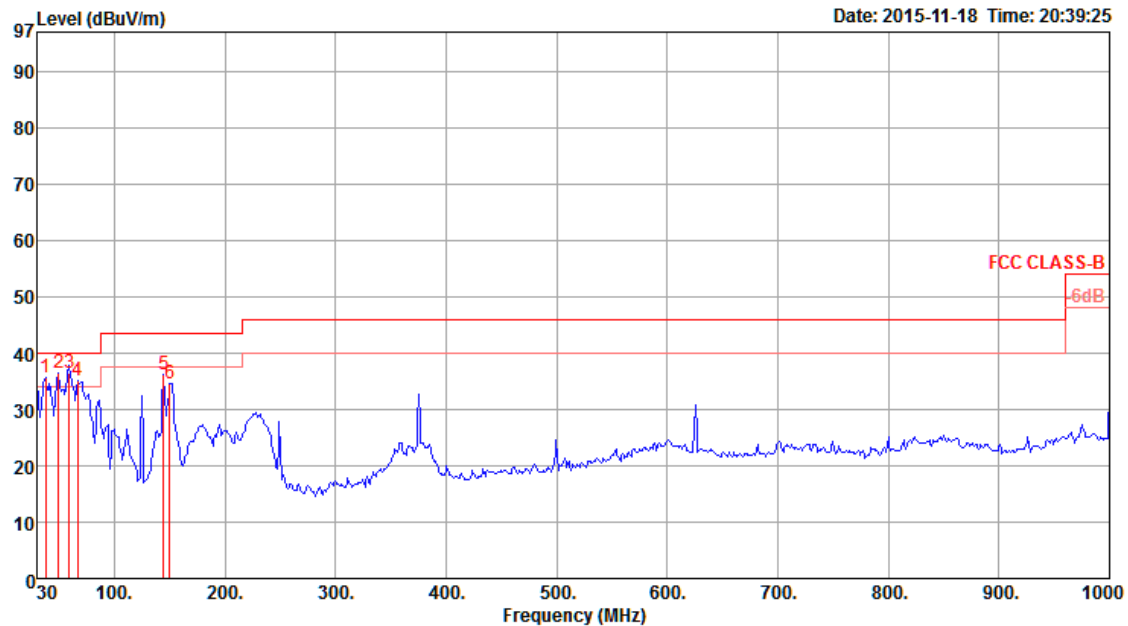

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	37.76	35.57	40.00	-4.43	49.78	0.26	15.01	29.48	360	100	Peak	VERTICAL
2	49.40	36.45	40.00	-3.55	56.46	0.37	9.08	29.46	360	100	Peak	VERTICAL
3	59.10	36.42	40.00	-3.58	58.22	0.44	7.17	29.41	227	114	QP	VERTICAL
4	66.86	35.13	40.00	-4.87	57.18	0.47	6.86	29.38	360	100	Peak	VERTICAL
5	144.46	36.16	43.50	-7.34	52.60	0.90	11.69	29.03	360	100	Peak	VERTICAL
6	150.28	34.69	43.50	-8.81	51.61	0.92	11.17	29.01	360	100	Peak	VERTICAL

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

**4.5.9. Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)**

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung & Owen Hsu	<b>Configurations</b>	IEEE 802.11b CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 22, 2015		
<b>Test Mode</b>	Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.5 dBi		

**Horizontal**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4823.91	51.86	74.00	-22.14	47.38	6.18	32.82	34.52	10	120	Peak	HORIZONTAL
2	4823.96	45.05	54.00	-8.95	40.57	6.18	32.82	34.52	10	120	Average	HORIZONTAL

**Vertical**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4823.86	56.08	74.00	-17.92	51.60	6.18	32.82	34.52	198	326	Peak	VERTICAL
2	4823.94	52.92	54.00	-1.08	48.44	6.18	32.82	34.52	198	326	Average	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung & Owen Hsu	<b>Configurations</b>	IEEE 802.11b CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 22, 2015		
<b>Test Mode</b>	Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.5 dBi		

### Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4873.94	53.51	74.00	-20.49	45.42	7.94	33.23	33.08	300	238	Peak	HORIZONTAL
2	4873.94	48.18	54.00	-5.82	40.09	7.94	33.23	33.08	300	238	Average	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4873.96	52.35	54.00	-1.65	44.26	7.94	33.23	33.08	261	202	Average	VERTICAL
2	4874.03	55.93	74.00	-18.07	47.84	7.94	33.23	33.08	261	202	Peak	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung & Owen Hsu	<b>Configurations</b>	IEEE 802.11b CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 22, 2015		
<b>Test Mode</b>	Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.5 dBi		

### Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4923.95	53.74	74.00	-20.26	49.30	5.94	32.99	34.49	184	267	Peak	HORIZONTAL
2	4923.97	49.35	54.00	-4.65	44.91	5.94	32.99	34.49	184	267	Average	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4923.92	55.78	74.00	-18.22	51.34	5.94	32.99	34.49	228	288	Peak	VERTICAL
2	4923.93	51.86	54.00	-2.14	47.42	5.94	32.99	34.49	228	288	Average	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung & Owen Hsu	<b>Configurations</b>	IEEE 802.11g CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 22, 2015		
<b>Test Mode</b>	Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.5 dBi		

### Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4820.69	46.41	74.00	-27.59	41.93	6.18	32.82	34.52	68	199	Peak	HORIZONTAL
2	4827.91	34.84	54.00	-19.16	30.37	6.15	32.84	34.52	68	199	Average	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4826.48	38.31	54.00	-15.69	33.84	6.15	32.84	34.52	206	251	Average	VERTICAL
2	4826.94	51.29	74.00	-22.71	46.82	6.15	32.84	34.52	206	251	Peak	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung & Owen Hsu	<b>Configurations</b>	IEEE 802.11g CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 22, 2015		
<b>Test Mode</b>	Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.5 dBi		

### Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4875.30	58.21	74.00	-15.79	53.75	6.06	32.91	34.51	184	266	Peak	HORIZONTAL
2	4875.88	44.11	54.00	-9.89	39.65	6.06	32.91	34.51	184	266	Average	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4875.59	61.04	74.00	-12.96	56.58	6.06	32.91	34.51	205	251	Peak	VERTICAL
2	4876.01	47.56	54.00	-6.44	43.10	6.06	32.91	34.51	205	251	Average	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung & Owen Hsu	<b>Configurations</b>	IEEE 802.11g CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 22, 2015		
<b>Test Mode</b>	Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.5 dBi		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4925.94	34.79	54.00	-19.21	30.35	5.94	32.99	34.49	196	235	Average	HORIZONTAL
2	4926.68	46.40	74.00	-27.60	41.96	5.94	32.99	34.49	196	235	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4923.77	48.40	74.00	-25.60	43.96	5.94	32.99	34.49	198	286	Peak	VERTICAL
2	4924.20	35.99	54.00	-18.01	31.55	5.94	32.99	34.49	198	286	Average	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung & Owen Hsu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 22, 2015		
<b>Test Mode</b>	Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.5 dBi		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4827.39	33.98	54.00	-20.02	29.51	6.15	32.84	34.52	156	161	Average	HORIZONTAL
2	4828.12	47.71	74.00	-26.29	43.24	6.15	32.84	34.52	156	161	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4826.62	49.27	74.00	-24.73	44.80	6.15	32.84	34.52	227	112	Peak	VERTICAL
2	4827.40	37.23	54.00	-16.77	32.76	6.15	32.84	34.52	227	112	Average	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung & Owen Hsu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 22, 2015		
<b>Test Mode</b>	Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.5 dBi		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4875.04	41.29	54.00	-12.71	36.83	6.06	32.91	34.51	240	221	Average	HORIZONTAL
2	4875.66	56.29	74.00	-17.71	51.83	6.06	32.91	34.51	240	221	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4875.11	58.21	74.00	-15.79	53.75	6.06	32.91	34.51	210	221	Peak	VERTICAL
2	4875.61	44.12	54.00	-9.88	39.66	6.06	32.91	34.51	210	221	Average	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung & Owen Hsu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 22, 2015		
<b>Test Mode</b>	Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.5 dBi		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4925.23	34.21	54.00	-19.79	29.77	5.94	32.99	34.49	268	195	Average	HORIZONTAL
2	4927.92	45.73	74.00	-28.27	41.29	5.94	32.99	34.49	268	195	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4921.61	46.65	74.00	-27.35	42.20	5.97	32.97	34.49	329	167	Peak	VERTICAL
2	4927.03	33.65	54.00	-20.35	29.21	5.94	32.99	34.49	329	167	Average	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung & Owen Hsu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 3 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 22, 2015		
<b>Test Mode</b>	Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.5 dBi		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4844.96	33.55	54.00	-20.45	29.09	6.12	32.86	34.52	265	127	Average	HORIZONTAL
2	4847.73	46.41	74.00	-27.59	41.94	6.12	32.86	34.51	265	127	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4844.09	46.51	74.00	-27.49	42.05	6.12	32.86	34.52	219	165	Peak	VERTICAL
2	4844.26	33.78	54.00	-20.22	29.32	6.12	32.86	34.52	219	165	Average	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung & Owen Hsu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 22, 2015		
<b>Test Mode</b>	Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.5 dBi		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4871.66	33.60	54.00	-20.40	29.14	6.06	32.91	34.51	118	207	Average	HORIZONTAL
2	4877.31	46.16	74.00	-27.84	41.69	6.06	32.91	34.50	118	207	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4874.46	35.79	54.00	-18.21	31.33	6.06	32.91	34.51	203	172	Average	VERTICAL
2	4874.93	48.02	74.00	-25.98	43.56	6.06	32.91	34.51	203	172	Peak	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung & Owen Hsu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 9 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 22, 2015		
<b>Test Mode</b>	Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.5 dBi		

### Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4903.90	43.58	74.00	-30.42	39.13	6.00	32.95	34.50	224	141	Peak	HORIZONTAL
2	4906.10	33.26	54.00	-20.74	28.81	6.00	32.95	34.50	224	141	Average	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4899.30	33.27	54.00	-20.73	28.82	6.00	32.95	34.50	279	167	Average	VERTICAL
2	4901.50	43.19	74.00	-30.81	38.74	6.00	32.95	34.50	279	167	Peak	VERTICAL

### Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung & Owen Hsu	<b>Configurations</b>	IEEE 802.11b CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 22, 2015		
<b>Test Mode</b>	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4823.94	53.35	74.00	-20.65	48.87	6.18	32.82	34.52	1	189	Peak	HORIZONTAL
2	4823.97	49.52	54.00	-4.48	45.04	6.18	32.82	34.52	1	189	Average	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4823.94	55.68	74.00	-18.32	51.20	6.18	32.82	34.52	323	156	Peak	VERTICAL
2	4823.96	52.88	54.00	-1.12	48.40	6.18	32.82	34.52	323	156	Average	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung & Owen Hsu	<b>Configurations</b>	IEEE 802.11b CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 22, 2015		
<b>Test Mode</b>	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi		

### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4873.93	50.74	54.00	-3.26	46.28	6.06	32.91	34.51	62	133 Average	HORIZONTAL
2	4874.01	54.26	74.00	-19.74	49.80	6.06	32.91	34.51	62	133 Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	4873.96	52.85	54.00	-1.15	48.39	6.06	32.91	34.51	325	132 Average	VERTICAL
2	4873.98	56.01	74.00	-17.99	51.55	6.06	32.91	34.51	325	132 Peak	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung & Owen Hsu	<b>Configurations</b>	IEEE 802.11b CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 22, 2015		
<b>Test Mode</b>	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4923.97	52.78	54.00	-1.22	48.34	5.94	32.99	34.49	30	166	Average	HORIZONTAL
2	4924.07	56.64	74.00	-17.36	52.20	5.94	32.99	34.49	30	166	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4923.84	55.99	74.00	-18.01	51.55	5.94	32.99	34.49	329	150	Peak	VERTICAL
2	4923.97	52.57	54.00	-1.43	48.13	5.94	32.99	34.49	329	150	Average	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung & Owen Hsu	<b>Configurations</b>	IEEE 802.11g CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 22, 2015		
<b>Test Mode</b>	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4825.42	34.72	54.00	-19.28	30.25	6.15	32.84	34.52	12	161	Average	HORIZONTAL
2	4826.08	47.53	74.00	-26.47	43.06	6.15	32.84	34.52	12	161	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4825.65	51.89	74.00	-22.11	47.42	6.15	32.84	34.52	324	150	Peak	VERTICAL
2	4826.06	38.21	54.00	-15.79	33.74	6.15	32.84	34.52	324	150	Average	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung & Owen Hsu	<b>Configurations</b>	IEEE 802.11g CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 22, 2015		
<b>Test Mode</b>	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4875.19	56.95	74.00	-17.05	52.49	6.06	32.91	34.51	297	127	Peak	HORIZONTAL
2	4876.20	43.09	54.00	-10.91	38.63	6.06	32.91	34.51	297	127	Average	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4875.25	59.76	74.00	-14.24	55.30	6.06	32.91	34.51	325	134	Peak	VERTICAL
2	4875.71	45.82	54.00	-8.18	41.36	6.06	32.91	34.51	325	134	Average	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung & Owen Hsu	<b>Configurations</b>	IEEE 802.11g CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 22, 2015		
<b>Test Mode</b>	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4925.94	35.45	54.00	-18.55	31.01	5.94	32.99	34.49	58	148	Average	HORIZONTAL
2	4926.63	48.95	74.00	-25.05	44.51	5.94	32.99	34.49	58	148	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4926.34	49.07	74.00	-24.93	44.63	5.94	32.99	34.49	324	137	Peak	VERTICAL
2	4926.63	36.17	54.00	-17.83	31.73	5.94	32.99	34.49	324	137	Average	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung & Owen Hsu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 22, 2015		
<b>Test Mode</b>	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4824.17	34.18	54.00	-19.82	29.70	6.18	32.82	34.52	283	144	Average	HORIZONTAL
2	4832.94	47.01	74.00	-26.99	42.54	6.15	32.84	34.52	283	144	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4827.10	33.85	54.00	-20.15	29.38	6.15	32.84	34.52	160	160	Average	VERTICAL
2	4832.68	47.22	74.00	-26.78	42.75	6.15	32.84	34.52	160	160	Peak	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung & Owen Hsu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 22, 2015		
<b>Test Mode</b>	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4876.75	56.44	74.00	-17.56	51.98	6.06	32.91	34.51	299	135	Peak	HORIZONTAL
2	4876.95	42.68	54.00	-11.32	38.21	6.06	32.91	34.50	299	135	Average	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4876.61	60.18	74.00	-13.82	55.72	6.06	32.91	34.51	330	132	Peak	VERTICAL
2	4877.71	45.50	54.00	-8.50	41.03	6.06	32.91	34.50	330	132	Average	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung & Owen Hsu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 22, 2015		
<b>Test Mode</b>	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4923.98	34.92	54.00	-19.08	30.48	5.94	32.99	34.49	59	155	Average	HORIZONTAL
2	4924.36	49.15	74.00	-24.85	44.71	5.94	32.99	34.49	59	155	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4924.09	47.34	74.00	-26.66	42.90	5.94	32.99	34.49	79	141	Peak	VERTICAL
2	4924.92	34.96	54.00	-19.04	30.52	5.94	32.99	34.49	79	141	Average	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung & Owen Hsu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 3 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 22, 2015		
<b>Test Mode</b>	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4844.12	33.84	54.00	-20.16	29.38	6.12	32.86	34.52	355	148	Average	HORIZONTAL
2	4844.41	47.88	74.00	-26.12	43.42	6.12	32.86	34.52	355	148	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4843.98	33.49	54.00	-20.51	29.03	6.12	32.86	34.52	150	162	Average	VERTICAL
2	4844.87	47.06	74.00	-26.94	42.60	6.12	32.86	34.52	150	162	Peak	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung & Owen Hsu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 22, 2015		
<b>Test Mode</b>	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4873.77	47.59	74.00	-26.41	43.13	6.06	32.91	34.51	50	188	Peak	HORIZONTAL
2	4874.61	34.29	54.00	-19.71	29.83	6.06	32.91	34.51	50	188	Average	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4874.47	47.11	74.00	-26.89	42.65	6.06	32.91	34.51	195	162	Peak	VERTICAL
2	4874.68	35.47	54.00	-18.53	31.01	6.06	32.91	34.51	195	162	Average	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung & Owen Hsu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 9 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 22, 2015		
<b>Test Mode</b>	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4903.93	34.08	54.00	-19.92	29.63	6.00	32.95	34.50	289	152	Average	HORIZONTAL
2	4904.08	47.96	74.00	-26.04	43.51	6.00	32.95	34.50	289	152	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4903.98	33.44	54.00	-20.56	28.99	6.00	32.95	34.50	52	138	Average	VERTICAL
2	4904.64	47.19	74.00	-26.81	42.74	6.00	32.95	34.50	52	138	Peak	VERTICAL

### Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.6. Emissions Measurement

### 4.6.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (30dBc in any 100 kHz bandwidth emission)	100 kHz / 300 kHz for Peak

### 4.6.3. Test Procedures

For Radiated band edges Measurement:

1. The test procedure is the same as section 4.5.3.

For Radiated Out of Band Emission Measurement:

1. Test was performed in accordance with KDB558074 D01 v03r05 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10.1 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure.

#### **4.6.4. Test Setup Layout**

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.5.4.

For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.5.4.

#### **4.6.5. Test Deviation**

There is no deviation with the original standard.

#### **4.6.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

#### 4.6.7. Test Result of Band Edge and Fundamental Emissions

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung & Owen Hsu	<b>Configurations</b>	IEEE 802.11b CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 22, 2015 ~ Dec. 01, 2015		
<b>Test Mode</b>	Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.5 dBi		

##### Channel 1

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	2364.82	61.87	74.00	-12.13	30.00	3.82	28.05	0.00	353	146 Peak	HORIZONTAL
2	2385.23	50.59	54.00	-3.41	18.72	3.85	28.02	0.00	353	146 Average	HORIZONTAL
3	2412.72	117.51			85.65	3.87	27.99	0.00	353	146 Average	HORIZONTAL
4	2413.45	120.55			88.69	3.87	27.99	0.00	353	146 Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

##### Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2357.80	48.64	54.00	-5.36	16.02	4.35	28.27	0.00	209	5 Average	HORIZONTAL
2	2358.20	58.07	74.00	-15.93	25.45	4.35	28.27	0.00	209	5 Peak	HORIZONTAL
3	2436.20	116.89			84.06	4.44	28.39	0.00	209	5 Peak	HORIZONTAL
4	2436.20	113.25			80.42	4.44	28.39	0.00	209	5 Average	HORIZONTAL
5	2516.20	59.18	74.00	-14.82	26.09	4.54	28.55	0.00	209	5 Peak	HORIZONTAL
6	2516.60	50.71	54.00	-3.29	17.62	4.54	28.55	0.00	209	5 Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

##### Channel 11

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	2462.72	116.28			84.44	3.90	27.94	0.00	0	122 Average	HORIZONTAL
2	2462.87	118.97			87.13	3.90	27.94	0.00	0	122 Peak	HORIZONTAL
3	2485.73	62.19	74.00	-11.81	30.35	3.92	27.92	0.00	0	122 Peak	HORIZONTAL
4	2486.17	51.41	54.00	-2.59	19.57	3.92	27.92	0.00	0	122 Average	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung & Owen Hsu	<b>Configurations</b>	IEEE 802.11g CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 22, 2015		
<b>Test Mode</b>	Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.5 dBi		

**Channel 1**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2389.71	66.01	74.00	-7.99	34.14	3.85	28.02	0.00	191	103	Peak	HORIZONTAL
2	2390.00	52.96	54.00	-1.04	21.09	3.85	28.02	0.00	191	103	Average	HORIZONTAL
3	2412.58	116.84			84.98	3.87	27.99	0.00	191	103	Peak	HORIZONTAL
4	2413.01	106.28			74.42	3.87	27.99	0.00	191	103	Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

**Channel 6**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2378.71	63.00	74.00	-11.00	31.13	3.84	28.03	0.00	176	120	Peak	HORIZONTAL
2	2386.64	50.04	54.00	-3.96	18.17	3.85	28.02	0.00	176	120	Average	HORIZONTAL
3	2438.16	114.44			82.59	3.88	27.97	0.00	176	120	Average	HORIZONTAL
4	2439.32	124.50			92.65	3.89	27.96	0.00	176	120	Peak	HORIZONTAL
5	2483.89	52.42	54.00	-1.58	20.58	3.92	27.92	0.00	176	120	Average	HORIZONTAL
6	2484.80	67.73	74.00	-6.27	35.89	3.92	27.92	0.00	176	120	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

**Channel 11**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2463.01	105.86			74.02	3.90	27.94	0.00	175	136	Average	HORIZONTAL
2	2463.88	117.91			86.07	3.90	27.94	0.00	175	136	Peak	HORIZONTAL
3	2483.50	52.90	54.00	-1.10	21.06	3.92	27.92	0.00	175	136	Average	HORIZONTAL
4	2484.87	66.41	74.00	-7.59	34.57	3.92	27.92	0.00	175	136	Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung & Owen Hsu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 22, 2015		
<b>Test Mode</b>	Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.5 dBi		

### Channel 1

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2389.86	65.16	74.00	-8.84	33.29	3.85	28.02	0.00	192	165	Peak	HORIZONTAL
2	2390.00	52.87	54.00	-1.13	21.00	3.85	28.02	0.00	192	165	Average	HORIZONTAL
3	2413.59	119.57			87.71	3.87	27.99	0.00	192	165	Peak	HORIZONTAL
4	2413.59	107.25			75.39	3.87	27.99	0.00	192	165	Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

### Channel 6

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2390.00	63.99	74.00	-10.01	32.12	3.85	28.02	0.00	175	124	Peak	HORIZONTAL
2	2390.00	51.25	54.00	-2.75	19.38	3.85	28.02	0.00	175	124	Average	HORIZONTAL
3	2437.58	112.61			80.76	3.88	27.97	0.00	175	124	Average	HORIZONTAL
4	2438.74	124.17			92.32	3.88	27.97	0.00	175	124	Peak	HORIZONTAL
5	2484.76	67.69	74.00	-6.31	35.85	3.92	27.92	0.00	175	124	Peak	HORIZONTAL
6	2484.76	52.51	54.00	-1.49	20.67	3.92	27.92	0.00	175	124	Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

### Channel 11

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2463.74	117.29			85.45	3.90	27.94	0.00	177	114	Peak	HORIZONTAL
2	2464.03	106.03			74.19	3.90	27.94	0.00	177	114	Average	HORIZONTAL
3	2483.50	52.85	54.00	-1.15	21.01	3.92	27.92	0.00	177	114	Average	HORIZONTAL
4	2484.29	65.41	74.00	-8.59	33.57	3.92	27.92	0.00	177	114	Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung & Owen Hsu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 3, 6, 9 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 22, 2015		
<b>Test Mode</b>	Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.5 dBi		

### Channel 3

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2386.40	71.75	74.00	-2.25	39.88	3.85	28.02	0.00	177	377	Peak	HORIZONTAL
2	2387.27	52.59	54.00	-1.41	20.72	3.85	28.02	0.00	177	377	Average	HORIZONTAL
3	2425.18	112.53			80.67	3.88	27.98	0.00	177	377	Peak	HORIZONTAL
4	2425.47	102.16			70.30	3.88	27.98	0.00	177	377	Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

### Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2389.13	67.98	74.00	-6.02	36.11	3.85	28.02	0.00	186	140	Peak	HORIZONTAL
2	2389.71	50.26	54.00	-3.74	18.39	3.85	28.02	0.00	186	140	Average	HORIZONTAL
3	2435.26	105.13			73.28	3.88	27.97	0.00	186	140	Average	HORIZONTAL
4	2435.84	114.69			82.84	3.88	27.97	0.00	186	140	Peak	HORIZONTAL
5	2483.50	50.36	54.00	-3.64	18.52	3.92	27.92	0.00	186	140	Average	HORIZONTAL
6	2486.49	72.58	74.00	-1.42	40.74	3.92	27.92	0.00	186	140	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

### Channel 9

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2453.45	113.14			81.29	3.90	27.95	0.00	176	135	Peak	HORIZONTAL
2	2453.74	102.02			70.17	3.90	27.95	0.00	176	135	Average	HORIZONTAL
3	2491.65	52.88	54.00	-1.12	21.05	3.92	27.91	0.00	176	135	Average	HORIZONTAL
4	2492.23	69.44	74.00	-4.56	37.61	3.92	27.91	0.00	176	135	Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung & Owen Hsu	<b>Configurations</b>	IEEE 802.11b CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 22, 2015		
<b>Test Mode</b>	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi		

### Channel 1

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	2385.37	52.97	54.00	-1.03	21.10	3.85	28.02	0.00	18	188 Average	HORIZONTAL
2	2388.55	64.76	74.00	-9.24	32.89	3.85	28.02	0.00	18	188 Peak	HORIZONTAL
3	2411.13	120.03			88.17	3.86	28.00	0.00	18	188 Peak	HORIZONTAL
4	2411.13	117.15			85.29	3.86	28.00	0.00	18	188 Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

### Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	2390.00	61.69	74.00	-12.31	29.82	3.85	28.02	0.00	355	264 Peak	VERTICAL
2	2390.00	52.99	54.00	-1.01	21.12	3.85	28.02	0.00	355	264 Average	VERTICAL
3	2437.87	119.97			88.12	3.88	27.97	0.00	355	264 Average	VERTICAL
4	2438.45	123.05			91.20	3.88	27.97	0.00	355	264 Peak	VERTICAL
5	2485.53	62.53	74.00	-11.47	30.69	3.92	27.92	0.00	355	264 Peak	VERTICAL
6	2485.53	52.55	54.00	-1.45	20.71	3.92	27.92	0.00	355	264 Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

### Channel 11

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	deg	cm		
1	2463.16	121.35			89.51	3.90	27.94	0.00	350	240 Peak	VERTICAL
2	2463.74	118.05			86.21	3.90	27.94	0.00	350	240 Average	VERTICAL
3	2485.82	63.06	74.00	-10.94	31.22	3.92	27.92	0.00	350	240 Peak	VERTICAL
4	2487.84	52.95	54.00	-1.05	21.11	3.92	27.92	0.00	350	240 Average	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.



<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung & Owen Hsu	<b>Configurations</b>	IEEE 802.11g CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 22, 2015		
<b>Test Mode</b>	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi		

### Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2390.00	66.66	74.00	-7.34	34.79	3.85	28.02	0.00	343	156	Peak	HORIZONTAL
2	2390.00	52.51	54.00	-1.49	20.64	3.85	28.02	0.00	343	156	Average	HORIZONTAL
3	2411.13	105.64			73.78	3.86	28.00	0.00	343	156	Average	HORIZONTAL
4	2411.28	115.86			84.00	3.87	27.99	0.00	343	156	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

### Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2357.87	51.91	54.00	-2.09	20.03	3.82	28.06	0.00	355	118	Average	HORIZONTAL
2	2359.61	64.12	74.00	-9.88	32.24	3.82	28.06	0.00	355	118	Peak	HORIZONTAL
3	2437.87	124.25			92.40	3.88	27.97	0.00	355	118	Peak	HORIZONTAL
4	2438.16	114.47			82.62	3.88	27.97	0.00	355	118	Average	HORIZONTAL
5	2483.50	64.23	74.00	-9.77	32.39	3.92	27.92	0.00	355	118	Peak	HORIZONTAL
6	2483.50	51.34	54.00	-2.66	19.50	3.92	27.92	0.00	355	118	Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

### Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2464.03	118.48			86.64	3.90	27.94	0.00	22	196	Peak	VERTICAL
2	2464.75	107.70			75.86	3.90	27.94	0.00	22	196	Average	VERTICAL
3	2483.50	52.80	54.00	-1.20	20.96	3.92	27.92	0.00	22	196	Average	VERTICAL
4	2483.79	67.02	74.00	-6.98	35.18	3.92	27.92	0.00	22	196	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung & Owen Hsu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT20 CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 22, 2015		
<b>Test Mode</b>	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi		

### Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2390.00	67.32	74.00	-6.68	35.45	3.85	28.02	0.00	357	182	Peak	HORIZONTAL
2	2390.00	52.55	54.00	-1.45	20.68	3.85	28.02	0.00	357	182	Average	HORIZONTAL
3	2410.55	116.03			84.17	3.86	28.00	0.00	357	182	Peak	HORIZONTAL
4	2410.55	104.62			72.76	3.86	28.00	0.00	357	182	Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

### Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2361.06	51.27	54.00	-2.73	19.39	3.82	28.06	0.00	27	192	Average	VERTICAL
2	2381.03	64.43	74.00	-9.57	32.56	3.84	28.03	0.00	27	192	Peak	VERTICAL
3	2439.60	113.85			82.00	3.89	27.96	0.00	27	192	Average	VERTICAL
4	2439.89	125.52			93.67	3.89	27.96	0.00	27	192	Peak	VERTICAL
5	2483.50	50.69	54.00	-3.31	18.85	3.92	27.92	0.00	27	192	Average	VERTICAL
6	2485.82	66.02	74.00	-7.98	34.18	3.92	27.92	0.00	27	192	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

### Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2463.74	118.79			86.95	3.90	27.94	0.00	23	181	Peak	VERTICAL
2	2464.89	106.90			75.06	3.90	27.94	0.00	23	181	Average	VERTICAL
3	2483.79	52.56	54.00	-1.44	20.72	3.92	27.92	0.00	23	181	Average	VERTICAL
4	2484.66	67.67	74.00	-6.33	35.83	3.92	27.92	0.00	23	181	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

<b>Temperature</b>	22°C	<b>Humidity</b>	55%
<b>Test Engineer</b>	Stim Sung & Owen Hsu	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 VHT40 CH 3, 6, 9 / Chain 1 + Chain 2 + Chain 3 + Chain 4
<b>Test Date</b>	Nov. 22, 2015		
<b>Test Mode</b>	Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi		

### Channel 3

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2375.82	68.11	74.00	-5.89	36.24	3.83	28.04	0.00	32	165	Peak	VERTICAL
2	2385.95	52.78	54.00	-1.22	20.91	3.85	28.02	0.00	32	165	Average	VERTICAL
3	2424.89	100.70			68.84	3.87	27.99	0.00	32	165	Average	VERTICAL
4	2425.47	110.38			78.52	3.88	27.98	0.00	32	165	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

### Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2387.97	52.62	54.00	-1.38	20.75	3.85	28.02	0.00	355	183	Average	VERTICAL
2	2389.13	72.07	74.00	-1.93	40.20	3.85	28.02	0.00	355	183	Peak	VERTICAL
3	2445.97	116.01			84.16	3.89	27.96	0.00	355	183	Peak	VERTICAL
4	2446.26	105.89			74.04	3.89	27.96	0.00	355	183	Average	VERTICAL
5	2484.08	52.37	54.00	-1.63	20.53	3.92	27.92	0.00	355	183	Average	VERTICAL
6	2493.34	72.78	74.00	-1.22	40.95	3.92	27.91	0.00	355	183	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

### Channel 9

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2443.32	110.52			78.67	3.89	27.96	0.00	17	233	Peak	HORIZONTAL
2	2443.90	100.53			68.68	3.89	27.96	0.00	17	233	Average	HORIZONTAL
3	2484.37	52.51	54.00	-1.49	20.67	3.92	27.92	0.00	17	233	Average	HORIZONTAL
4	2487.55	67.49	74.00	-6.51	35.65	3.92	27.92	0.00	17	233	Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Note:


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

For Emission not in Restricted Band


Mode 1: EUT 1 + Set 1 Dipole Antenna / 4.5 dBi

Plot on Configuration IEEE 802.11b / Reference Level

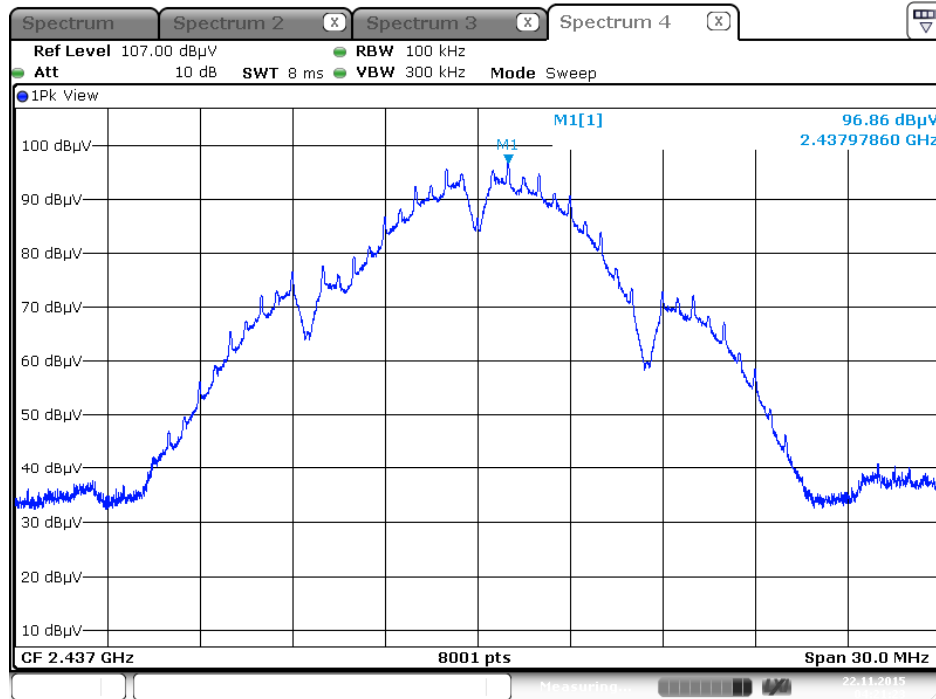


Date: 22 NOV. 2015 04:21:24

Plot on Configuration IEEE 802.11b / CH 1 / 30MHz~2400MHz (down 30dBc)

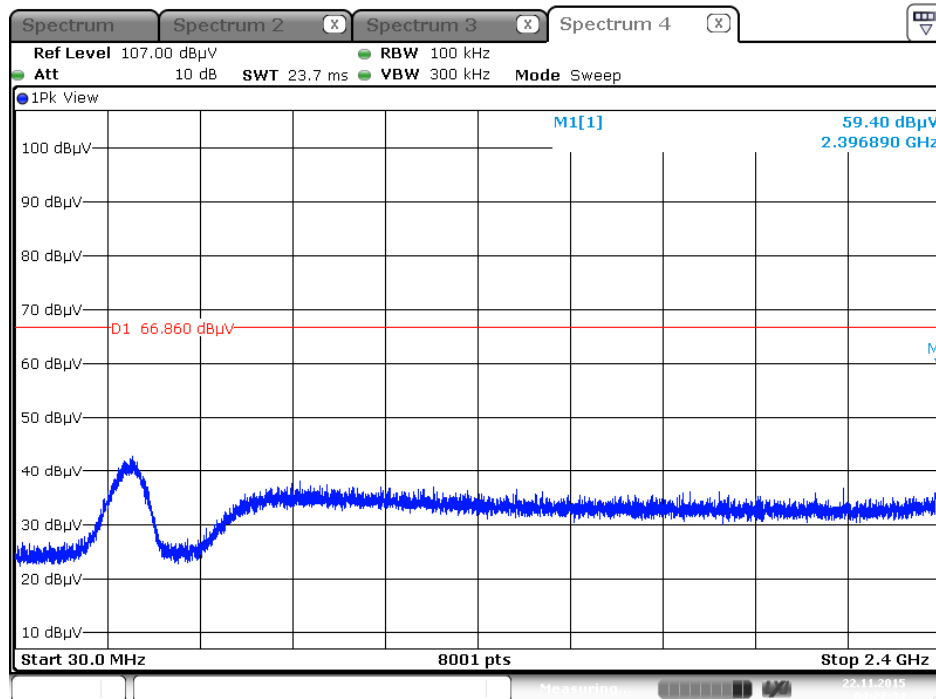


Date: 22 NOV. 2015 04:27:35


Plot on Configuration IEEE 802.11b / CH 1 / 2500MHz~26500MHz (down 30dBc)

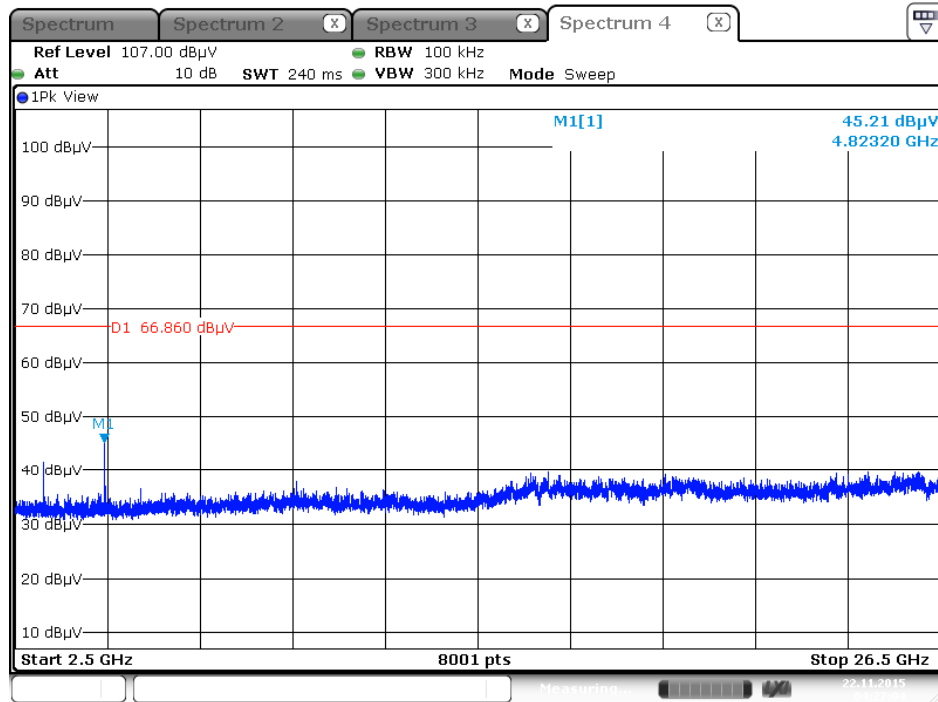

Plot on Configuration IEEE 802.11b / CH 11 / 30MHz~2400MHz (down 30dBc)

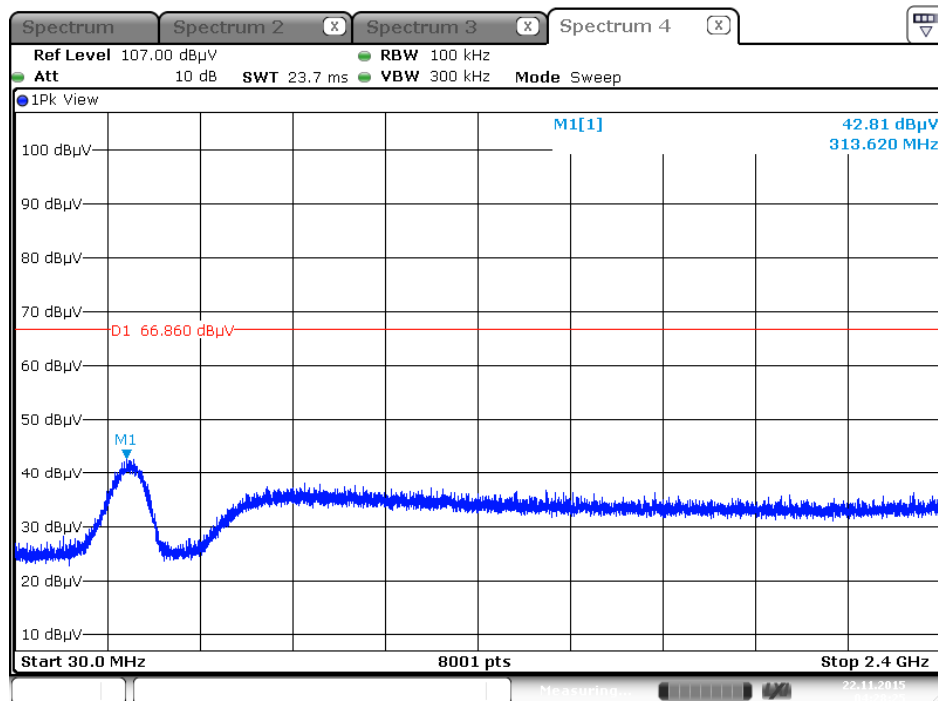


Plot on Configuration IEEE 802.11b / CH 11 / 2500MHz~26500MHz (down 30dBc)

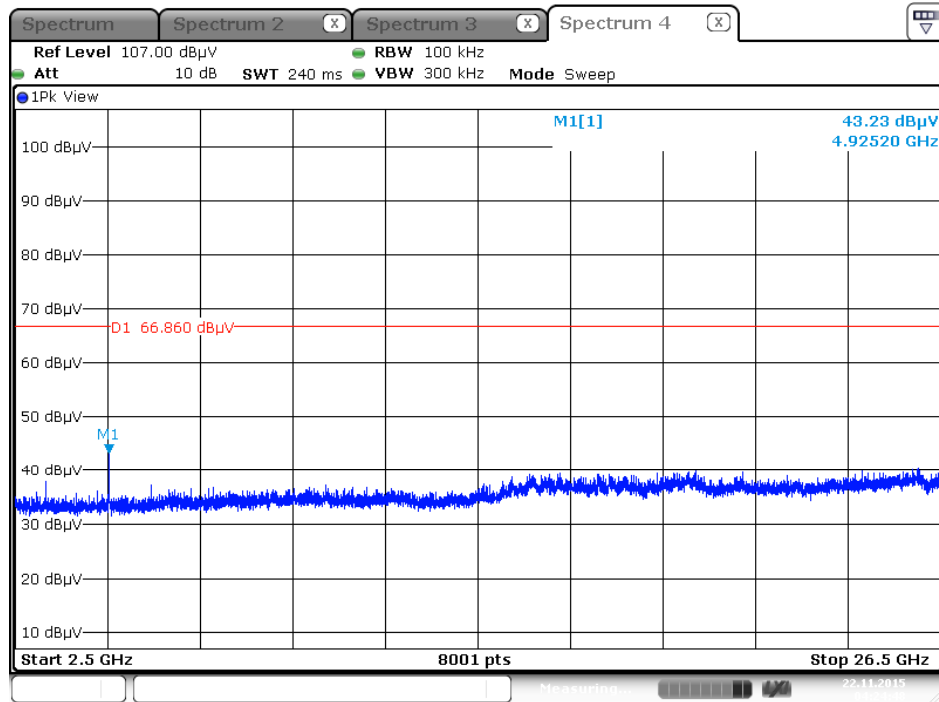


Date: 22 NOV. 2015 04:24:48


Plot on Configuration IEEE 802.11g / Reference Level

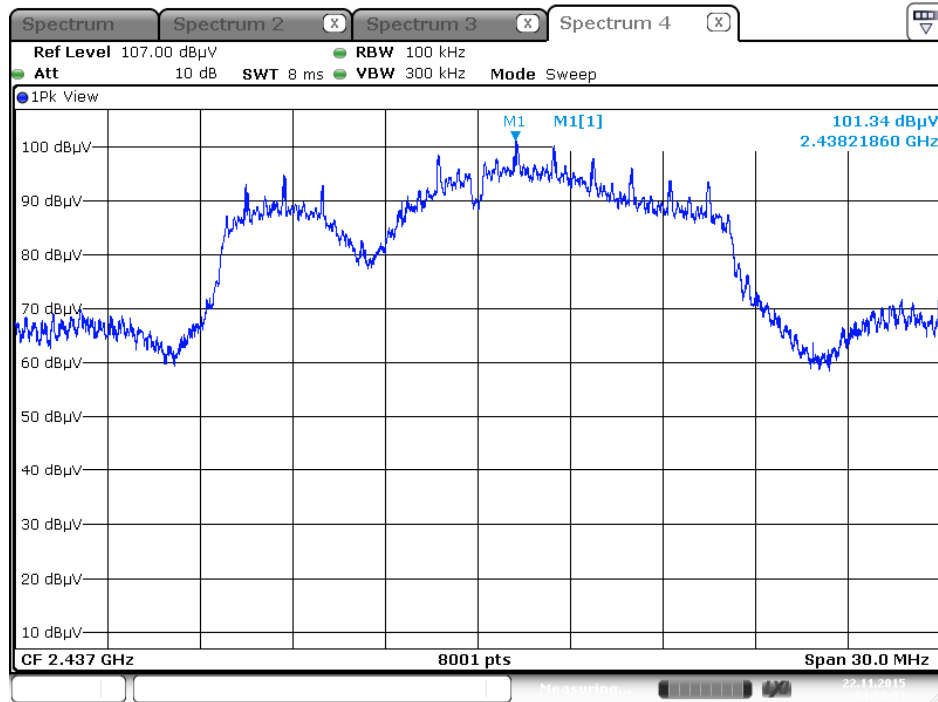


Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 30dBc)

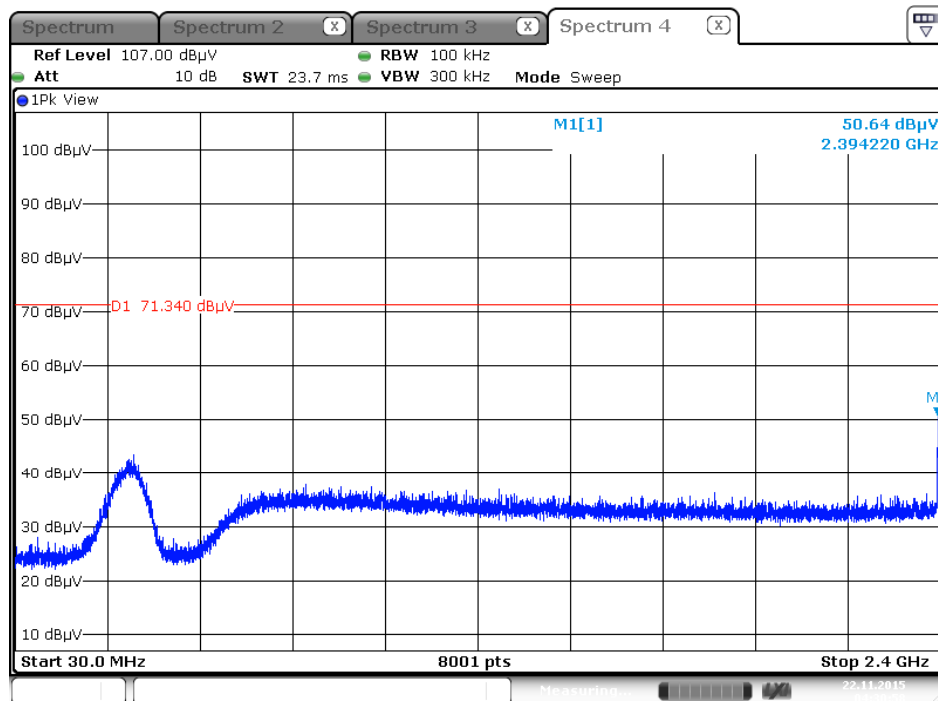

Plot on Configuration IEEE 802.11g / CH 1 / 2500MHz~26500MHz (down 30dBc)

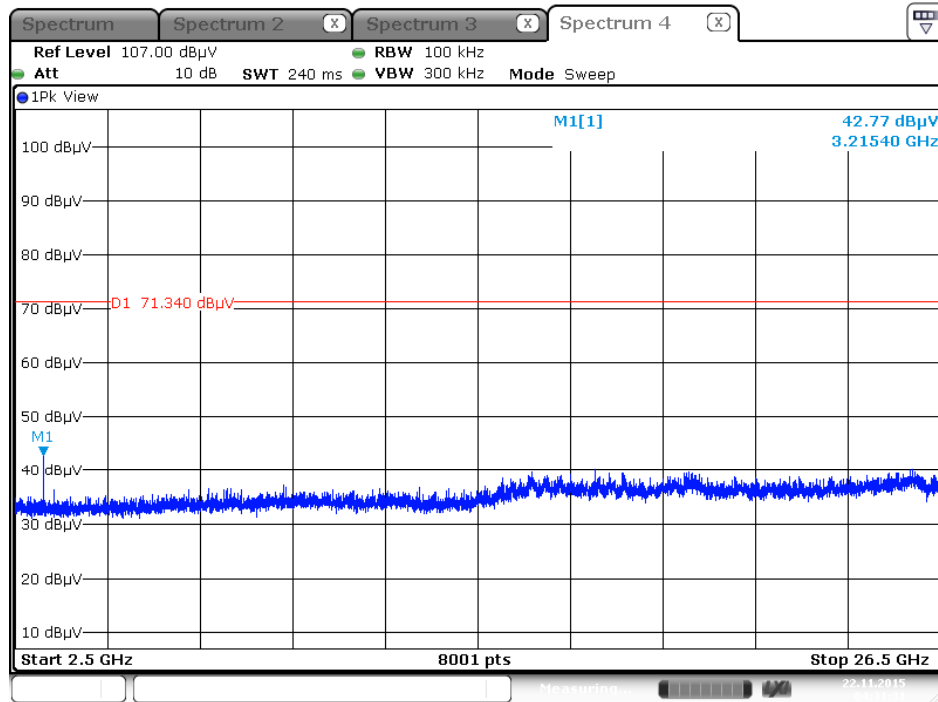


Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 30dBc)

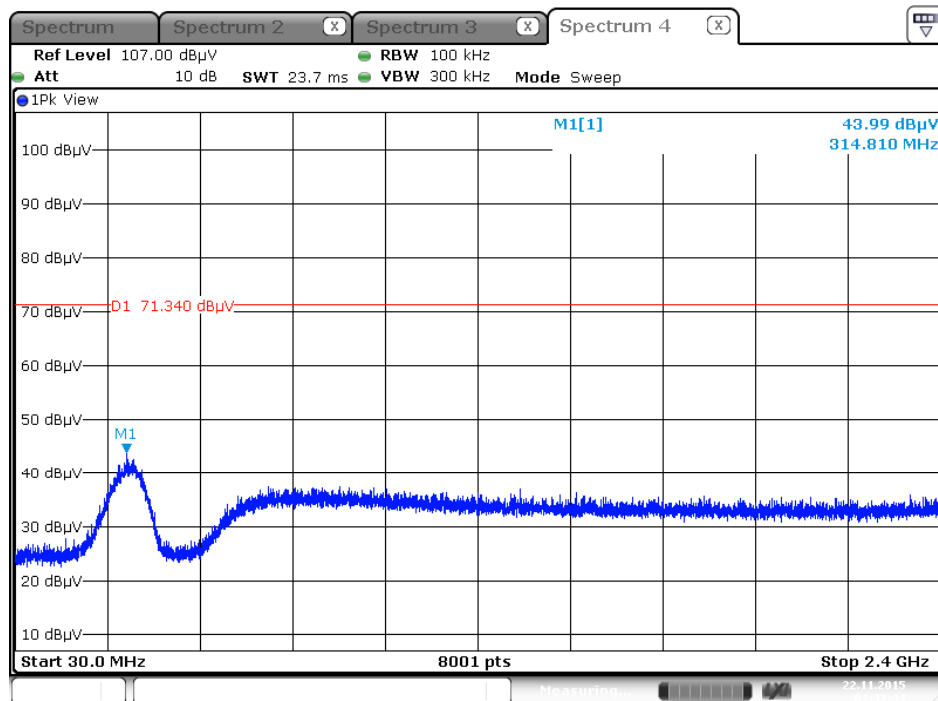




Plot on Configuration IEEE 802.11g / CH 11 / 2500MHz~26500MHz (down 30dBc)

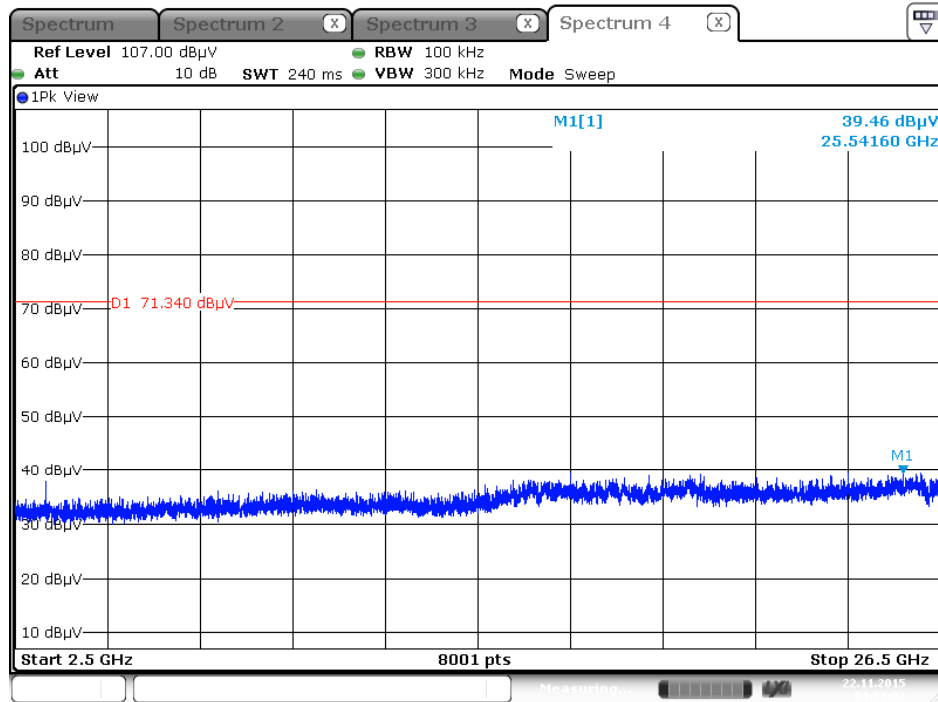


Date: 22 NOV .2015 04:33:02

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Reference Level

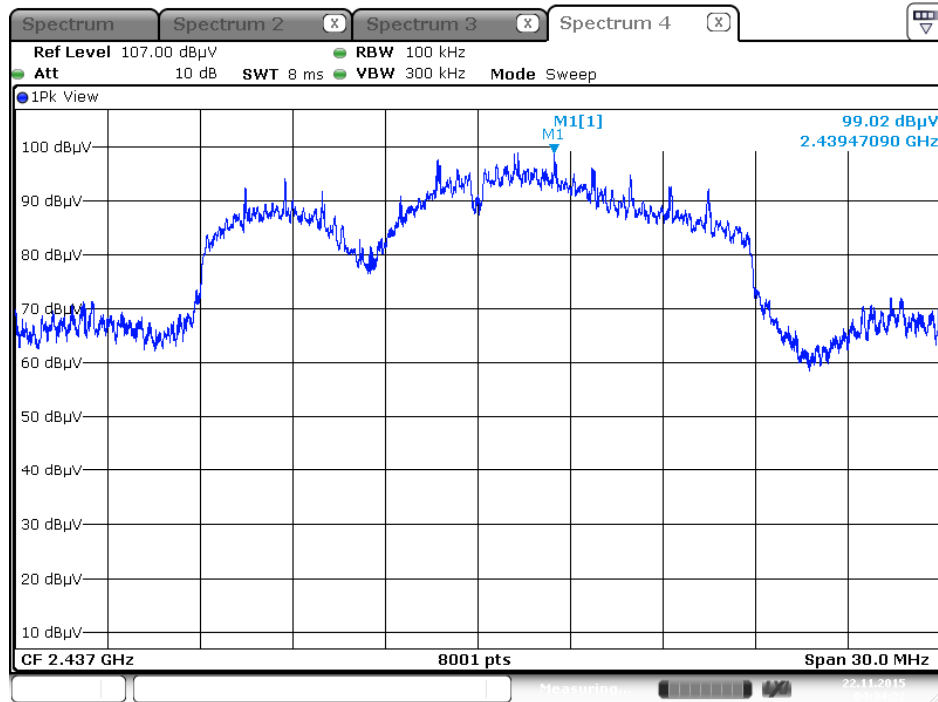


Date: 22 NOV. 2015 04:34:22

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 1 / 30MHz~2400MHz (down 30dBc)

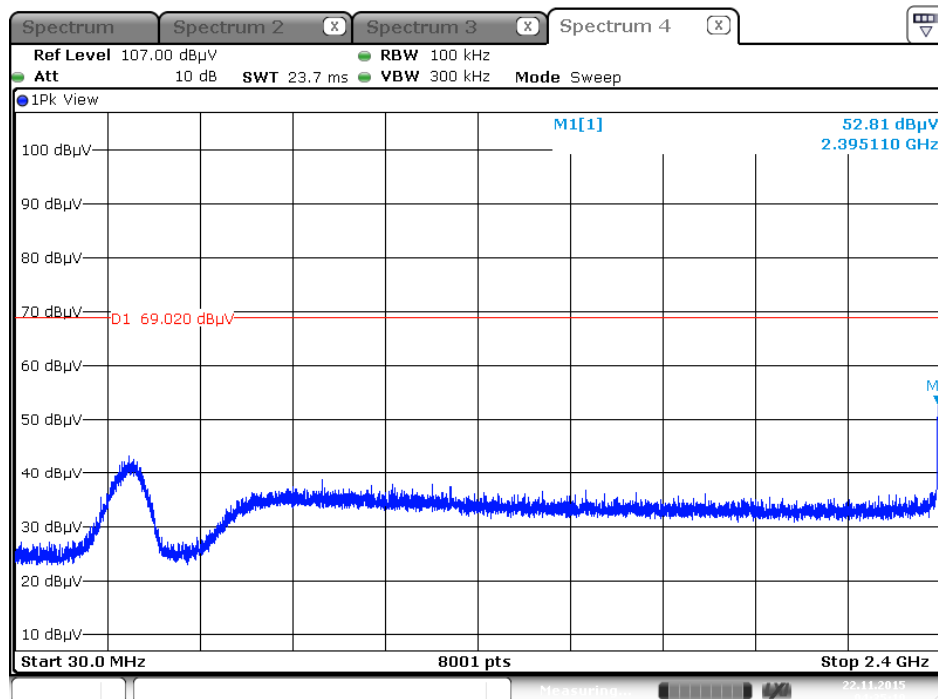


Date: 22 NOV. 2015 04:35:19


Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 1 / 2500MHz~26500MHz (down 30dBc)

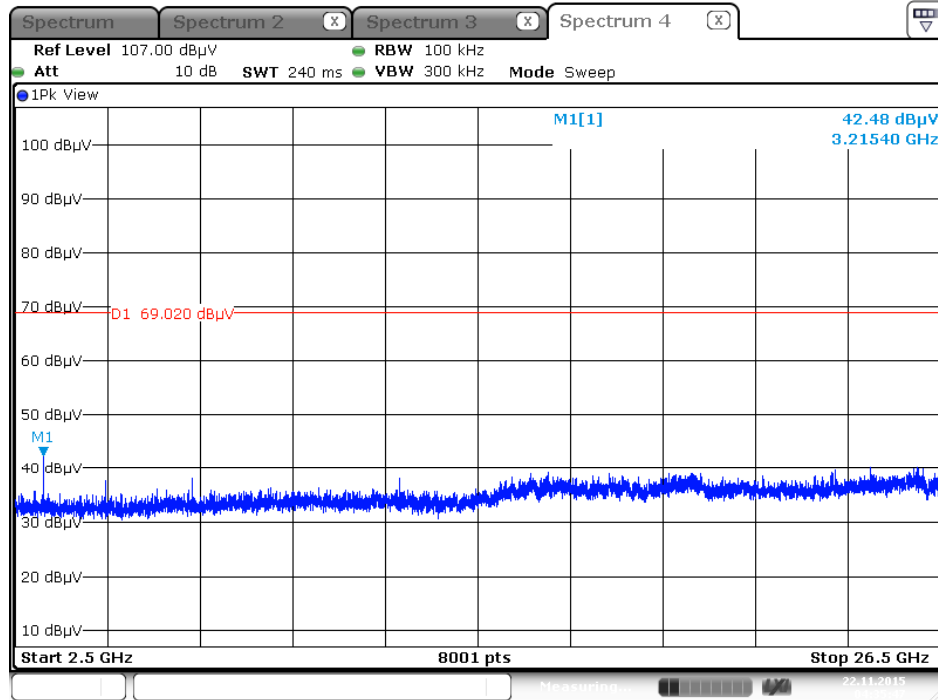

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 11 / 30MHz~2400MHz (down 30dBc)

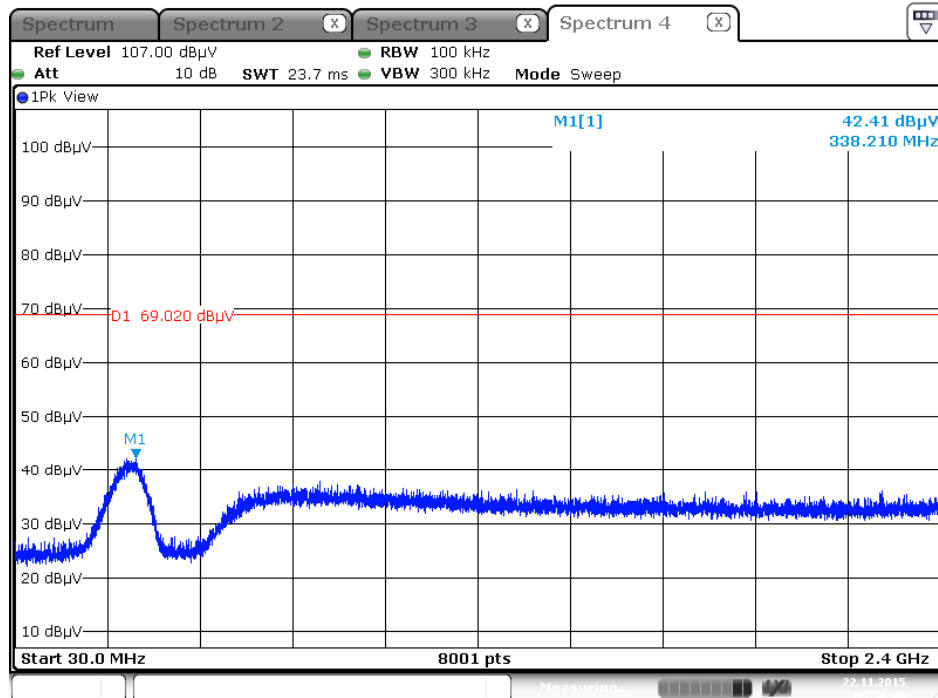


Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 11 / 2500MHz~26500MHz (down 30dBc)

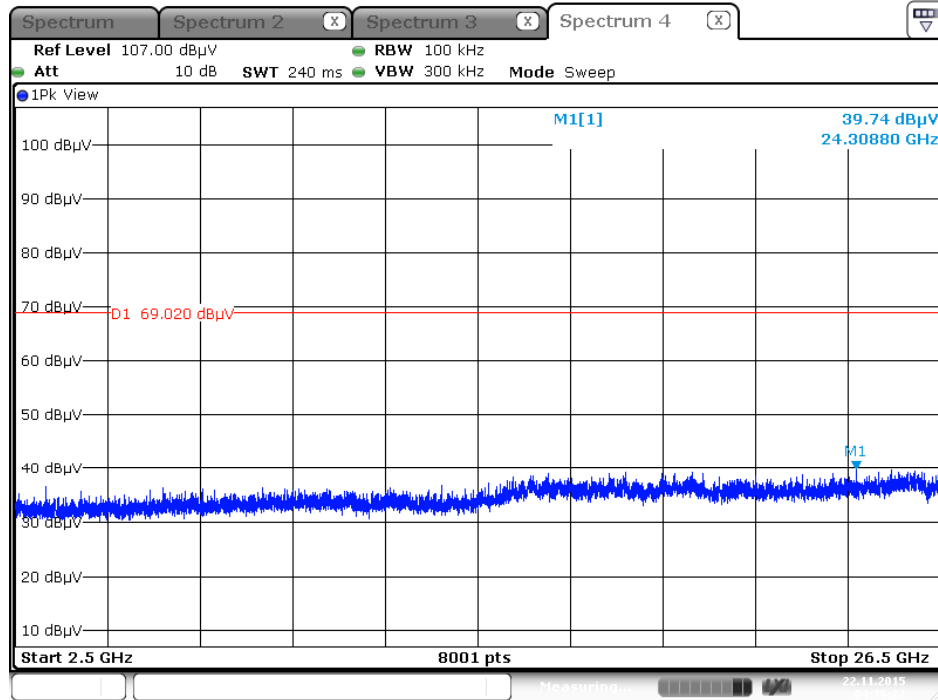


Date: 22 NOV. 2015 04:36:22


Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Reference Level

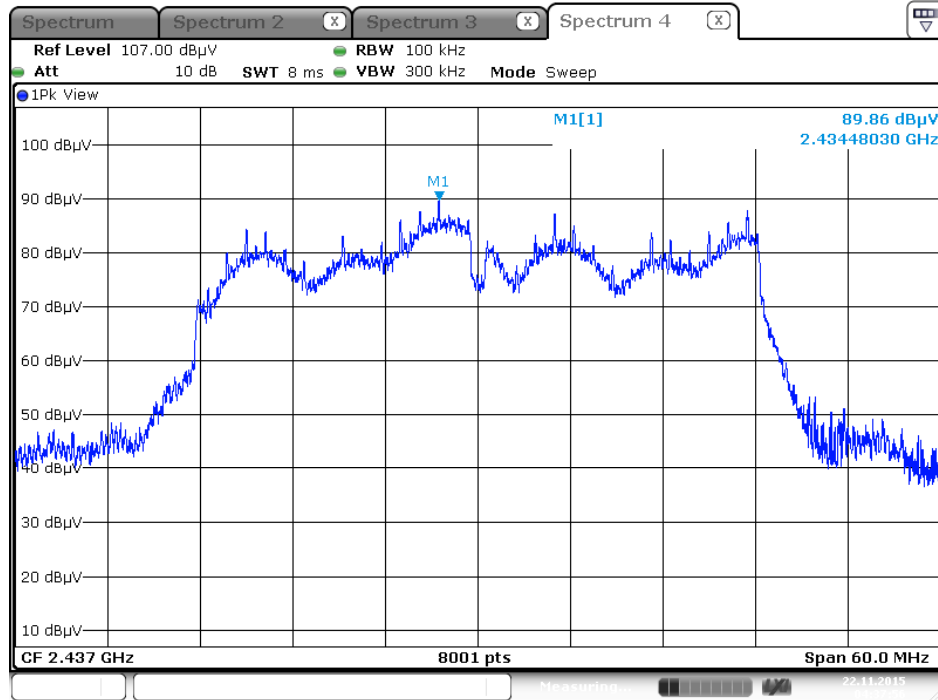


Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 3 / 30MHz~2400MHz (down 30dBc)

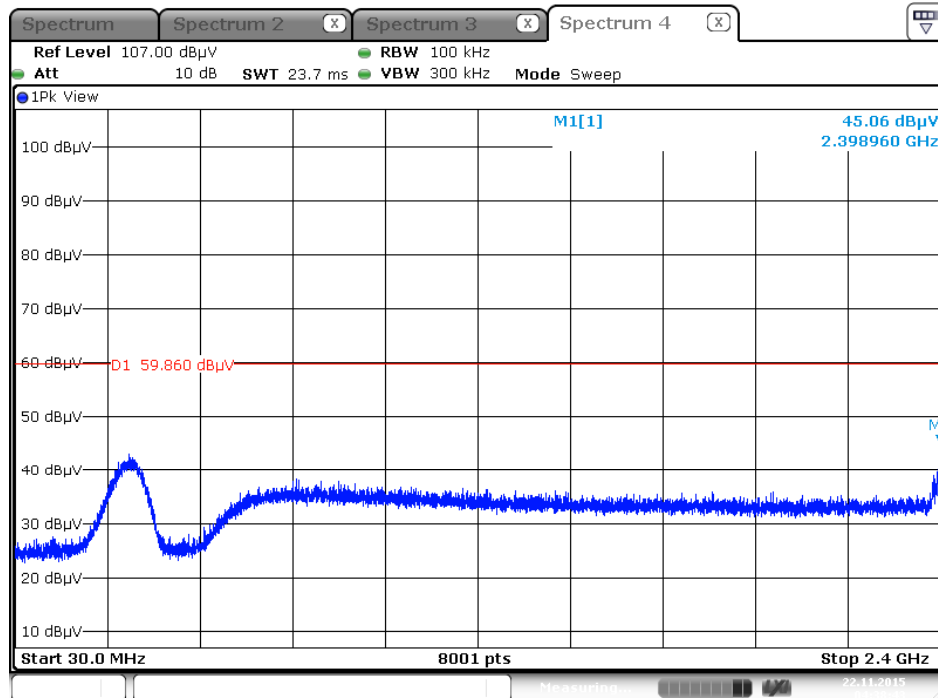


Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 3 / 2500MHz~26500MHz (down 30dBc)

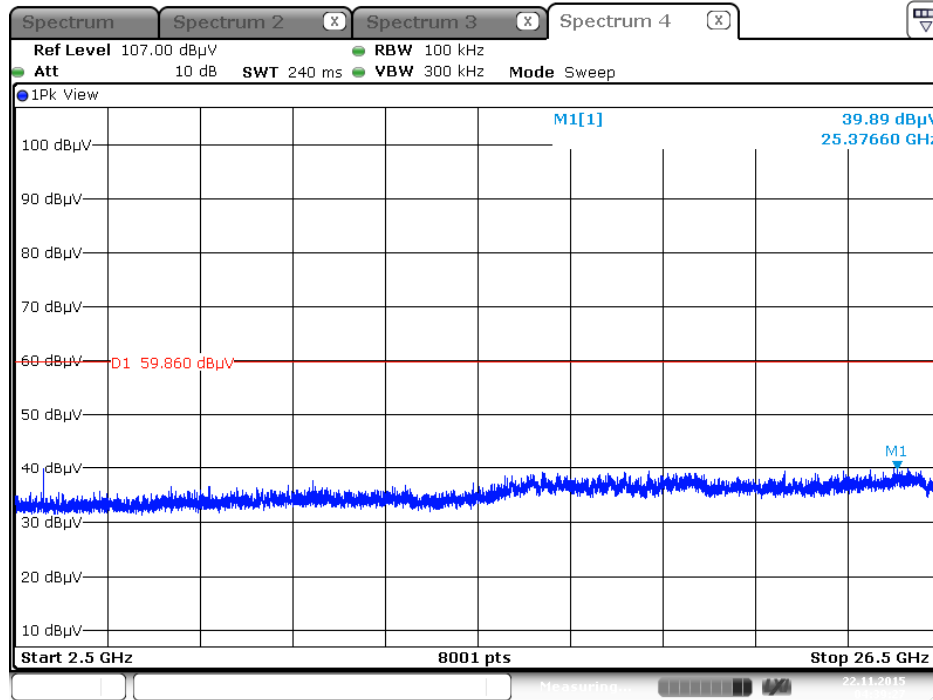

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 9 / 30MHz~2400MHz (down 30dBc)

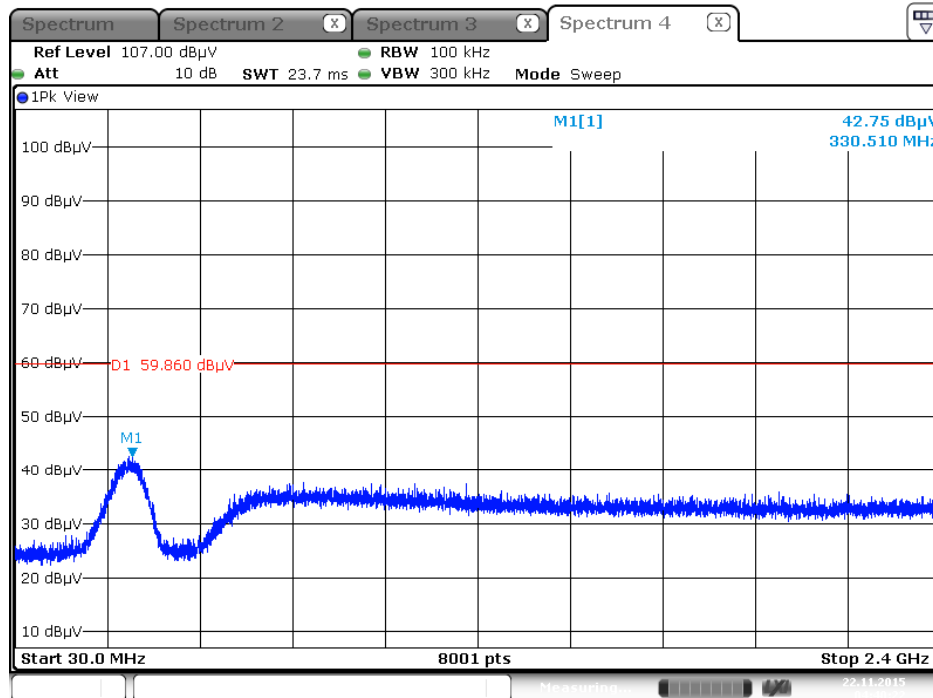


Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 9 / 2500MHz~26500MHz (down 30dBc)

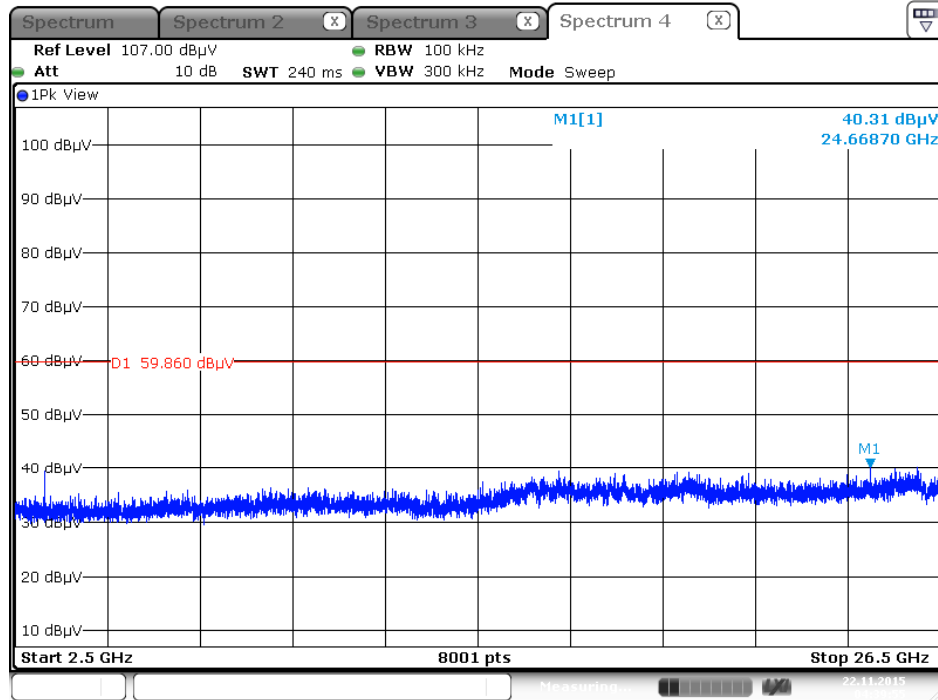

Date: 22 NOV .2015 04:39:56


Mode 2: EUT 2 + Set 3 PIFA Antenna / Chain1:6.25 dBi, Chain2:5.77 dBi, Chain3:6.45 dBi, Chain4:5.60 dBi

Plot on Configuration IEEE 802.11b / Reference Level

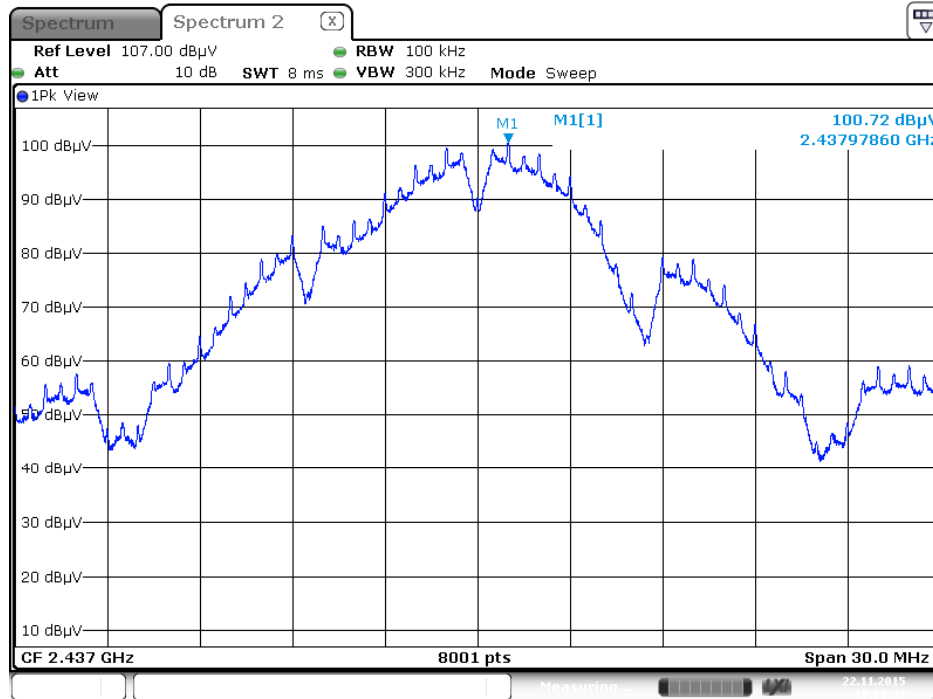

Date: 22 NOV .2015 18:00:21


Plot on Configuration IEEE 802.11b / CH 1 / 30MHz~2400MHz (down 30dBc)

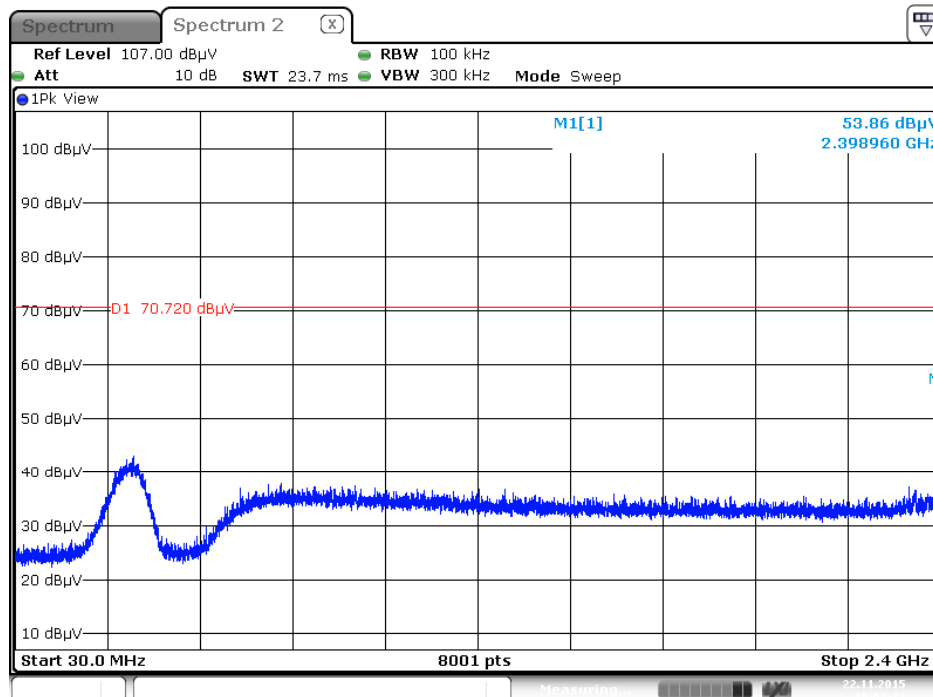


Date: 22 NOV .2015 18:02:13




Plot on Configuration IEEE 802.11b / CH 1 / 2500MHz~26500MHz (down 30dBc)

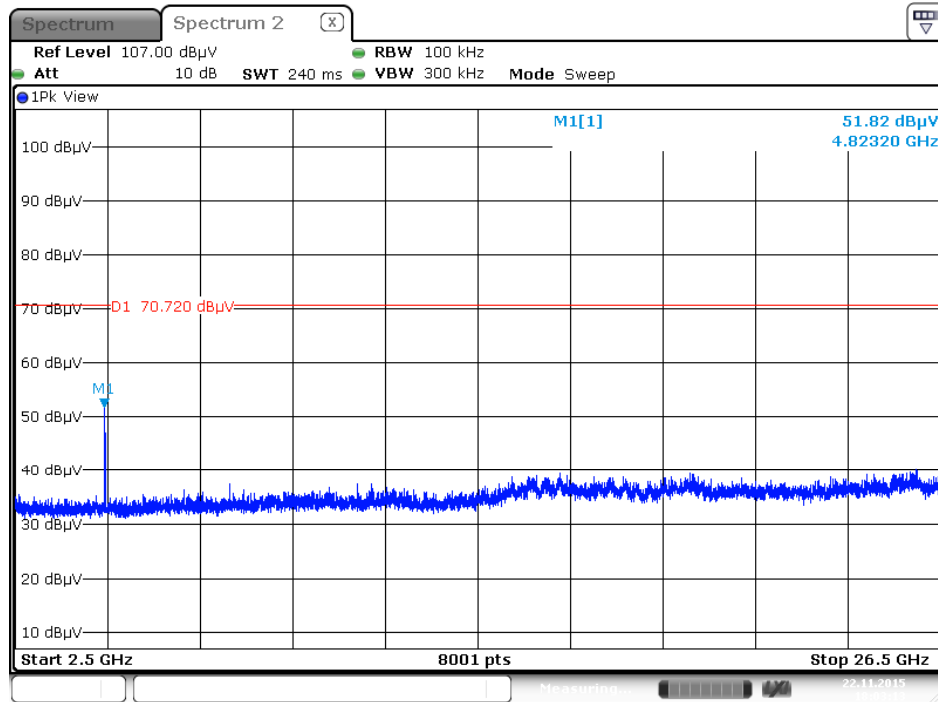

Plot on Configuration IEEE 802.11b / CH 11 / 30MHz~2400MHz (down 30dBc)

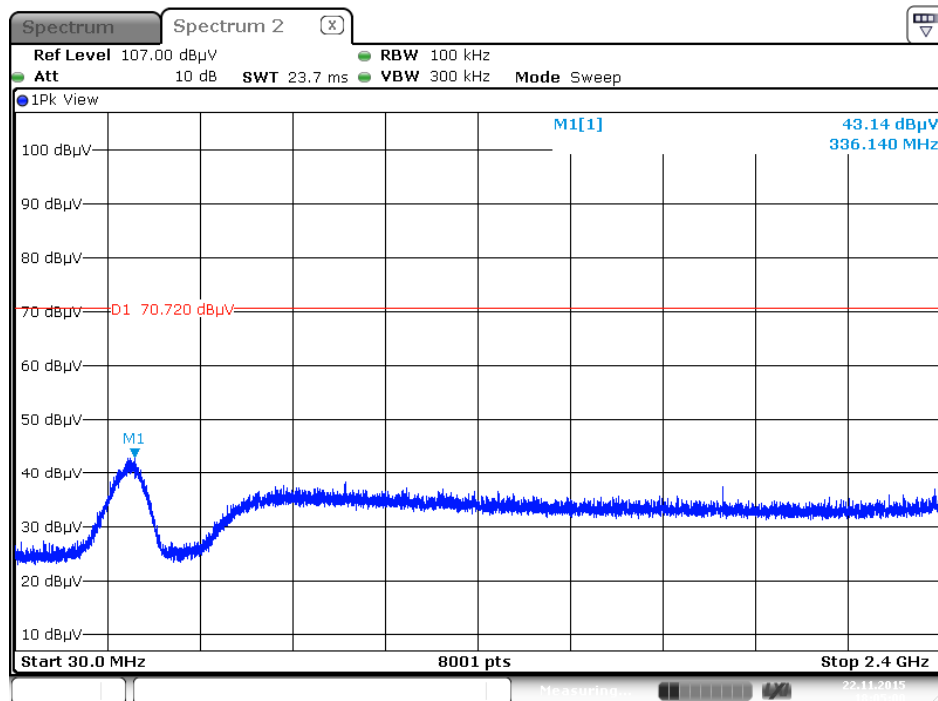


Plot on Configuration IEEE 802.11b / CH 11 / 2500MHz~26500MHz (down 30dBc)

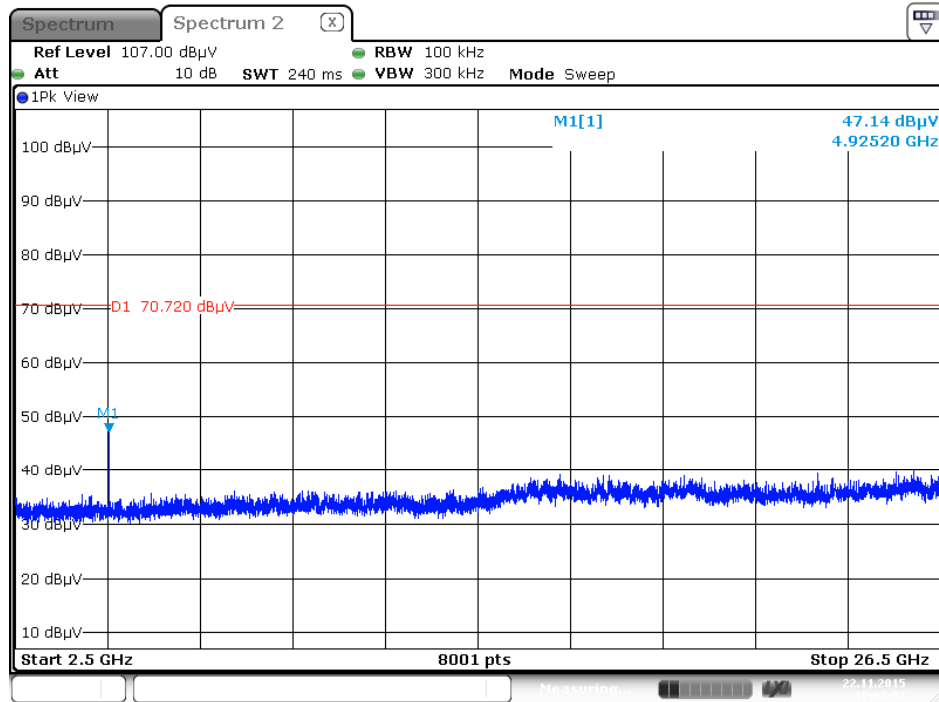


Date: 22 NOV. 2015 18:04:07

Plot on Configuration IEEE 802.11g / Reference Level

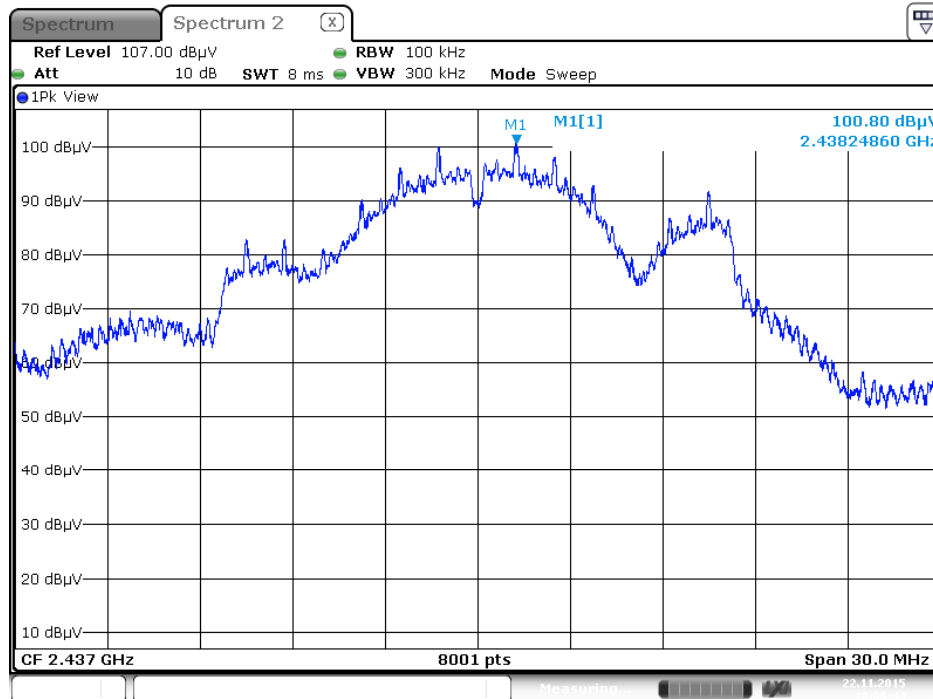


Date: 22 NOV. 2015 18:09:45

Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 30dBc)

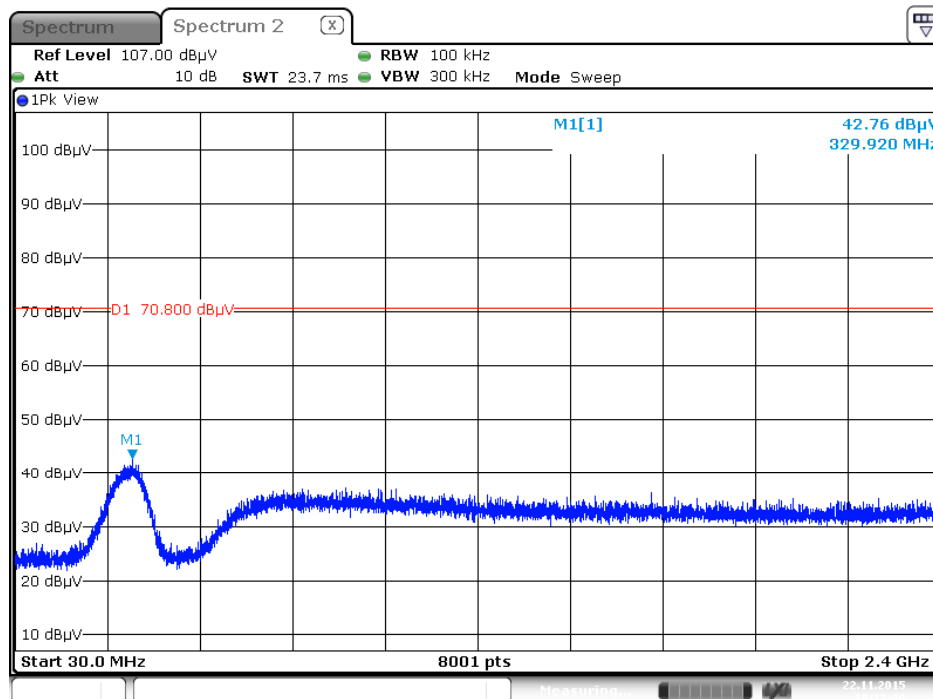


Date: 22 NOV. 2015 18:13:09


Plot on Configuration IEEE 802.11g / CH 1 / 2500MHz~26500MHz (down 30dBc)

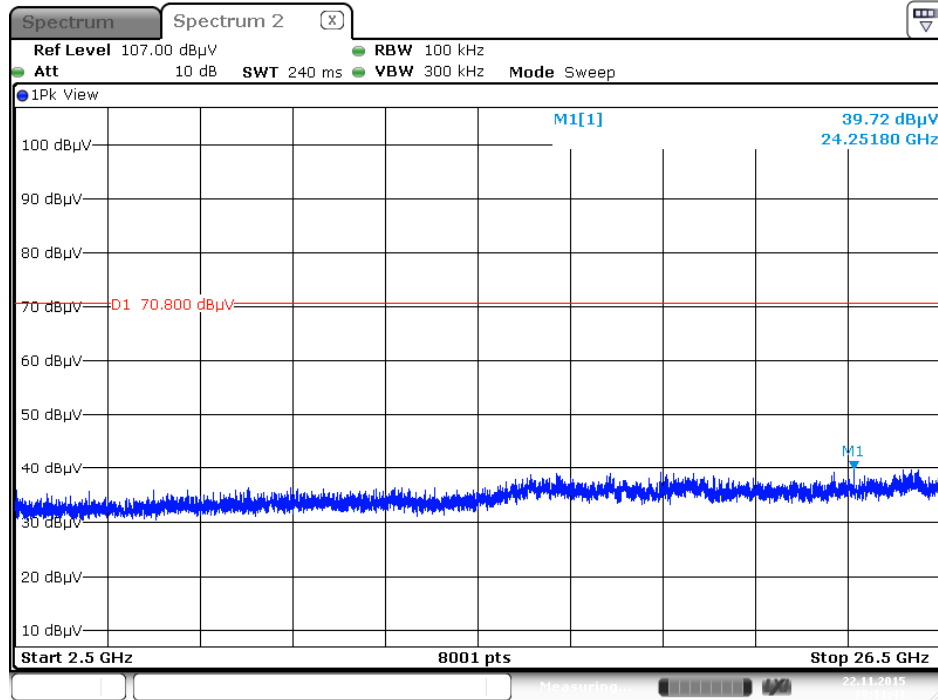

Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 30dBc)

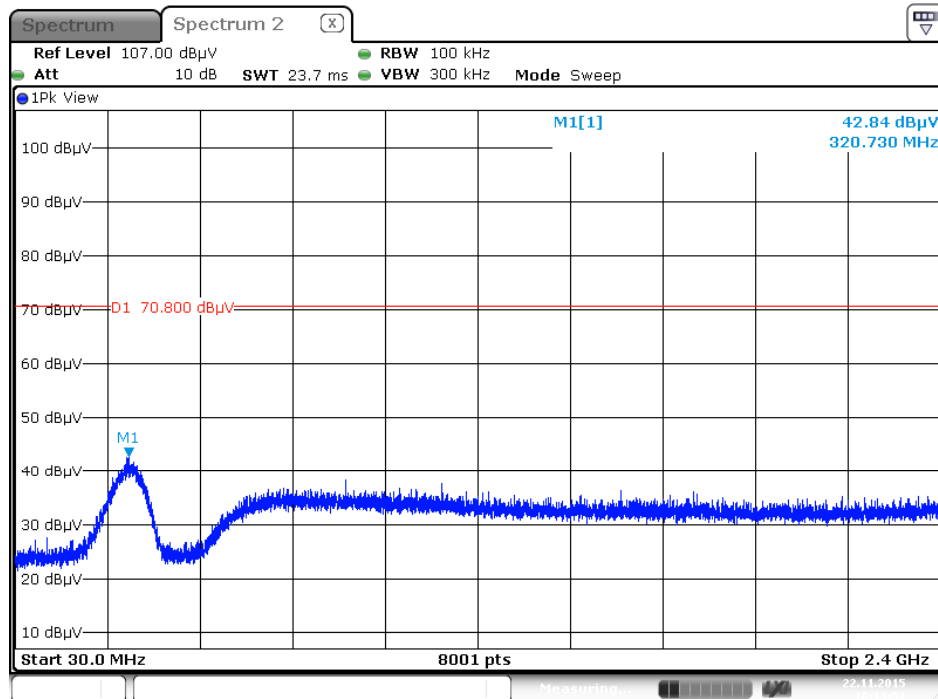


Plot on Configuration IEEE 802.11g / CH 11 / 2500MHz~26500MHz (down 30dBc)

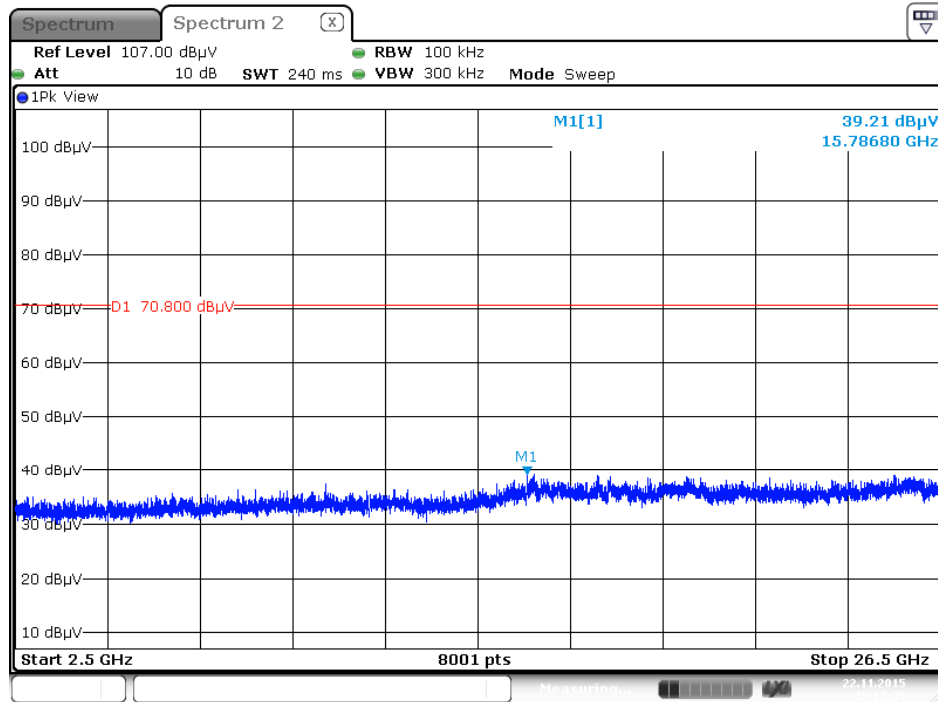


Date: 22 NOV. 2015 18:12:35

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Reference Level

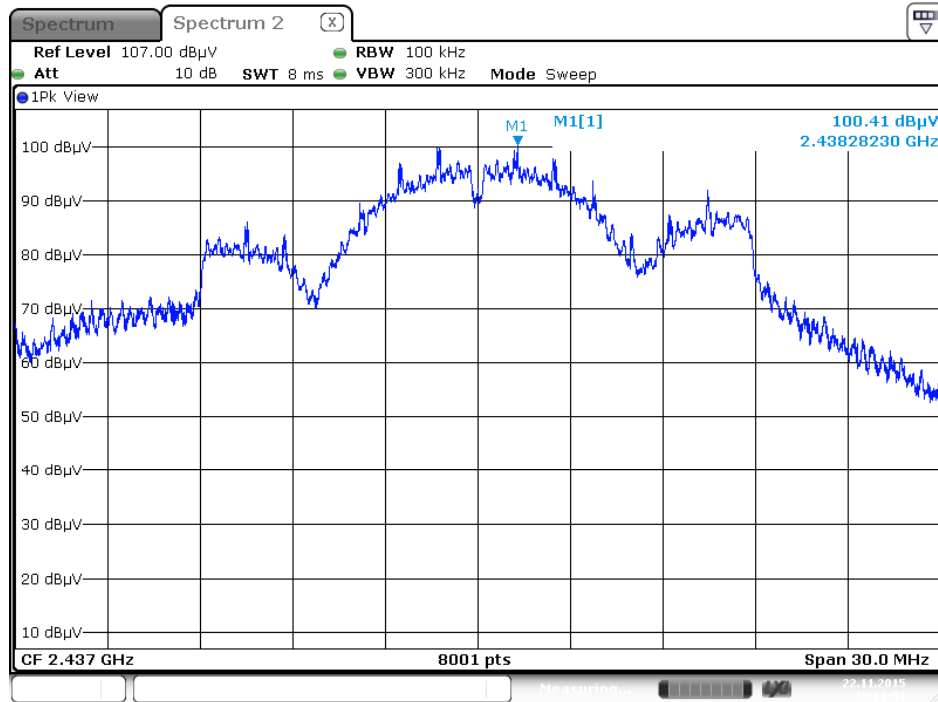


Date: 22 NOV. 2015 18:19:54

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 1 / 30MHz~2400MHz (down 30dBc)

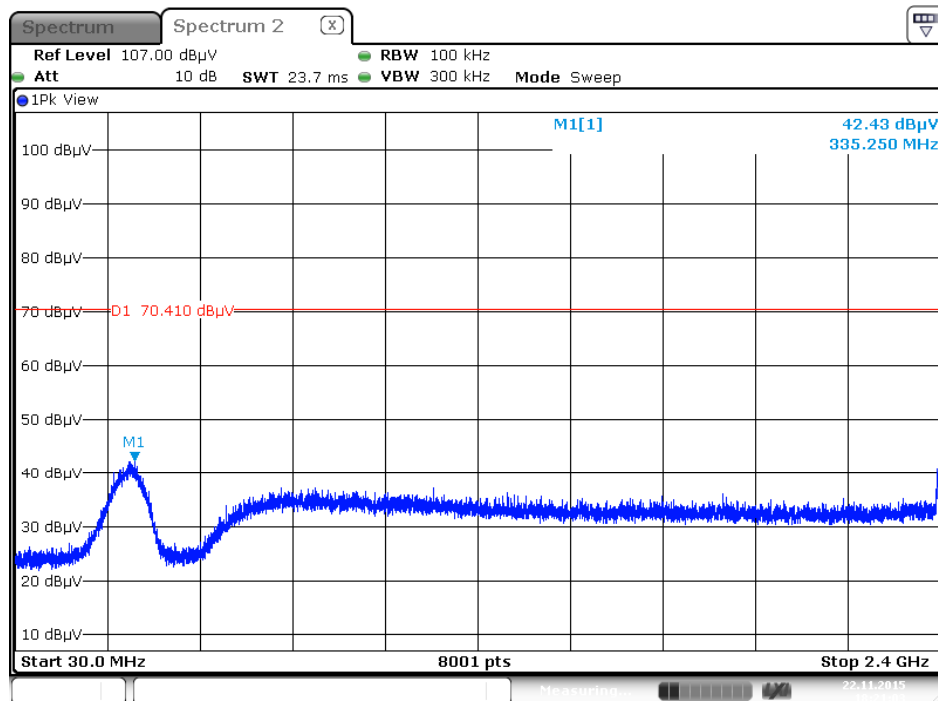


Date: 22 NOV. 2015 18:21:03


Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 1 / 2500MHz~26500MHz (down 30dBc)

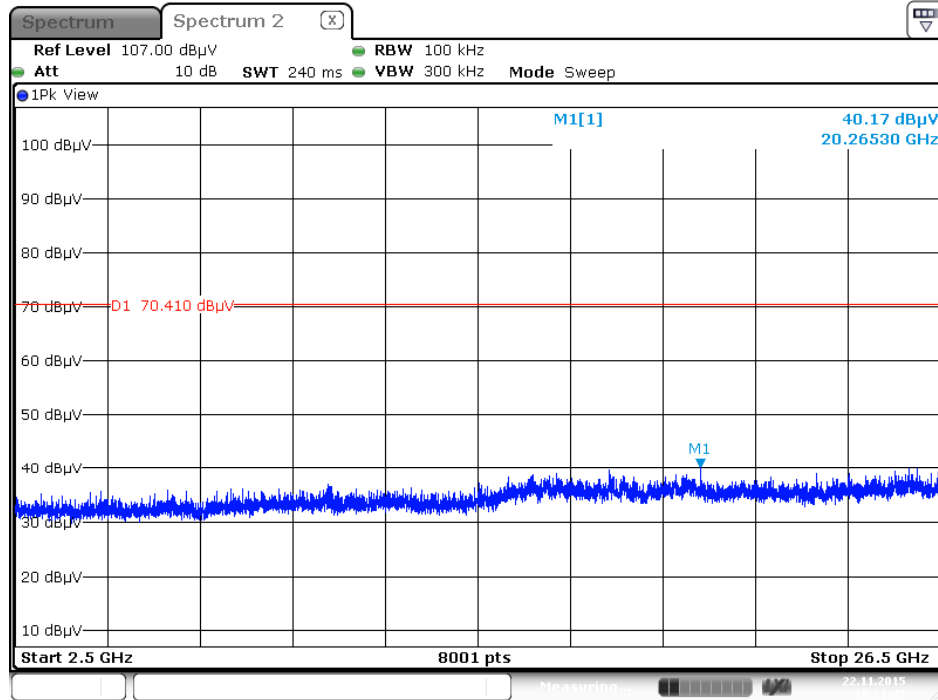

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 11 / 30MHz~2400MHz (down 30dBc)

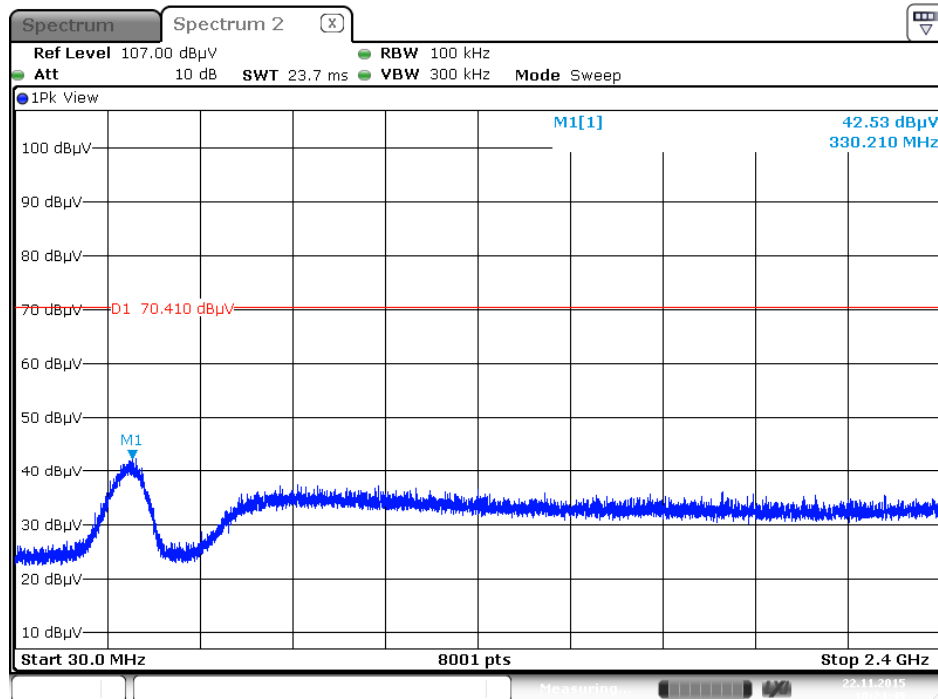


Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 11 / 2500MHz~26500MHz (down 30dBc)

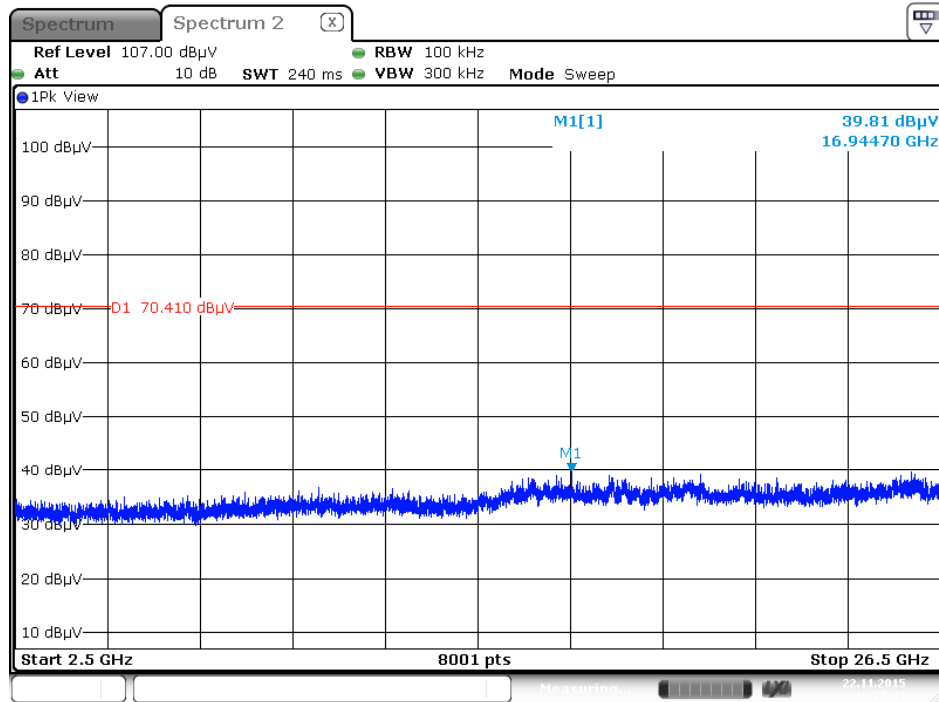


Date: 22 NOV. 2015 18:22:33




Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Reference Level

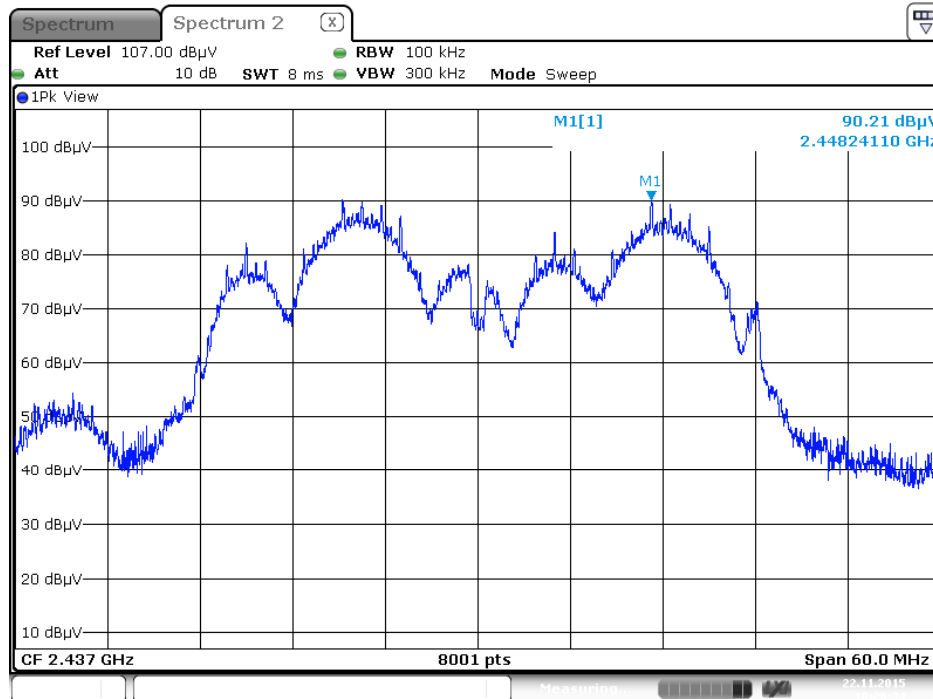


Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 3 / 30MHz~2400MHz (down 30dBc)

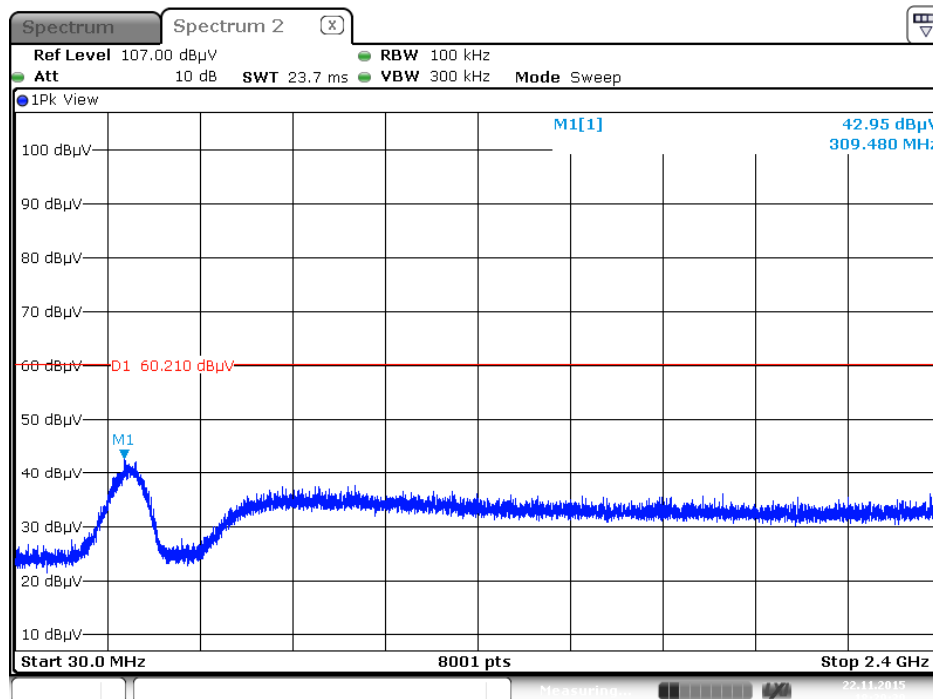


Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 3 / 2500MHz~26500MHz (down 30dBc)

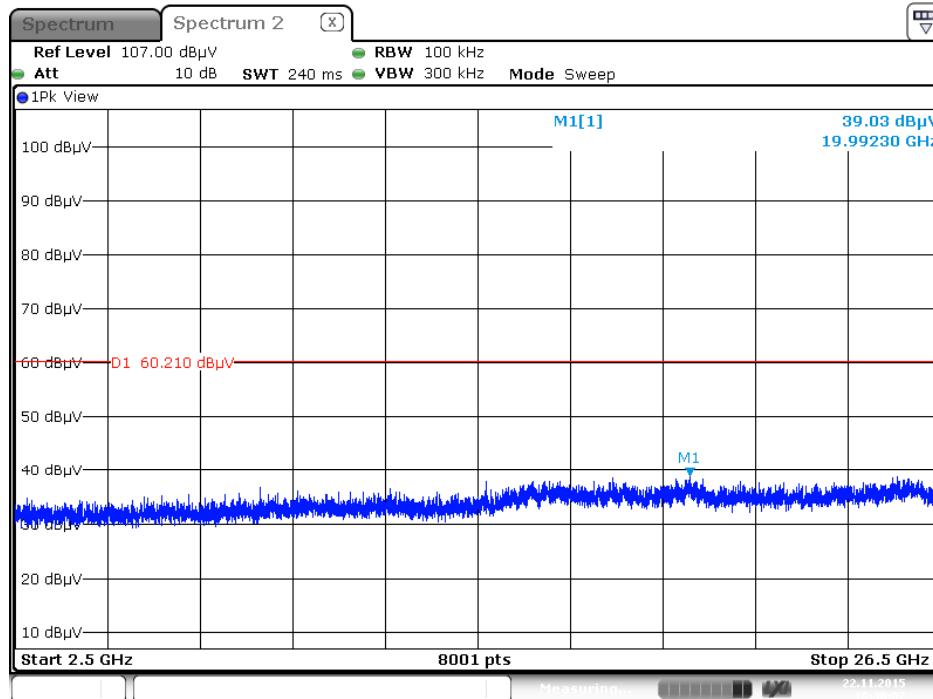

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 9 / 30MHz~2400MHz (down 30dBc)

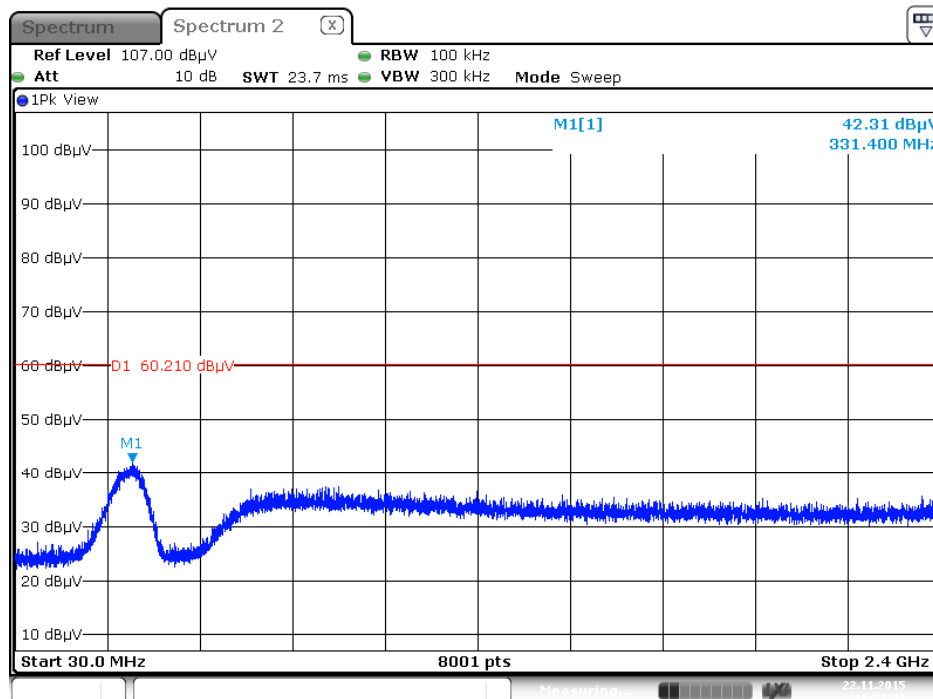

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 9 / 2500MHz~26500MHz (down 30dBc)

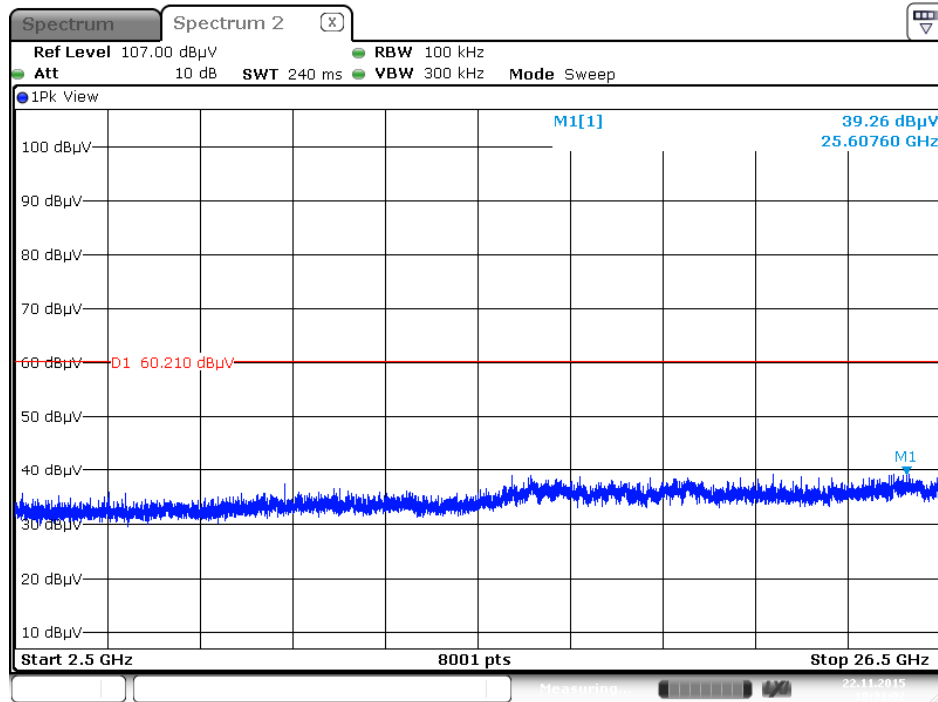

Date: 22 NOV. 2015 18:31:02

## 4.7. Antenna Requirements

### 4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### 4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 22, 2015	Conduction (CO01-CB)
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.45GHz	Jan. 27, 2016	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127650	9kHz ~ 30MHz	Nov. 16, 2015	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Nov. 13, 2015	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	May 25, 2015	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	May 24, 2016	Conduction (CO01-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	37880	20MHz ~ 2GHz	Sep. 03, 2015	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 12, 2015*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 22, 2015	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 21, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Feb. 24, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Mar. 15, 2016	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 12, 2015	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Oct. 27, 2015	Radiation (03CH01-CB)
EMI Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8.4GHz	Jan. 21, 2015	Radiation (03CH01-CB)
EMI Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8.4GHz	Jan. 27, 2016	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz ~ 1 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-17	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
Test Software	Audix	E3	6.2009-10-7	N/A	N/A	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 12, 2014	Conducted (TH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 09, 2015	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 02, 2015	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	RG402	High Cable-7	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 02, 2015	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“\*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

## 6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.2 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%