



Shenzhen Academy of Metrology & Quality Inspection

NETC National Digital Electronic Product Testing Center

FCC TEST REPORT

For

Mutisensor

Model Number: ZW6302, ZW6302A, ZW6302B, ZW6302C

FCC ID: U2ZZW6302

Report Number : WT168003888

Test Laboratory : Shenzhen Academy of Metrology and Quality Inspection

National Digital Electronic Product Testing Center

Site Location : No.4 TongFa Road, Xili Town, Nanshan District,
Shenzhen, China

Tel : 0086-755-86009898

Fax : 0086-755-86009898-31396

Web : www.smq.com.cn



Test report declaration

Applicant : SHEENWAY ASIA LTD.

Address : Room1313, 13/F., AustinTower, 22-26AustinAvenu, TsimSha Tsui, Kowloon. Hong Kong. China

Manufacturer : SHEENWAY ASIA LTD.

Address : Room1313, 13/F., AustinTower, 22-26AustinAvenu, TsimSha Tsui, Kowloon. Hong Kong. China

EUT Description : Mutsensor

Model No : ZW6302, ZW6302A, ZW6302B, ZW6302C

FCC ID : U2ZZW6302

Test Standards:

FCC Part 15 (October 1, 2015 Edition)

ANSI C63.10-2013

The EUT described above is tested by Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory to determine the maximum emissions from the EUT. Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory is assumed full responsibility for the accuracy of the test results. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10-2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with FCC Rules Part 15.249.

The test report is valid for above tested sample only and shall not be reproduced in part without written approval of the laboratory.

Project Engineer:



 (Chen Qichun)

Date: Aug.10,2016

Checked by:



 (Yang Dongping)

Date: Aug.10,2016

Approved by:



 (Lin Bin)

Date: Aug.10,2016



TABLE OF CONTENTS

TEST REPORT DECLARATION	2
1. TEST RESULTS SUMMARY	5
2. GENERAL INFORMATION	6
2.1. Report information.....	6
2.2. Laboratory Accreditation and Relationship to Customer	6
2.3. Measurement Uncertainty.....	7
3. PRODUCT DESCRIPTION	8
3.1. EUT Description.....	8
3.2. Block Diagram of EUT Configuration	9
3.3. Operating Condition of EUT.....	9
3.4. Special Accessories.....	9
3.5. Equipment Modifications	9
3.6. Support Equipment List.....	9
3.7. Test Conditions.....	10
4. TEST EQUIPMENT USED	11
5. CONDUCTED DISTURBANCE TEST	12
5.1. Test Standard and Limit	12
5.2. Test Procedure	12
5.3. Test Arrangement.....	12
5.4. Test Data	13
6. RADIATED DISTURBANCE TEST	15
6.1. Test Standard and Limit	15
6.2. Test Procedure	15
6.3. Test Arrangement.....	15
6.4. Test Data	16
7. OCCUPIED BANDWIDTH	35
7.1. Test Standard and Limit	35
7.2. Test Procedure	35
7.3. Test Arrangement.....	35



- 7.4. Test Data35
- 8. BAND EDGE37**
 - 8.1. Test Standard and Limit37
 - 8.2. Band Edge FCC 15.249(d) Limit.....37
 - 8.3. Test Procedure37
 - 8.4. Test Arrangement.....37
 - 8.5. Test Data37
- 9. ANTENNA REQUIREMENT42**



1. TEST RESULTS SUMMARY

Table 1 Test Results Summary

Test Items	FCC Rules	Test Results
Conducted Disturbance	15.207	Pass
Radiated disturbance	15.249	Pass
Occupied Bandwidth	15.215	Pass
Band Edges	15.249	Pass
Antenna Requirement	15.203	Pass

Remark: "N/A" means "Not applicable."



2. GENERAL INFORMATION

2.1. Report information

2.1.1. This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that SMQ approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that SMQ in any way guarantees the later performance of the product/equipment.

2.1.2. The sample/s mentioned in this report is/are supplied by Applicant, SMQ therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.

2.1.3. Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through SMQ, unless the applicant has authorized SMQ in writing to do so.

2.2. Laboratory Accreditation and Relationship to Customer

The testing report were performed by the Shenzhen Academy of Metrology and quality Inspection EMC Laboratory (Guangdong EMC compliance testing center), in their facilities located at No.4 TongFa Road, Xili Town, Nanshan District, Shenzhen, China. At the time of testing, Laboratory is accredited by the following organizations:

China National Accreditation Service for Conformity Assessment (CNAS) accredits the Laboratory for conformance to FCC standards, EMC international standards and EN standards. The Registration Number is CNAS L0579.

The Laboratory is listed in the United States of American Federal Communications Commission (FCC), and the registration number are 806614 (3m anechoic chamber), 446246 (10m anechoic chamber) and 994606 (10m anechoic chamber).

The Laboratory is registered to perform emission tests with Industry Canada (IC), and the registration number is 11177A.

TUV Rhineland accredits the Laboratory for conformance to IEC and EN standards, the registration number is UA 50303686.



2.3. Measurement Uncertainty

Conducted Emission

9kHz~30MHz 3.5dB

Radiated Emission

30MHz~1000MHz 4.5dB

1GHz~18GHz 4.6dB



3. PRODUCT DESCRIPTION

3.1. EUT Description

- Description : Mutisensor
- Manufacturer : SHEENWAY ASIA LTD.
- Model Number : ZW6302, ZW6302A, ZW6302B, ZW6302C
- Rated Input : DC 3V, CR123A battery*2 or USB power DC 5V, 500mA
- Power supply : DC 3V, CR123A battery*2 or USB power DC 5V, 500mA
- Operate Frequency : 908.4MHz, 916MHz
- Modulation : 908.4MHz: FSK, 916MHz: GFSK
- Antenna Designation : Integrated

Models ZW6302, ZW6302A, ZW6302B, ZW6302C basically have the same circuitry theory. The mechanical components, structure, electrical and RF chip are same as each other. The difference is just elimination part of function. The difference is shown as below.

Model:	Function
ZW6302	Motion Sensor
ZW6302A	Motion Sensor, Temperature Sensor
ZW6302B	Motion Sensor, Temperature Sensor, Light Sensor
ZW6302C	Motion Sensor, Temperature Sensor, Light Sensor, Humidity Sensor


Pre-scan is performed on all models, and ZW6302B is worst-case. Therefore the final tests were performed on ZW6302B only.



3.2. Block Diagram of EUT Configuration



Test Setup 1 (power by AC adaptor)



Test Setup 2 (power by battery)

3.3. Operating Condition of EUT

Mode 1: Transmitting at 908.4MHz

Mode 2: Transmitting at 916MHz

Mode 3: ON, Receiving

3.4. Special Accessories

Not available for this EUT intended for grant.

3.5. Equipment Modifications

Not available for this EUT intended for grant.

3.6. Support Equipment List

Table 2 Support Equipment List

Name	Model No	S/N	Manufacturer
AC adaptor	A75A-500550-US	--	ALCATEL



3.7. Test Conditions

Date of test: Jul.19, 2016 - Aug.03, 2016

Date of EUT Receive: Jul.19, 2016

Temperature: (23-24) °C

Relative Humidity: (42-51)%



4. TEST EQUIPMENT USED

Table 3 Test Equipment

No.	Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
SB3319	Test Receiver	Rohde & Schwarz	ESCS30	Dec.11, 2015	1 Year
SB3321	AMN	Rohde & Schwarz	ESH2-Z5	Jan.07, 2016	1 Year
SB8501/09	EMI Test Receiver	Rohde & Schwarz	ESU40	Mar.23, 2016	1 Year
SB3955	Broadband antenna	SCHWARZBECK	VULB9163	Jan.07, 2016	1 Year
SB8501/01	Horn Antenna	Rohde & Schwarz	HF907	Mar.21, 2016	1 Year
SB8501/17	Preamplifier	Rohde & Schwarz	SCU-18	Mar.21, 2016	1 Year



5. CONDUCTED DISTURBANCE TEST

5.1. Test Standard and Limit

5.1.1. Test Standard

FCC Part 15 15.207

5.1.2. Test Limit

Table 4 Conducted Disturbance Test Limit (Class B)

Frequency	Maximum RF Line Voltage (dB μ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

*Decreasing linearly with logarithm of the frequency

*The lower limit shall apply at the transition frequency.

5.2. Test Procedure

The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through an Artificial Mains Network (A.M.N.). AN EMI test receiver is used to test the emissions from both sides of AC line. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode.

The bandwidth of EMI test receiver is set at 9 kHz.

5.3. Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.



5.4. Test Data

The emissions don't show in below are too low against the limits. Refer to the test curves.

Test mode 1: Transmitting at 908.4MHz (worst-case)


Table 5 Conducted Disturbance Test Data

Model No.: ZW6302B							
Test mode: 1							
Line							
Frequency MHz	QP		AV		QP	AV	Factor (dB)
	Level (dBuV)	Limit (dBuV)	Level (dBuV)	Limit (dBuV)	Reading (dBuV)	Reading (dBuV)	
0.150	33.0	66	10.9	56	23.3	1.2	9.7
0.230	26.2	62.4	18.6	52.4	16.5	8.9	9.7
0.302	19.9	60.2	12.5	50.2	10.2	2.8	9.7
0.370	20.2	58.5	11.4	48.5	10.5	1.7	9.7
2.778	18.1	56	6.4	46	8.2	-3.5	9.9
4.568	20.4	56	13.6	46	10.5	3.7	9.9
Neutral							
Frequency MHz	QP		AV		QP	AV	Factor (dB)
	Level (dBuV)	Limit (dBuV)	Level (dBuV)	Limit (dBuV)	Reading (dBuV)	Reading (dBuV)	
0.150	33.0	66	11.8	56	23.3	2.1	9.7
0.230	26.4	62.4	17.9	52.4	16.7	8.2	9.7
0.370	23.3	58.5	15.1	48.5	13.6	5.4	9.7
2.506	16.8	56	4.6	46	6.9	-5.3	9.9
2.882	16.8	56	4.1	46	6.9	-5.8	9.9
4.232	17.4	56	7.1	46	7.5	-2.8	9.9


- REMARKS: 1. Emission level(dBuV)=Read Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB) =LISN Factor (dB) + Cable Factor (dB)+Limiter Factor(dB)
 3. The other emission levels were very low against the limit.



Line

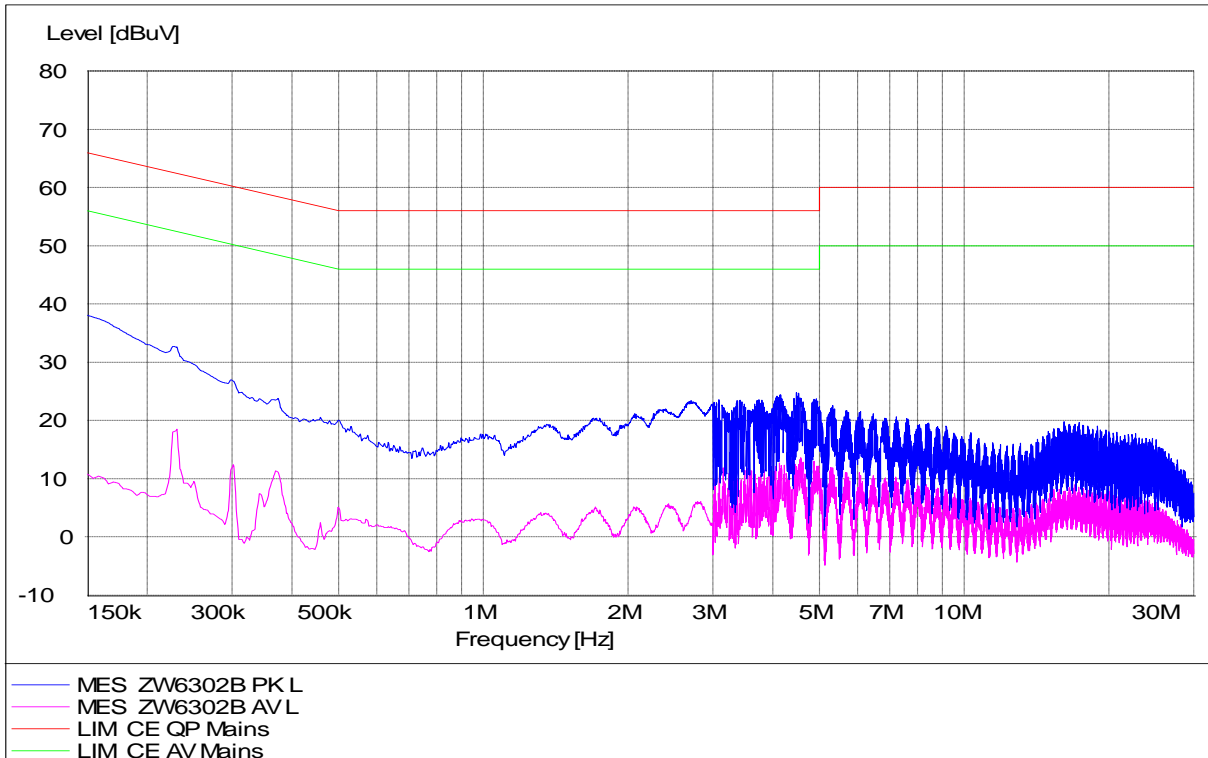

Neutral

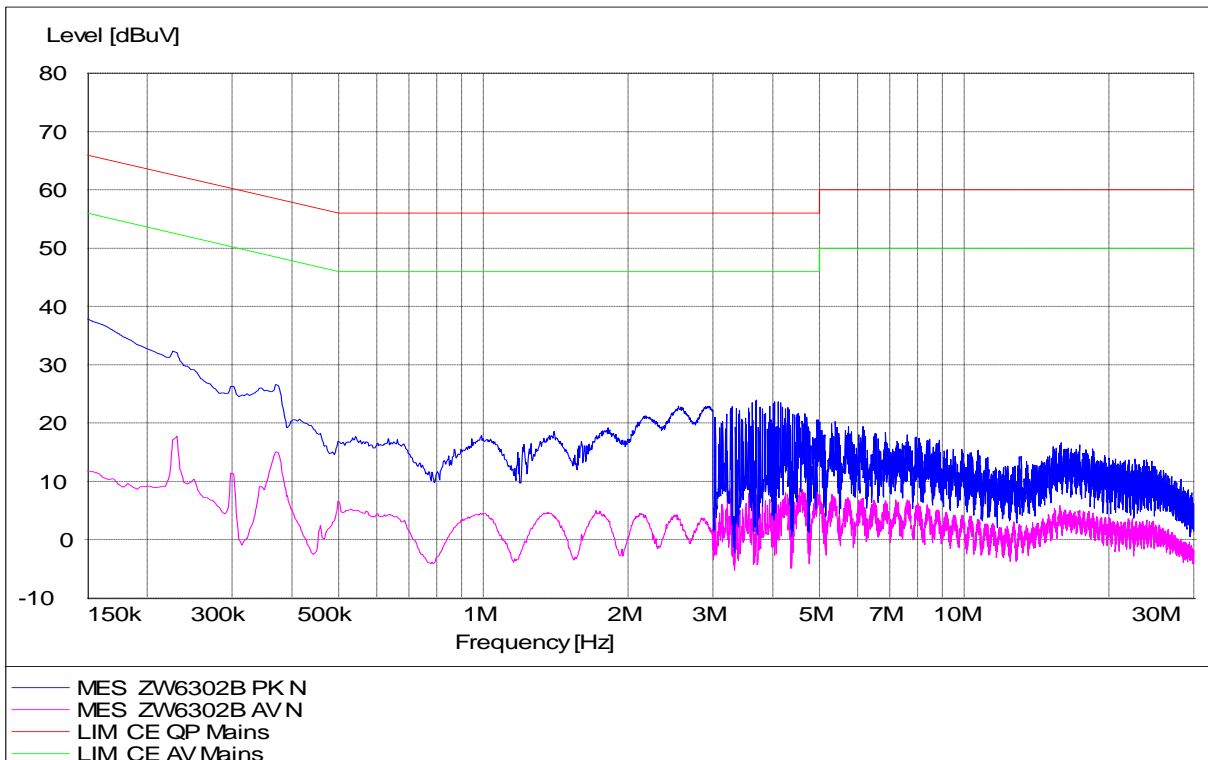



6. RADIATED DISTURBANCE TEST

6.1. Test Standard and Limit

6.1.1. Test Standard

FCC Part 15 15.249

6.1.2. Test Limit

Table 6 Radiated Disturbance Test Limit (Class B)

FREQUENCY MHz	FIELD STRENGTHS LIMITS (μ V/m)	FIELD STRENGTHS LIMITS dB (μ V/m)
Fundamental	50000	94.0
Harmonics	500	54.0
30 ~ 88	100	40.0
88 ~ 216	150	43.5
216 ~ 960	200	46.0
960 ~	500	54.0

* The lower limit shall apply at the transition frequency.

* The test distance is 3m.

6.2. Test Procedure

Radiated emission test below 1 GHz, test at SAC, the EUT is placed on a turntable, which is 0.8 meter above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can move up and down to find out the maximum emission level. Radiated emission test above 1 GHz, test at FAR, the EUT is placed on a non-conductive table, which is 1.5 meter above ground. Broadband antenna is used as a receiving antenna at frequency range 30MHz to 1000MHz, Horn antenna is used as a receiving antenna at frequency range above 1GHz. Both horizontal and vertical polarization of the antenna is set on test, in order to find out the max emission, the relative positions of this EUT was rotated through three orthogonal axes.

The RBW of the EMI test receiver is:

30~1000MHz	120KHz
1-18GHz	1MHz

6.3. Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture. The EUT shall be measured in the XYZ three positions, and the test data which was shown in the follow was the worst case.



6.4. Test Data

Table 7 Radiated Disturbance Test Data

Model No.: ZW6302B								
Test mode: 1, Power by AC adaptor								
Frequency (MHz)	Polarization	Correction Factor (dB)	Antenna Factor (dB/m)	Reading Value (dB μ V)	Emission Level dB (μ V/m)	Limits dB (μ V/m)	EUT axes	Note
31.663	Vertical	0.6	12.3	-1.0	11.9	40.0	X	QP
37.319	Vertical	0.6	12.3	1.7	14.6	40.0	X	QP
45.606	Vertical	0.8	13.6	-0.6	13.8	40.0	X	QP
102.137	Vertical	1.1	13.2	-1.7	12.6	43.5	X	QP
908.400	Vertical	3.9	21.1	45.8	70.8	94	X	Fundamental QP
8175.812	Vertical	-37.7	36.1	54.3	52.7	74	X	Harmonics PK
8175.812	Vertical	-37.7	36.1	45.1	43.5	54	X	Harmonics AV
9085.122	Vertical	-36.3	36.8	52.0	52.5	74	X	Harmonics PK
9085.122	Vertical	-36.3	36.8	41.1	41.6	54	X	Harmonics AV
9993.000	Vertical	-34.4	37.0	53.1	55.7	74	X	Harmonics PK
9993.000	Vertical	-34.4	37.0	42.6	45.2	54	X	Harmonics AV
37.225	Horizontal	0.6	12.3	-2.3	10.6	40.0	X	QP
45.239	Horizontal	0.8	13.6	-2.9	11.5	40.0	X	QP
58.994	Horizontal	0.9	13.0	-2.6	11.3	40.0	X	QP
99.842	Horizontal	1.1	12.8	-1.3	12.6	43.5	X	QP
908.400	Horizontal	3.9	21.1	43.5	68.5	94	X	Fundamental QP
6301.097	Horizontal	-35.7	34.7	50.3	49.3	74	X	PK
6301.097	Horizontal	-35.7	34.7	36.4	35.4	54	X	AV
8175.779	Horizontal	-37.7	36.1	53.5	51.9	74	X	Harmonics PK
8175.779	Horizontal	-37.7	36.1	43.0	41.4	54	X	Harmonics AV
9992.470	Horizontal	-34.4	37.0	54.1	56.7	74	X	Harmonics PK
9992.470	Horizontal	-34.4	37.0	40.8	43.4	54	X	Harmonics AV



Table 8 Radiated Disturbance Test Data

Model No.: ZW6302B								
Test mode: 2, Power by AC adaptor								
Frequency (MHz)	Polarization	Correction Factor (dB)	Antenna Factor (dB/m)	Reading Value (dB μ V)	Emission Level dB (μ V/m)	Limits dB (μ V/m)	EUT axes	Note
37.892	Horizontal	0.7	12.3	-2.5	10.5	40.0	X	QP
51.209	Horizontal	0.8	13.3	-2.7	11.4	40.0	X	QP
59.419	Horizontal	0.9	13.0	-2.8	11.1	40.0	X	QP
103.069	Horizontal	1.2	13.2	-1.6	12.8	43.5	X	QP
916.000	Horizontal	3.9	21.1	47.5	72.5	94	X	Fundamental QP
1746.120	Horizontal	-40.5	26.7	57.6	43.8	74	X	PK
1746.120	Horizontal	-40.5	26.7	43.9	30.1	54	X	AV
8244.423	Horizontal	-37.6	36.5	54.5	53.4	74	X	Harmonics PK
8244.423	Horizontal	-37.6	36.5	40.8	39.7	54	X	Harmonics AV
9160.000	Horizontal	-36.2	36.8	54.3	54.9	74	X	Harmonics PK
9160.000	Horizontal	-36.2	36.8	42.3	42.9	54	X	Harmonics AV
30.090	Vertical	0.6	12.3	0.1	13.0	40.0	X	QP
39.045	Vertical	0.7	12.3	1.7	14.7	40.0	X	QP
45.365	Vertical	0.8	13.6	-1.2	13.2	43.5	X	QP
102.794	Vertical	1.1	13.2	-1.4	12.9	43.5	X	QP
916.000	Vertical	3.9	21.1	48.0	73.0	94	X	Fundamental QP
4364.315	Vertical	-39.4	33.6	53.6	47.8	74	X	PK
4364.315	Vertical	-39.4	33.6	39.4	33.6	54	X	AV
6412.512	Vertical	-34.5	34.8	52.4	52.7	74	X	Harmonics PK
6412.512	Vertical	-34.5	34.8	34.9	35.2	54	X	Harmonics AV
8244.416	Vertical	-37.6	36.5	55.3	54.2	74	X	Harmonics PK
8244.416	Vertical	-37.6	36.5	42.6	41.5	54	X	Harmonics AV



Table 9 Radiated Disturbance Test Data

Model No.: ZW6302B								
Test mode: 3, Power by AC adaptor								
Frequency (MHz)	Polarization	Correction Factor (dB)	Antenna Factor (dB/m)	Reading Value (dB μ V)	Emission Level dB (μ V/m)	Limits dB (μ V/m)	EUT axes	Note
40.845	Horizontal	0.7	13.6	-2.8	11.5	40.0	X	QP
56.108	Horizontal	0.9	13.0	-2.2	11.7	40.0	X	QP
102.917	Horizontal	1.2	13.2	-1.3	13.1	43.5	X	QP
107.466	Horizontal	1.2	13.2	-1.9	12.5	43.5	X	QP
182.897	Horizontal	1.6	9.7	-0.4	10.9	43.5	X	QP
1806.061	Horizontal	-40.5	26.9	52.3	38.7	74	X	PK
1806.061	Horizontal	-40.5	26.9	38.0	24.4	54	X	AV
3566.317	Horizontal	-38.9	31.5	50.6	43.2	74	X	PK
3566.000	Horizontal	-38.9	31.5	37.0	29.6	54	X	AV
5375.816	Horizontal	-38.5	33.9	52.3	47.7	74	X	PK
5375.816	Horizontal	-38.5	33.9	38.3	33.7	54	X	AV
30.040	Vertical	0.6	12.3	0.3	13.2	40.0	X	QP
39.045	Vertical	0.7	12.3	1.4	14.4	40.0	X	QP
45.235	Vertical	0.8	13.6	-0.8	13.6	40.0	X	QP
54.420	Vertical	0.8	13.3	-2.5	11.6	40.0	X	QP
102.948	Vertical	1.2	13.2	-1.4	13.0	43.5	X	QP
1884.471	Vertical	-40.5	26.9	52.5	38.9	74	X	PK
1884.471	Vertical	-40.5	26.9	38.6	25.0	54	X	AV
3048.312	Vertical	-39.3	30.4	51.5	42.6	74	X	PK
3048.312	Vertical	-39.3	30.4	37.6	28.7	54	X	AV
5468.931	Vertical	-38.4	34.3	52.2	48.1	74	X	PK
5468.931	Vertical	-38.4	34.3	38.4	34.3	54	X	AV



Table 10 Radiated Disturbance Test Data

Model No.: ZW6302B								
Test mode: 1, Power by Battery								
Frequency (MHz)	Polarization	Correction Factor (dB)	Antenna Factor (dB/m)	Reading Value (dB μ V)	Emission Level dB (μ V/m)	Limits dB (μ V/m)	EUT axes	Note
39.912	Horizontal	0.6	12.3	-1.7	11.2	40.0	X	QP
51.219	Horizontal	0.8	13.3	-2.7	11.4	40.0	X	QP
58.978	Horizontal	0.9	13.0	-2.6	11.3	40.0	X	QP
102.644	Horizontal	1.1	13.2	-1.4	12.9	43.5	X	QP
908.400	Horizontal	3.9	21.1	43.9	68.9	94	X	Fundamental QP
1812.180	Horizontal	-40.4	26.9	57.3	43.8	74	X	Harmonics PK
1812.180	Horizontal	-40.4	26.9	46.0	32.5	54	X	Harmonics AV
5286.200	Horizontal	-38.9	33.9	55.2	50.2	74	X	PK
5286.200	Horizontal	-38.9	33.9	40.3	35.3	54	X	AV
9084.400	Horizontal	-36.3	36.8	53.3	53.8	74	X	Harmonics PK
9084.400	Horizontal	-36.3	36.8	42.1	42.6	54	X	Harmonics AV
48.678	Vertical	0.8	13.6	-3.0	11.4	40.0	X	QP
62.107	Vertical	0.9	12.7	-3.1	10.5	40.0	X	QP
103.916	Vertical	1.3	13.2	-1.6	12.9	43.5	X	QP
194.087	Vertical	1.7	10.6	-0.6	11.7	43.5	X	QP
908.400	Vertical	3.9	21.1	47.9	72.9	94	X	Fundamental QP
2645.040	Vertical	-39.9	29.6	52.2	41.9	74	X	PK
2645.040	Vertical	-39.9	29.6	40.8	30.5	54	X	AV
4542.100	Vertical	-39.4	33.7	51.5	45.8	74	X	Harmonics PK
4542.100	Vertical	-39.4	33.7	39.9	34.2	54	X	Harmonics AV
7601.123	Vertical	-37.6	36.0	55.4	53.8	74	X	PK
7601.123	Vertical	-37.6	36.0	40.9	39.3	54	X	AV



Table 11 Radiated Disturbance Test Data

Model No.: ZW6302B								
Test mode: 2, Power by Battery								
Frequency (MHz)	Polarization	Correction Factor (dB)	Antenna Factor (dB/m)	Reading Value (dB μ V)	Emission Level dB (μ V/m)	Limits dB (μ V/m)	EUT axes	Note
45.846	Vertical	0.8	13.6	-2.8	11.6	40.0	X	QP
51.676	Vertical	0.8	13.3	-2.8	11.3	40.0	X	QP
101.682	Vertical	1.1	13.2	-1.5	12.8	43.5	X	QP
185.506	Vertical	1.5	9.7	-0.1	11.1	43.5	X	QP
916.000	Vertical	3.9	21.1	50.0	75.0	94	X	Fundamental QP
2438.220	Vertical	-40.1	28.6	54.3	42.8	74	X	PK
2438.220	Vertical	-40.1	28.6	41.7	30.2	54	X	AV
5549.000	Vertical	-38.3	34.3	55.7	51.7	74	X	PK
5549.000	Vertical	-38.3	34.3	39.8	35.8	54	X	AV
8244.416	Vertical	-37.6	36.5	54.9	53.8	74	X	Harmonics PK
8244.416	Vertical	-37.6	36.5	41.2	40.1	54	X	Harmonics AV
37.279	Horizontal	0.6	12.3	-2.5	10.4	40.0	X	QP
42.618	Horizontal	0.8	13.6	-3.0	11.4	40.0	X	QP
50.974	Horizontal	0.8	13.3	-2.6	11.5	40.0	X	QP
103.109	Horizontal	1.2	13.2	-1.5	12.9	43.5	X	QP
916.000	Horizontal	3.9	21.1	45.8	70.8	94	X	Fundamental QP
2748.000	Horizontal	-39.8	29.6	50.9	40.7	74	X	Harmonics PK
2748.000	Horizontal	-39.8	29.6	40.4	30.2	54	X	Harmonics AV
3987.000	Horizontal	-39.1	32.7	53.6	47.2	74	X	PK
3987.000	Horizontal	-39.1	32.7	38.7	32.3	54	X	AV
9160.000	Horizontal	-36.2	36.8	55.8	56.4	74	X	Harmonics PK
9160.000	Horizontal	-36.2	36.8	44.6	45.2	54	X	Harmonics AV



Table 12 Radiated Disturbance Test Data

Model No.: ZW6302B								
Test mode: 3, Power by Battery								
Frequency (MHz)	Polarization	Correction Factor (dB)	Antenna Factor (dB/m)	Reading Value (dB μ V)	Emission Level dB (μ V/m)	Limits dB (μ V/m)	EUT axes	Note
43.205	Vertical	0.8	13.6	-3.0	11.4	40.0	X	QP
54.824	Vertical	0.8	13.3	-2.7	11.4	40.0	X	QP
91.047	Vertical	1.2	11.9	-1.4	11.7	43.5	X	QP
100.674	Vertical	1.1	13.2	-1.5	12.8	43.5	X	QP
195.109	Vertical	1.6	10.6	-0.5	11.7	43.5	X	QP
1919.645	Vertical	-40.4	26.9	51.7	38.2	74	X	PK
1919.645	Vertical	-40.4	26.9	38.3	24.8	54	X	AV
3366.182	Vertical	-38.8	31.7	50.5	43.4	74	X	PK
3366.182	Vertical	-38.8	31.7	36.5	29.4	54	X	AV
5639.725	Vertical	-38.3	34.4	52.1	48.2	74	X	PK
5639.725	Vertical	-38.3	34.4	38.2	34.3	54	X	AV
46.287	Horizontal	0.8	13.6	-2.8	11.6	40.0	X	QP
60.687	Horizontal	0.9	12.7	-2.4	11.2	40.0	X	QP
93.203	Horizontal	1.1	11.9	-1.1	11.9	43.5	X	QP
104.467	Horizontal	1.3	13.2	-1.7	12.8	43.5	X	QP
198.838	Horizontal	1.6	10.6	-0.4	11.8	43.5	X	QP
1837.562	Horizontal	-40.5	26.9	52.6	39.0	74	X	PK
1837.562	Horizontal	-40.5	26.9	38.6	25.0	54	X	AV
3709.121	Horizontal	-39.0	32.0	51.6	44.6	74	X	PK
3709.121	Horizontal	-39.0	32.0	37.5	30.5	54	X	AV
5580.939	Horizontal	-38.2	34.3	52.6	48.7	74	X	PK
5580.939	Horizontal	-38.2	34.3	38.5	34.6	54	X	AV

- Note: 1. Emission level(dBuV/m)=Reading Value(dBuV) + Correction Factor(dB)+Antenna Factor (dB/m)
 2. Correction Factor(dB) = Cable Factor (dB)+Amplifier Factor(dB)
 3. No other spurious and harmonic emissions were reported greater than listed emissions above table.




Table 13 Restricted Band Radiated Emission Data

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	
6.31175 - 6.31225	123 - 138	2200 - 2300	
8.291 - 8.294	149.9 - 150.05	2310 - 2390	
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	
12.29 - 12.293	167.72 - 173.2	3332 - 3339	
12.51975 -	240 - 285	3345.8 - 3358	
12.52025	322 - 335.4	3600 - 4400	
12.57675 -			
12.57725			
13.36 - 13.41			


All the emission levels of the above band were less than the limit 20dB.



Test mode 1, power by AC adaptor, below 1GHz, Vertical

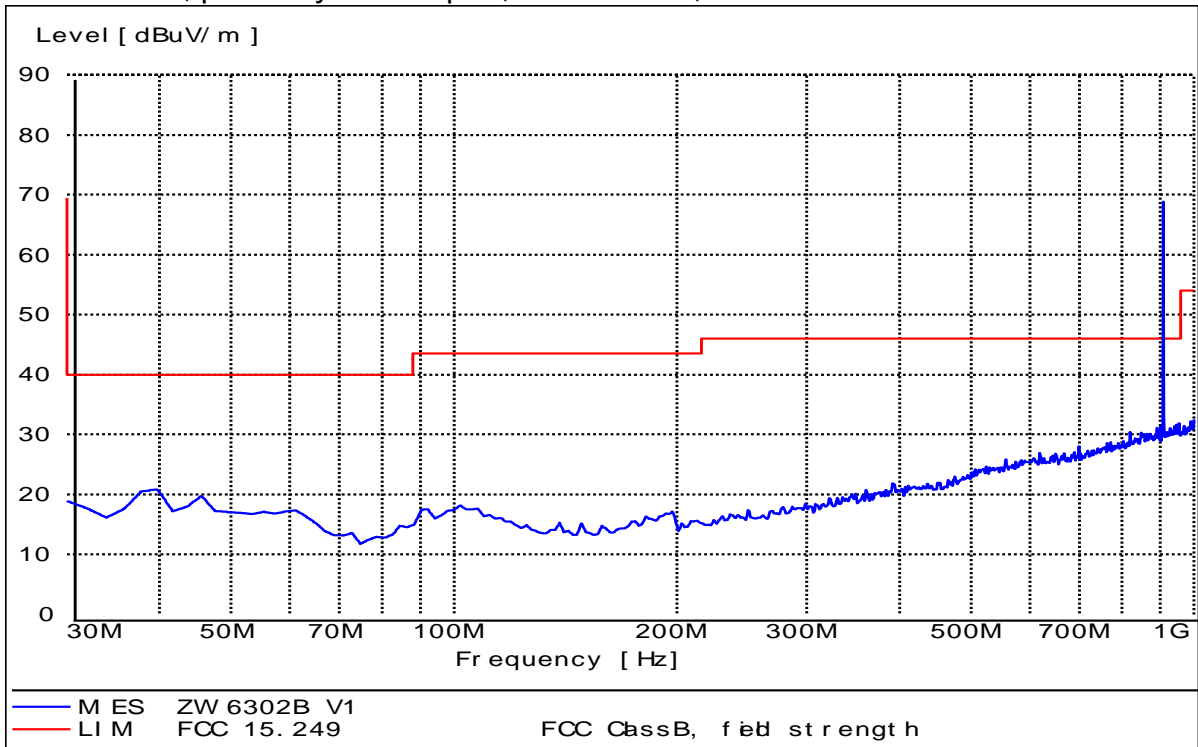


Test mode 1, power by AC adaptor, below 1GHz, Horizontal

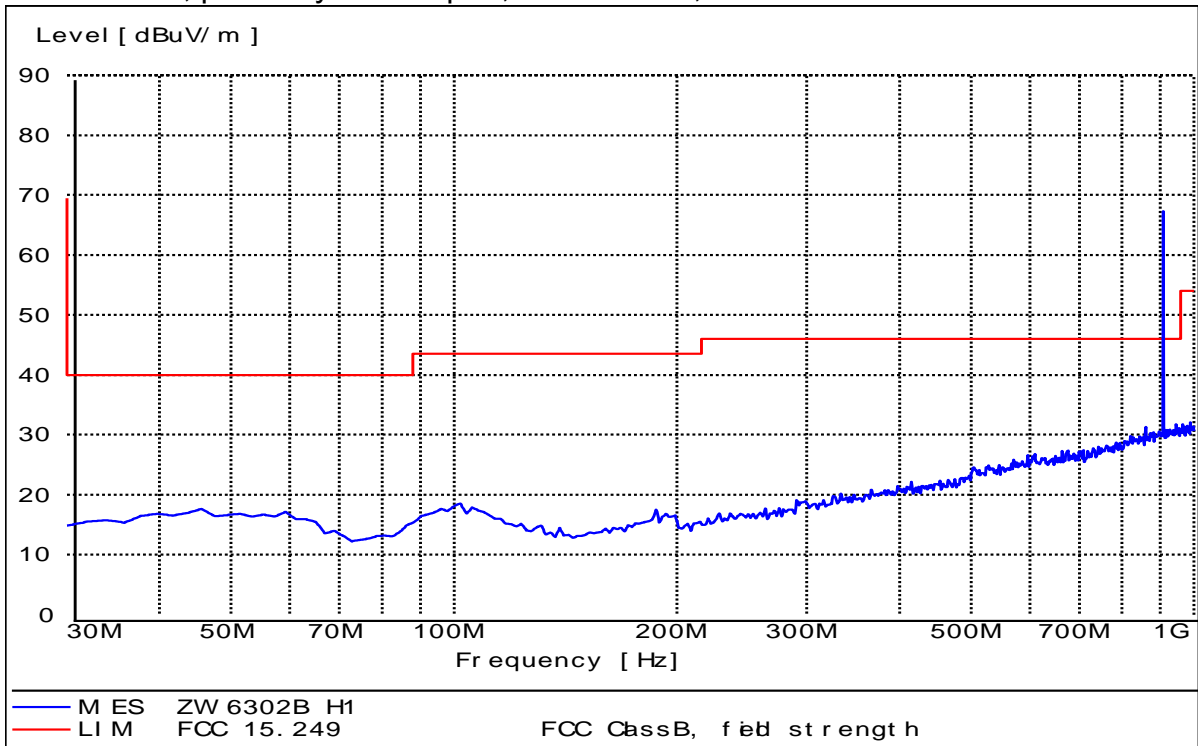




Test mode 1, power by AC adaptor, above 1GHz, Vertical

FCC Electric Field Strength 1-18GHz operate on 900MHz

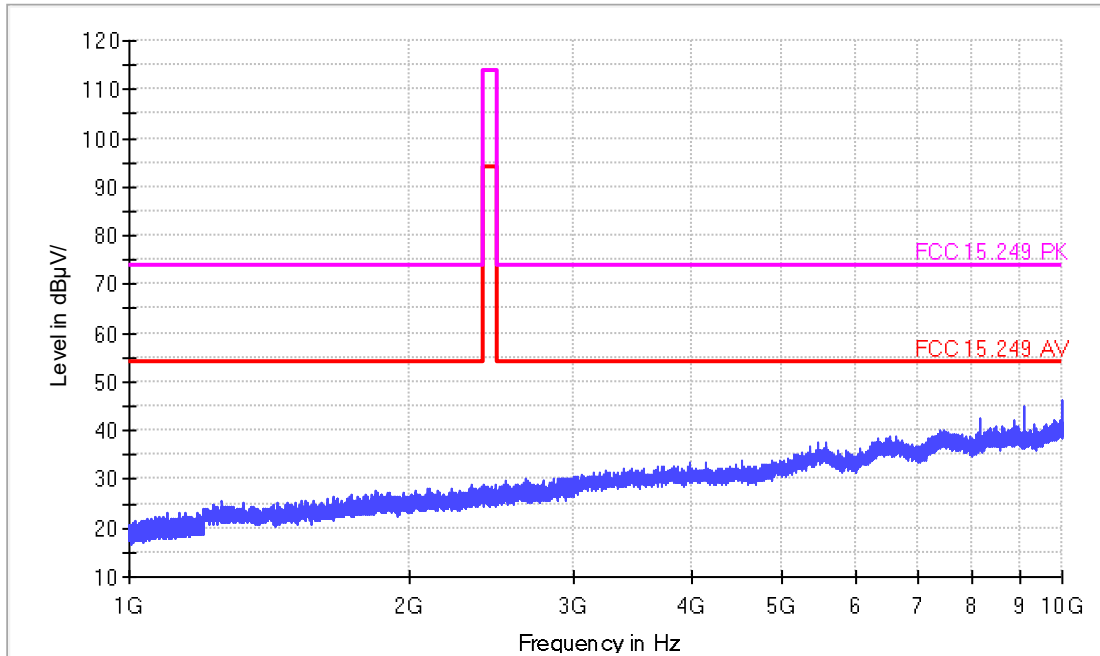


Test mode 1, power by AC adaptor, above 1GHz, Horizontal

FCC Electric Field Strength 1-18GHz operate on 900MHz

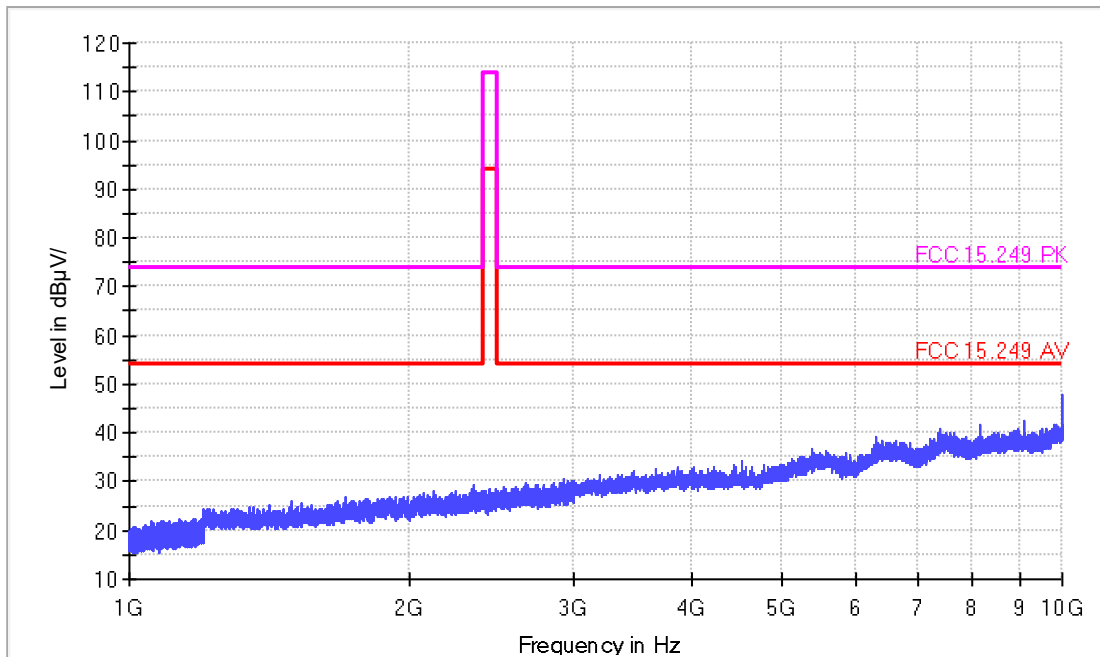




Test mode 2, power by AC adaptor, below 1GHz, Vertical

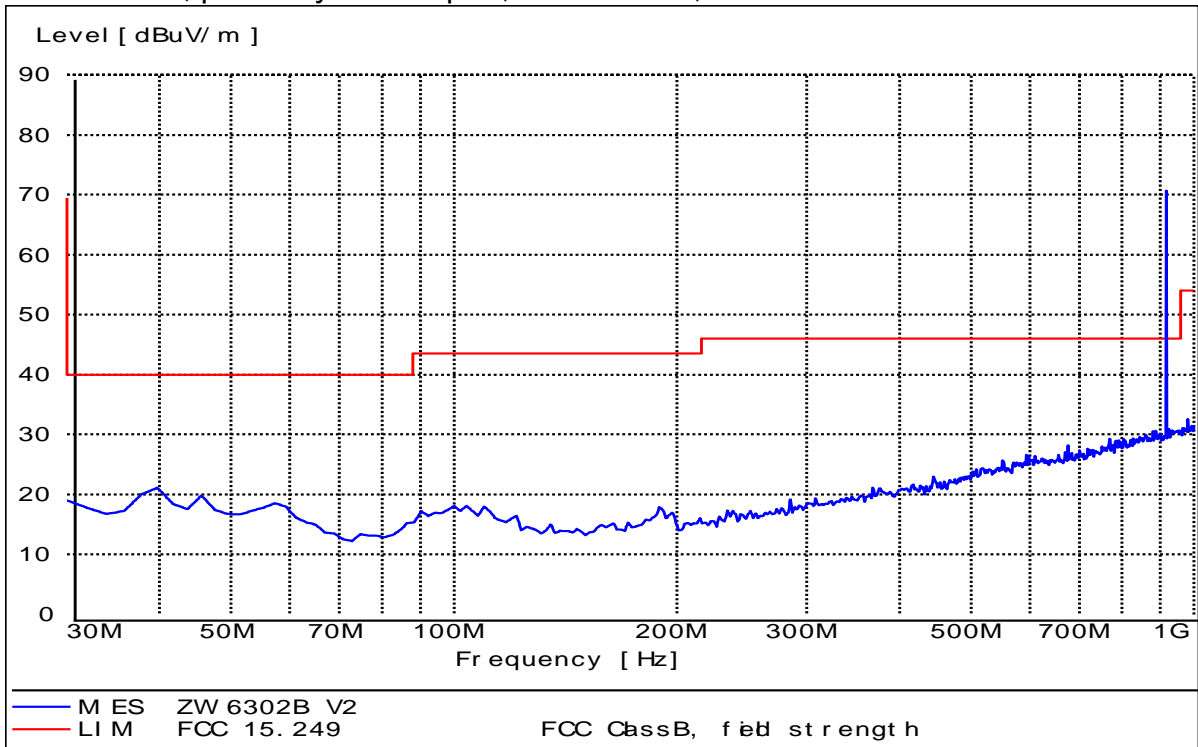


Test mode 2, power by AC adaptor, below 1GHz, Horizontal

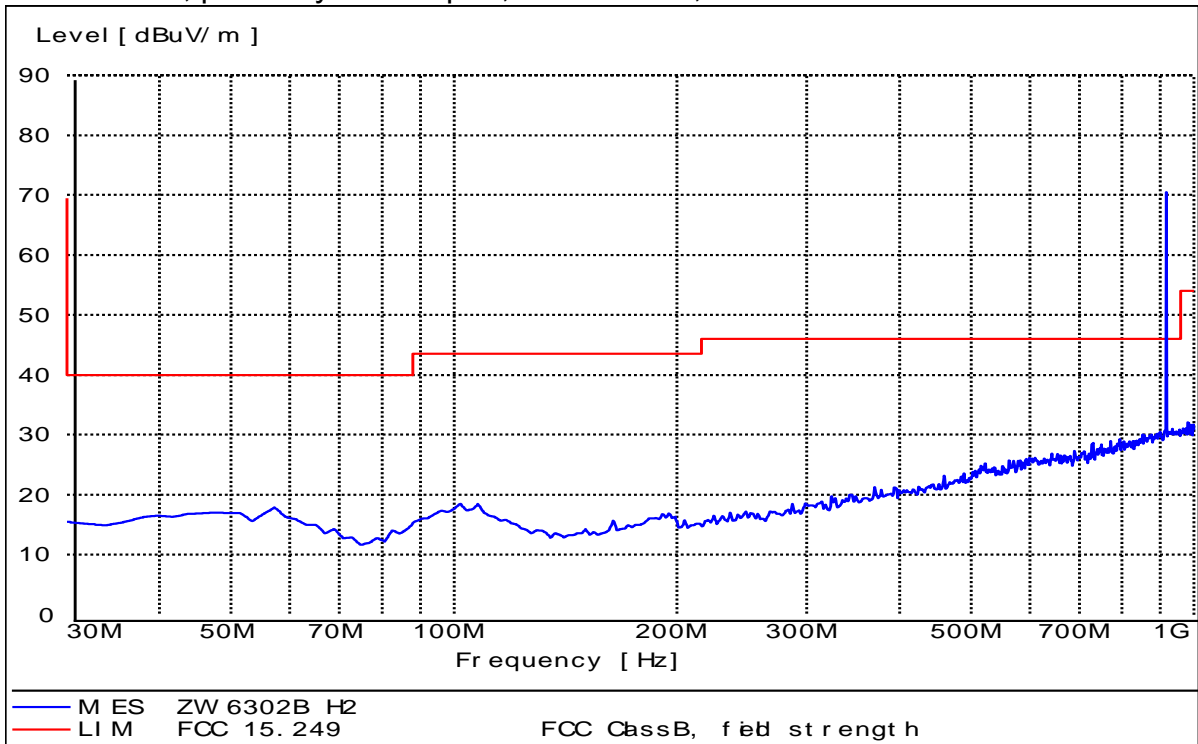




Test mode 2, power by AC adaptor, above 1GHz, Vertical

FCC Electric Field Strength 1-18GHz operate on 900MHz

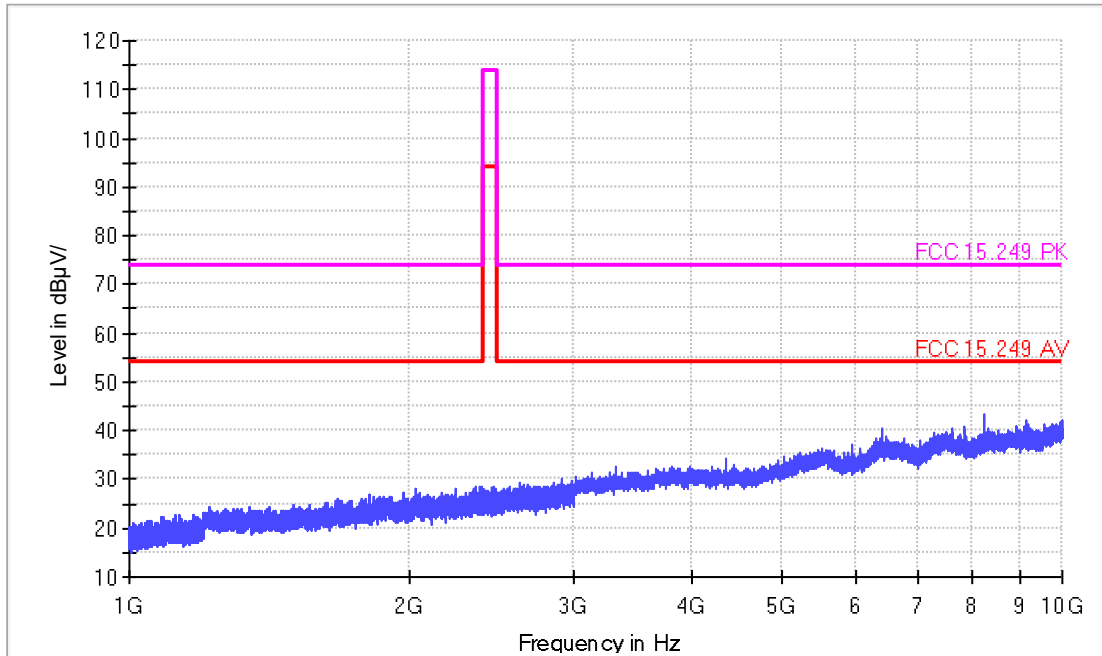


Test mode 2, power by AC adaptor, above 1GHz, Horizontal

FCC Electric Field Strength 1-18GHz operate on 900MHz

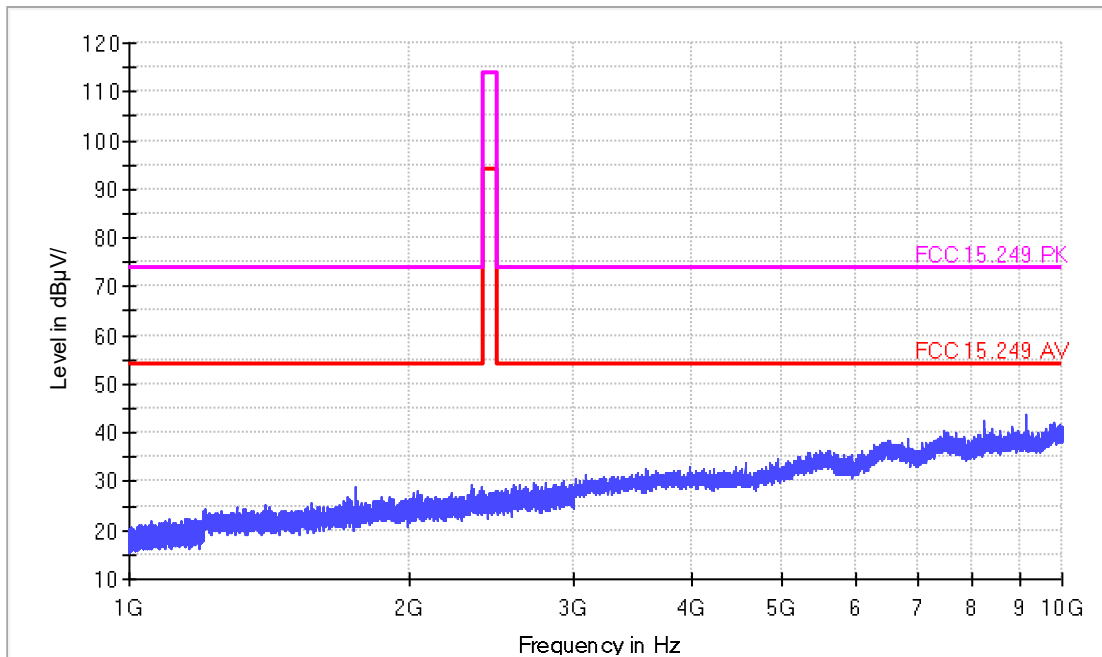




Test mode 3, power by AC adaptor, below 1GHz, Vertical

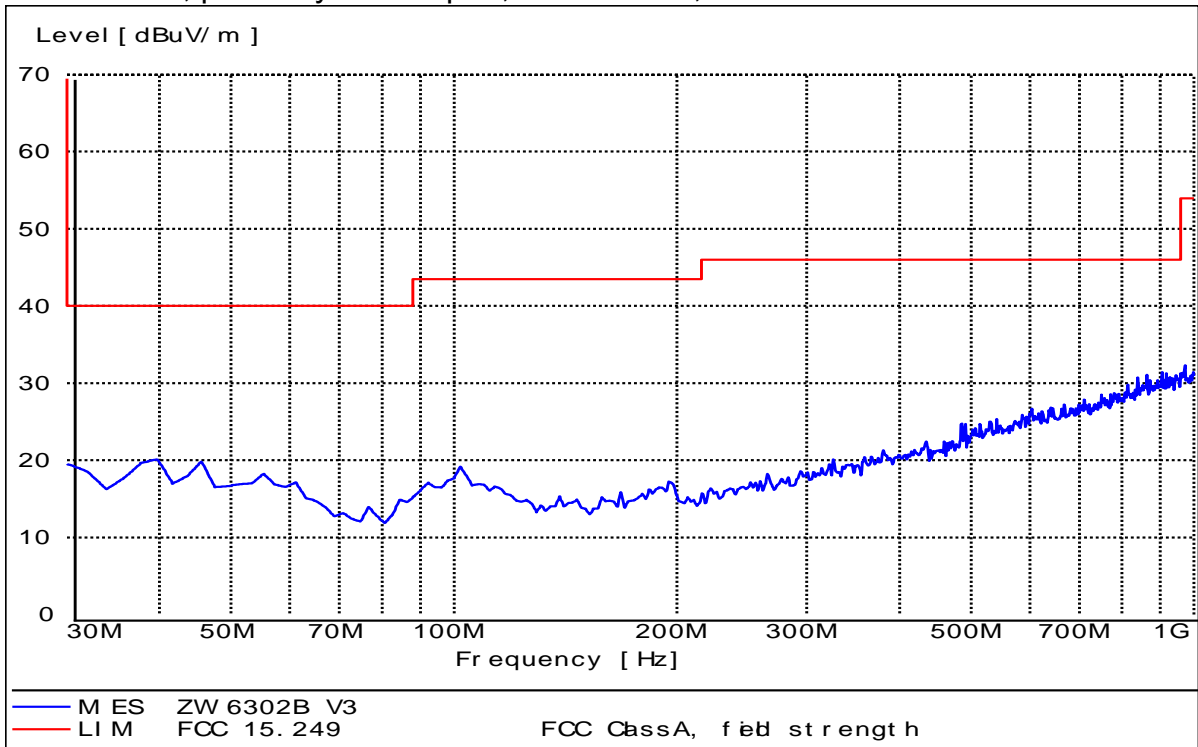


Test mode 3, power by AC adaptor, below 1GHz, Horizontal

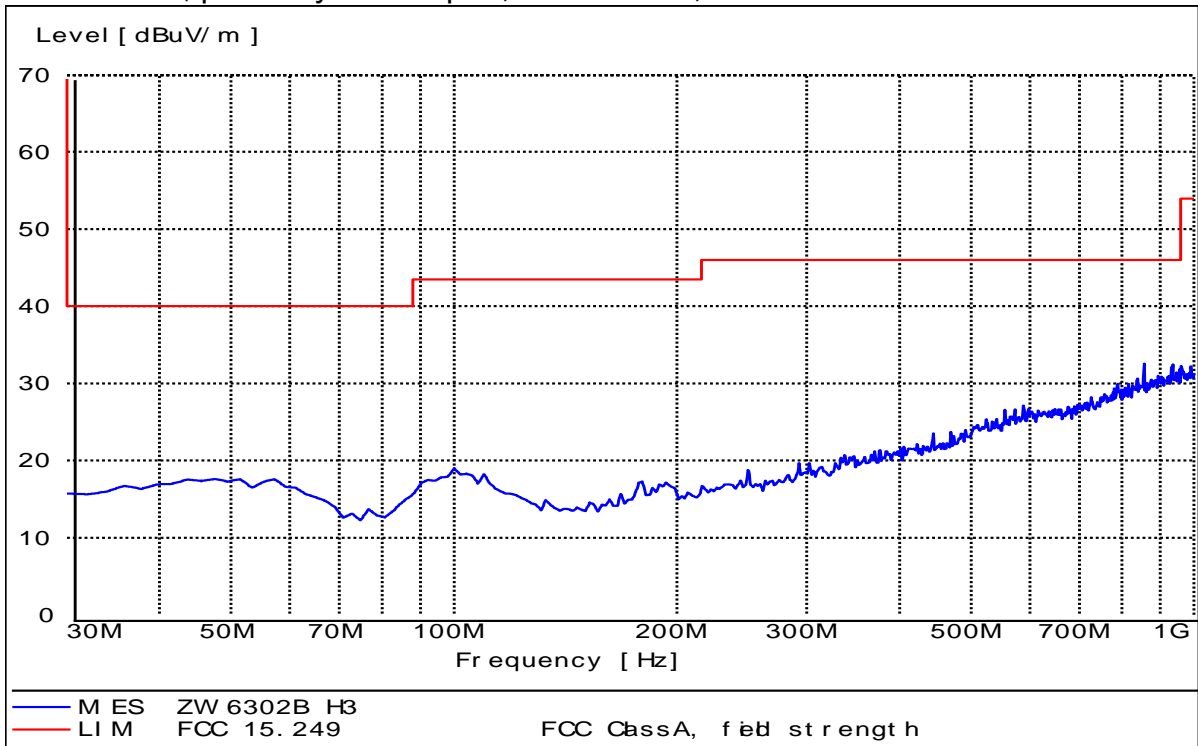




Test mode 3, power by AC adaptor, above 1GHz, Vertical

FCC Electric Field Strength 1-18GHz operate on 900MHz

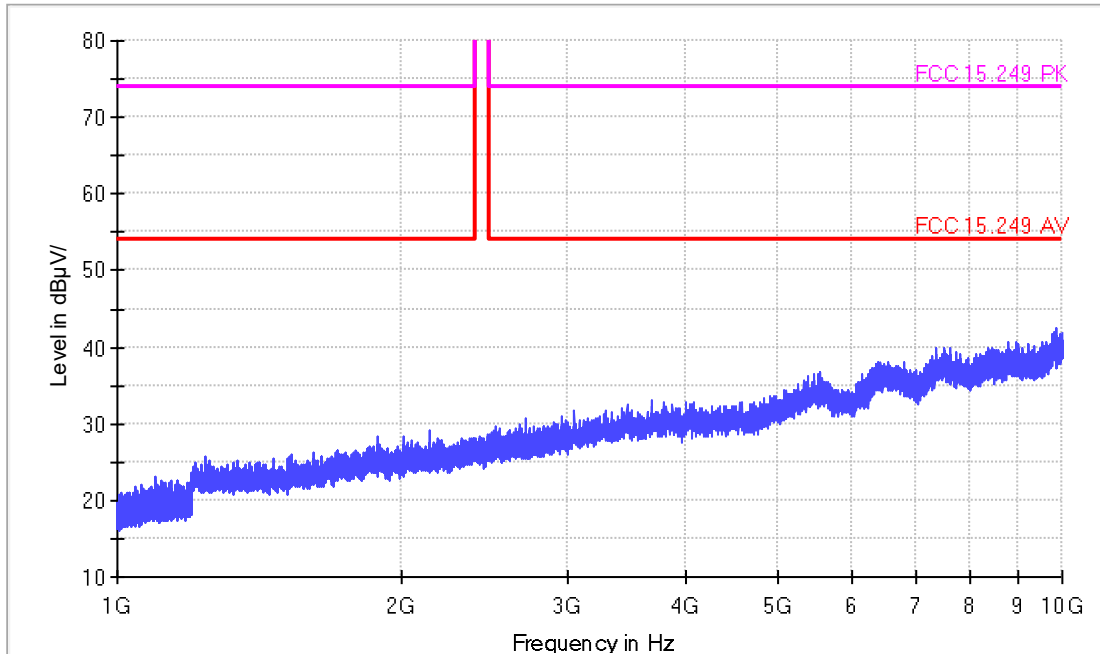


Test mode 3, power by AC adaptor, above 1GHz, Horizontal

FCC Electric Field Strength 1-18GHz operate on 900MHz

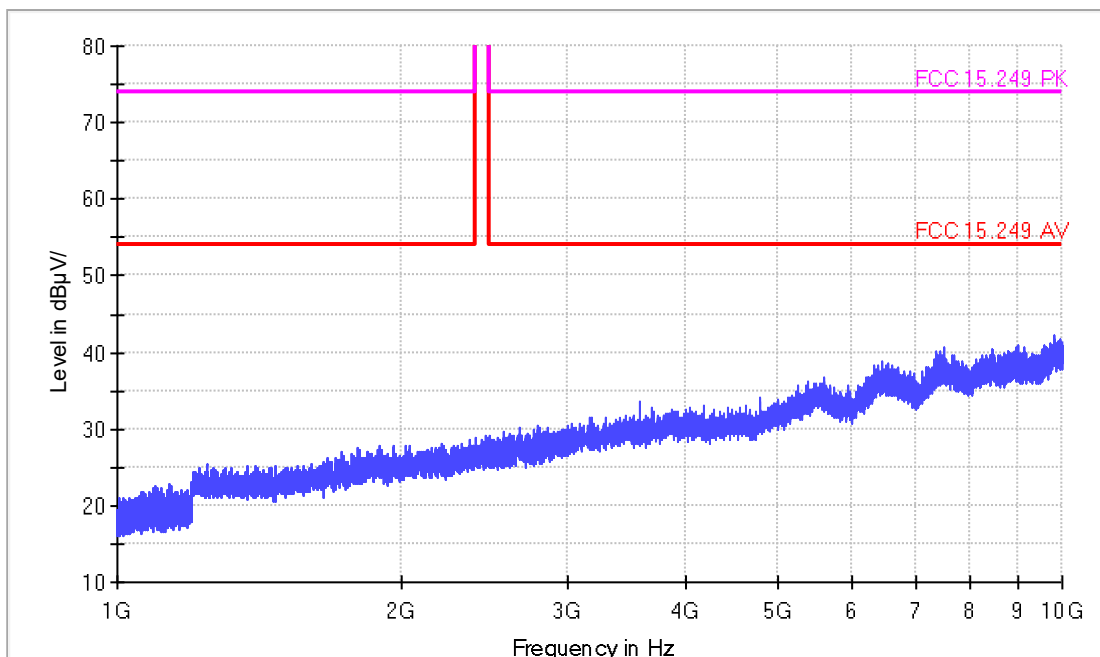




Test mode 1, power by battery, below 1GHz, Vertical

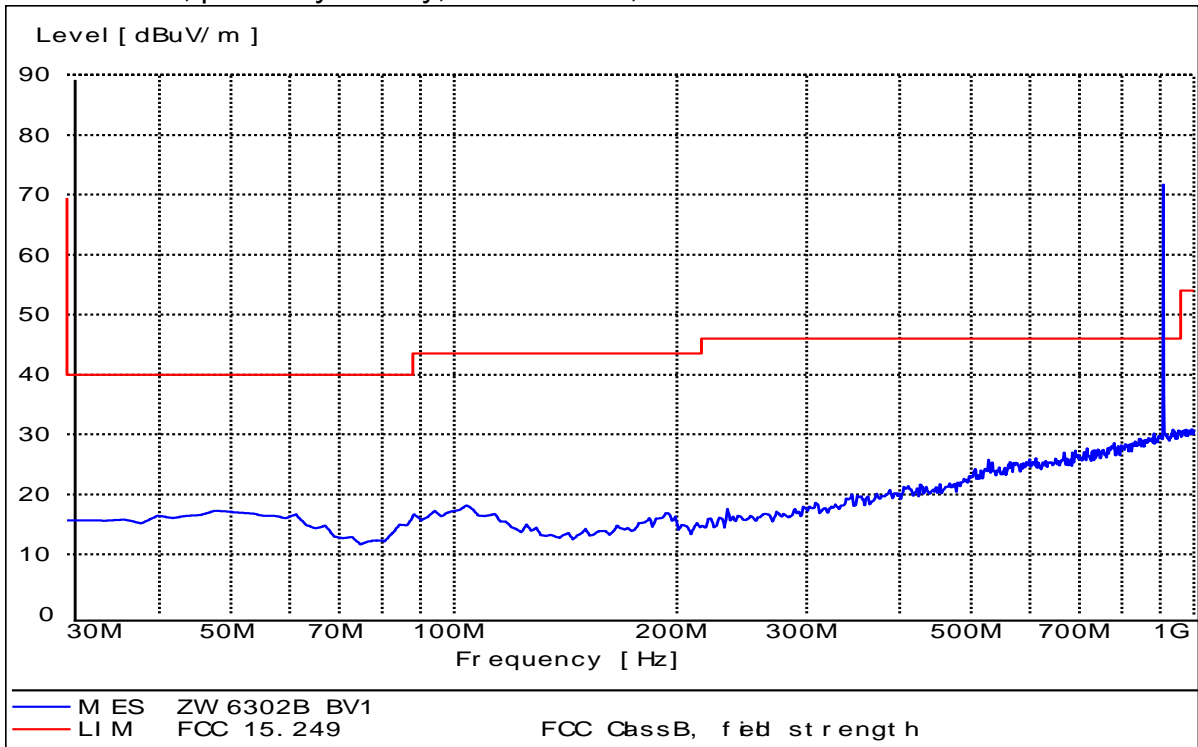


Test mode 1, power by battery, below 1GHz, Horizontal

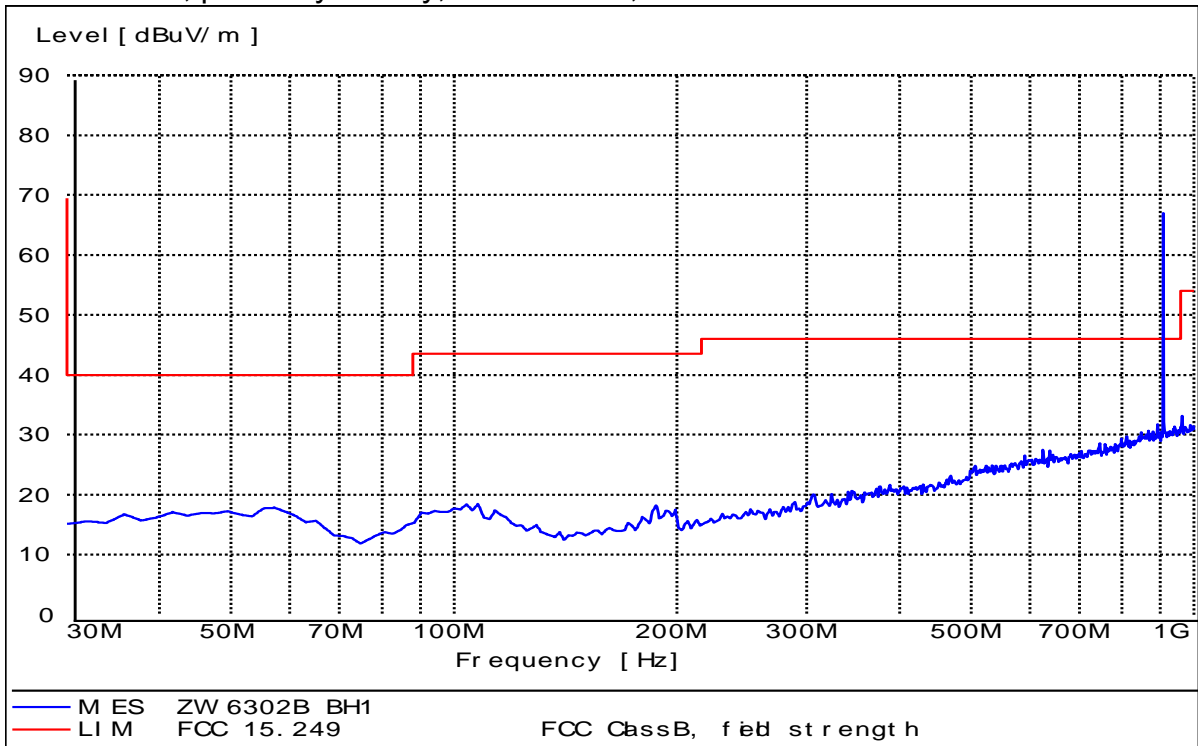




Test mode 1, power by battery, above 1GHz, Vertical

FCC Electric Field Strength 1-18GHz operate on 900MHz

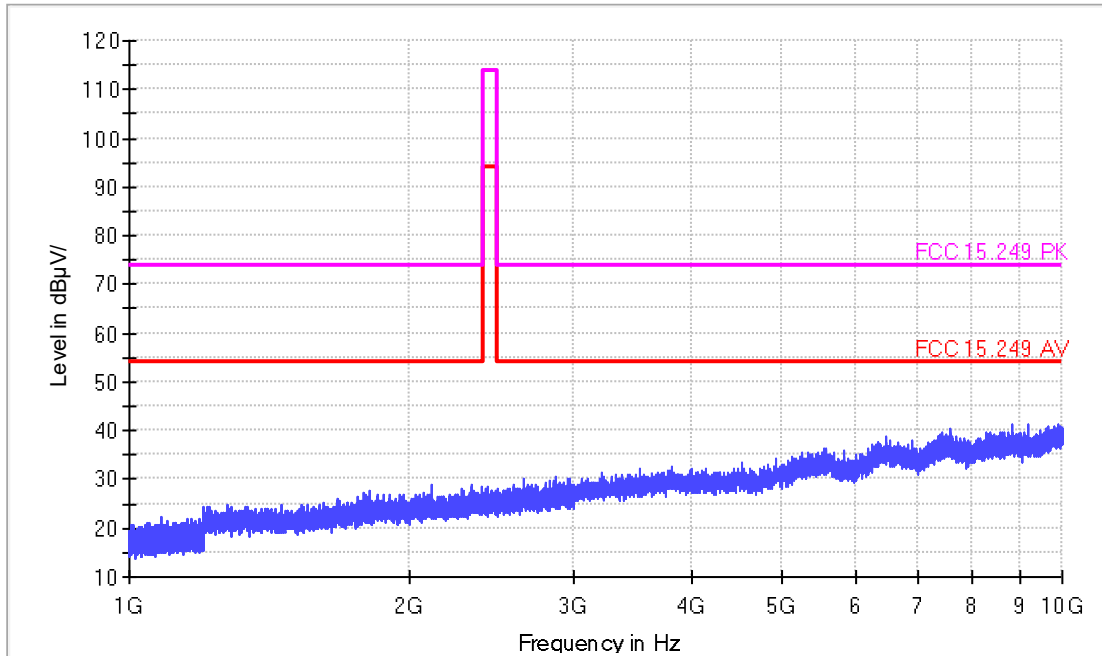


Test mode 1, power by battery, above 1GHz, Horizontal

FCC Electric Field Strength 1-18GHz operate on 900MHz

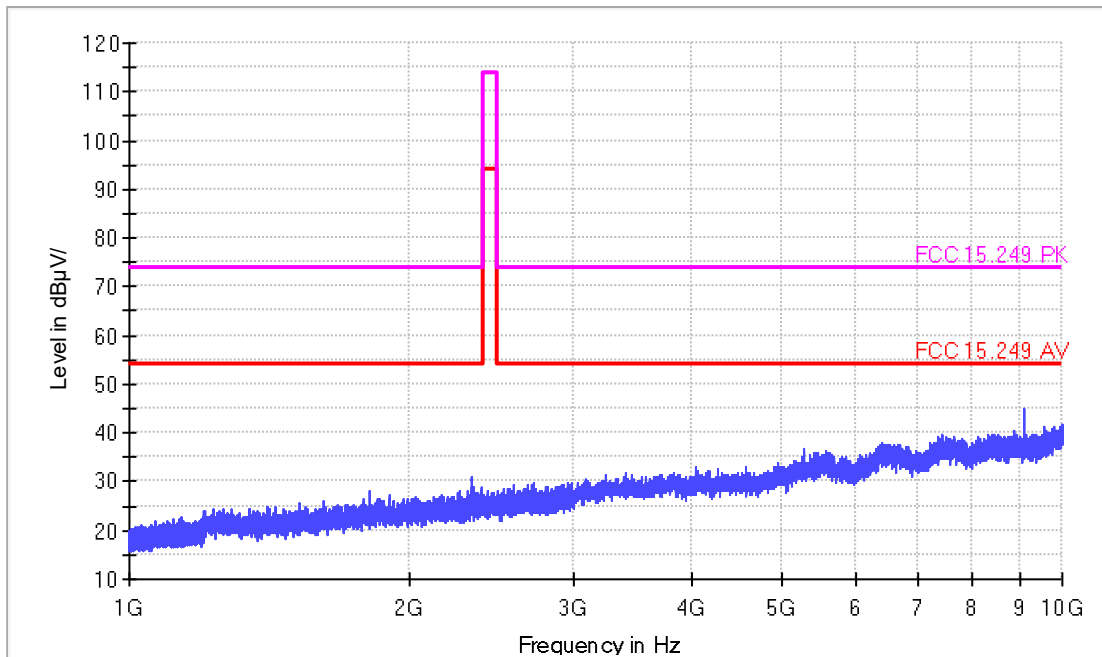




Test mode 2, power by battery, below 1GHz, Vertical

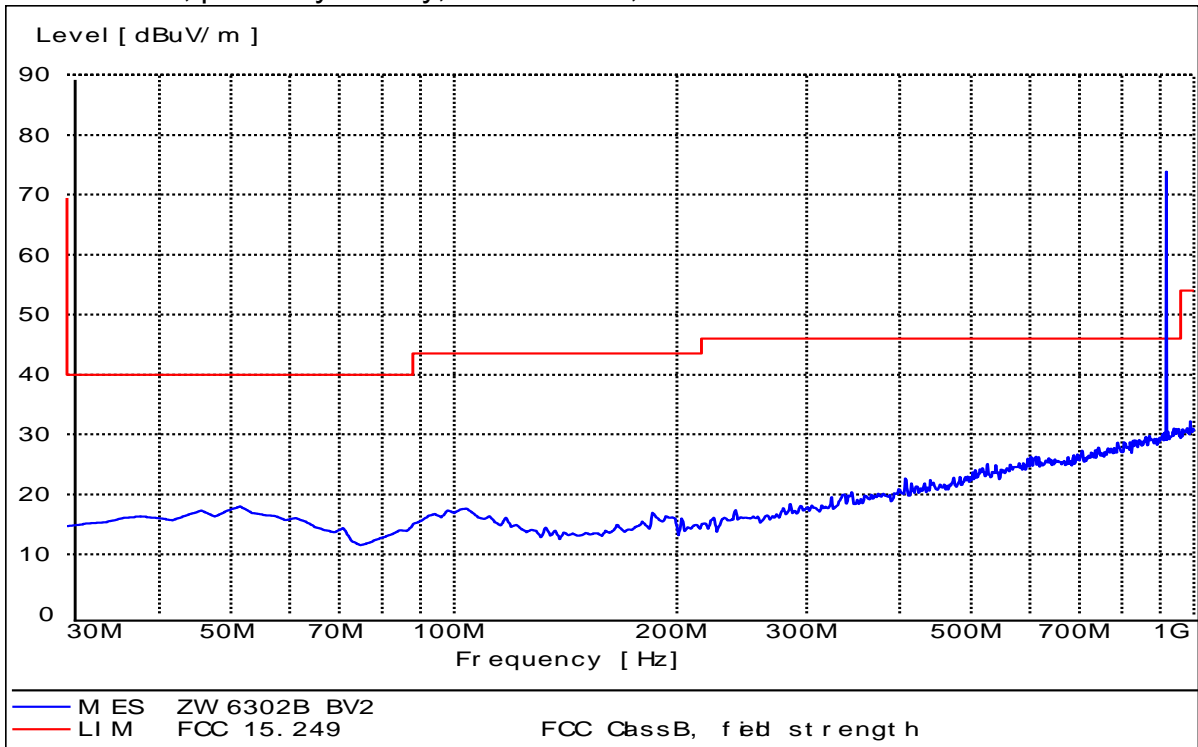


Test mode 2, power by battery, below 1GHz, Horizontal

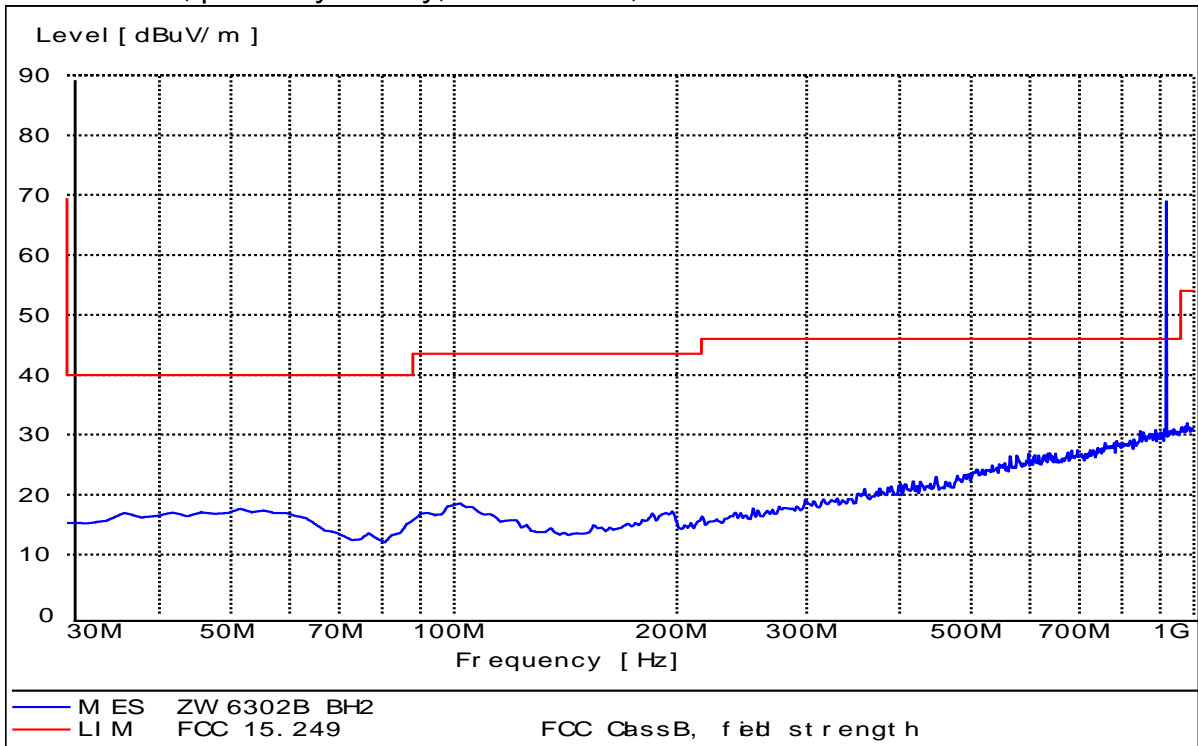




Test mode 2, power by battery, above 1GHz, Vertical

FCC Electric Field Strength 1-18GHz operate on 900MHz

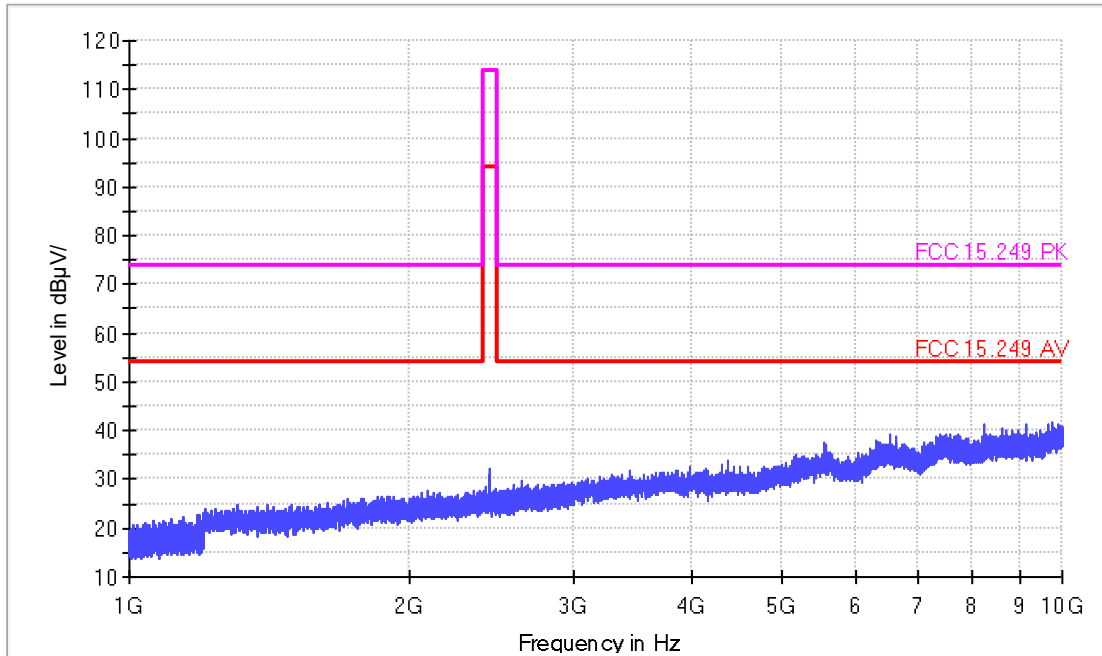


Test mode 2, power by battery, above 1GHz, Horizontal

FCC Electric Field Strength 1-18GHz operate on 900MHz

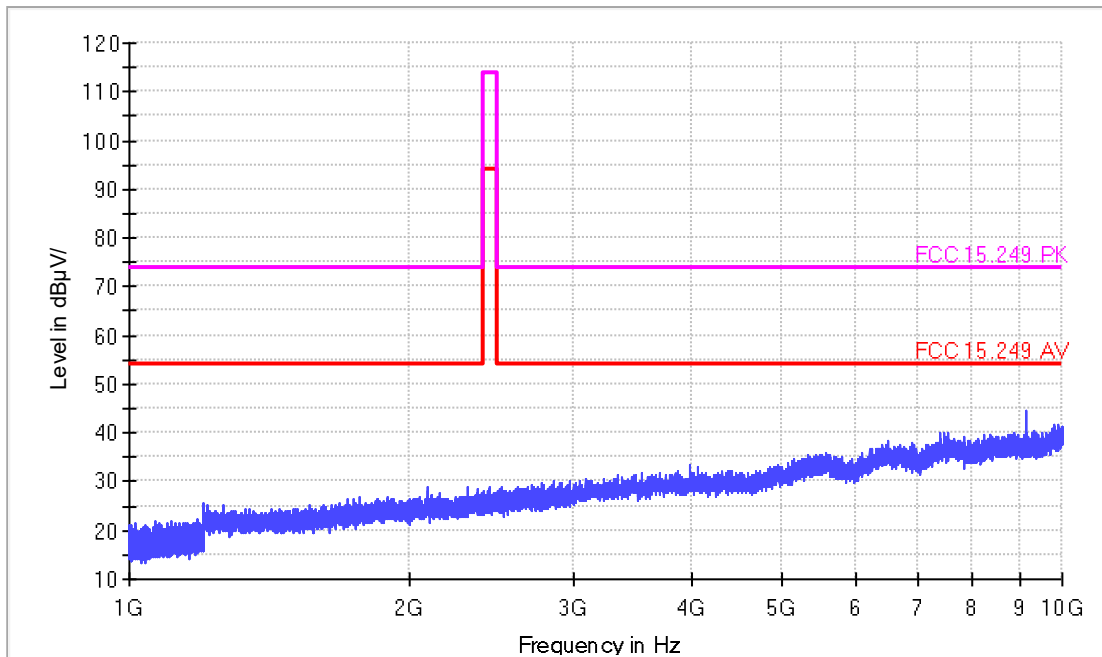




Test mode 3, power by battery, below 1GHz, Vertical

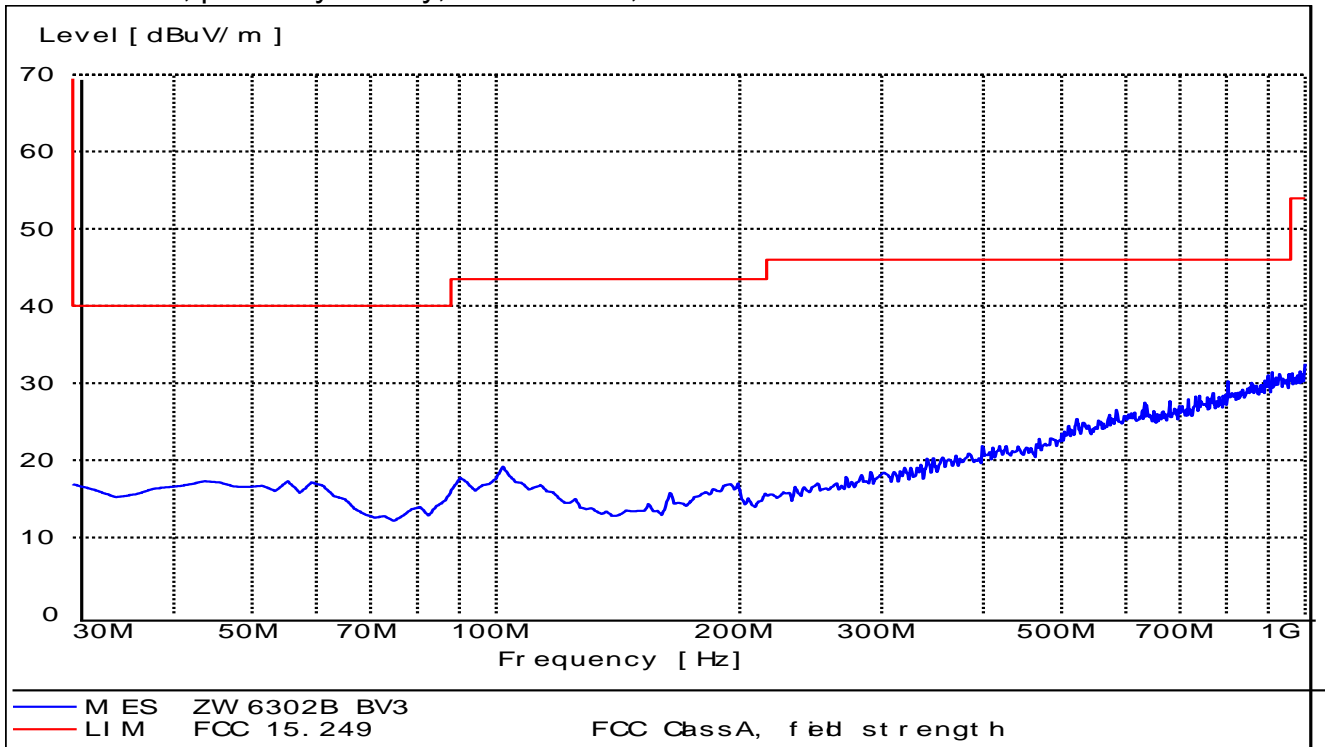


Test mode 3, power by battery, below 1GHz, Horizontal

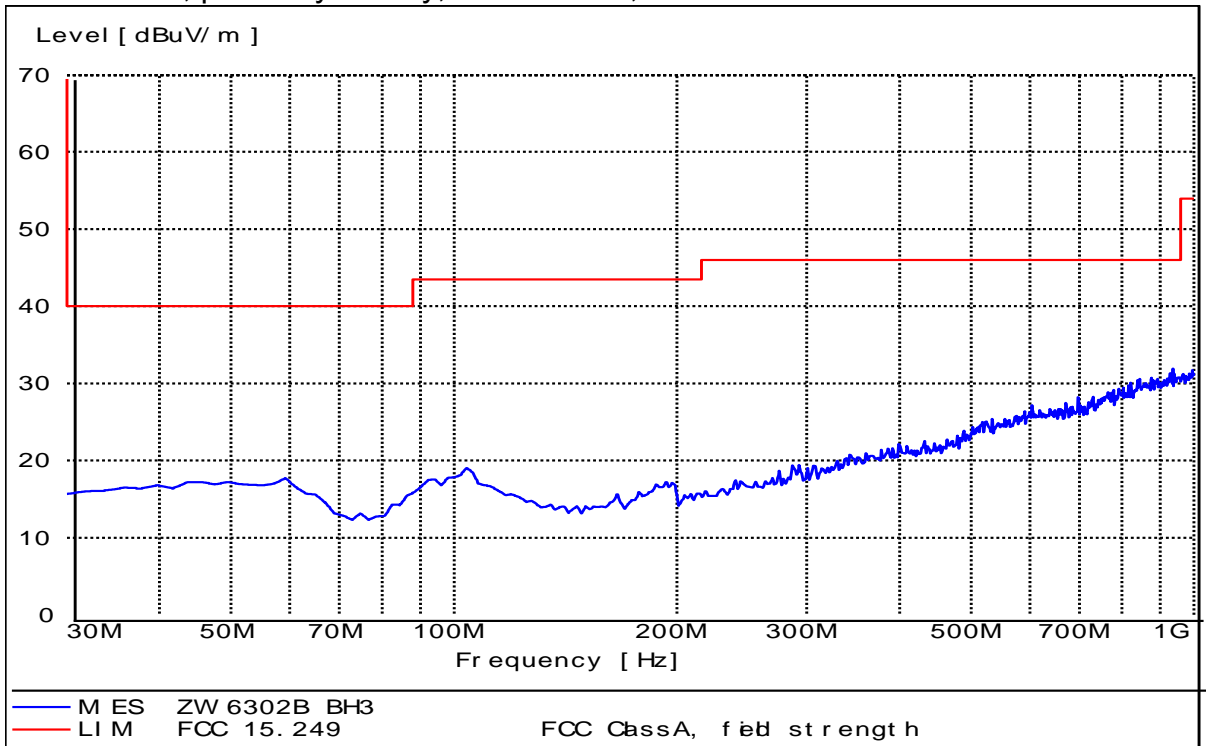




Test mode 3, power by battery, above 1GHz, Vertical

FCC Electric Field Strength 1-18GHz operate on 900MHz

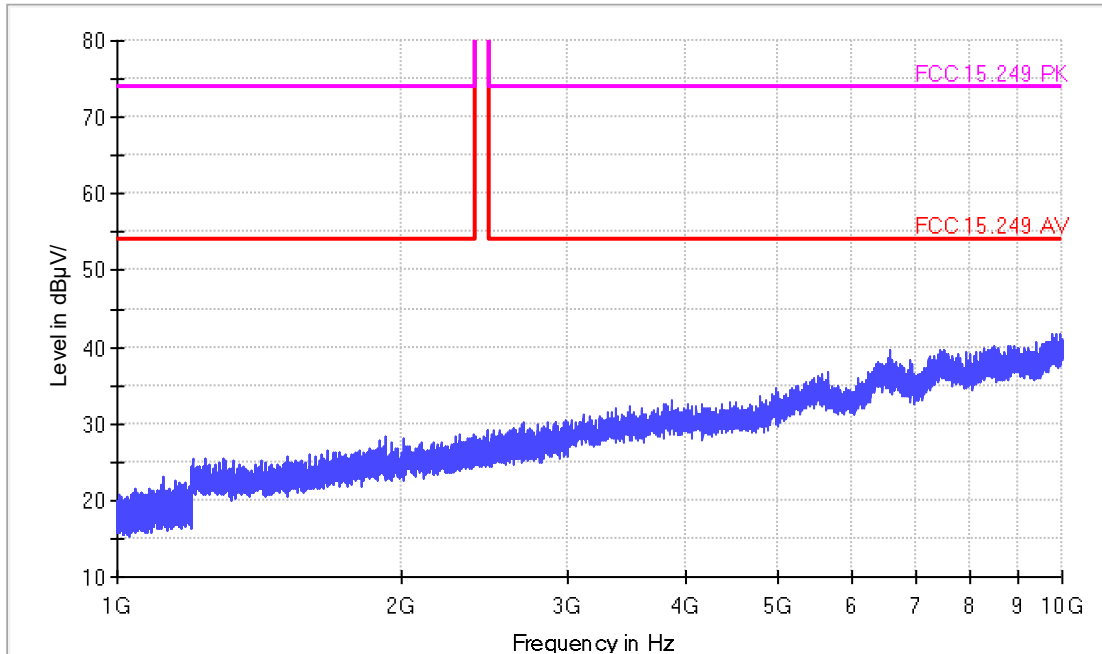

Test mode 3, power by battery, above 1GHz, Horizontal

FCC Electric Field Strength 1-18GHz operate on 900MHz

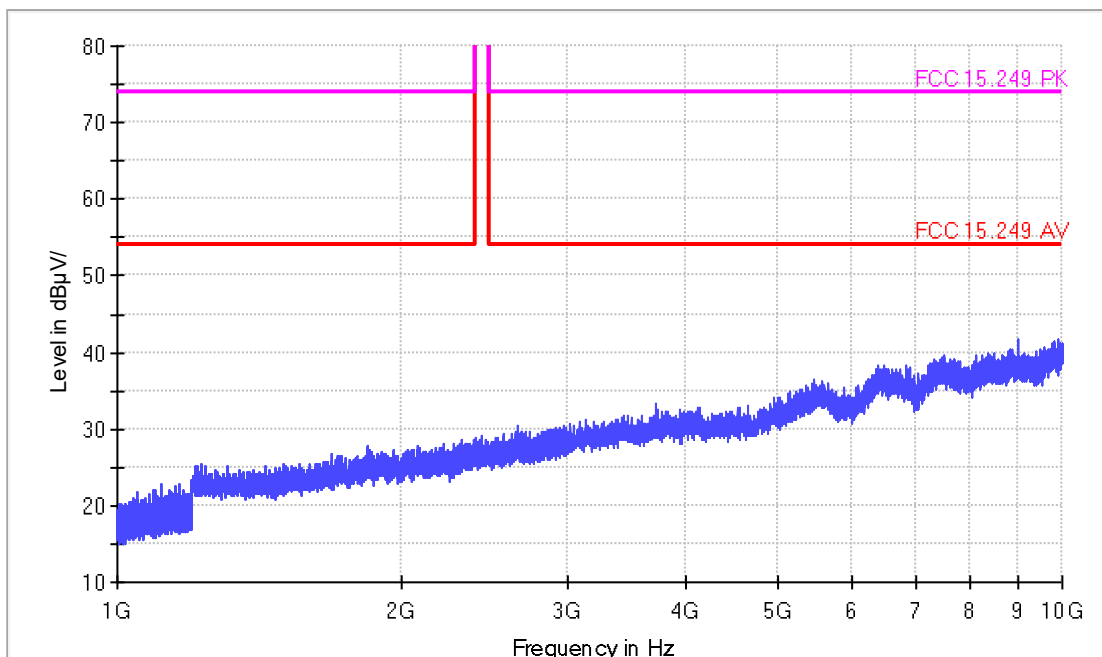



7. OCCUPIED BANDWIDTH

7.1. Test Standard and Limit

7.1.1. Test Standard

FCC Part 15 15.215

7.2. Test Procedure


1. Set EUT as normal operation
2. Set EMI test receiver Center Frequency = fundamental frequency, RBW=10kHz, VBW=30kHz, Span=Wide enough to capture the complete power envelope.
3. Set EMI test receiver Max hold. Mark peak, -20dB.

7.3. Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

7.4. Test Data


Transmitting at 908.4MHz: 20dB bandwidth =108.2 kHz

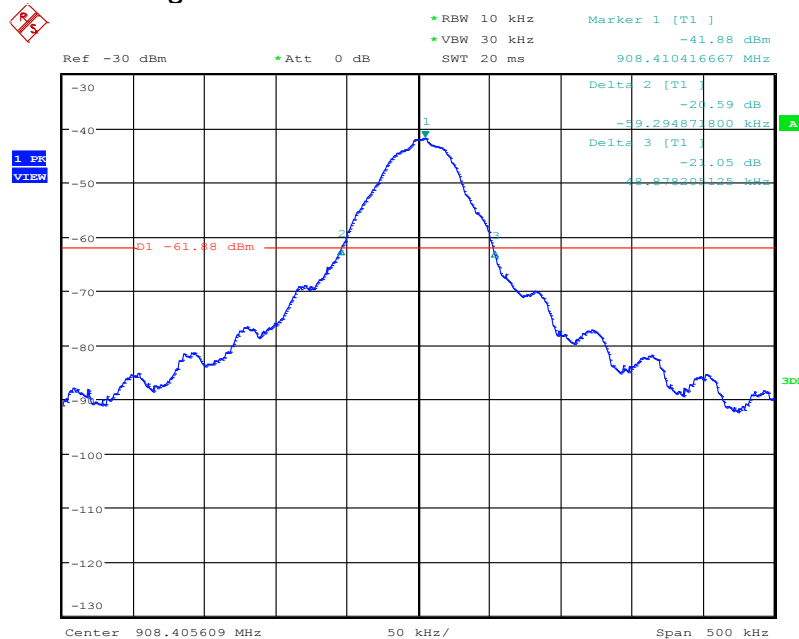

Date: 25.JUL.2016 14:52:46



Transmitting at 916MHz: 20dB bandwidth =157.9 kHz

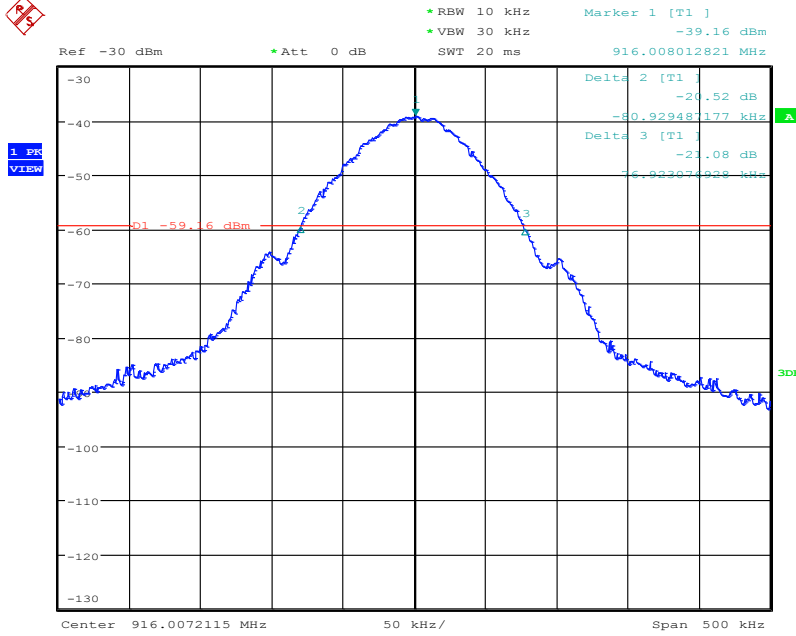

Date: 25.JUL.2016 14:49:45



8. BAND EDGE

8.1. Test Standard and Limit

8.1.1. Test Standard

FCC Part 15 15.249

8.2. Band Edge FCC 15.249(d) Limit

Emission radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation

8.3. Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instruments. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Measure the highest amplitude appearing on spectral display and set it as reference level. Plot the graph with marking the highest point and edge frequency.
4. Repeat above procedures until all measured frequencies were complete.

8.4. Test Arrangement



The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

8.5. Test Data

All the emission outside 902 to 928 is lower than 46 dB (μ V/m). The detailed information refers to test picture.





Transmitting at 908.4MHz, power by AC adaptor

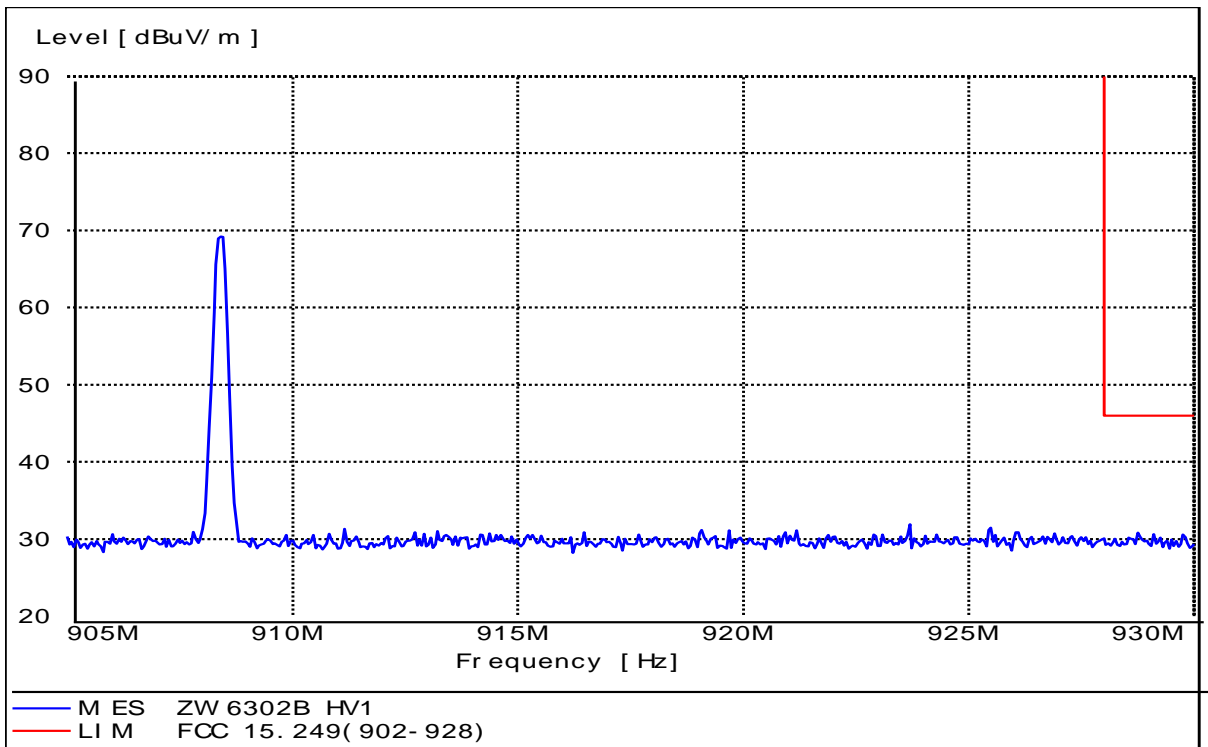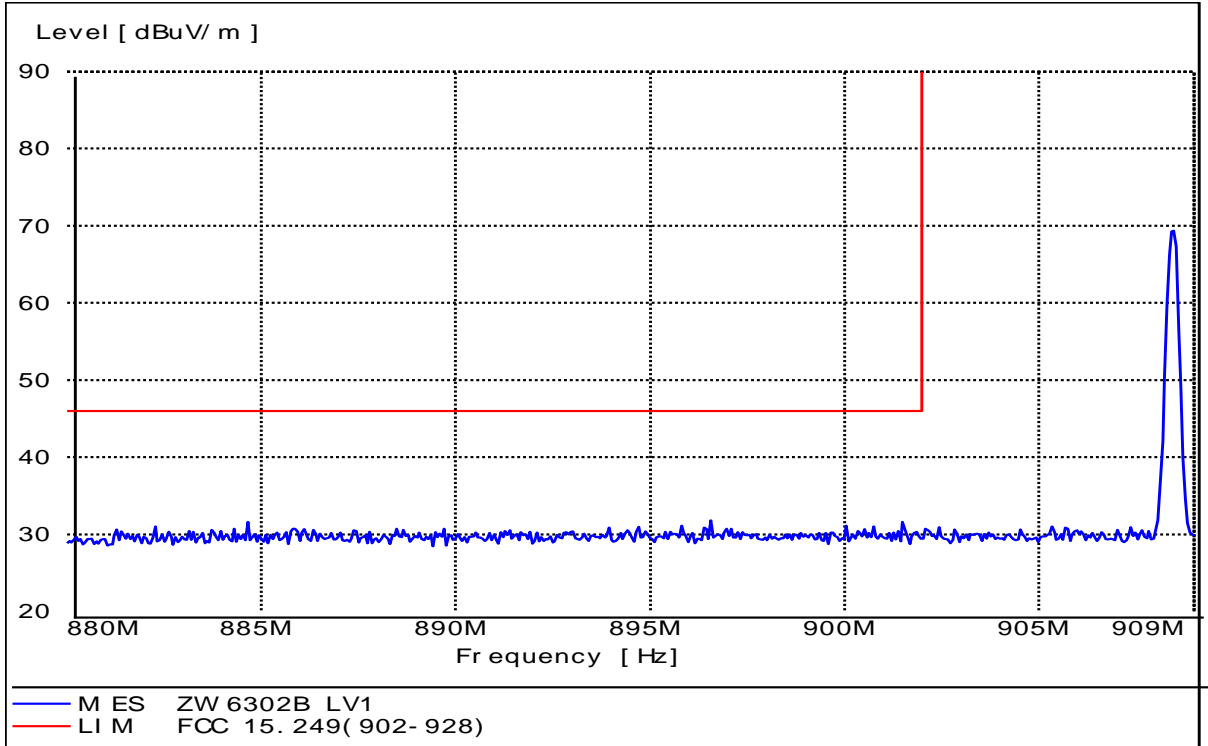





Transmitting at 916MHz, power by AC adaptor

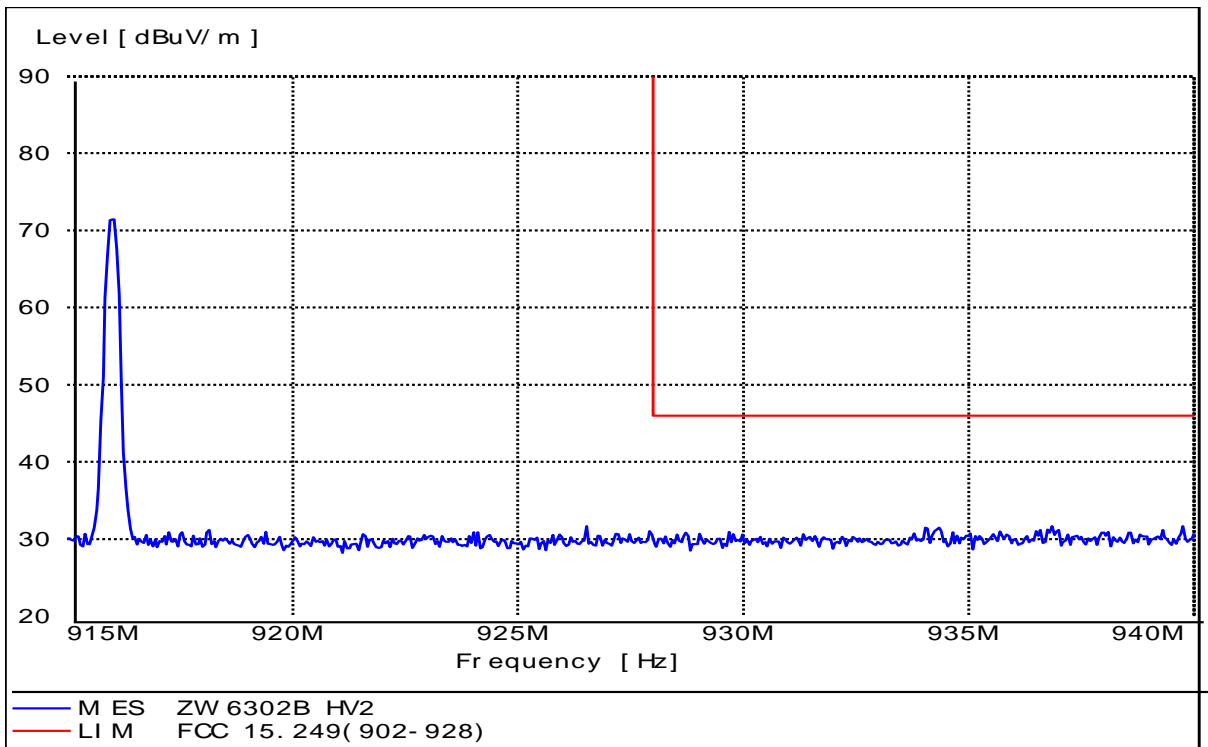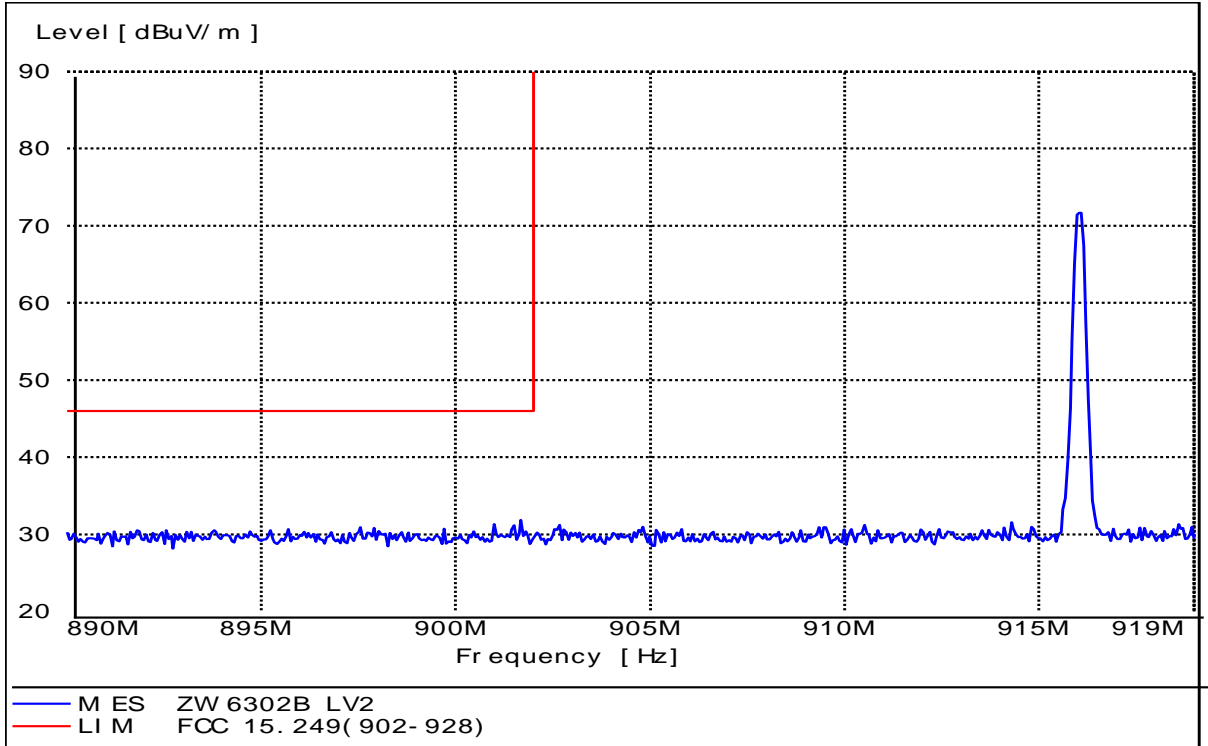





Transmitting at 908.4MHz, power by battery

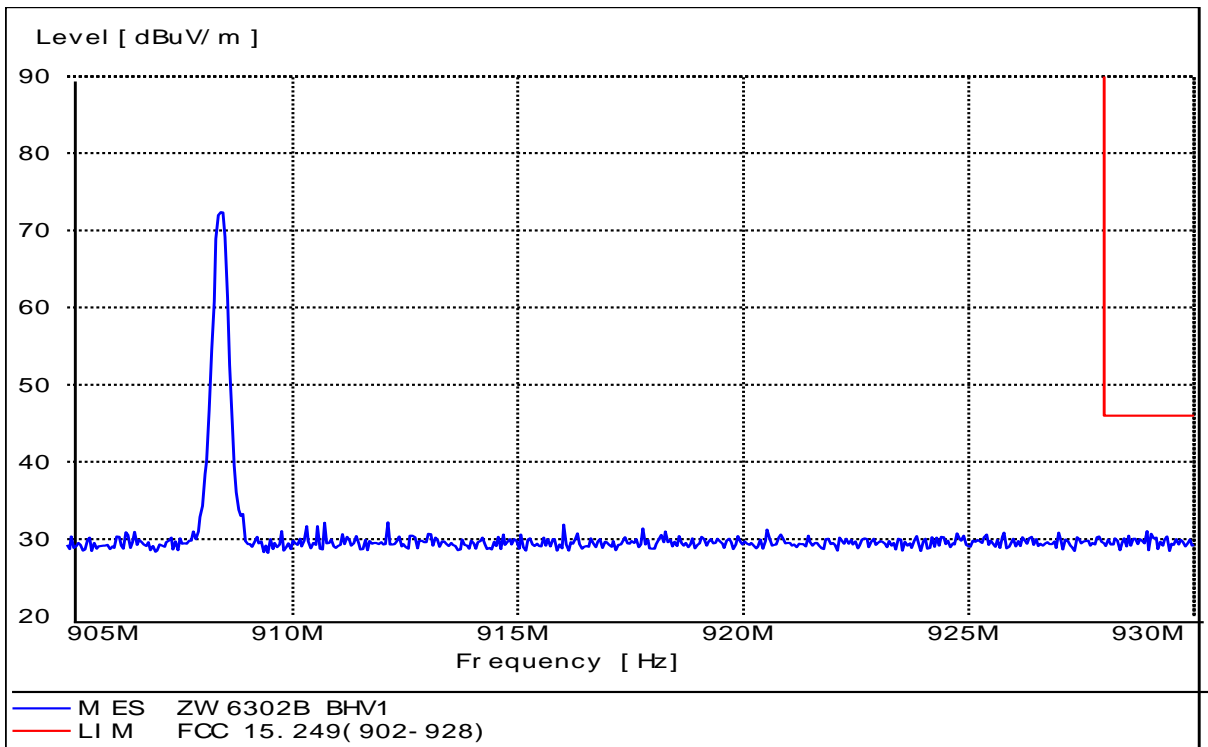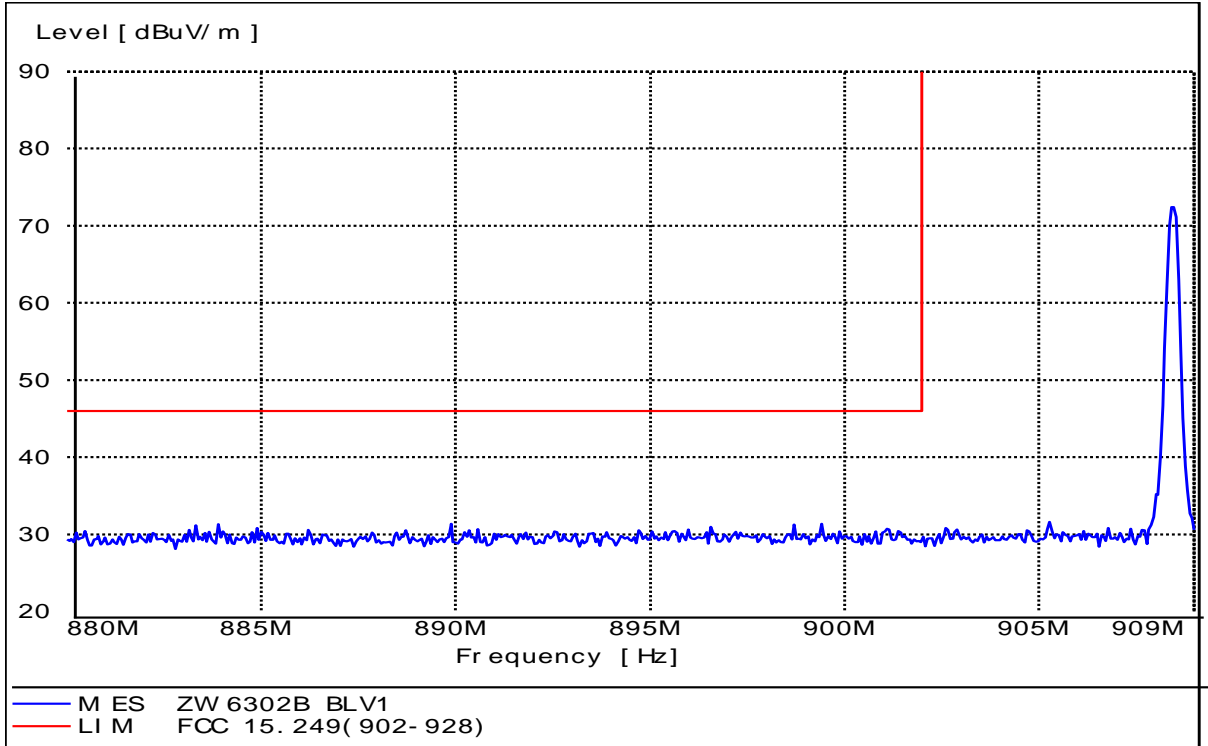



Transmitting at 916MHz, power by battery

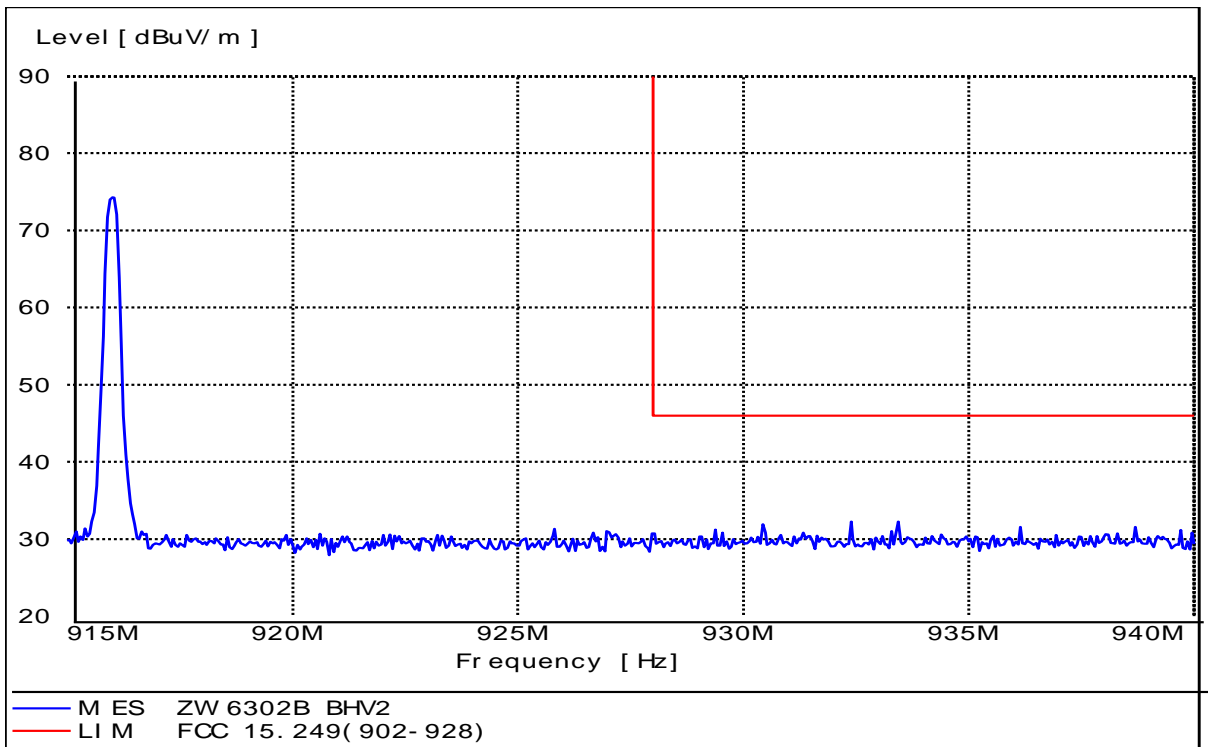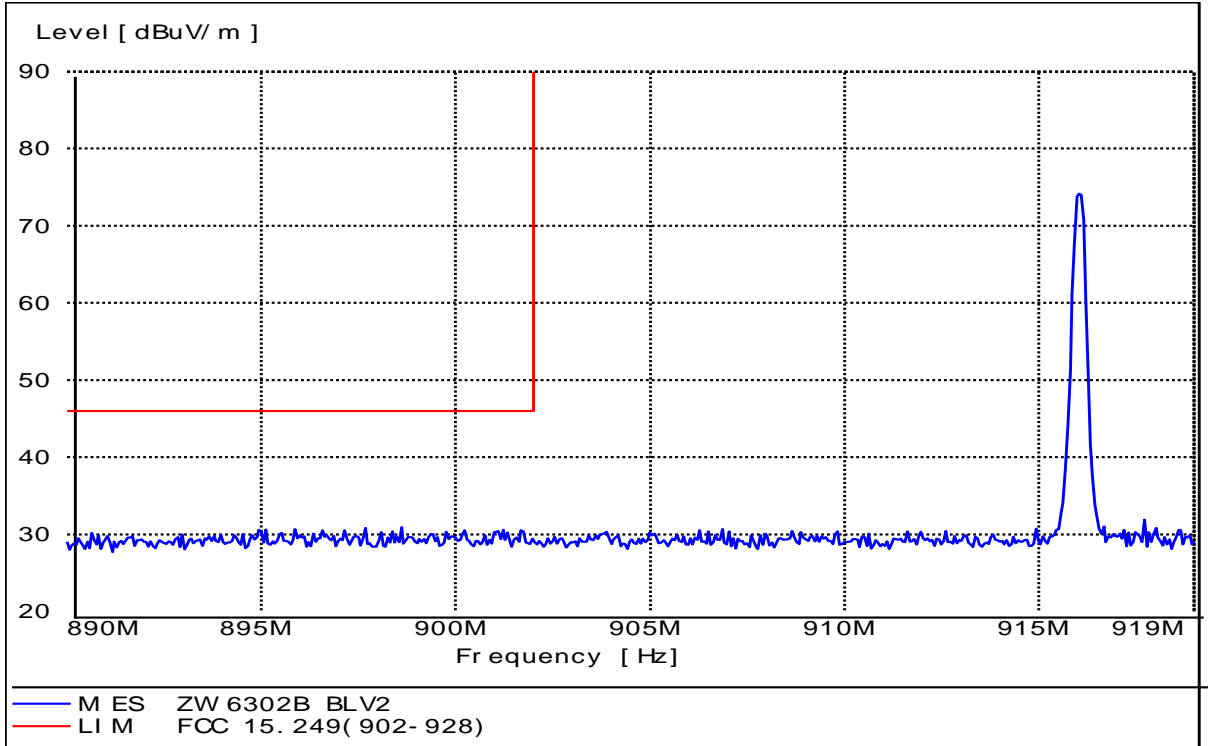



9. ANTENNA REQUIREMENT

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The EUT has a built in antenna which is integrated inside the enclosure, this is permanently attached antenna and meets the requirements of this section.