

FCC TEST REPORT

For

Z-Wave 700s Water Leak Sensor

Model Number: ZW6309, ZW6309A

FCC ID: U2ZZW6309

Report Number : WT208001522

Test Laboratory	:	Shenzhen Academy of Metrology and Quality Inspection
Site Location	:	NETC Building, No.4 Tongfa Rd., Xili, Nanshan, Shenzhen, China
Tel	:	0086-755-86928965
Fax	:	0086-755-86009898-31396
Web	:	www.smq.com.cn
Email	:	emcrf@smq.com.cn

Test report declaration

Applicant : Sheenway Asia Ltd.
Address : Room1313, 13/F, Austin Tower, 22-26 Austin Avenue, Tsim
Sha Tsui, Kowloon, Hong Kong, China
Manufacturer : Sheenway Asia Ltd.
Address : Room1313, 13/F, Austin Tower, 22-26 Austin Avenue, Tsim
Sha Tsui, Kowloon, Hong Kong, China
EUT Description : Z-Wave 700s Water Leak Sensor
Model No. : ZW6309, ZW6309A
FCC ID : U2ZZW6309

Test Standards:

FCC Part 15 (October 1, 2019 Edition)
ANSI C63.10-2013

The EUT described above is tested by Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory to determine the maximum emissions from the EUT. Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory is assumed full responsibility for the accuracy of the test results. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 and the energy emitted by the sample EUT tested as described in this report is in compliance with FCC Rules Part 15.249.

The test report is valid for above tested sample only and shall not be reproduced in part without written approval of the laboratory.




Project Engineer:	 _____ (Zhou Fangai)	Date:	<u>Sep.22, 2020</u>
Checked by:	 _____ (Lin Yixiang)	Date:	<u>Sep.22, 2020</u>
Approved by:	 _____ (Lin Bin)	Date:	<u>Sep.22, 2020</u>

TABLE OF CONTENTS

TEST REPORT DECLARATION.....	2
1. TEST RESULTS SUMMARY	4
2. GENERAL INFORMATION	5
2.1. Report information.....	5
2.2. Laboratory Accreditation and Relationship to Customer	5
2.3. Measurement Uncertainty	6
3. PRODUCT DESCRIPTION.....	7
3.1. EUT Description	7
3.2. Block Diagram of EUT Configuration	7
3.3. Operating Condition of EUT	7
3.4. Special Accessories.....	7
3.5. Equipment Modifications	7
3.6. Support Equipment List.....	7
3.7. Test Conditions.....	7
4. TEST EQUIPMENT USED	8
5. CONDUCTED EMISSION TEST	9
5.1. Test Standard and Limit.....	9
5.2. Test Procedure	9
5.3. Test Arrangement	9
5.4. Test Data	9
6. RADIATED EMISSION TEST	12
6.1. Test Standard and Limit.....	12
6.2. Test Procedure	12
6.3. Test Arrangement	12
6.4. Test Data	13
7. OCCUPIED BANDWIDTH	20
7.1. Test Standard and Limit.....	20
7.2. Test Procedure	20
7.3. Test Arrangement	20
7.4. Test Data	20
8. BAND EDGE	22
8.1. Test Standard and Limit.....	22
8.2. Band Edge FCC 15.249(d) Limit	22
8.3. Test Procedure	22
8.4. Test Arrangement	22
8.5. Test Data	22
9. ANTENNA REQUIREMENT	24

1. TEST RESULTS SUMMARY

Table 1 Test Results Summary

Test Items	FCC Rules	Test Results
Conducted Emission	15.207	Pass
Radiated Emission	15.249	Pass
Occupied Bandwidth	15.215	Pass
Band Edges	15.249	Pass
Antenna Requirement	15.203	Pass

Remark: "N/A" means "Not applicable."

2. GENERAL INFORMATION

2.1. Report information

This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that SMQ approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that SMQ in any way guarantees the later performance of the product/equipment.

The sample/s mentioned in this report is/are supplied by Applicant, SMQ therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.

Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through SMQ, unless the applicant has authorized SMQ in writing to do so.

The lab will not be liable for any loss or damage resulting for false, inaccurate, inappropriate or incomplete product information provided by the applicant/manufacturer.

2.2. Laboratory Accreditation and Relationship to Customer

The testing report were performed by the Shenzhen Academy of Metrology and quality Inspection EMC Laboratory (Guangdong EMC compliance testing center), in their facilities located at NETC Building, No.4 Tongfa Rd., Xili, Nanshan, Shenzhen, China. At the time of testing, Laboratory is accredited by the following organizations:

China National Accreditation Service for Conformity Assessment (CNAS) accredits the Laboratory for conformance to FCC standards, EMC international standards and EN standards. The Registration Number is CNAS L0579.

The Laboratory is Accredited Testing Laboratory of FCC with Designation number CN1165 and Site registration number 582918.

The Laboratory is registered to perform emission tests with Innovation, Science and Economic Development (ISED), and the registration number is 11177A.

The Laboratory is registered to perform emission tests with VCCI, and the registration number are C-20048, G20076, R-20077, R-20078 and T-20047.

The Laboratory is Accredited Testing Laboratory of American Association for Laboratory Accreditation (A2LA) and certificate number is 3292.01.

2.3.Measurement Uncertainty

Conducted Emission

9 kHz~150 kHz 3.7dB

150 kHz~30MHz 3.3dB

Radiated Emission

30MHz~1000MHz 4.3dB

1GHz~6GHz 4.6 dB

6GHz~18GHz 5.1dB


3. PRODUCT DESCRIPTION

3.1.EUT Description

Description : Z-Wave 700s Water Leak Sensor
Manufacturer : Sheenway Asia Ltd.
Model Number : ZW6309, ZW6309A
Rated Input : Battery: DC 3V,USB:DC5V
Power supply : AC 120V/60Hz
Operate Frequency : 908.4MHz, 916MHz
Modulation : 908.4MHz: FSK, 916MHz: GFSK
Antenna Designation : Monopole Antenna

Remark: Comparing with ZW6309A, ZW6309 removes the humidity sensing component to reduce the humidity sensing function. The others circuit theory, electrical design and the critical components are exactly the same. The differences do not affect the RF performance. All the tests were performed on model ZW6309A.

3.2.Block Diagram of EUT Configuration

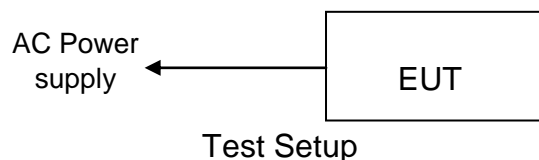

3.3.Operating Condition of EUT

Test Mode 1: Transmitting at 908.4MHz
Test Mode 2: Transmitting at 916MHz

3.4.Special Accessories

Not available for this EUT intended for grant.

3.5.Equipment Modifications

Not available for this EUT intended for grant.

3.6.Support Equipment List

Table 2 Support Equipment List

Name	Model No	S/N	Manufacturer
AC adaptor	A8001	--	--

3.7.Test Conditions

Date of test: Aug.06, 2020 – Aug.25, 2020
Date of EUT Receive: Jul.30, 2020
Temperature: (23-25) °C
Relative Humidity: (49-52) %

4. TEST EQUIPMENT USED

Table 3 Test Equipment

No.	Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
SB9058/05	Test Receiver	R&S	ESCI 3	Sep.27,2019	1 Year
SB4357	AMN	R&S	ENN216	Aug.27,2019	1 Year
SB3436	Test Receiver	R&S	ESI26	Nov.07,2019	1 Year
SB3955	Broadband Antenna	Schwarzbeck	VULB9163	Jan.10,2020	1 Year
SB8501/09	Test Receiver	R&S	ESU40	Feb.14,2020	1 Year
SB3435	Horn Antenna	R&S	HF906	Dec.17,2019	1 Year
SB9060	Signal Analyzer	R&S	FSQ40	May.18, 2020	1 Year

5. CONDUCTED EMISSION TEST

5.1. Test Standard and Limit

5.1.1. Test Standard

FCC Part 15 15.207

5.1.2. Test Limit

Table 4 Conducted Emission Test Limit

Frequency	Maximum RF Line Voltage (dB μ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

*Decreasing linearly with logarithm of the frequency

*The lower limit shall apply at the transition frequency.

5.2. Test Procedure

The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through an Artificial Mains Network (A.M.N.). AN EMI test receiver is used to test the emissions from both sides of AC line. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

5.3. Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

5.4. Test Data

The emissions don't show in below are too low against the limits. Refer to the test curves.


Test mode 1: Transmitting at 908.4MHz (worst-case)

Table 5 Conducted Emission Test Data


Test mode: 1							
Line							
Frequency MHz	QP		AV		QP	AV	Factor (dB)
	Level (dBuV)	Limit (dBuV)	Level (dBuV)	Limit (dBuV)	Reading (dBuV)	Reading (dBuV)	
0.154	43.6	65.8	15.7	55.8	33.9	6.0	9.7
0.541	26.1	56	9.7	46	16.3	-0.1	9.8
0.892	24.9	56	9.4	46	15.1	-0.4	9.8
1.239	24.0	56	9.7	46	14.2	-0.1	9.8
2.643	23.2	56	5.6	46	13.3	-4.3	9.9
4.375	22.3	56	8.9	46	12.4	-1.0	9.9
Neutral							
Frequency MHz	QP		AV		QP	AV	Factor (dB)
	Level (dBuV)	Limit (dBuV)	Level (dBuV)	Limit (dBuV)	Reading (dBuV)	Reading (dBuV)	
0.150	45.6	66	17.1	56	35.9	7.4	9.7
0.541	32.6	56	15.6	46	22.8	5.8	9.8
0.888	30.1	56	13.6	46	20.3	3.8	9.8
1.248	29.8	56	13.1	46	20.0	3.3	9.8
2.634	25.6	56	10.5	46	15.7	0.6	9.9
10.788	32.3	60	12.3	50	22.4	2.4	9.9

REMARKS: 1. Emission level(dBuV)=Read Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB) =LISN Factor (dB) + Cable Factor (dB)+Limiter Factor(dB)
 3. The other emission levels were very low against the limit.

Line

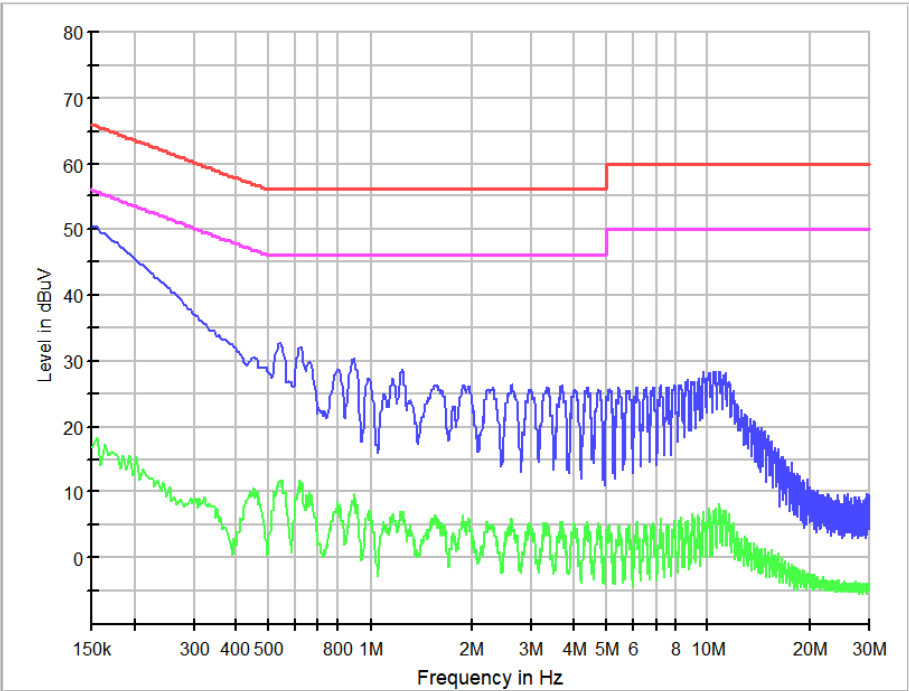

Neutral

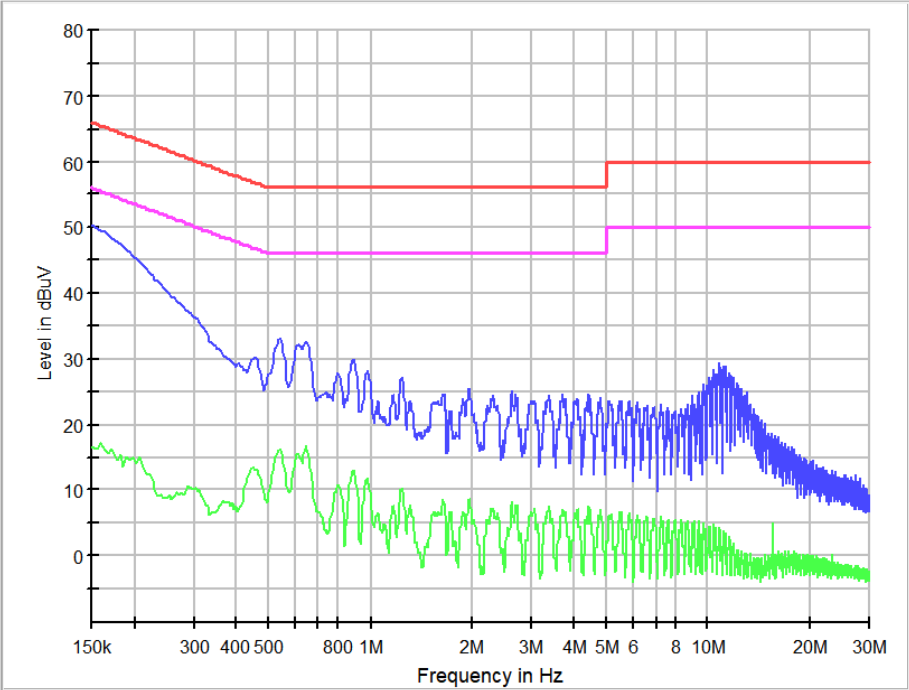

6. RADIATED EMISSION TEST

6.1. Test Standard and Limit

6.1.1. Test Standard

FCC Part 15 15.249

6.1.2. Test Limit

Table 6 Radiated Emission Test Limit

FREQUENCY MHz	FIELD STRENGTHS LIMITS (μ V/m)	FIELD STRENGTHS LIMITS dB (μ V/m)
Fundamental	50000	94.0
Harmonics	500	54.0
30 ~ 88	100	40.0
88 ~ 216	150	43.5
216 ~ 960	200	46.0
960 ~	500	54.0

* The lower limit shall apply at the transition frequency.

* The test distance is 3m.

6.2. Test Procedure

Radiated emission test below 1 GHz, test at SAC, the EUT is placed on a turntable, which is 0.8 meter above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can move up and down to find out the maximum emission level. Radiated emission test above 1 GHz, test at FAR, the EUT is placed on a non-conductive table, which is 1.5 meter above ground. Broadband antenna is used as a receiving antenna at frequency range 30MHz to 1000MHz, Horn antenna is used as a receiving antenna at frequency range above 1GHz. Both horizontal and vertical polarization of the antenna is set on test, in order to find out the max emission, the relative positions of this EUT were rotated through three orthogonal axes.

The RBW of the EMI test receiver is:

30~1000MHz 120 KHz

1000-18000MHz 1MHz

6.3. Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture. The EUT shall be measured in the XYZ three positions, and the test data which was shown in the

follow was the worst case.

6.4. Test Data

The emissions don't show in below are too low against the limits. Refer to the test curves.

Table 7 Radiated Emission Test Data

Test mode: 1								
Frequency (MHz)	Polarization	Correction Factor (dB)	Antenna Factor (dB/m)	Reading Value (dBμV)	Emission Level dB (μV/m)	Limits dB (μV/m)	EUT axes	Note
33.031	Vertical	0.7	12.3	7.1	20.1	40	X	QP
38.487	Vertical	0.7	12.3	9.5	22.5	40	X	QP
71.340	Vertical	0.9	8.7	1.5	11.1	40	X	QP
89.534	Vertical	1.1	10.3	1.8	13.2	43.5	X	QP
908.401	Vertical	3.9	21.1	58.0	83.0	94	X	Fundamental QP
9963.427	Vertical	-34.7	37.0	50.1	52.4	74	X	PK
9963.427	Vertical	-34.7	37.0	36.4	38.7	54	X	AV
8984.304	Vertical	-36.2	37.0	50.8	51.6	74	X	PK
8984.304	Vertical	-36.2	37.0	37.4	38.2	54	X	AV
71.103	Horizontal	0.9	8.7	2.9	12.5	40	X	QP
89.533	Horizontal	1.1	10.3	-0.6	10.8	43.5	X	QP
282.563	Horizontal	2.0	12.7	-6.2	8.5	46	X	QP
908.400	Horizontal	3.9	21.1	66.7	91.7	94	X	Fundamental QP
5450.120	Horizontal	-38.4	34.3	53.3	49.2	74	X	PK
5450.120	Horizontal	-38.4	34.3	42.4	38.3	54	X	AV
9798.325	Horizontal	-35.3	37.1	50.9	52.7	74	X	PK
9798.325	Horizontal	-35.3	37.1	37.0	38.8	54	X	AV

Table 8 Radiated Emission Test Data

Test mode: 2								
Frequency (MHz)	Polarization	Correction Factor (dB)	Antenna Factor (dB/m)	Reading Value (dBμV)	Emission Level dB (μV/m)	Limits dB (μV/m)	EUT axes	Note
33.031	Vertical	0.7	12.3	7.1	20.1	40	X	QP
38.487	Vertical	0.7	12.3	9.8	22.8	40	X	QP
96.323	Vertical	1.1	12.8	-8.7	5.2	43.5	X	QP
916.003	Vertical	3.9	21.1	56.2	81.2	94	X	Fundamental QP
8983.363	Vertical	-36.2	37.0	51.4	52.2	74	X	PK
8983.363	Vertical	-36.2	37.0	37.4	38.2	54	X	AV
9772.677	Vertical	-35.5	37.1	51.3	52.9	74	X	PK
9772.677	Vertical	-35.5	37.1	37.7	39.3	54	X	AV
40.548	Horizontal	0.7	13.6	-8.2	6.1	40	X	QP
55.098	Horizontal	0.8	13.0	-8.6	5.2	40	X	QP
102.629	Horizontal	1.1	13.2	-9.1	5.2	43.5	X	QP
916.002	Horizontal	3.9	21.1	65.4	90.4	94	X	Fundamental QP
5495.764	Horizontal	-38.3	34.3	54.3	50.3	74	X	PK
5495.764	Horizontal	-38.3	34.3	42.9	38.9	54	X	AV
9776.366	Horizontal	-35.5	37.1	51.2	52.8	74	X	PK
9776.366	Horizontal	-35.5	37.1	37.6	39.2	54	X	AV

Note: 1. Emission level (dBμV/m)=Reading Value(dBuV) + Correction Factor(dB)+Antenna Factor (dB/m)

2. Correction Factor (dB) = Cable Factor (dB)+Amplifier Factor(dB)

3. No other spurious and harmonic emissions were reported greater than listed emissions above table.


Table 9 Restricted Band Radiated Emission Data

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	
6.31175 - 6.31225	123 - 138	2200 - 2300	
8.291 - 8.294	149.9 - 150.05	2310 - 2390	
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	
12.29 - 12.293	167.72 - 173.2	3332 - 3339	
12.51975 -	240 - 285	3345.8 - 3358	
12.52025	322 - 335.4	3600 - 4400	
12.57675 -			
12.57725			
13.36 - 13.41			

All the emission levels of the above band were less than the limit 20dB.


Test mode 1, below 1GHz, Horizontal

Copy of Field strength 30M-1GHz

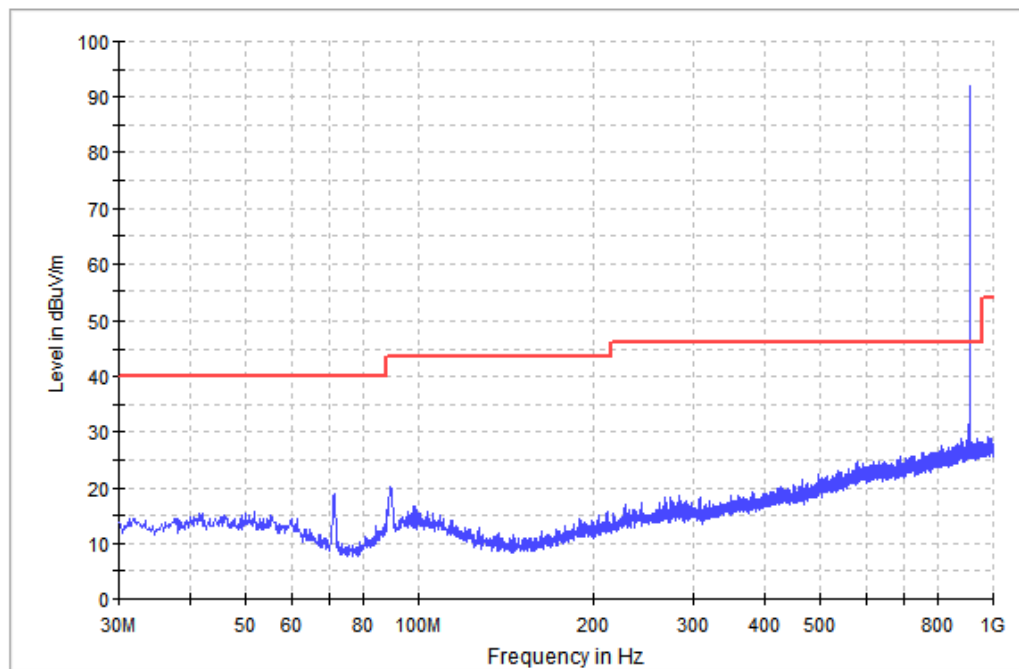


Test mode 1, below 1GHz, Vertical


Copy of Field strength 30M-1GHz

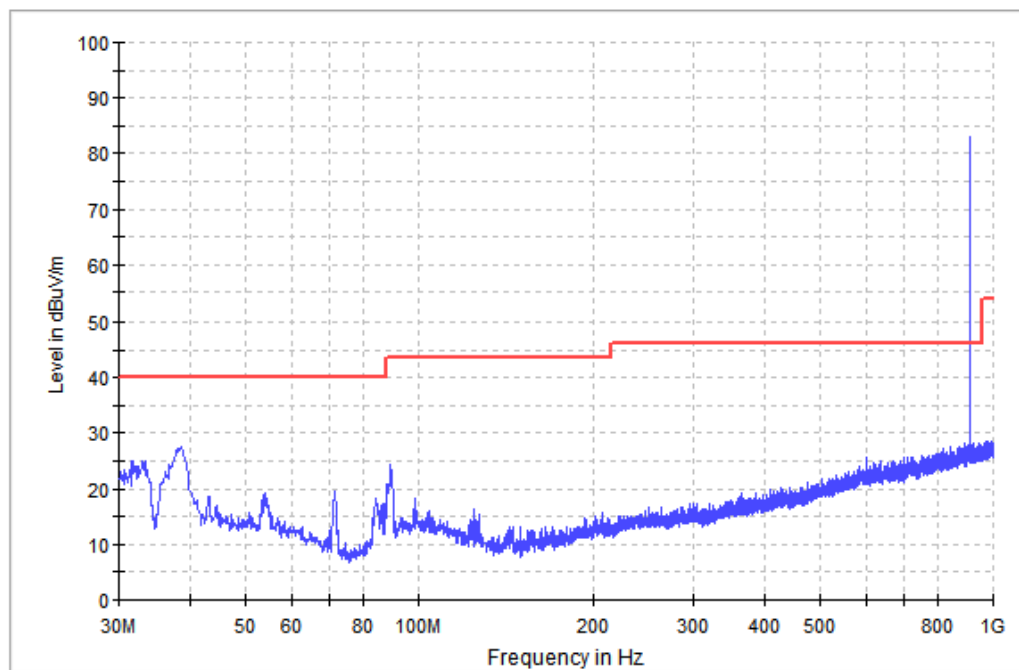

Test mode 1, above 1GHz, Horizontal

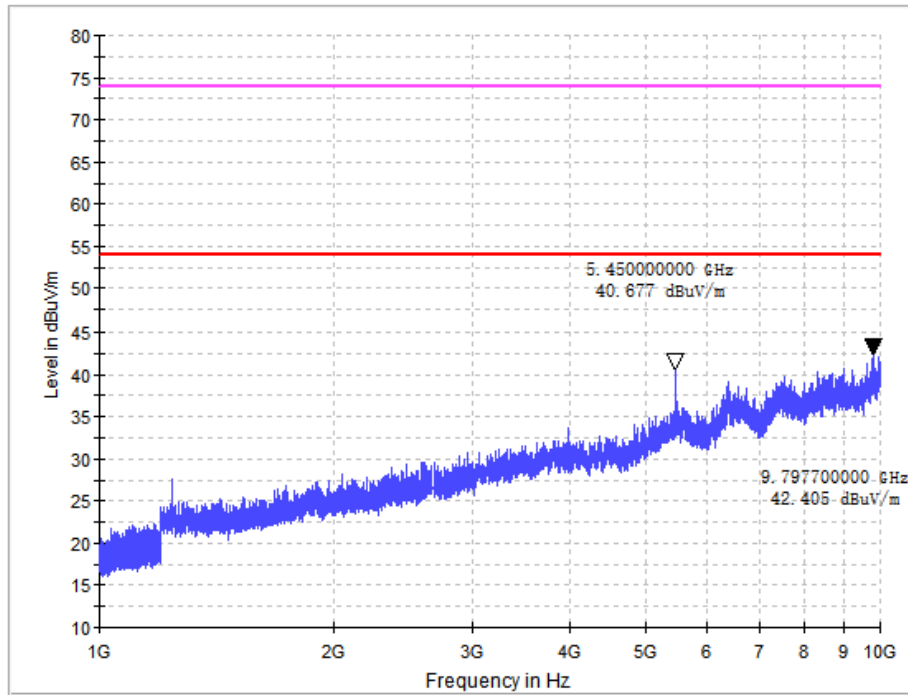


Test mode 1, above 1GHz, Vertical

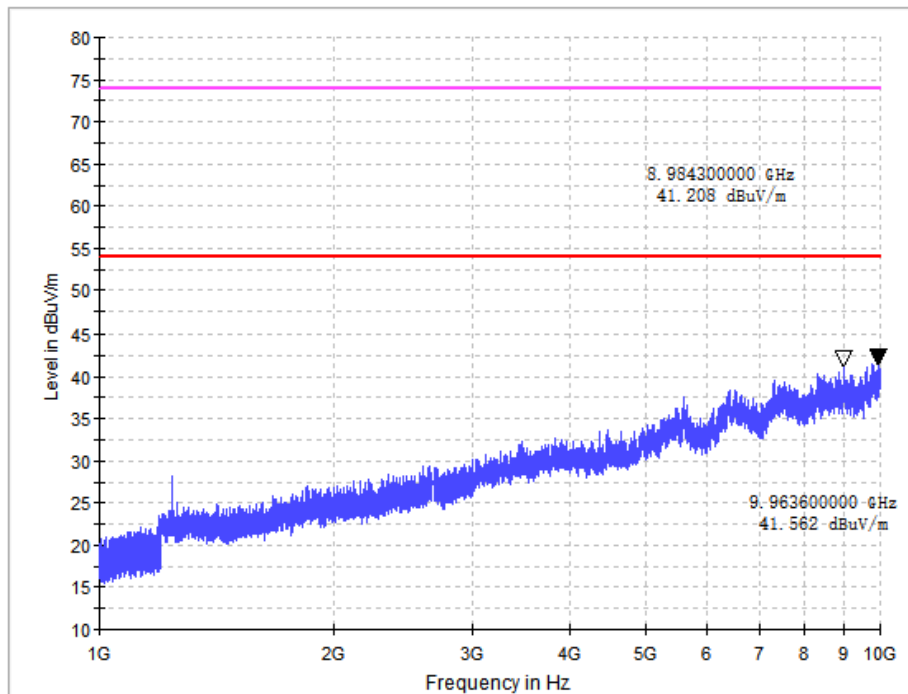


Test mode 2, below 1GHz, Horizontal

Copy of Field strength 30M-1GHz

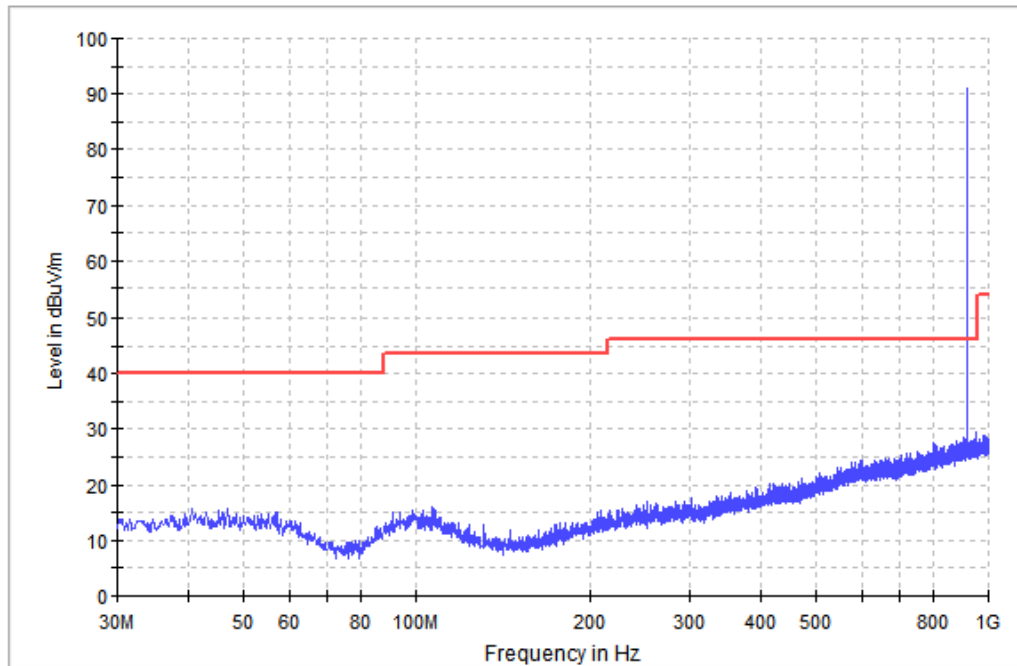


Test mode 2, below 1GHz, Vertical


Copy of Field strength 30M-1GHz

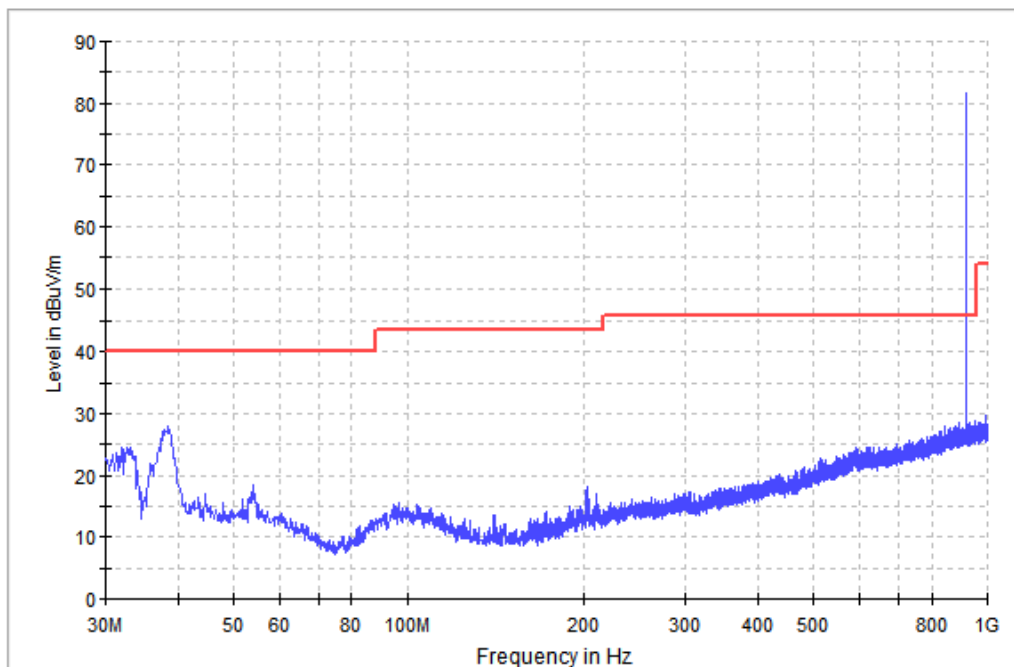

Test mode 2, above 1GHz, Horizontal

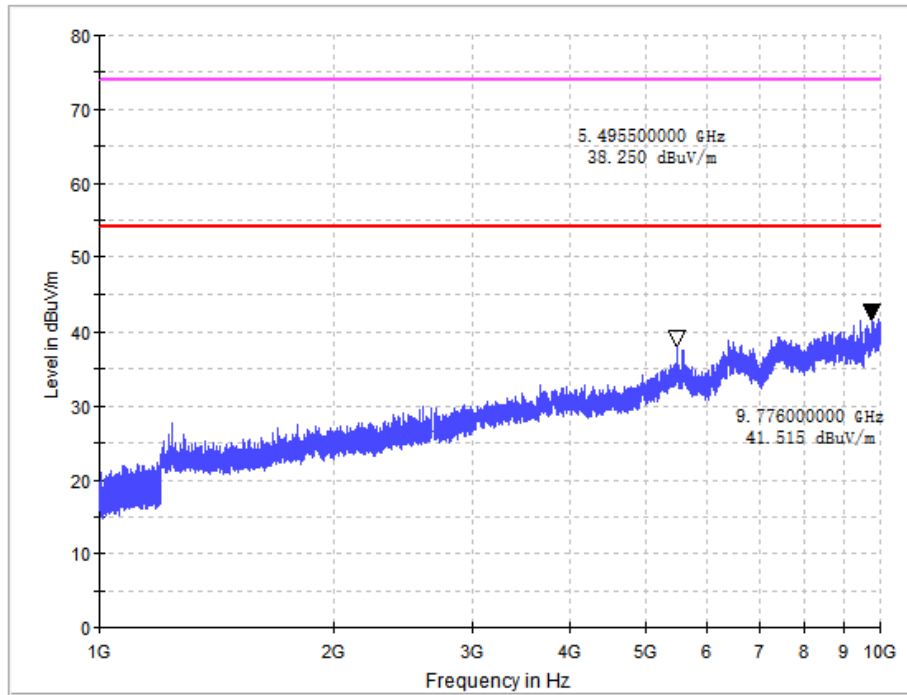

Test mode 2, above 1GHz, Vertical

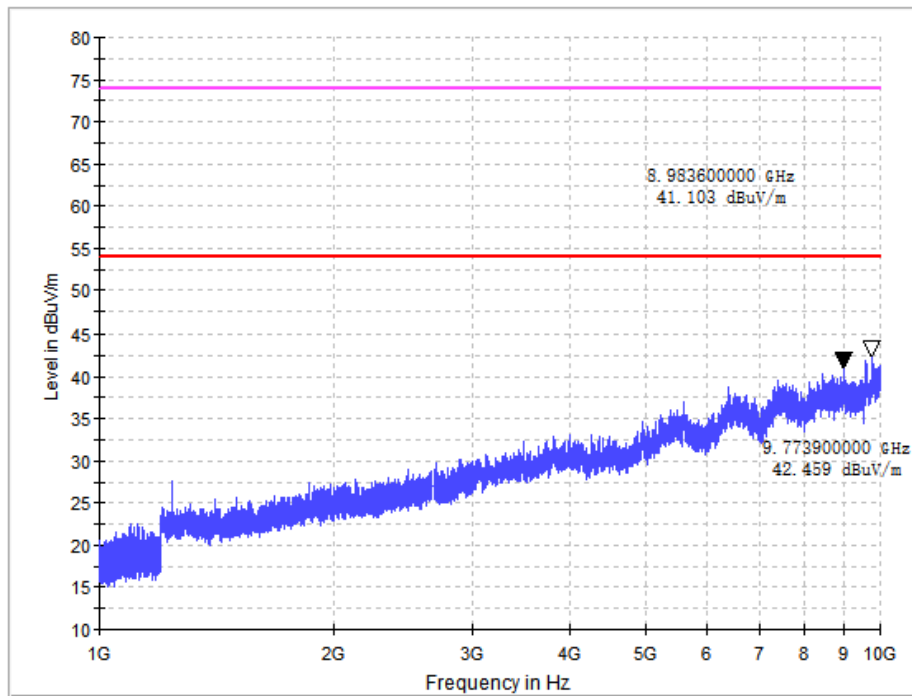

7. OCCUPIED BANDWIDTH

7.1. Test Standard and Limit

7.1.1. Test Standard

FCC Part 15 15.215

7.2. Test Procedure


1. Set EUT as normal operation
2. Set EMI test receiver Center Frequency = fundamental frequency, RBW=1% to 5% of the OBW, VBW=3 times of RBW, Span=Wide enough to capture the complete power envelope.
3. Set EMI test receiver Max hold. Mark peak, -20dB.

7.3. Test Arrangement


The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

7.4. Test Data

Transmitting at 908.4MHz: 20dB bandwidth =92.9 kHz

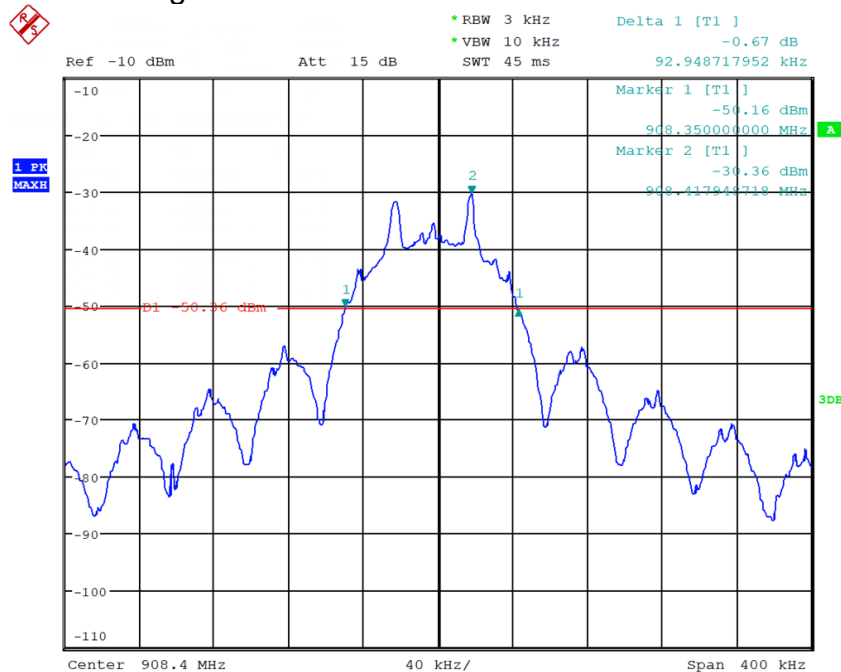

Transmitting at 916MHz: 20dB bandwidth =122.4 kHz

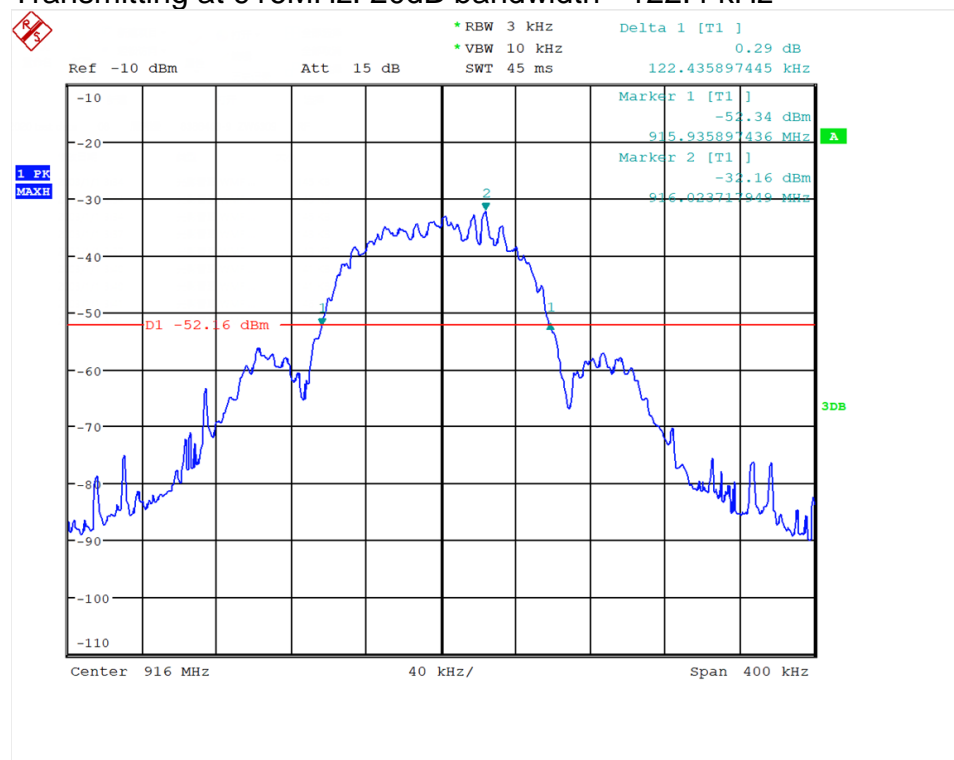

8. BAND EDGE

8.1. Test Standard and Limit

8.1.1. Test Standard

FCC Part 15 15.249

8.2. Band Edge FCC 15.249(d) Limit

Emission radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation

8.3. Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instruments. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Measure the highest amplitude appearing on spectral display and set it as reference level. Plot the graph with marking the highest point and edge frequency.
4. Repeat above procedures until all measured frequencies were complete.


8.4. Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.


8.5. Test Data

All the emission outside 902 to 928 is lower than 46 dB ($\mu\text{V}/\text{m}$). The detailed information refers to test picture.

Transmitting at 908.4MHz

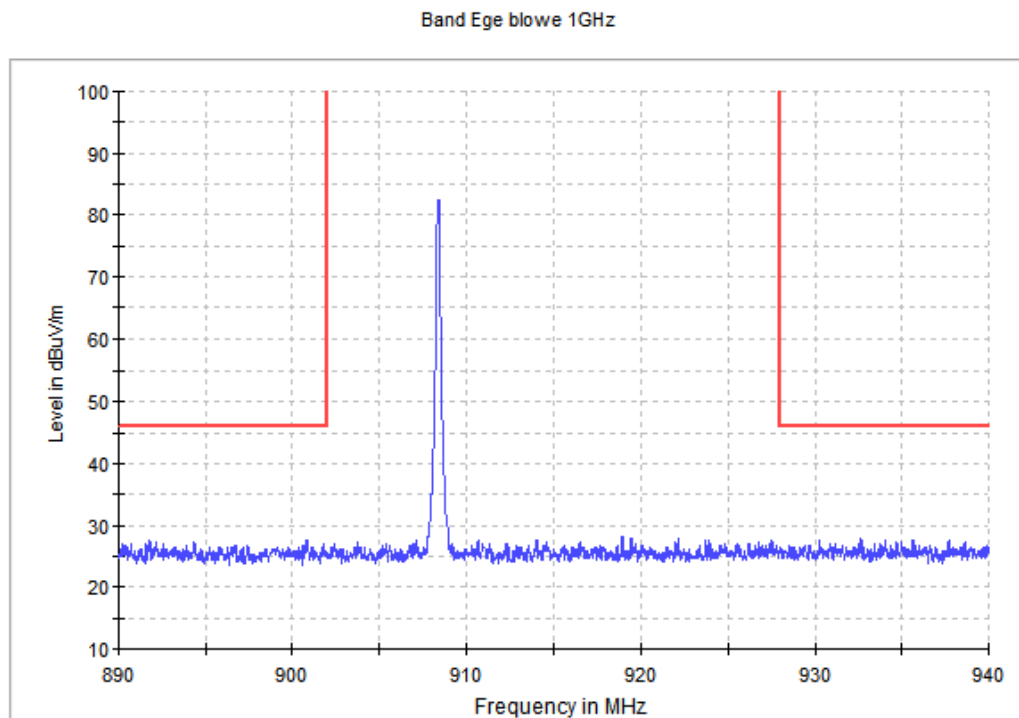

Transmitting at 916MHz

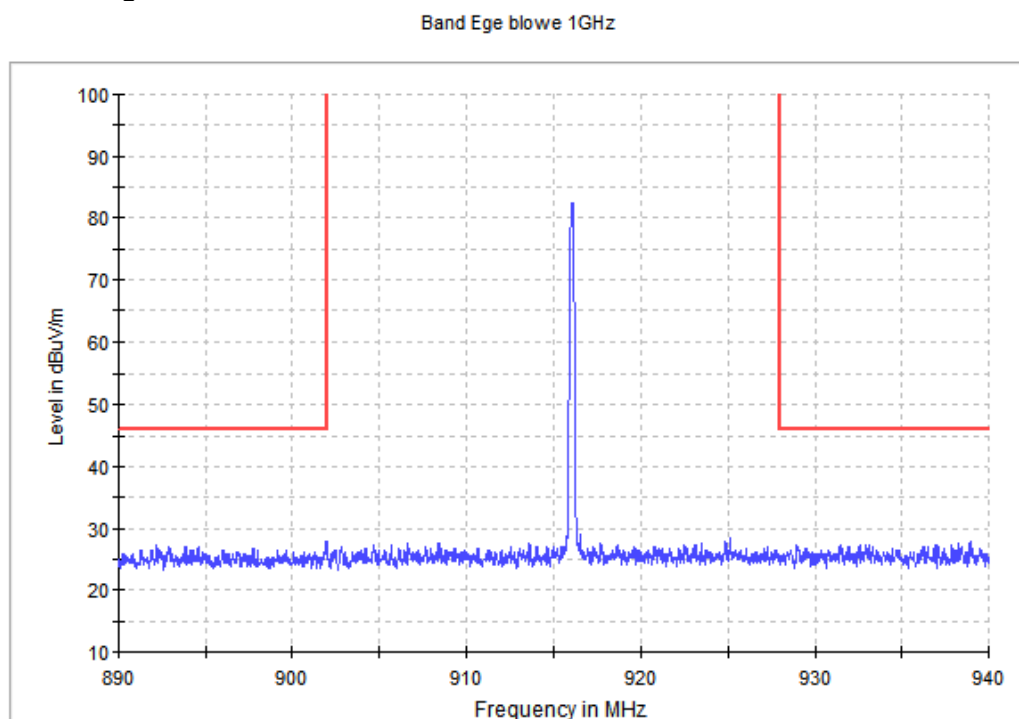

9. ANTENNA REQUIREMENT

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The EUT has a built in antenna which is integrated inside the enclosure, this is permanently attached antenna and meets the requirements of this section.

-----End of Report-----