



MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

3162 BELICK STREET • SANTA CLARA, CALIFORNIA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372

September 12, 2011

S&C Electric Company
1135 Atlantic Avenue
Alameda, CA 94501

Dear Prakash Ramadass,

Enclosed is the EMC Wireless test report for compliance testing of the S&C Electric Company, 1720 IntelliCom as tested to the requirements of Title 47 of the CFR, Ch. 1 (10-1-06 ed.), Part 15, Subpart B, ICES-003, Issue 4 February 2004 for a Class A Digital Device and FCC Part 15 Subpart C, RSS-210, Issue 8, December 2010 for Intentional Radiators.

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,
MET LABORATORIES, INC.

Jennifer Warnell
Documentation Department

Reference: (\S&C Electric Company\EMCS32814-FCC247)

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc.

Electromagnetic Compatibility Criteria Test Report

for the

**S&C Electric Company
1720 IntelliCom**

Tested under
the FCC Certification Rules
contained in
Title 47 of the CFR, Parts 15 Subpart B & ICES-003
for Class A Digital Devices
&
15.247 Subpart C & RSS-210, Issue 8, December 2010
for Intentional Radiators

MET Report: EMCS32814-FCC247

September 12, 2011

Prepared For:

**S&C Electric Company
1135 Atlantic Avenue
Alameda, CA 94501**

Prepared By:
MET Laboratories, Inc.
914 W. Patapsco Ave.
Baltimore, MD 21230

Electromagnetic Compatibility Criteria Test Report

for the

S&C Electric Company
1720 IntelliCom

Tested under
the FCC Certification Rules
contained in
Title 47 of the CFR, Parts 15 Subpart B & ICES-003
for Class A Digital Devices
&
15.247 Subpart C & RSS-210, Issue 8, December 2010
for Intentional Radiators



Minh Ly, Project Engineer
Electromagnetic Compatibility Lab



Jennifer Warnell
Documentation Department

Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules Parts 15B, 15.247 and Industry Canada standards ICES-003, Issue 4 February 2004, RSS-210, Issue 8, December 2010 under normal use and maintenance.



Shawn McMillen,
Wireless Manager, Electromagnetic Compatibility Lab

Report Status Sheet

Revision	Report Date	Reason for Revision
∅	September 12, 2011	Initial Issue.

Table of Contents

I.	Executive Summary	1
	A. Purpose of Test	2
	B. Executive Summary	2
II.	Equipment Configuration	3
	A. Overview	4
	B. References	5
	C. Test Site	5
	D. Description of Test Sample	6
	E. Equipment Configuration	7
	F. Support Equipment	7
	G. Ports and Cabling Information	7
	H. Mode of Operation	7
	I. Method of Monitoring EUT Operation	8
	J. Modifications	8
	a) Modifications to EUT	8
	b) Modifications to Test Standard	8
	K. Disposition of EUT	8
III.	Electromagnetic Compatibility Criteria for Unintentional Radiators	9
	§ 15.107(a) Conducted Emissions Limits	10
	§ 15.109(a) Radiated Emissions Limits	12
IV.	Electromagnetic Compatibility Criteria for Intentional Radiators	16
	§ 15.203 Antenna Requirement	17
	§ 15.207(a) Conducted Emissions Limits	18
	§ 15.247(a) 6 dB and 99% Bandwidth	21
	§ 15.247(b) Peak Power Output and RF Exposure	38
	§ 15.247(d) Radiated Spurious Emissions Requirements and Band Edge	57
	§ 15.247(d) RF Conducted Spurious Emissions Requirements and Band Edge	87
	§ 15.247(e) Peak Power Spectral Density	131
V.	Test Equipment	152
VI.	Certification & User's Manual Information	154
	A. Certification Information	155
	B. Label and User's Manual Information	159
VII.	ICES-003 Procedural & Labeling Requirements	161

List of Tables

Table 1. Executive Summary of EMC Part 15.247 Compliance Testing	2
Table 2. EUT Summary Table.....	4
Table 3. References	5
Table 4. Equipment Configuration	7
Table 5. Support Equipment.....	7
Table 6. Ports and Cabling Information	7
Table 7. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Subsections 15.107(a) (b) and 15.207(a)	10
Table 8. Conducted Emissions - Voltage, AC Power, (120VAC).....	11
Table 9. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b)	12
Table 10. Radiated Emissions Limits, Test Results, FCC Limits, 30 MHz – 1 GHz	13
Table 11. Radiated Emissions Limits, Test Results, FCC Limits, 1 GHz – 6 GHz.....	14
Table 12. Radiated Emissions Limits, Test Results, ICES-003 Limits	15
Table 13. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)	18
Table 14. Conducted Emissions, 15.207, Test Results.....	19
Table 15. Occupied Bandwidth, Test Results, 2.4 GHz, Port 1.....	22
Table 16. Occupied Bandwidth, Test Results, 2.4 GHz, Port 2.....	22
Table 17. Occupied Bandwidth, Test Results, 2.4 GHz, Port 3.....	22
Table 18. Occupied Bandwidth, Test Results, 5 GHz, Port 1.....	23
Table 19. Occupied Bandwidth, Test Results, 5 GHz, Port 2.....	23
Table 20. Occupied Bandwidth, Test Results, 5 GHz, Port 3.....	23
Table 21. Output Power Requirements from §15.247.....	38
Table 22. Peak Output Power, Test Results, 2.4 GHz, Port 1	39
Table 23. Peak Output Power, Test Results, 2.4 GHz, Port 2	39
Table 24. Peak Output Power, Test Results, 2.4 GHz, Port 3	39
Table 25. RF Output Power Results – All Ports, 802.11n Mode (20MHz).....	39
Table 26. RF Output Power Results – All Ports, 802.11n Mode (40MHz).....	39
Table 27. Peak Output Power, Test Results, 5 GHz, Port 1	40
Table 28. Peak Output Power, Test Results, 5 GHz, Port 2	40
Table 29. Peak Output Power, Test Results, 5 GHz, Port 3	40
Table 30. RF Output Power Results – All Ports, 802.11n Mode (20MHz).....	40
Table 31. RF Output Power Results – All Ports, 802.11n mode (40MHz)	40
Table 32. Restricted Bands of Operation.....	57
Table 33. Radiated Emissions Limits Calculated from FCC Part 15, § 15.209 (a).....	58
Table 34. Radiated Harmonic Emissions, Low Channel, 2.4 GHz, Port 1, 802.11g, 13 dBi Sector	59
Table 35. Radiated Harmonic Emissions, Mid Channel, 2.4 GHz, Port 1, 802.11g, 13 dBi Sector	59
Table 36. Radiated Harmonic Emissions, High Channel, 2.4 GHz, Port 1, 802.11g, 13 dBi Sector.....	59
Table 37. Radiated Harmonic Emissions, Low Channel, 2.4 GHz, Combined Ports, 802.11n 20MHz, 13 dBi Sector	60
Table 38. Radiated Harmonic Emissions, Mid Channel, 2.4 GHz, Combined Ports, 802.11n 20MHz, 13 dBi Sector.....	60
Table 39. Radiated Harmonic Emissions, High Channel, 2.4 GHz, Combined Ports, 802.11n 20MHz, 13 dBi Sector	60
Table 40. Radiated Harmonic Emissions, Mid Channel, 2.4 GHz, Combined Ports, 802.11n 40MHz, 5 dBi Omni.....	61
Table 41. Radiated Harmonic Emissions, Low Channel, 5 GHz, Combined Ports, 802.11a, 9 dBi Omni	62
Table 42. Radiated Harmonic Emissions, Mid Channel, 5 GHz, Combined Ports, 802.11a, 9 dBi Omni	62
Table 43. Radiated Harmonic Emissions, High Channel, 5 GHz, Combined Ports, 802.11a, 9 dBi Omni.....	62
Table 44. Radiated Harmonic Emissions, Low Channel, 5 GHz, Combined Ports, 802.11a, 16 dBi Sector	63
Table 45. Radiated Harmonic Emissions, Mid Channel, 5 GHz, Combined Ports, 802.11a, 16 dBi Sector	63
Table 46. Radiated Harmonic Emissions, High Channel, 5 GHz, Combined Ports, 802.11a, 16 dBi Sector.....	63
Table 47. Radiated Harmonic Emissions, Low Channel, 5 GHz, Combined Ports, 802.11a, 19 dBi Panel.....	64
Table 48. Radiated Harmonic Emissions, Mid Channel, 5 GHz, Combined Ports, 802.11a, 19 dBi Panel	64
Table 49. Radiated Harmonic Emissions, High Channel, 5 GHz, Combined Ports, 802.11a, 19 dBi Panel	64
Table 50. Radiated Harmonic Emissions, Low Channel, 5 GHz, Combined Ports, 802.11n 20MHz, 9 dBi Omni	65

Table 51. Radiated Harmonic Emissions, Mid Channel, 5 GHz, Combined Ports, 802.11n 20MHz, 9 dBi Omni	65
Table 52. Radiated Harmonic Emissions, High Channel, 5 GHz, Combined Ports, 802.11n 20MHz, 9 dBi Omni	65
Table 53. Radiated Harmonic Emissions, Low Channel, 5 GHz, Combined Ports, 802.11n 20MHz, 16 dBi Sector	66
Table 54. Radiated Harmonic Emissions, Mid Channel, 5 GHz, Combined Ports, 802.11n 20MHz, 16 dBi Sector	66
Table 55. Radiated Harmonic Emissions, High Channel, 5 GHz, Combined Ports, 802.11n 20MHz, 16 dBi Sector	66
Table 56. Radiated Harmonic Emissions, Low Channel, 5 GHz, Combined Ports, 802.11n 20MHz, 19 dBi Panel	67
Table 57. Radiated Harmonic Emissions, Mid Channel, 5 GHz, Combined Ports, 802.11n 20MHz, 19 dBi Panel	67
Table 58. Radiated Harmonic Emissions, High Channel, 5 GHz, Combined Ports, 802.11n 20MHz, 19 dBi Panel	67
Table 59. Radiated Harmonic Emissions, Low Channel, 5 GHz, Combined Ports, 802.11n 40MHz, 9 dBi Omni	68
Table 60. Radiated Harmonic Emissions, High Channel, 5 GHz, Combined Ports, 802.11n 40MHz, 5 dBi Omni	68
Table 61. Radiated Harmonic Emissions, Low Channel, 5 GHz, Combined Ports, 802.11n 40MHz, 16 dBi Sector	68
Table 62. Radiated Harmonic Emissions, High Channel, 5 GHz, Combined Ports, 802.11n 40MHz, 16 dBi Sector	68
Table 63. Radiated Harmonic Emissions, Low Channel, 5 GHz, Combined Ports, 802.11n 40MHz, 19 dBi Panel	69
Table 64. Radiated Harmonic Emissions, High Channel, 5 GHz, Combined Ports, 802.11n 40MHz, 19 dBi Panel	69
Table 65. Peak Power Spectral Density, Test Results, 2.4 GHz, Port 1	131
Table 66. Peak Power Spectral Density, Test Results, 2.4 GHz, Port 2	131
Table 67. Peak Power Spectral Density, Test Results, 2.4 GHz, Port 3	132
Table 68. Peak Power Spectral Density, Test Results, 2.4 GHz, Combined Ports	132
Table 69. Peak Power Spectral Density, Test Results, 5 GHz, Port 1	132
Table 70. Peak Power Spectral Density, Test Results, 5 GHz, Port 2	132
Table 71. Peak Power Spectral Density, Test Results, 5 GHz, Port 3	133
Table 72. Peak Power Spectral Density, Test Results, 5 GHz, Combined Ports	133

List of Figures

Figure 1. Block Diagram of Test Configuration	6
Figure 2. Block Diagram, Occupied Bandwidth Test Setup	21
Figure 3. Block Diagram, Peak Power Output Test Setup	38

List of Terms and Abbreviations

AC	Alternating Current
ACF	Antenna Correction Factor
Cal	Calibration
<i>d</i>	Measurement Distance
dB	Decibels
dB μ A	Decibels above one microamp
dB μ V	Decibels above one microvolt
dB μ A/m	Decibels above one microamp per meter
dB μ V/m	Decibels above one microvolt per meter
DC	Direct Current
E	Electric Field
DSL	Digital Subscriber Line
ESD	Electrostatic Discharge
EUT	Equipment Under Test
<i>f</i>	Frequency
FCC	Federal Communications Commission
GRP	Ground Reference Plane
H	Magnetic Field
HCP	Horizontal Coupling Plane
Hz	Hertz
IEC	International Electrotechnical Commission
kHz	kilohertz
kPa	kilopascal
kV	kilovolt
LISN	Line Impedance Stabilization Network
MHz	Megahertz
μ H	microhenry
μ	microfarad
μ s	microseconds
NEBS	Network Equipment-Building System
PRF	Pulse Repetition Frequency
RF	Radio Frequency
RMS	Root-Mean-Square
TWT	Traveling Wave Tube
V/m	Volts per meter
VCP	Vertical Coupling Plane

I. Executive Summary

A. Purpose of Test

An EMC evaluation was performed to determine compliance of the S&C Electric Company 1720 IntelliCom, with the requirements of Part 15, §15.247. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the 1720 IntelliCom. S&C Electric Company should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the 1720 IntelliCom, has been **permanently** discontinued.

B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, §15.247, in accordance with S&C Electric Company, purchase order number 3035. All tests were conducted using measurement procedure ANSI C63.4-2003.

FCC Reference	IC Reference	Description	Compliance
47 CFR Part 15.247:2005	RSS-210 Issue 8: 2007	Applicable Standard	Compliant
47 CFR Part 15.107 (a)	RSS-210 Issue 8: 2007	Conducted Emission Limits for a Class A Digital Device	Compliant
47 CFR Part 15.109 (a)	RSS-210 Issue 8: 2007	Radiated Emission Limits for a Class A Digital Device	Compliant
Title 47 of the CFR, Part 15 §15.203	N/A	Antenna Requirement	Compliant
Title 47 of the CFR, Part 15 §15.207(a)	RSS-210(7.2.2)	Conducted Emission Voltage	Compliant
Title 47 of the CFR, Part 15 §15.247(a)(1)	RSS-210(A8.1)	Occupied Bandwidth	Compliant
Title 47 of the CFR, Part 15 §15.247(b)	RSS-210(A8.4)	RF Output Power	Compliant
Title 47 of the CFR, Part 15 §15.209, §15.247(d)	RSS-210(A8.5)	Radiated Spurious Emissions	Compliant
Title 47 of the CFR, Part 15 §15.205	RSS-210(A8.5)	Emissions at Restricted Band	Compliant
Title 47 of the CFR, Part 15 §15.209, §15.247(d)	RSS-210(A8.5)	Conducted Spurious Emissions	Compliant
Title 47 of the CFR, Part 15; §15.247(e)	RSS-210(A8.3)	Power Spectral Density	Compliant
Title 47 of the CFR, Part 15 §15.247(i)	RSS-Gen(5.5)	Maximum Permissible Exposure	Compliant
N/A	RSS-Gen(4.8)	Receiver Spurious Emissions	Compliant

Table 1. Executive Summary of EMC Part 15.247 Compliance Testing

II. Equipment Configuration

A. Overview

MET Laboratories, Inc. was contracted by S&C Electric Company to perform testing on the 1720 IntelliCom, under S&C Electric Company's purchase order number 3035.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the S&C Electric Company, 1720 IntelliCom.

The results obtained relate only to the item(s) tested.

Model(s) Tested:	1720 IntelliCom			
Model(s) Covered:	1720 IntelliCom			
EUT Specifications:	Primary Power: 120/240VAC			
	FCC ID: U3D-INTELLICOM IC: 5349C-INTELLICOM			
	Type of Modulations:	OFDM (Orthogonal Frequency Division multiplexing)		
	Emission Designator:	2.4 GHz	5 GHz	
		802.11g: 16M3D7D	802.11a: 16M2D7D	
		802.11n 20MHz: 17M7D7D	802.11n 20MHz: 17M5D7D	
		802.11n 40MHz: 36M6D7D	802.11n 40MHz: 36M6D7D	
	Equipment Code:	DTS		
	Peak RF Output Power:	2.4 GHz	5 GHz	
		802.11g: 26.09dBm	802.11a: 29.62dBm	
802.11n 20MHz: 28.13dBm		802.11n 20MHz: 29.57dBm		
	802.11n 40MHz: 27.10dBm	802.11n 40MHz: 29.28dBm		
EUT Frequency Ranges:	2412MHz – 2462MHz; 2437-2437MHz 5745MHz – 5825MHz; 5755MHz – 5795MHz			
Analysis:	The results obtained relate only to the item(s) tested.			
Environmental Test Conditions:	Temperature: 15-35° C			
	Relative Humidity: 30-60%			
	Barometric Pressure: 860-1060 mbar			
Evaluated by:	Minh Ly			
Report Date(s):	September 12, 2011			

Table 2. EUT Summary Table

B. References

CFR 47, Part 15, Subpart C	Federal Communication Commission, Code of Federal Regulations, Title 47, Part 15: General Rules and Regulations, Allocation, Assignment, and Use of Radio Frequencies
RSS-210, Issue 8, December 2010	Low-power License-exempt Radiocommunications Devices (All Frequency Bands): Category I Equipment
CFR 47, Part 15, Subpart B	Electromagnetic Compatibility: Criteria for Radio Frequency Devices
ICES-003, Issue 4 February 2004	Electromagnetic Compatibility: Criteria for Radio Frequency Devices
ANSI C63.4:2003	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI/NCSL Z540-1-1994	Calibration Laboratories and Measuring and Test Equipment - General Requirements
ANSI/ISO/IEC 17025:2000	General Requirements for the Competence of Testing and Calibration Laboratories

Table 3. References

C. Test Site

All testing was performed at MET Laboratories, Inc., 3162 Belick Street, Santa Clara, CA 95054. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 5 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

D. Description of Test Sample

The S&C Electric Company 1720 IntelliCom, Equipment Under Test (EUT), is a Dual Radio Wireless Mesh Node.

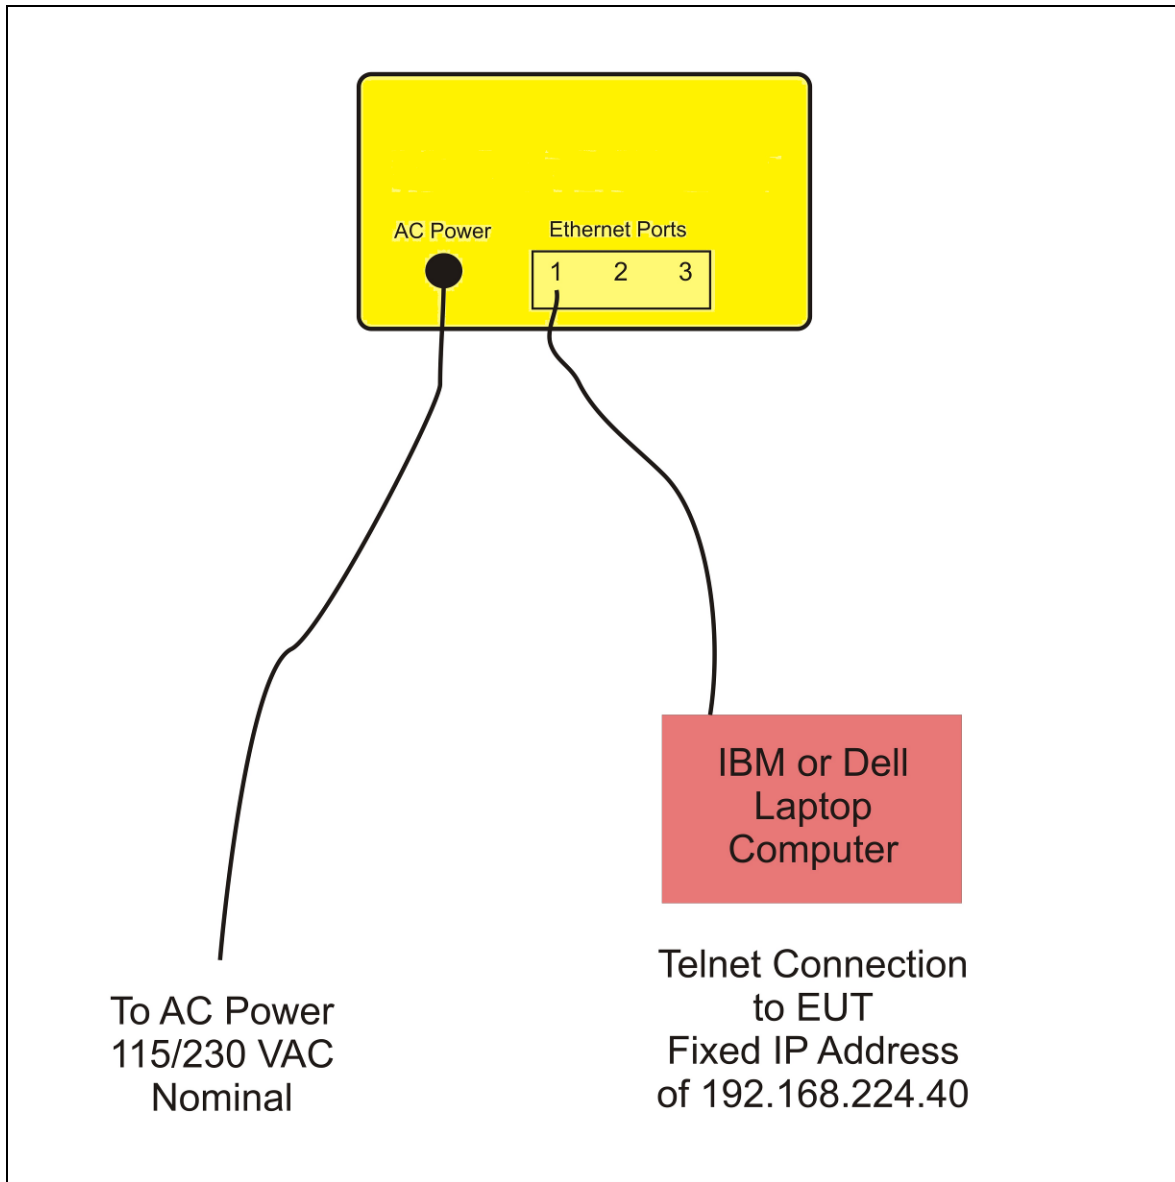


Figure 1. Block Diagram of Test Configuration

E. Equipment Configuration

The EUT was set up as outlined in Figure 1, Block Diagram of Test Setup. All cards, racks, etc., incorporated as part of the EUT is included in the following list.

Name / Description	Model Number	Serial Number	Rev. #
IntelliCom WAN 1720 Mesh Node	1720	N/A	1
9DBI OMNI	MA-W055-MIMONHFT9	N/A	N/A
13DBI SECTOR (2.4GHZ)	MA-WD24-MIMOFT13	N/A	N/A
16DBI SECTOR	MA-WD55-MIMOFT16	N/A	N/A
19DBI PANEL	MA-WA55-MIMO	N/A	N/A

Table 4. Equipment Configuration

F. Support Equipment

Support equipment necessary for the operation and testing of the EUT is included in the following list.

Ref. ID	Name / Description	Manufacturer	Model Number
N/A	LAPTOP COMPUTER	IBM	T42
N/A	LAPTOP COMPUTER	DELL	S300

Table 5. Support Equipment

G. Ports and Cabling Information

Ref. ID	Port name on EUT	Cable Description or reason for no cable	Qty.	Length (m)	Shielded (Y/N)	Termination Box ID & Port Name
N/A	PORT 1	ETHERNET	1	18	N	N/A
N/A	PORT 2 – 3	NOT CONNECTED; ONLY 1 ETHERNET CONNECTION IS NECESSARY TO COMMUNICATE WITH EUT	N/A	N/A	N/A	N/A
N/A	AC POWER	3 PIN CIRCULAR CONNECTOR	1	5	N	N/A
N/A	USB	NOT USED; DISABLED	N/A	N/A	N/A	N/A

Table 6. Ports and Cabling Information

H. Mode of Operation

The EUT has the Atheros Radio Test (ART) software loaded. The EUT can be put into continuous TX or RX using ART. The Mesh Node has a default IP address of 192.168.224.150. An external computer can ping this address to verify the Ethernet PHY and processor are running.

I. Method of Monitoring EUT Operation

An external computer can ping this address to verify the Ethernet PHY and processor are running.

J. Modifications

a) Modifications to EUT

1720 IntelliCom did not pass conducted line emission (15.207) testing. It was determined that additional common mode filtering was necessary on the line and neutral AC power input. In addition, improper trace routing caused arcing between the AC input and ground. The ground plane was removed in the vicinity of the common mode filtering and power pins.

The following was used to resolve this:

Added 100 uH SMT inductor between pin 1 of J7 and node formed by C5, D3, and D4.

Added 100 uH SMT inductor between pin 2 of F1 and node formed by C6, D3, and D4.

b) Modifications to Test Standard

No modifications were made to the test standard.

K. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to S&C Electric Company upon completion of testing.

III. Electromagnetic Compatibility Criteria for Unintentional Radiators

Electromagnetic Compatibility Criteria

§ 15.107 Conducted Emissions Limits

Test Requirement(s): **15.107 (a)** Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 7. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

15.107 (b) For a Class A digital device that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 7. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals. The lower limit applies at the band edges.

15.207(a), Except as shown in paragraphs (b) and (c) of this section*, charging, AC adapters or battery eliminators the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the Table 7, as measured using a 50 µH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency range (MHz)	Class A Conducted Limits (dBµV)		*Class B Conducted Limits (dBµV)	
	Quasi-Peak	Average	Quasi-Peak	Average
* 0.15- 0.45	79	66	66 - 56	56 - 46
0.45 - 0.5	79	66	56	46
0.5 - 30	73	60	60	50

Note 1 — The lower limit shall apply at the transition frequencies.
 Note 2 — The limit decreases linearly with the logarithm if the frequency in the range 0.15 MHz to 0.5 MHz.
 * -- Limits per Subsection 15.207(a).

Table 7. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Subsections 15.107(a) (b) and 15.207(a)

Test Results: The EUT was compliant with the Class B requirement(s) of this section. Measured emissions were below applicable limits.


Test Engineer(s): Minh Ly

Test Date(s): 08/18/09


Conducted Emissions - Voltage, AC Power, (120VAC)

Line	Freq (MHz)	QP Amplitude	QP Limit	Delta	Pass	Average Amplitude	Average Limit	Delta	Pass
Line	0.207	36.87	63.332	-26.462	Pass	32.02	53.332	-21.312	Pass
Line	9.56	36.79	60	-23.21	Pass	30.65	50	-19.35	Pass
Line	23.14	20.97	60	-39.03	Pass	15.998	50	-34.002	Pass
Neutral	0.207	34.76	63.332	-28.572	Pass	31.85	53.332	-21.482	Pass
Neutral	0.414	32.71	57.591	-24.881	Pass	31.52	47.591	-16.071	Pass
Neutral	9.562	37.77	60	-22.23	Pass	30.47	50	-19.53	Pass

Table 8. Conducted Emissions - Voltage, AC Power, (120VAC)

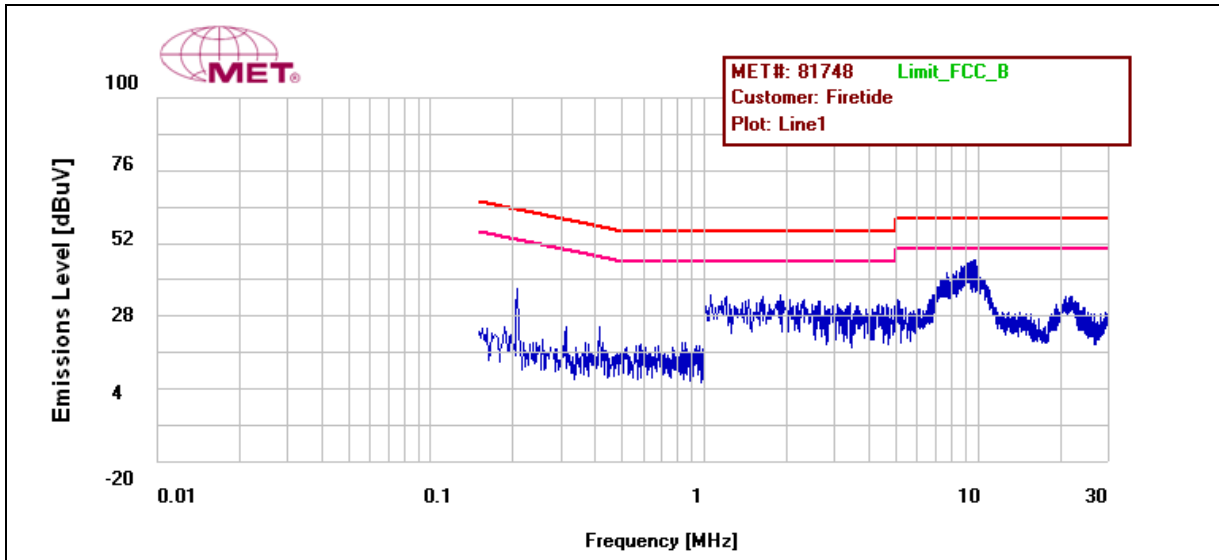

Plot 1. Conducted Emission, Phase Line Plot

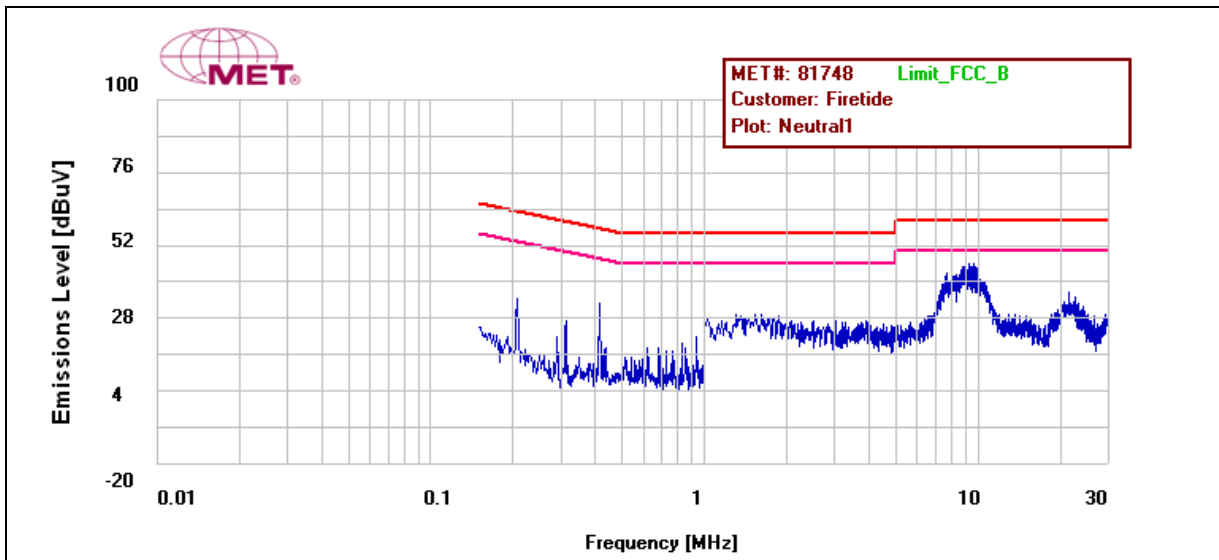

Plot 2. Conducted Emission, Neutral Line Plot

Radiated Emission Limits

§ 15.109 Radiated Emissions Limits

Test Requirement(s): **15.109 (a)** Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the Class B limits expressed in Table 9.

15.109 (b) The field strength of radiated emissions from a Class A digital device, as determined at a distance of 10 meters, shall not exceed the Class A limits expressed in Table 9.

Frequency (MHz)	Field Strength (dB μ V/m)	
	§15.109 (b), Class A Limit (dB μ V) @ 10m	§15.109 (a), Class B Limit (dB μ V) @ 3m
30 - 88	39.00	40.00
88 - 216	43.50	43.50
216 - 960	46.40	46.00
Above 960	49.50	54.00

Table 9. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b)

Test Procedures: The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber. The method of testing and test conditions of ANSI C63.4 were used. An antenna was located 3m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. Unless otherwise specified, measurements were made using a quasi-peak detector with a 120 kHz bandwidth.

Test Results: The EUT was compliant with the Class A requirement(s) of this section. Measured emissions were below applicable limits.


Test Engineer(s): Minh Ly

Test Date(s): 08/11/09

Radiated Emissions Limits Test Results, Class A

Frequency (MHz)	Antenna Polarity	EUT Azimuth (Degrees)	Antenna Height (cm)	Uncorrected Amplitude (dBuV)	ACF (dB/m)	Pre Amp Gain (dB)	CBL (dB)	DCF (dB)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
45.84	V	278	100	26.74	9.164	0	1.644	-10.46	27.088	39	-11.912
100	V	0	100	20.3	12.7	0	2.47	-10.46	25.01	43.5	-18.49
100	H	237	190	21.32	11.1	0	2.47	-10.46	24.43	43.5	-19.07
157.52	H	106	202	29.59	10.898	0	3.178	-10.46	33.206	43.5	-10.294
157.6	V	213	100	28.96	11.292	0	3.178	-10.46	32.97	43.5	-10.53
332.48	H	206	109	20.96	14.75	0	4.64	-10.46	29.89	46.4	-16.51


Table 10. Radiated Emissions Limits, Test Results, FCC Limits, 30 MHz – 1 GHz

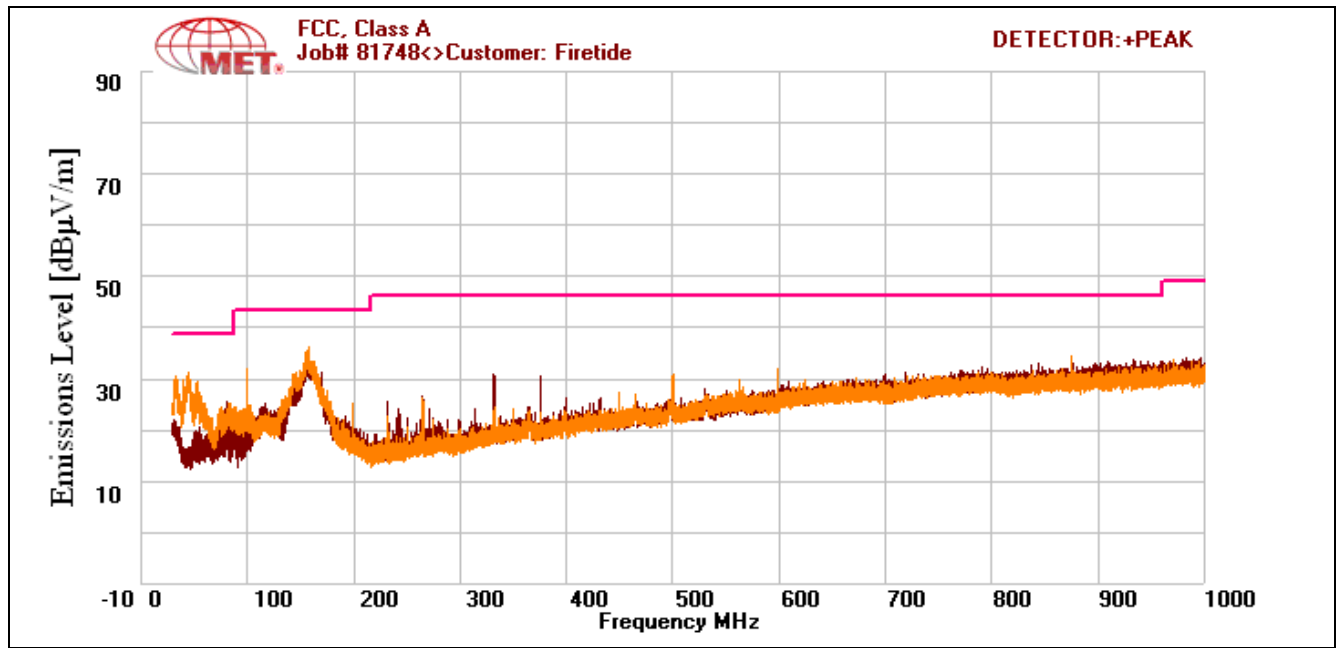

Plot 3. Radiated Emissions, Pre-Scan, FCC Limits, 30 MHz – 1 GHz

Frequency (MHz)	Antenna Polarity	EUT Azimuth (Degrees)	Antenna Height (cm)	Uncorrected Amplitude (dBuV)	ACF (dB/m)	Pre Amp Gain (dB)	CBL (dB)	DCF (dB)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1332	V	360	100	54.58	-1.641	35.149	1.726	-10.46	9.056	49.5	-40.444
1500	V	326	100	52.75	-1.848	34.894	1.82	-10.46	7.368	49.5	-42.132
4000	H	125	100	46.9	3.795	34.456	3.35	-10.46	9.129	49.5	-40.371
6000	V	0	100	44.09	8.972	34.372	4.61	-10.46	12.84	49.5	-36.66
6000	H	0	100	43.72	8.972	34.372	4.61	-10.46	12.47	49.5	-37.03

Table 11. Radiated Emissions Limits, Test Results, FCC Limits, 1 GHz – 6 GHz

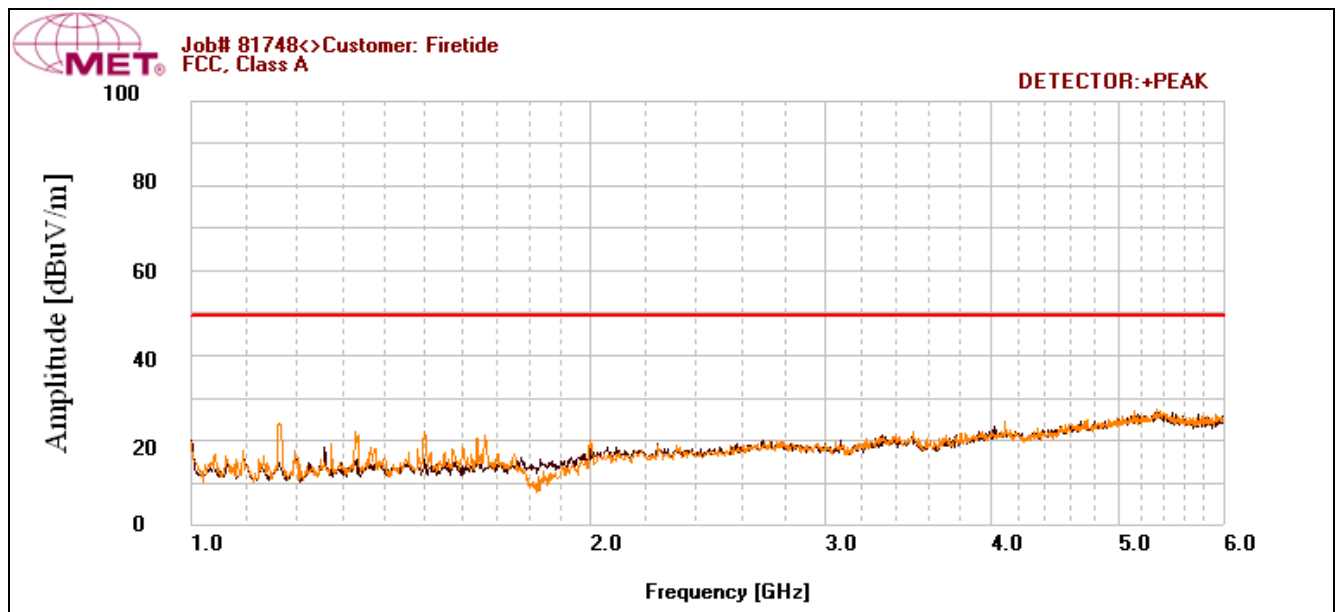


Plot 4. Radiated Emissions, Pre-Scan, FCC Limits, 1 GHz – 6 GHz

Radiated Emissions Limits Test Results, Class A

Frequency (MHz)	Antenna Polarity	EUT Azimuth (Degrees)	Antenna Height (cm)	Uncorrected Amplitude (dBuV)	ACF (dB/m)	Pre Amp Gain (dB)	CBL (dB)	DCF (dB)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
45.84	V	278	100	26.74	9.164	0	1.644	-10.46	27.088	40	-12.912
100	V	0	100	20.3	12.7	0	2.47	-10.46	25.01	40	-14.99
157.6	V	213	100	28.96	11.292	0	3.178	-10.46	32.97	40	-7.03
100	H	237	190	21.32	11.1	0	2.47	-10.46	24.43	40	-15.57
157.52	H	106	202	29.59	10.898	0	3.178	-10.46	33.206	40	-6.794
332.48	H	206	109	20.96	14.75	0	4.64	-10.46	29.89	47	-17.11

Table 12. Radiated Emissions Limits, Test Results, ICES-003 Limits

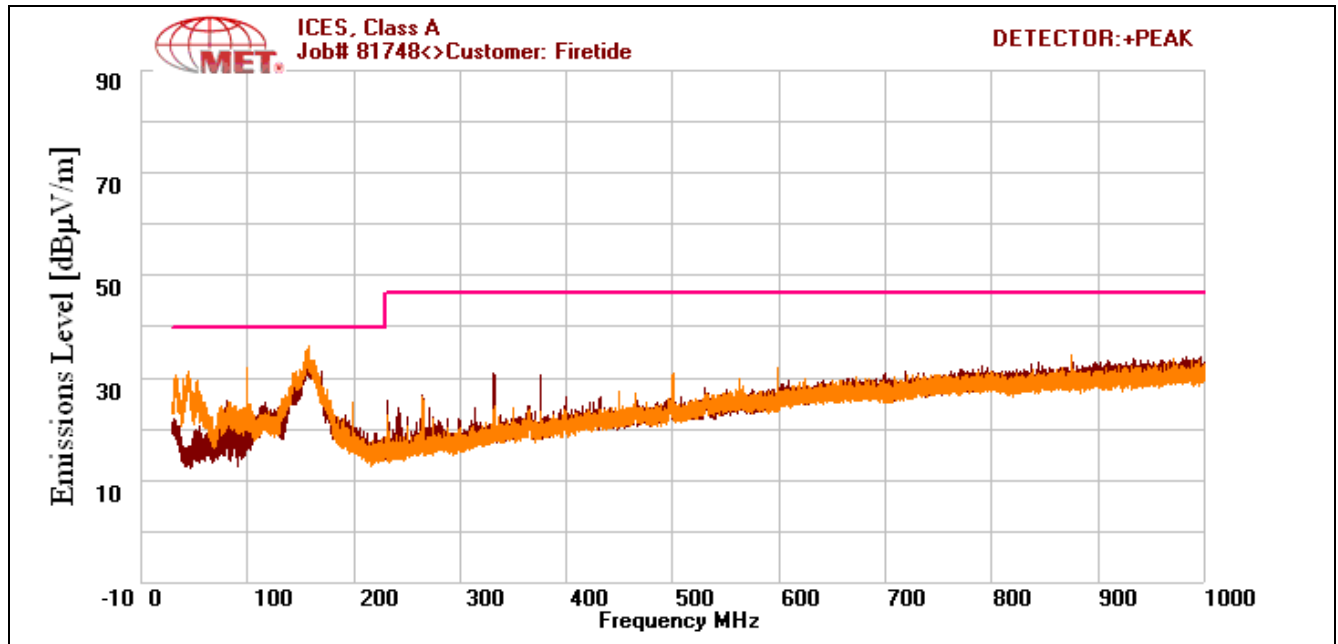

Plot 5. Radiated Emissions, Pre-Scan, ICES-003 Limits

IV. Electromagnetic Compatibility Criteria for Intentional Radiators

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.203 Antenna Requirement

Test Requirement: § 15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

Results: The EUT as tested is compliant the criteria of §15.203. The unit will be professionally installed.

Test Engineer(s): Minh Ly

Test Date(s): 08/11/09

Gain/Type	Model	Manufacturer
13dBi Sector (2.4GHz)	MA-WD24-MIMOFT13	MARS ANTENNAS & RF Systems LTD
5dBi Omni (2.4GHz & 5GHz)	C812-510010-A C812-510012-A	Wha Yu Industrial Co. Ltd
9dBi Omni (5GHz)	MA-W055-MIMONHFT9	MARS ANTENNAS & RF Systems LTD
16dBi Sector (5GHz)	MA-WD55-MIMOFT16	MARS ANTENNAS & RF Systems LTD
19dBi Panel (5GHz)	MA-WA55-MIMO	MARS ANTENNAS & RF Systems LTD

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.207 Conducted Emissions Limits

Test Requirement(s): § 15.207 (a): For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency range (MHz)	§ 15.207(a), Conducted Limit (dB μ V)	
	Quasi-Peak	Average
* 0.15- 0.45	66 - 56	56 - 46
0.45 - 0.5	56	46
0.5 - 30	60	50

Table 13. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)

Test Procedure: The EUT was placed on a 0.8 m-high wooden table inside a semi-anechoic chamber. The EUT was situated such that the back of the EUT was 0.4 m from one wall of the vertical ground plane, and the remaining sides of the EUT were no closer than 0.8 m from any other conductive surface. The EUT was powered from a 50 Ω /50 μ H Line Impedance Stabilization Network (LISN). The EMC receiver scanned the frequency range from 150 kHz to 30 MHz. Conducted Emissions measurements were made in accordance with *ANSI C63.4-2003 "Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz"*. The measurements were performed over the frequency range of 0.15 MHz to 30 MHz using a 50 Ω /50 μ H LISN as the input transducer to an EMC/field intensity meter. For the purpose of this testing, the transmitter was turned on.


Test Results: The EUT was compliant with this requirement.

Test Engineer(s): Minh Ly


Test Date(s): 08/17/09

Line	Freq (MHz)	QP Amplitude	QP Limit	Delta	Pass	Average Amplitude	Average Limit	Delta	Pass
Line	0.206	38.73	63.372	-24.642	Pass	33.83	53.372	-19.542	Pass
Line	0.76	21.03	56	-34.97	Pass	16.023	46	-29.977	Pass
Line	9.45	37.95	60	-22.05	Pass	31.47	50	-18.53	Pass
Neutral	0.207	36.5	63.332	-26.832	Pass	33.9	53.332	-19.432	Pass
Neutral	0.414	33.77	57.591	-23.821	Pass	32.7	47.591	-14.891	Pass
Neutral	9.117	38.87	60	-21.13	Pass	32.33	50	-17.67	Pass

Table 14. Conducted Emissions, 15.207, Test Results

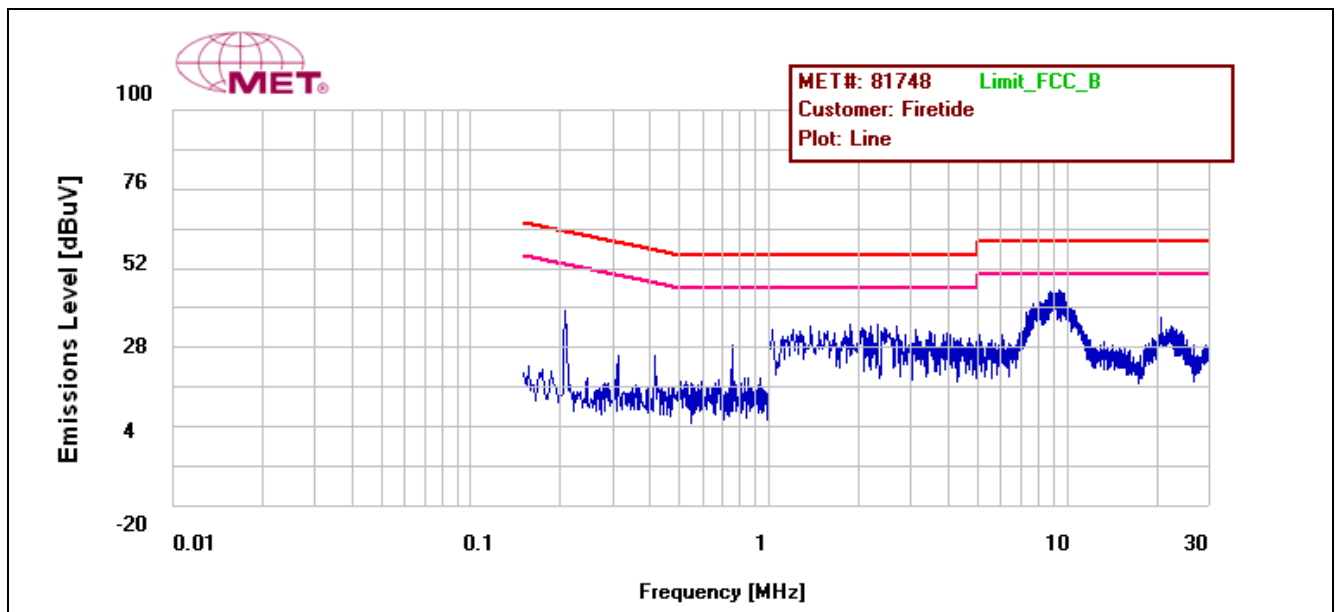

Plot 6. Conducted Emissions, Phase Line

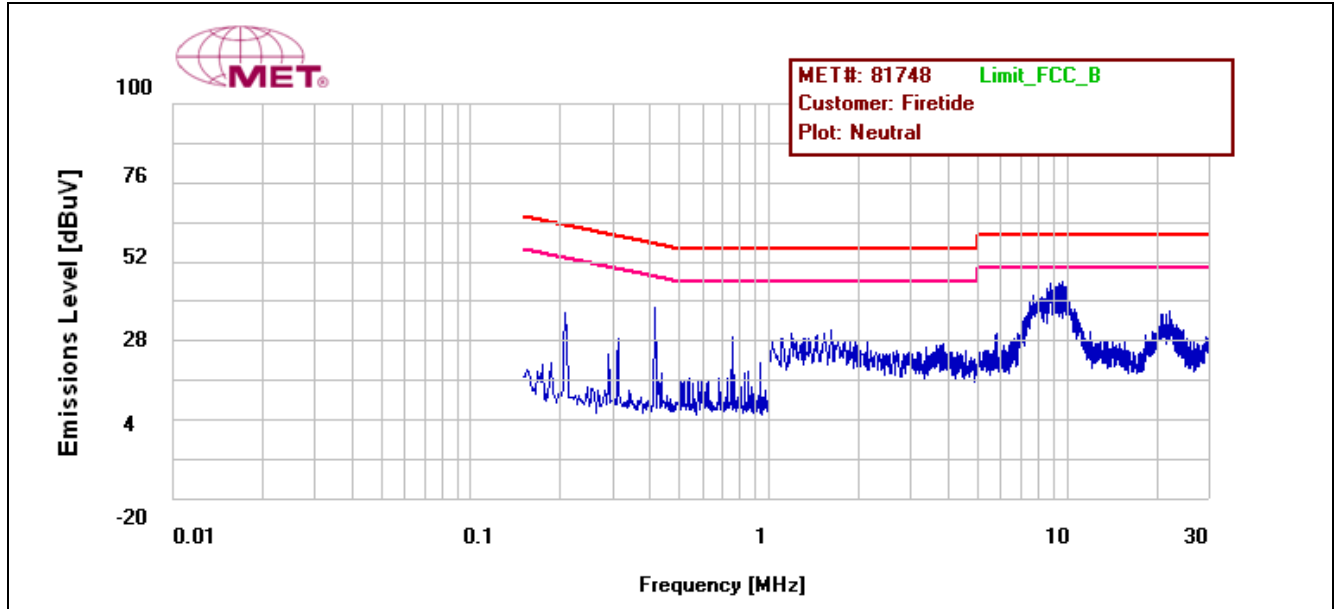

Plot 7. Conducted Emissions, Neutral Line

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(a) 6 dB and 99% Bandwidth

Test Requirements: § 15.247(a): Operation under the provisions of this section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

For systems using digital modulation techniques, the EUT may operate in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

Test Procedure: The transmitter was on and transmitting at the highest output power. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately 1% of the total emission bandwidth, VBW > RBW. The 6 dB Bandwidth was measured and recorded. The measurements were performed on the low, mid and high channels.

Test Results The EUT was compliant with § 15.247 (a).

The 6 dB and 99% Bandwidth was determined from the plots on the following pages.

Test Engineer(s): Minh Ly

Test Date(s): 08/17/09




Figure 2. Block Diagram, Occupied Bandwidth Test Setup

Occupied Bandwidth (2.4 GHz), Port 1				
Mode	Carrier Channel	Frequency (MHz)	Measured 6 dB Bandwidth (MHz)	Measured 99% Bandwidth (MHz)
802.11g	Low	2412	16.301	16.7118
	Mid	2437	15.702	16.9048
	High	2462	15.960	16.5275
802.11n (20MHz)	Low	2412	17.479	17.7502
	Mid	2437	17.576	17.8559
	High	2447	17.309	17.5549
802.11n (40MHz)	Mid	2437	36.633	36.7035

Table 15. Occupied Bandwidth, Test Results, 2.4 GHz, Port 1

Occupied Bandwidth (2.4 GHz), Port 2				
Mode	Carrier Channel	Frequency (MHz)	Measured 6 dB Bandwidth (MHz)	Measured 99% Bandwidth (MHz)
802.11n (20MHz)	Low	2412	17.573	17.7259
	Mid	2437	17.702	17.8810
	High	2462	17.278	17.8034
802.11n (40MHz)	Mid	2437	35.855	36.4845

Table 16. Occupied Bandwidth, Test Results, 2.4 GHz, Port 2

Occupied Bandwidth (2.4 GHz), Port 3				
Mode	Carrier Channel	Frequency (MHz)	Measured 6 dB Bandwidth (MHz)	Measured 99% Bandwidth (MHz)
802.11n (20MHz)	Low	2412	17.148	17.6532
	Mid	2437	16.838	17.7236
	High	2462	17.428	17.8052
802.11n (40MHz)	Mid	2437	36.046	36.3106

Table 17. Occupied Bandwidth, Test Results, 2.4 GHz, Port 3

Occupied Bandwidth (5 GHz), Port 1				
Mode	Carrier Channel	Frequency (MHz)	Measured 6 dB Bandwidth (MHz)	Measured 99% Bandwidth (MHz)
802.11g	Low	5745	13.473	16.2290
	Mid	5785	16.235	23.0412
	High	5825	15.746	22.3802
802.11n (20MHz)	Low	5745	17.538	17.8341
	Mid	5785	16.925	17.6839
	High	5825	17.365	17.6673
802.11n (40MHz)	Low	5755	35.503	36.5352
	High	5795	36.628	36.6484

Table 18. Occupied Bandwidth, Test Results, 5 GHz, Port 1


Occupied Bandwidth (5 GHz), Port 2				
Mode	Carrier Channel	Frequency (MHz)	Measured 6 dB Bandwidth (MHz)	Measured 99% Bandwidth (MHz)
802.11n (20MHz)	Low	5745	16.800	17.6619
	Mid	5785	17.509	17.6483
	High	5825	16.070	17.6021
802.11n (40MHz)	Low	5755	36.177	36.6398
	High	5795	35.487	36.9090

Table 19. Occupied Bandwidth, Test Results, 5 GHz, Port 2


Occupied Bandwidth (5 GHz), Port 3				
Mode	Carrier Channel	Frequency (MHz)	Measured 6 dB Bandwidth (MHz)	Measured 99% Bandwidth (MHz)
802.11n (20MHz)	Low	5745	17.411	17.7486
	Mid	5785	16.671	17.6934
	High	5825	16.539	17.7542
802.11n (40MHz)	Low	5755	36.143	36.9800
	High	5795	35.934	36.4675

Table 20. Occupied Bandwidth, Test Results, 5 GHz, Port 3


Occupied Bandwidth, 2.4 GHz, Port 1

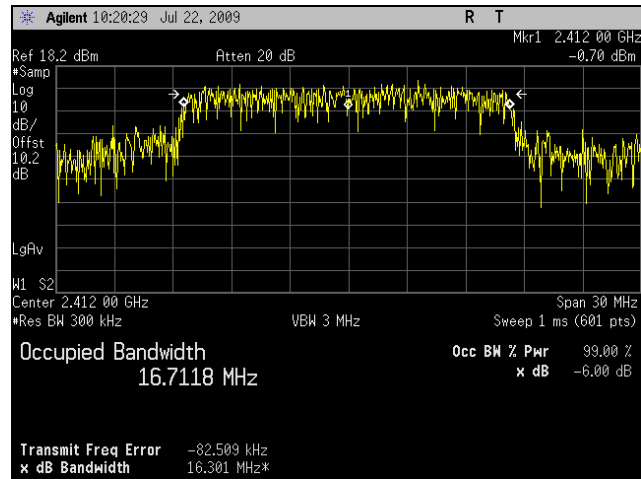


Plot 8. Occupied Band Width, Low Channel, 2.4 GHz, Port 1, 802.11g

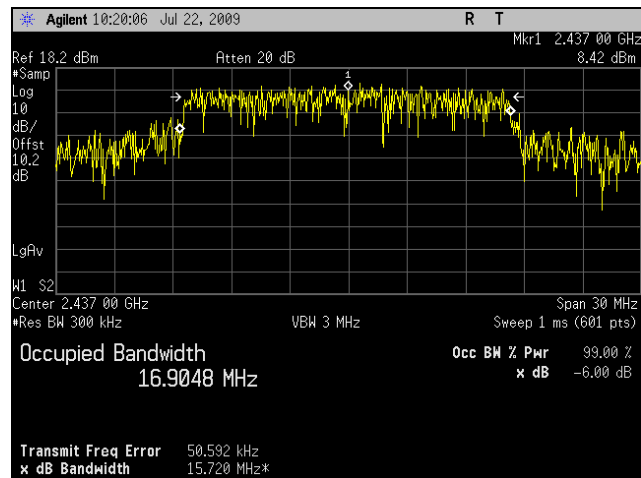


Plot 9. Occupied Band Width, Mid Channel, 2.4 GHz, Port 1, 802.11g

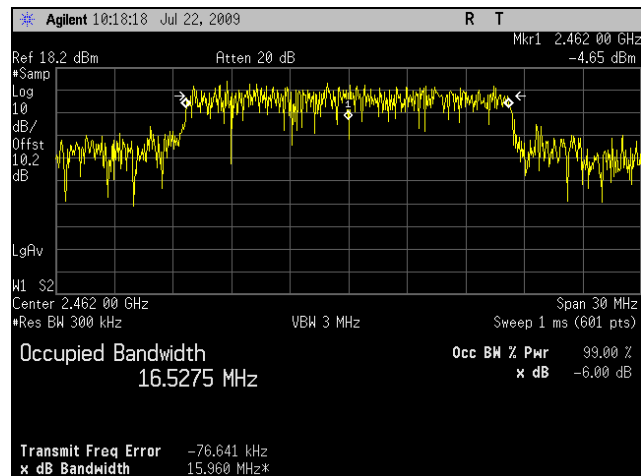


Plot 10. Occupied Band Width, High Channel, 2.4 GHz, Port 1, 802.11g

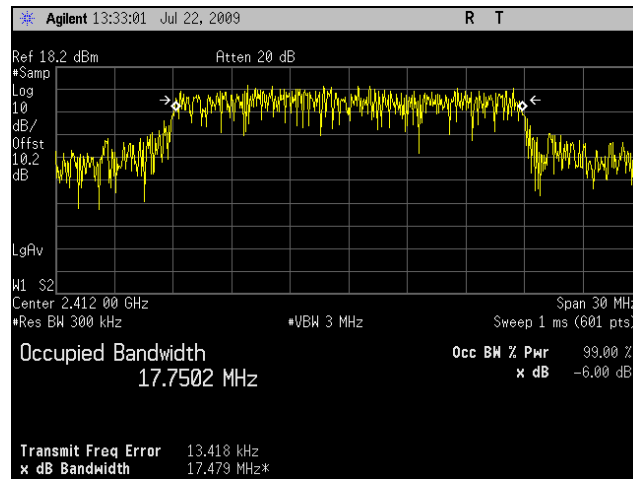


Plot 11. Occupied Band Width, Low Channel, 2.4 GHz, Port 1, 802.11n 20MHz

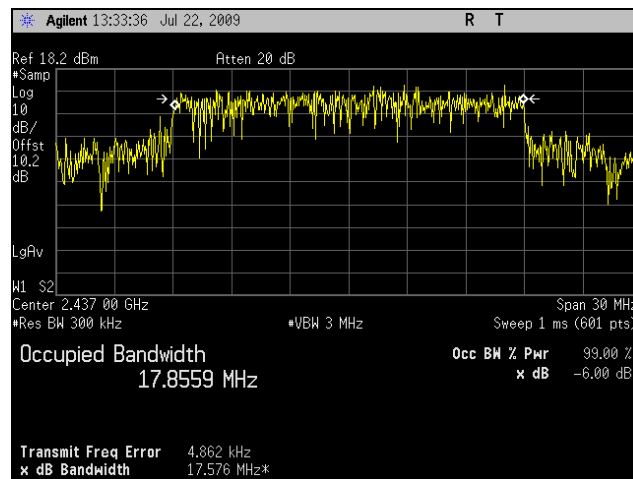

Plot 12. Occupied Band Width, Mid Channel, 2.4 GHz, Port 1, 802.11n 20MHz

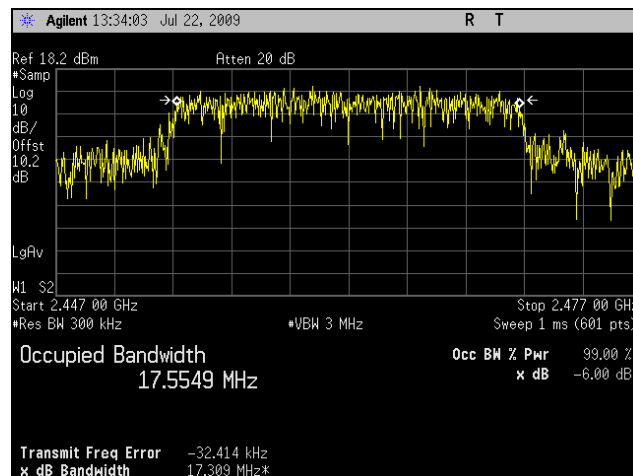


Plot 13. Occupied Band Width, High Channel, 2.4 GHz, Port 1, 802.11n 20MHz

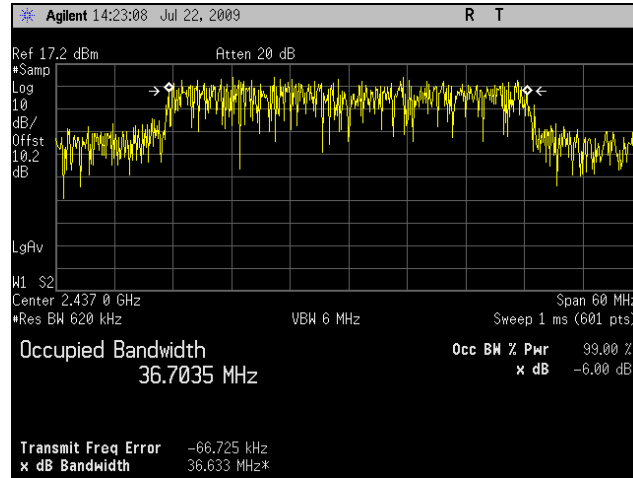


Plot 14. Occupied Band Width, Mid Channel, 2.4 GHz, Port 1, 802.11n 40MHz


Occupied Bandwidth, 2.4 GHz, Port 2

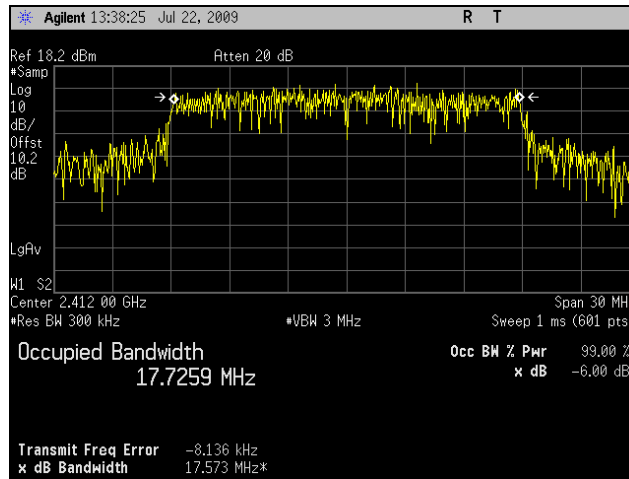


Plot 15. Occupied Band Width, Low Channel, 2.4 GHz, Port 2, 802.11n 20MHz

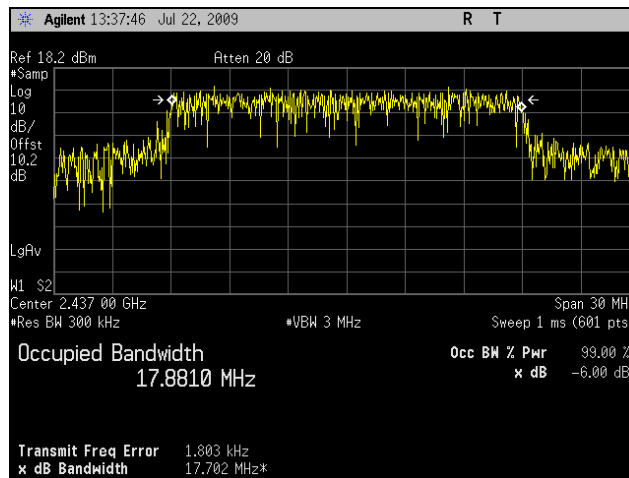

Plot 16. Occupied Band Width, Mid Channel, 2.4 GHz, Port 2, 802.11n 20MHz

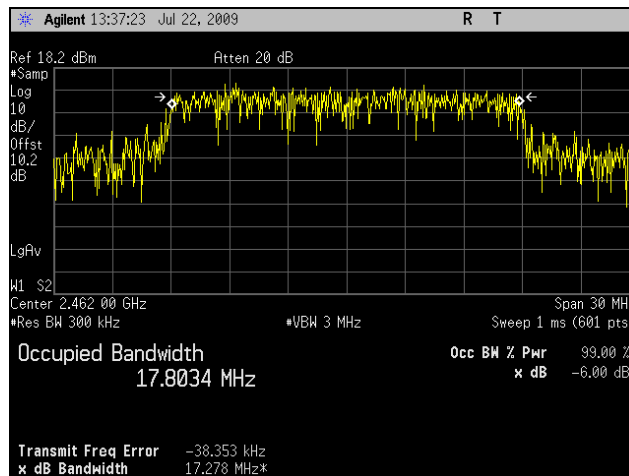


Plot 17. Occupied Band Width, High Channel, 2.4 GHz, Port 2, 802.11n 20MHz

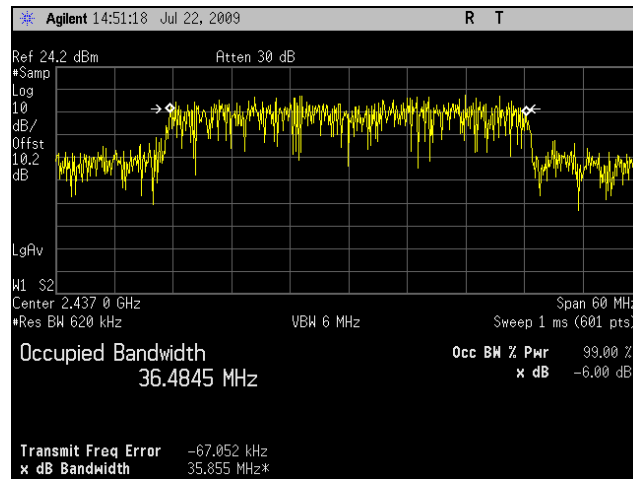


Plot 18. Occupied Band Width, Mid Channel, 2.4 GHz, Port 2, 802.11n 40MHz


Occupied Bandwidth, 2.4 GHz, Port 3

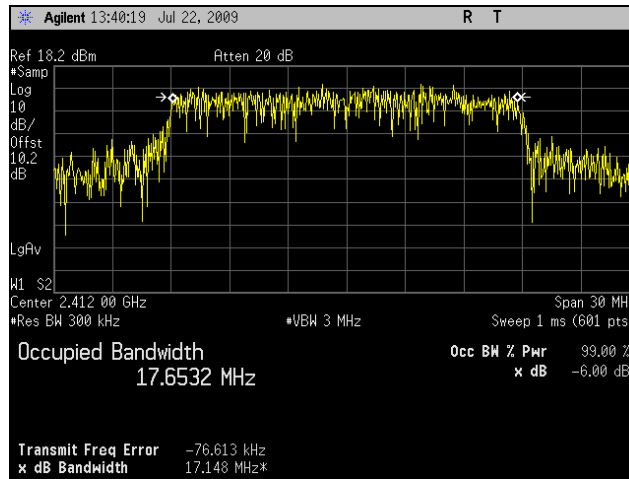


Plot 19. Occupied Band Width, Low Channel, 2.4 GHz, Port 3, 802.11n 20MHz

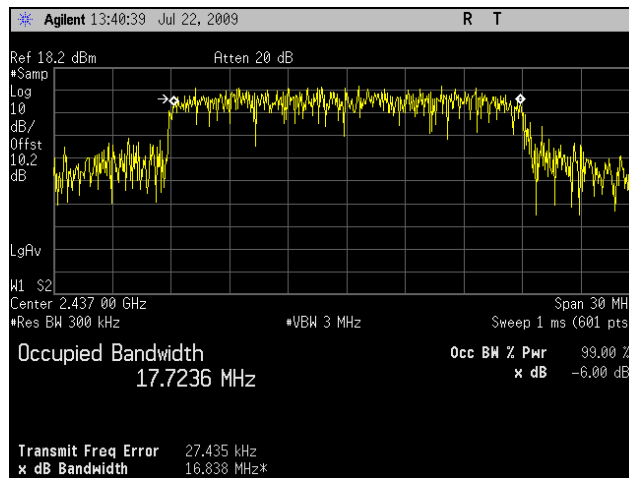

Plot 20. Occupied Band Width, Mid Channel, 2.4 GHz, Port 3, 802.11n 20MHz

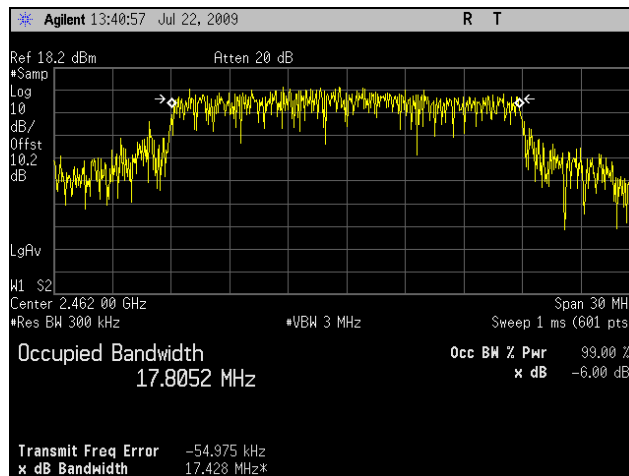


Plot 21. Occupied Band Width, High Channel, 2.4 GHz, Port 3, 802.11n 20MHz

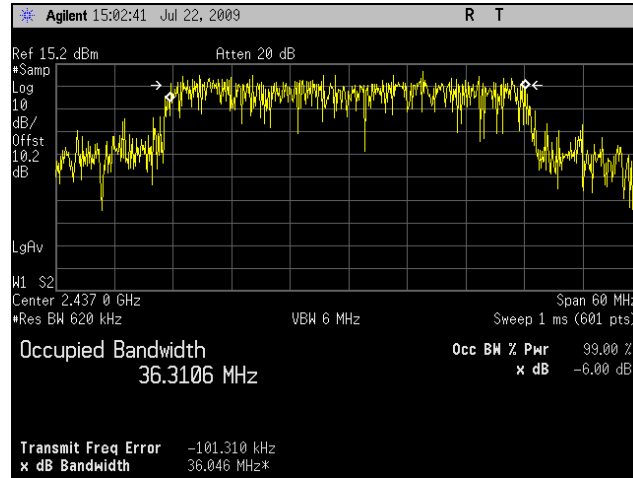


Plot 22. Occupied Band Width, Mid Channel, 2.4 GHz, Port 3, 802.11n 40MHz


Occupied Bandwidth, 5 GHz, Port 1

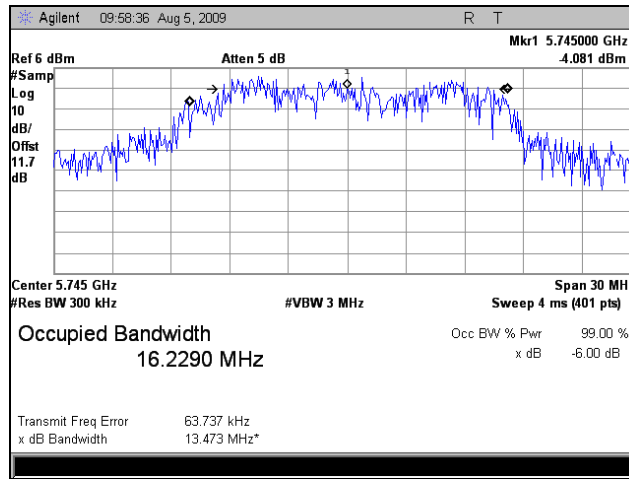


Plot 23. Occupied Band Width, Low Channel, 5 GHz, Port 1, 802.11a

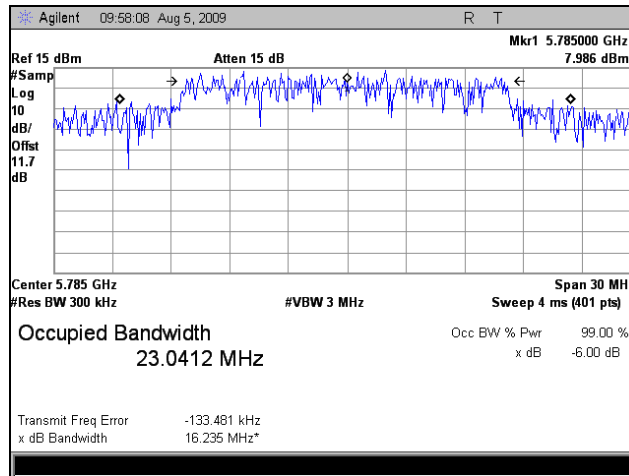


Plot 24. Occupied Band Width, Mid Channel, 5 GHz, Port 1, 802.11a

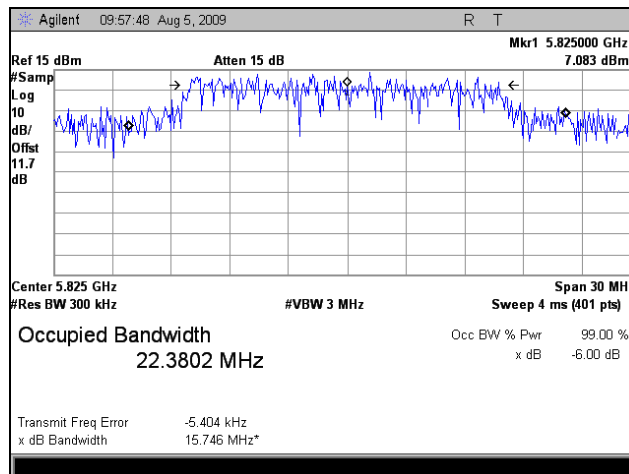


Plot 25. Occupied Band Width, High Channel, 5 GHz, Port 1, 802.11a

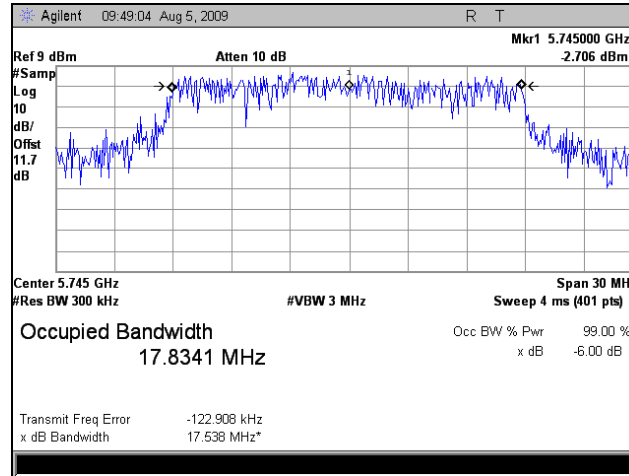


Plot 26. Occupied Band Width, Low Channel, 5 GHz, Port 1, 802.11n 20MHz

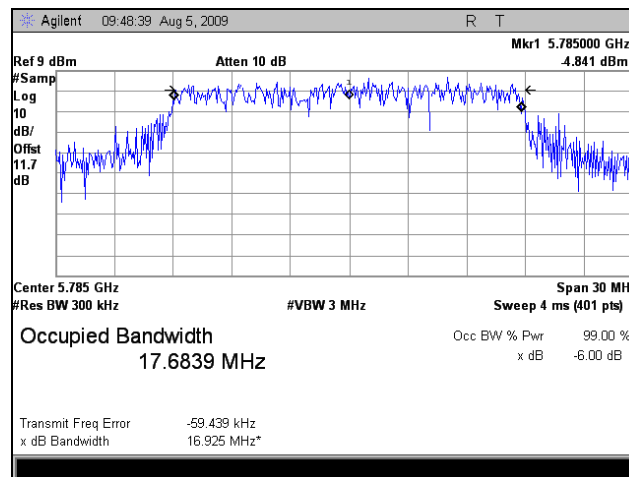


Plot 27. Occupied Band Width, Mid Channel, 5 GHz, Port 1, 802.11n 20MHz

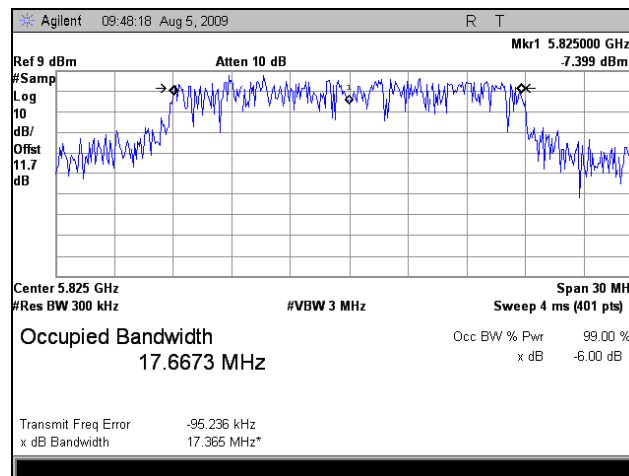

Plot 28. Occupied Band Width, High Channel, 5 GHz, Port 1, 802.11n 20MHz

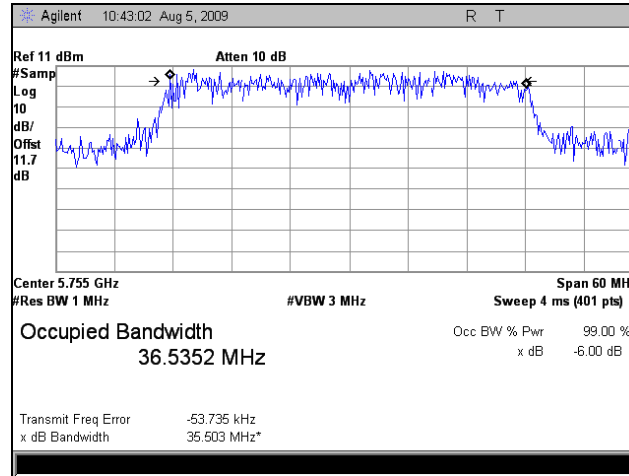


Plot 29. Occupied Band Width, Low Channel, 5 GHz, Port 1, 802.11n 40MHz

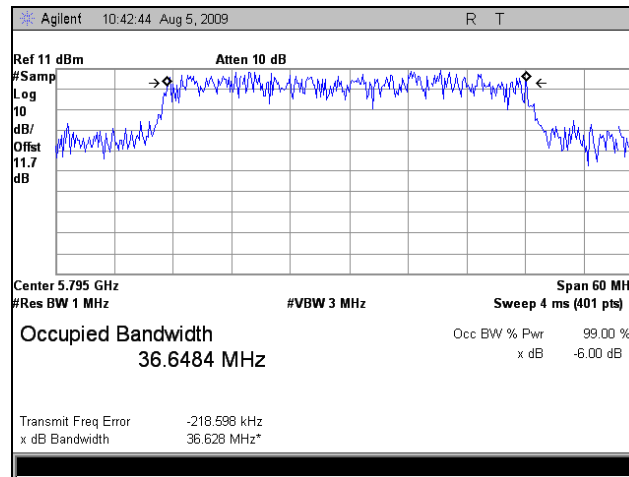


Plot 30. Occupied Band Width, High Channel, 5 GHz, Port 1, 802.11n 40MHz


Occupied Bandwidth, 5 GHz, Port 2

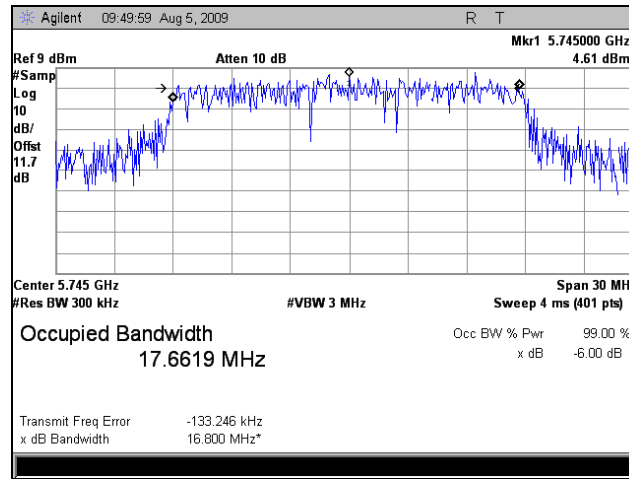


Plot 31. Occupied Band Width, Low Channel, 5 GHz, Port 2, 802.11n 20MHz

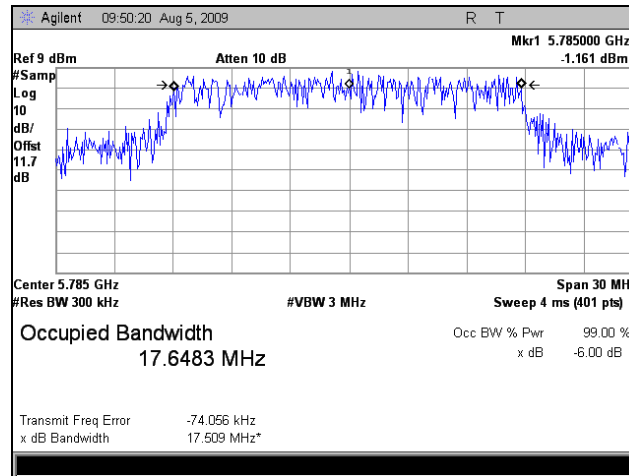


Plot 32. Occupied Band Width, Mid Channel, 5 GHz, Port 2, 802.11n 20MHz

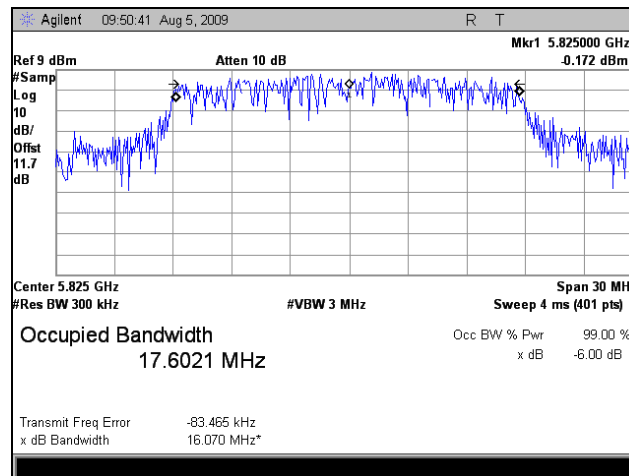

Plot 33. Occupied Band Width, High Channel, 5 GHz, Port 2, 802.11n 20MHz

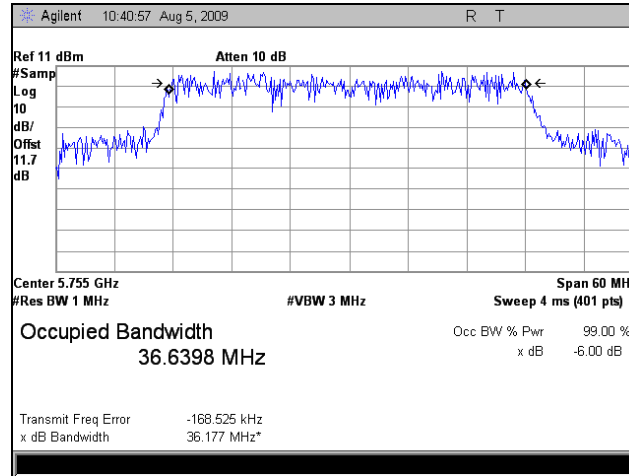


Plot 34. Occupied Band Width, Low Channel, 5 GHz, Port 2, 802.11n 40MHz

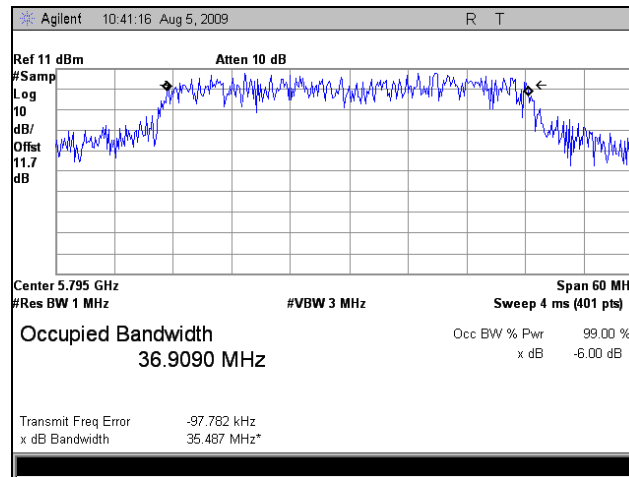


Plot 35. Occupied Band Width, High Channel, 5 GHz, Port 2, 802.11n 40MHz


Occupied Bandwidth, 5 GHz, Port 3

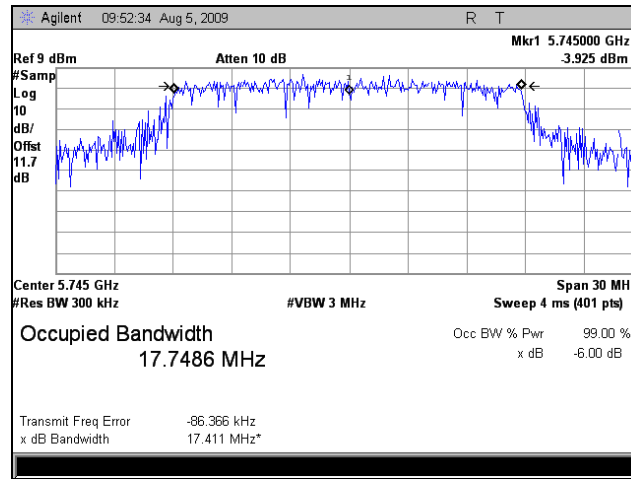


Plot 36. Occupied Band Width, Low Channel, 5 GHz, Port 3, 802.11n 20MHz

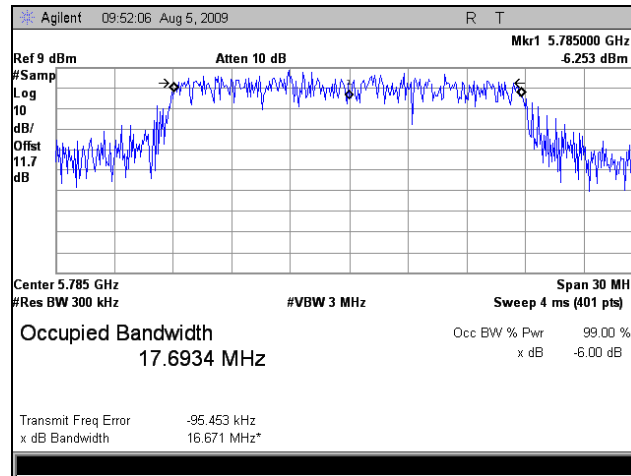


Plot 37. Occupied Band Width, Mid Channel, 5 GHz, Port 3, 802.11n 20MHz

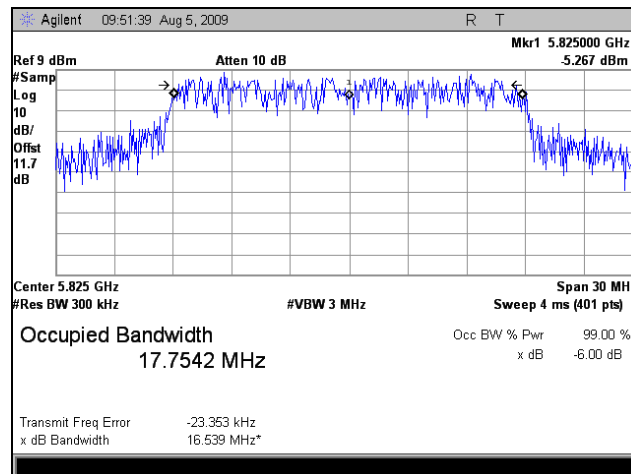

Plot 38. Occupied Band Width, High Channel, 5 GHz, Port 3, 802.11n 20MHz

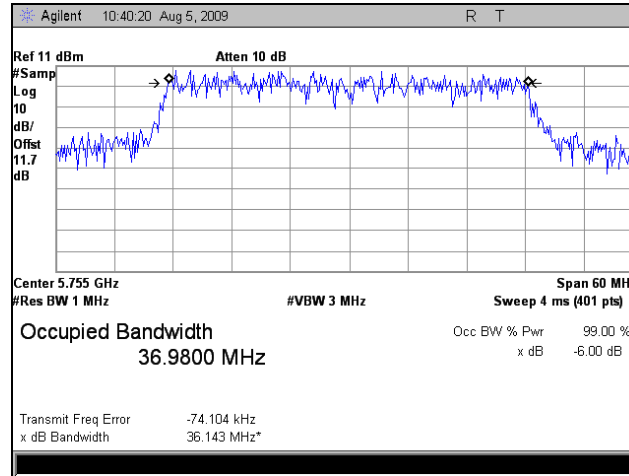

Plot 39. Occupied Band Width, Low Channel, 5 GHz, Port 3, 802.11n 40MHz

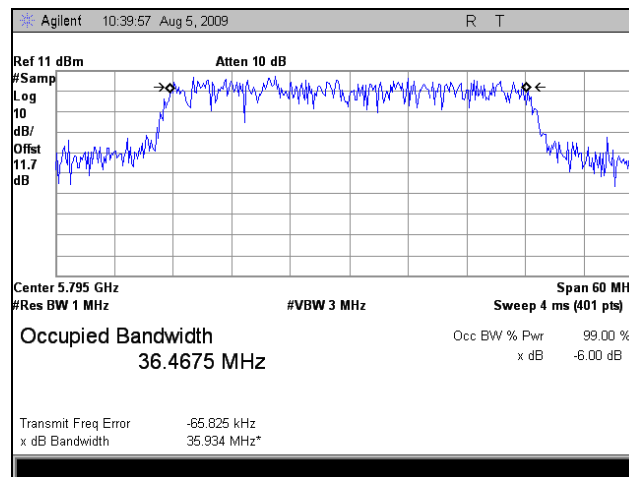

Plot 40. Occupied Band Width, High Channel, 5 GHz, Port 3, 802.11n 40MHz

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(b) Peak Power Output and RF Exposure

Test Requirements: §15.247(b): The maximum peak output power of the intentional radiator shall not exceed the following:

Digital Transmission Systems (MHz)	Output Limit (Watts)
902-928	1.000
2400-2483.5	1.000
5725- 5850	1.000

Table 21. Output Power Requirements from §15.247

§15.247(c): if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in the Table 21, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 2400 – 2483.5 MHz band may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 5725 – 5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

Fixed, point-to-point operation excludes the use of point-to-multipoint systems, Omni-directional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.

Test Procedure: The transmitter was connected to a calibrated spectrum analyzer. The EUT was measured at the low, mid and high channels of each band at the maximum power level.

Test Results: The EUT was compliant with the Peak Power Output limits of §15.247(b).

Test Engineer(s): Minh Ly

Test Date(s): 08/17/09




Figure 3. Block Diagram, Peak Power Output Test Setup

Peak Conducted Output Power, 2.4 GHz, Port 1			
Mode/Antenna	Carrier Channel	Frequency (MHz)	Measured Peak Output Power dBm
802.11g	Low	2412	25.98
	Mid	2437	25.71
	High	2462	26.09
802.11n 20MHz	Low	2412	22.29
	Mid	2437	22.47
	High	2462	23.17
802.11n 40MHz	Mid	2437	21.48

Table 22. Peak Output Power, Test Results, 2.4 GHz, Port 1

Peak Conducted Output Power, 2.4 GHz, Port 2			
Mode/Antenna	Carrier Channel	Frequency (MHz)	Measured Peak Output Power dBm
802.11n 20MHz	Low	2412	24.31
	Mid	2437	22.23
	High	2462	22.62
802.11n 40MHz	Mid	2437	22.79

Table 23. Peak Output Power, Test Results, 2.4 GHz, Port 2

Peak Conducted Output Power, 2.4 GHz, Port 3			
Mode/Antenna	Carrier Channel	Frequency (MHz)	Measured Peak Output Power dBm
802.11n 20MHz	Low	2412	23.27
	Mid	2437	23.83
	High	2462	23.39
802.11n 40MHz	Mid	2437	22.04

Table 24. Peak Output Power, Test Results, 2.4 GHz, Port 3

802.11n mode (20MHz)						
Carrier Channel	Frequency (MHz)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Total (dBm)	Total (W)
Low	2412	22.29	24.31	23.27	28.133	0.652
Mid	2437	22.47	22.23	23.83	27.673	0.586
High	2462	23.17	22.62	23.39	27.833	0.608

Table 25. RF Output Power Results – All Ports, 802.11n Mode (20MHz)

802.11n mode (40MHz)						
Carrier Channel	Frequency (MHz)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Total (dBm)	Total (W)
Mid	2437	21.48	22.79	22.04	27.105	0.5147

Table 26. RF Output Power Results – All Ports, 802.11n Mode (40MHz)

Note: Total Output Power=Port 1 (10^{^(Output Power/10)/1000}) + Port 2 (10^{^(Output Power/10)/1000}) + Port 3 (10^{^(Output Power/10)/1000})

Peak Conducted Output Power, 5 GHz, Port 1			
Mode	Carrier Channel	Frequency (MHz)	Measured Peak Output Power dBm
802.11a	Low	5745	29.20
	Mid	5785	29.62
	High	5825	28.53
802.11n 20MHz	Low	5745	24.70
	Mid	5785	24.59
	High	5825	24.94
802.11n 40MHz	Low	5755	24.05
	High	5795	23.79

Table 27. Peak Output Power, Test Results, 5 GHz, Port 1

Peak Conducted Output Power, 5 GHz, Port 2			
Mode	Carrier Channel	Frequency (MHz)	Measured Peak Output Power dBm
802.11n 20MHz	Low	5745	24.86
	Mid	5785	24.27
	High	5825	24.68
802.11n 40MHz	Low	5755	24.79
	High	5795	24.36

Table 28. Peak Output Power, Test Results, 5 GHz, Port 2

Peak Conducted Output Power, 5 GHz, Port 3			
Mode	Carrier Channel	Frequency (MHz)	Measured Peak Output Power dBm
802.11n 20MHz	Low	5745	24.85
	Mid	5785	24.90
	High	5825	24.41
802.11n 40MHz	Low	5755	24.68
	High	5795	24.33

Table 29. Peak Output Power, Test Results, 5 GHz, Port 3

802.11n mode (20MHz)						
Carrier Channel	Frequency (MHz)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Total (dBm)	Total (W)
Low	5745	24.70	24.86	24.85	29.57	0.906
Mid	5785	24.59	24.27	24.90	29.35	0.864
High	5825	24.94	24.68	24.41	29.45	0.883


Table 30. RF Output Power Results – All Ports, 802.11n Mode (20MHz)

802.11n mode (40MHz)						
Carrier Channel	Frequency (MHz)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Total (dBm)	Total (W)
Low	5755	24.05	24.79	24.68	29.28	0.850
High	5795	23.79	24.36	24.33	28.93	0.784


Table 31. RF Output Power Results – All Ports, 802.11n mode (40MHz)

Note: Total Output Power=Port 1 (10^{^(Output Power/10)/1000}) + Port 2 (10^{^(Output Power/10)/1000}) + Port 3 (10^{^(Output Power/10)/1000})


Peak Power Output, 2.4 GHz, Port 1

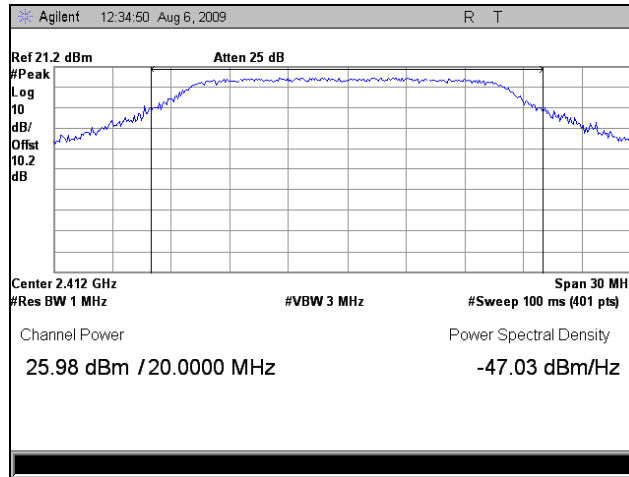


Plot 41. Peak Output Power, Low Channel, 2.4 GHz, Port 1, 802.11g

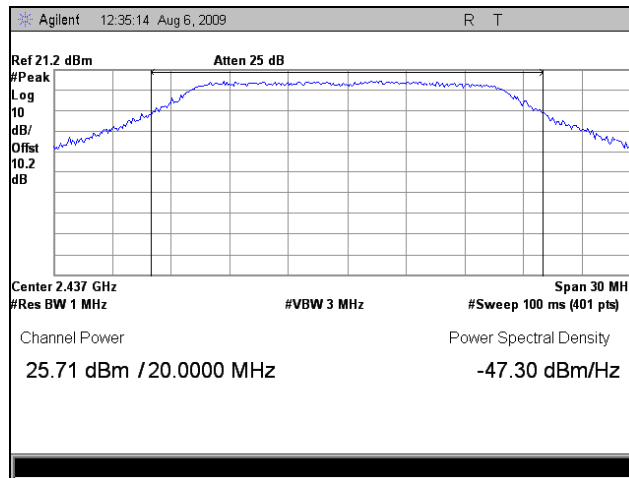


Plot 42. Peak Output Power, Mid Channel, 2.4 GHz, Port 1, 802.11g

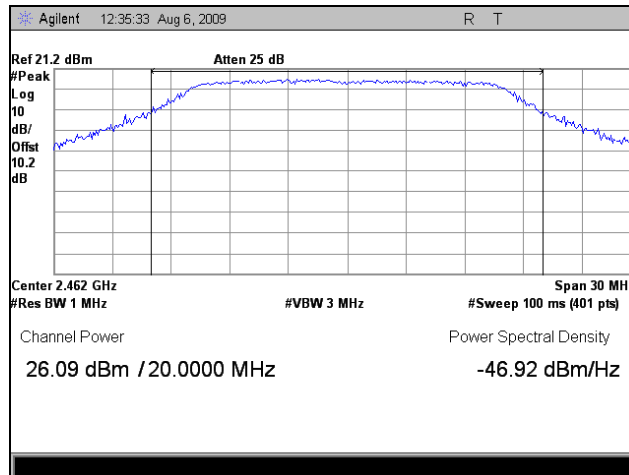


Plot 43. Peak Output Power, High Channel, 2.4 GHz, Port 1, 802.11g

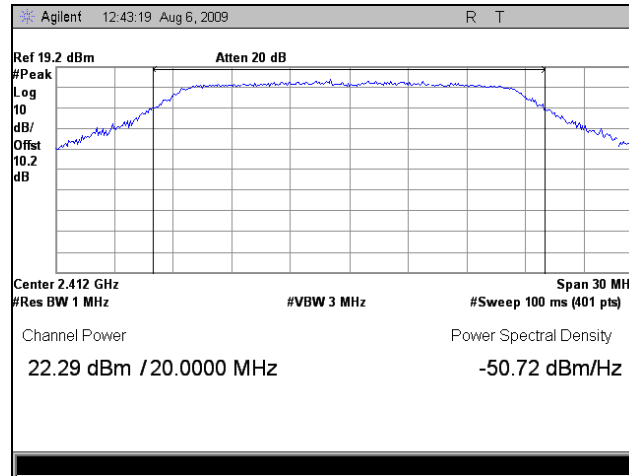


Plot 44. Peak Output Power, Low Channel, 2.4 GHz, Port 1, 802.11n 20MHz

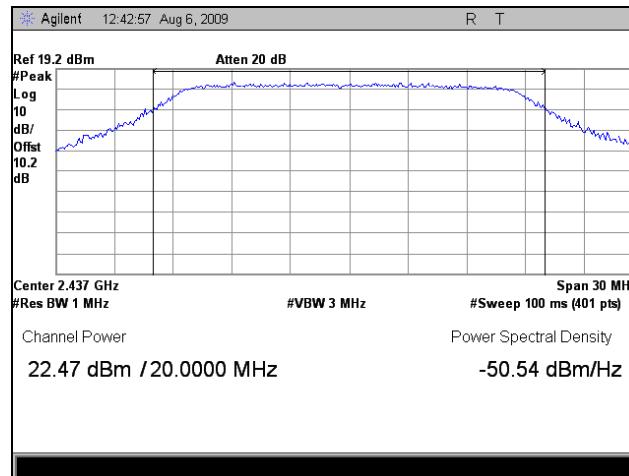

Plot 45. Peak Output Power, Mid Channel, 2.4 GHz, Port 1, 802.11n 20MHz

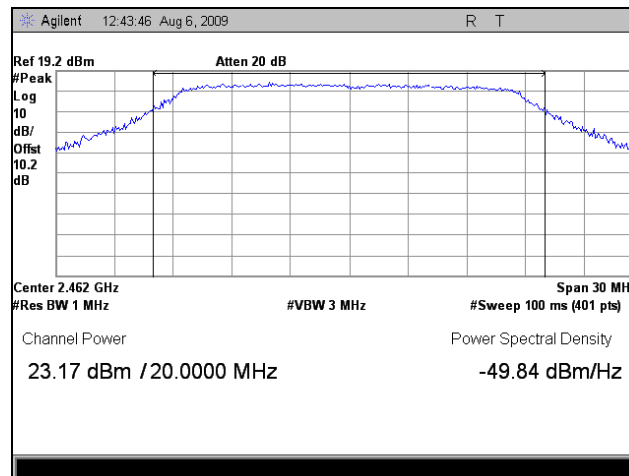


Plot 46. Peak Output Power, High Channel, 2.4 GHz, Port 1, 802.11n 20MHz

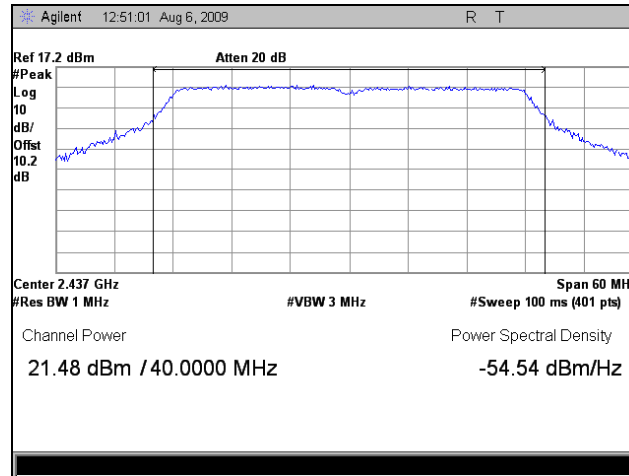


Plot 47. Peak Output Power, Mid Channel, 2.4 GHz, Port 1, 802.11n 40MHz


Peak Power Output, 2.4 GHz, Port 2

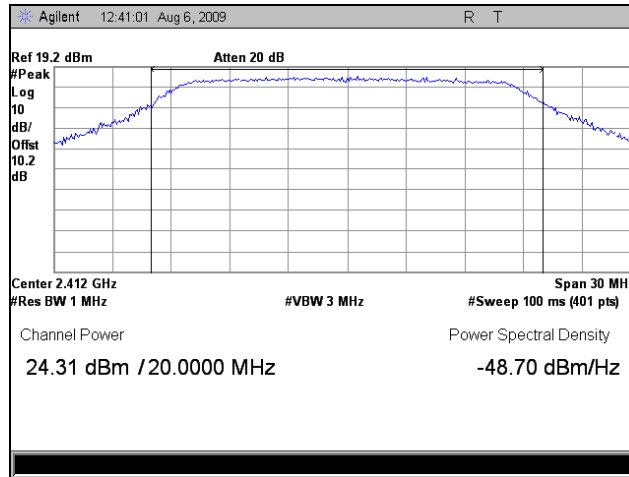


Plot 48. Peak Output Power, Low Channel, 2.4 GHz, Port 2, 802.11n 20MHz

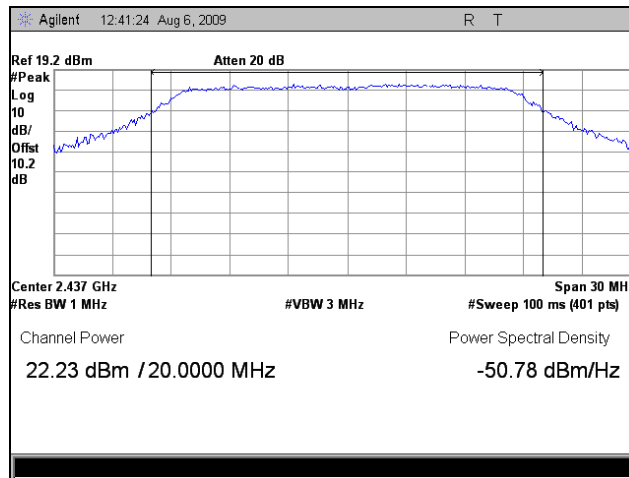

Plot 49. Peak Output Power, Mid Channel, 2.4 GHz, Port 2, 802.11n 20MHz

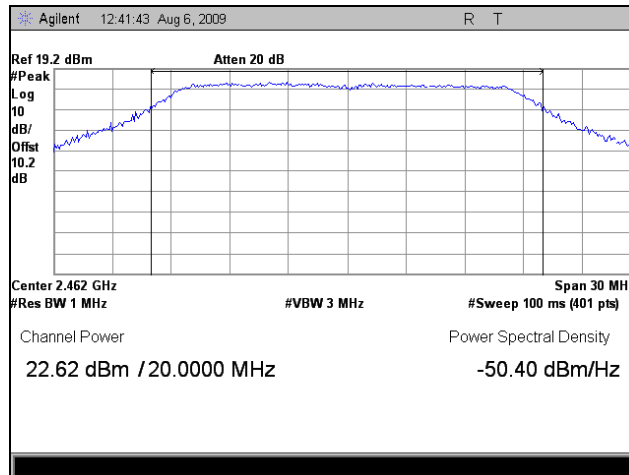


Plot 50. Peak Output Power, High Channel, 2.4 GHz, Port 2, 802.11n 20MHz

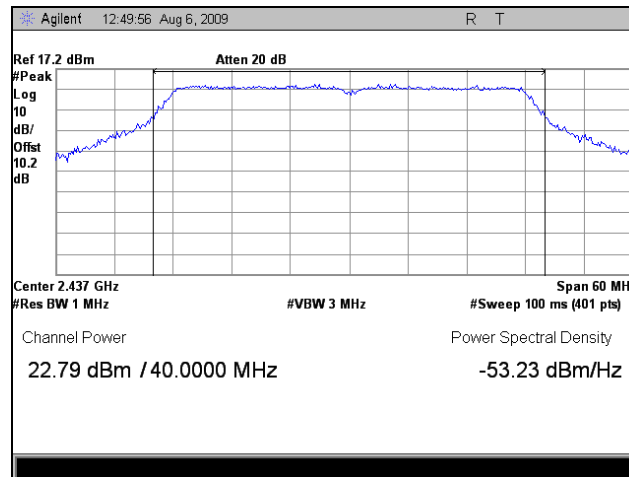


Plot 51. Peak Output Power, Mid Channel, 2.4 GHz, Port 2, 802.11n 40MHz


Peak Power Output, 2.4 GHz, Port 3

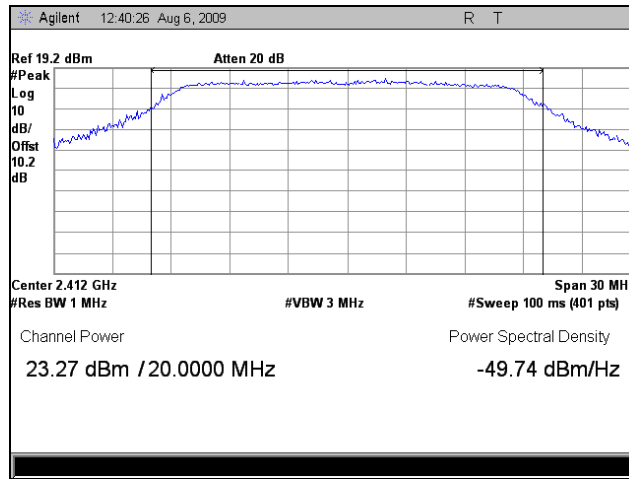


Plot 52. Peak Output Power, Low Channel, 2.4 GHz, Port 3, 802.11n 20MHz

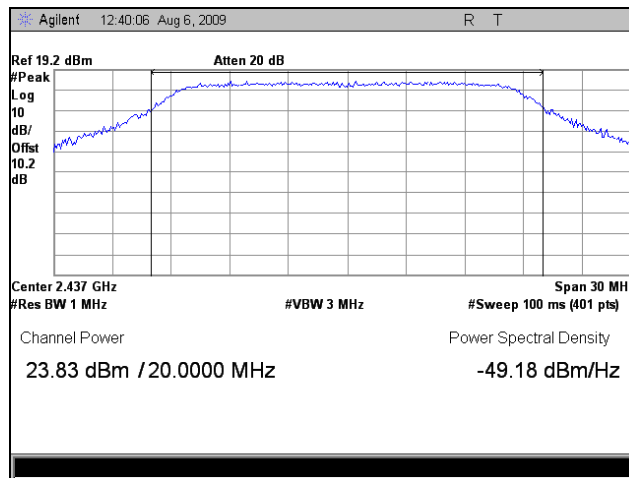

Plot 53. Peak Output Power, Mid Channel, 2.4 GHz, Port 3, 802.11n 20MHz

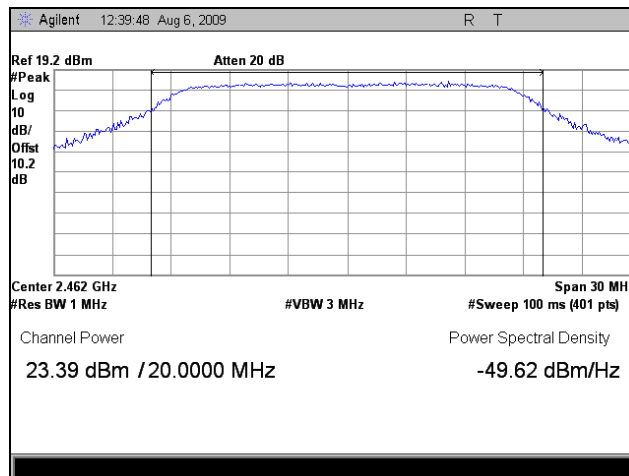


Plot 54. Peak Output Power, High Channel, 2.4 GHz, Port 3, 802.11n 20MHz

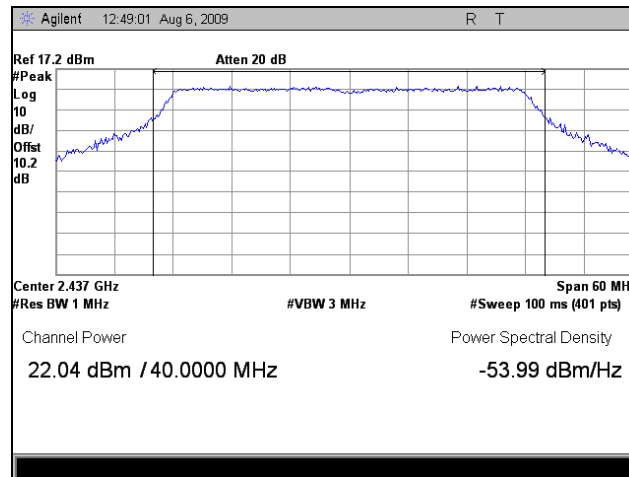


Plot 55. Peak Output Power, Mid Channel, 2.4 GHz, Port 3, 802.11n 40MHz


Peak Power Output, 5 GHz, Port 1

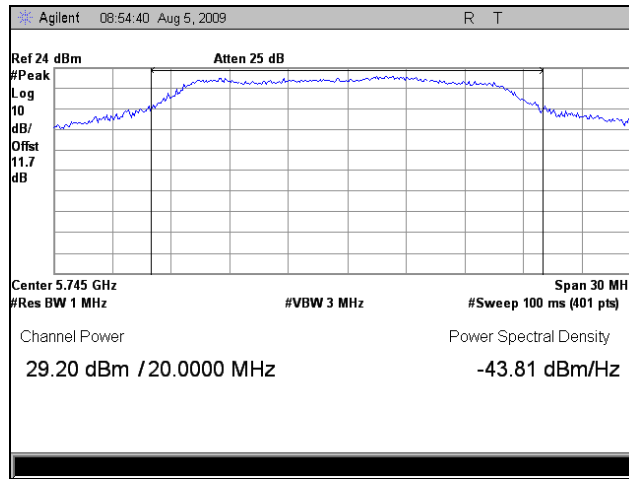


Plot 56. Peak Output Power, Low Channel, 5 GHz, Port 1, 802.11a

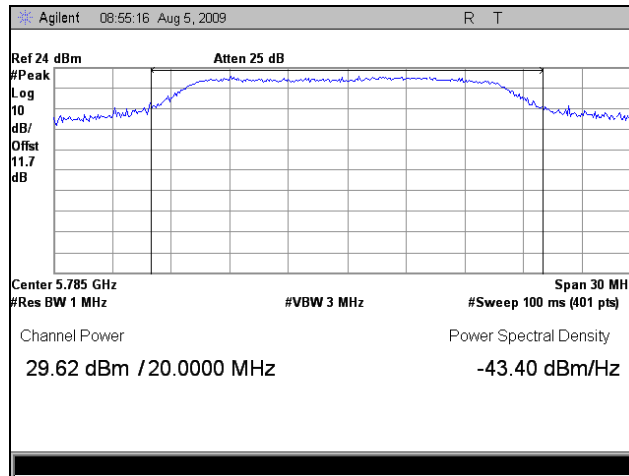


Plot 57. Peak Output Power, Mid Channel, 5 GHz, Port 1, 802.11a

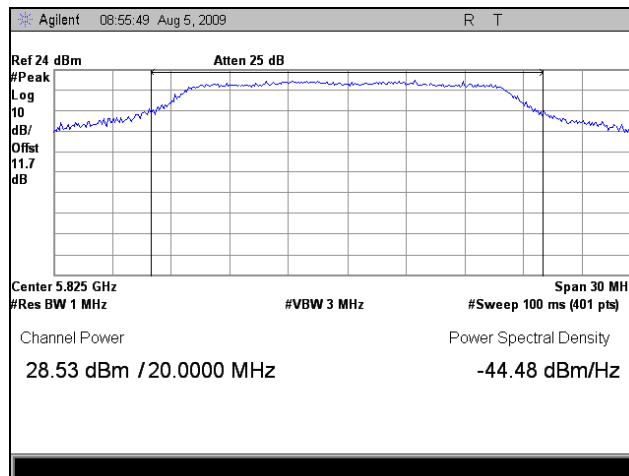


Plot 58. Peak Output Power, High Channel, 5 GHz, Port 1, 802.11a

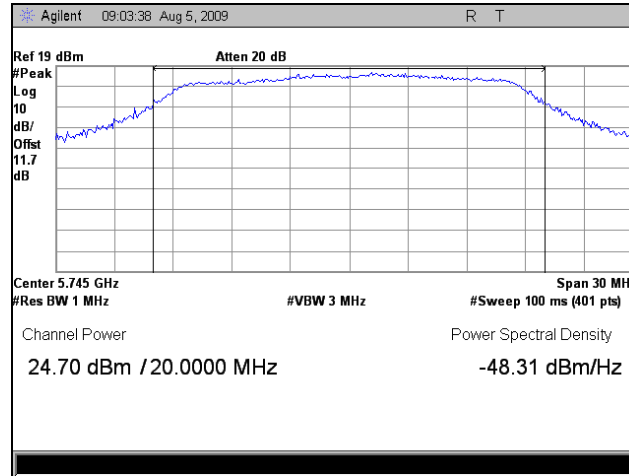


Plot 59. Peak Output Power, Low Channel, 5 GHz, Port 1, 802.11n 20MHz

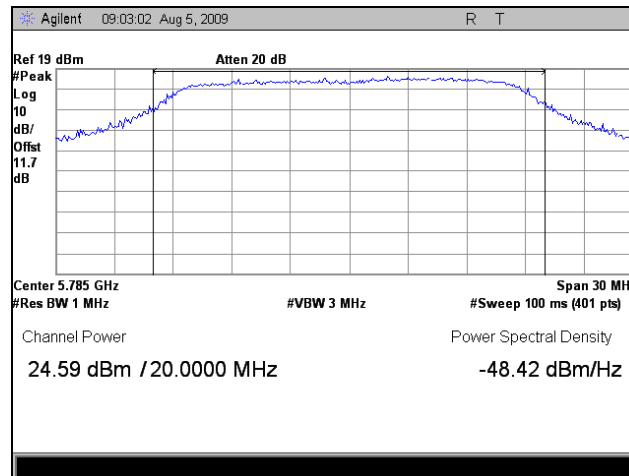


Plot 60. Peak Output Power, Mid Channel, 5 GHz, Port 1, 802.11n 20MHz

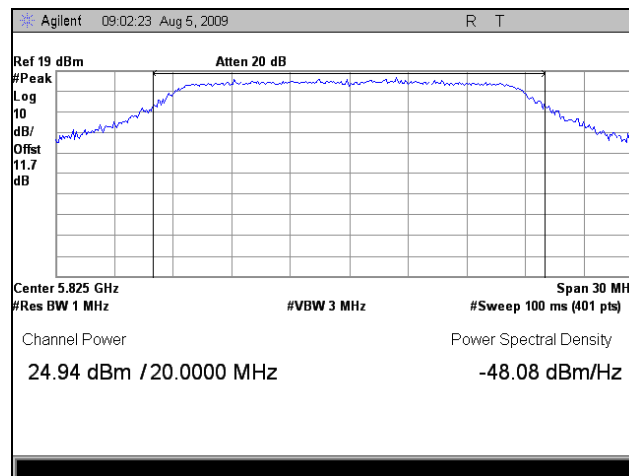

Plot 61. Peak Output Power, High Channel, 5 GHz, Port 1, 802.11n 20MHz

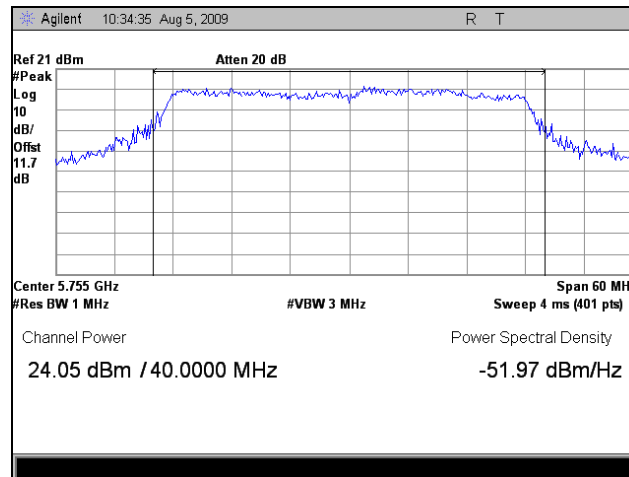


Plot 62. Peak Output Power, Low Channel, 5 GHz, Port 1, 802.11n 40MHz

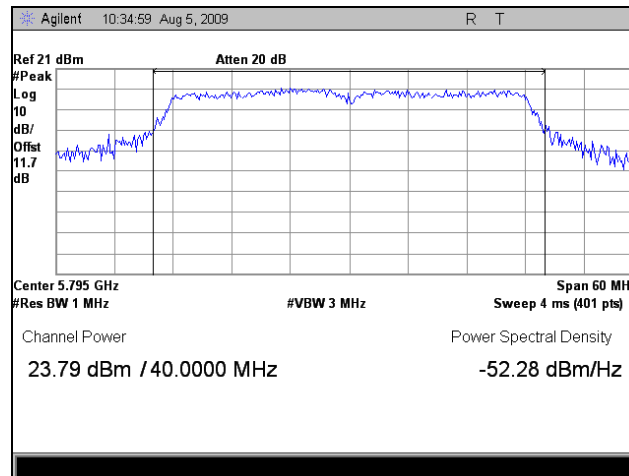


Plot 63. Peak Output Power, High Channel, 5 GHz, Port 1, 802.11n 40MHz


Peak Power Output, 5 GHz, Port 2

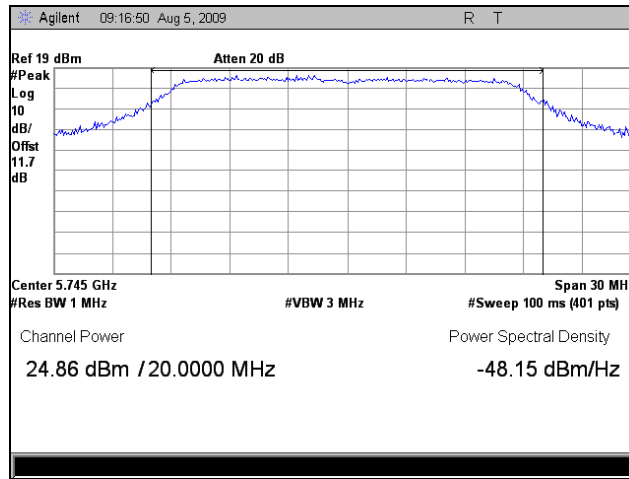


Plot 64. Peak Output Power, Low Channel, 5 GHz, Port 2, 802.11n 20MHz

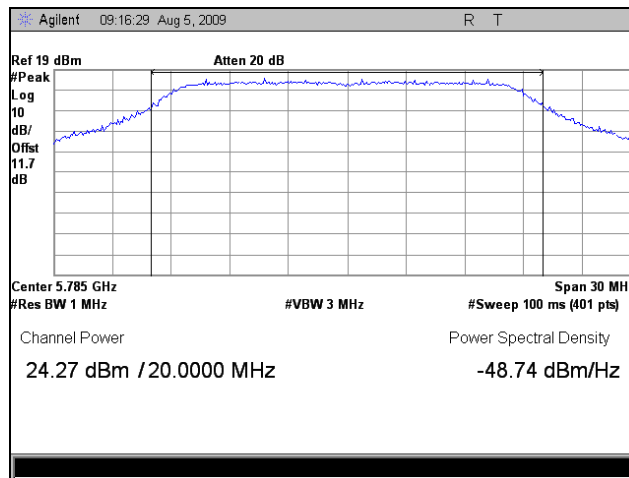


Plot 65. Peak Output Power, Mid Channel, 5 GHz, Port 2, 802.11n 20MHz

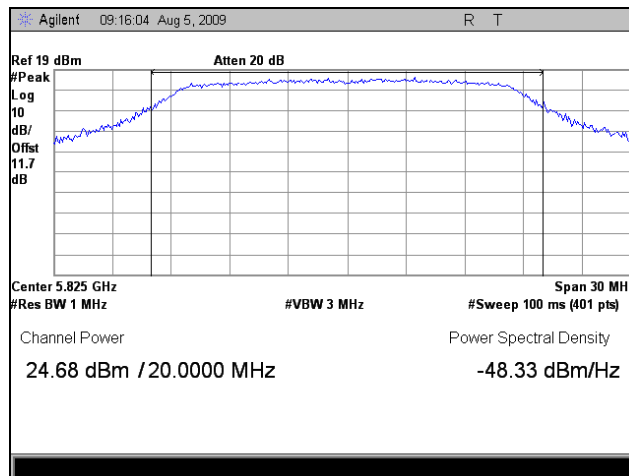

Plot 66. Peak Output Power, High Channel, 5 GHz, Port 2, 802.11n 20MHz

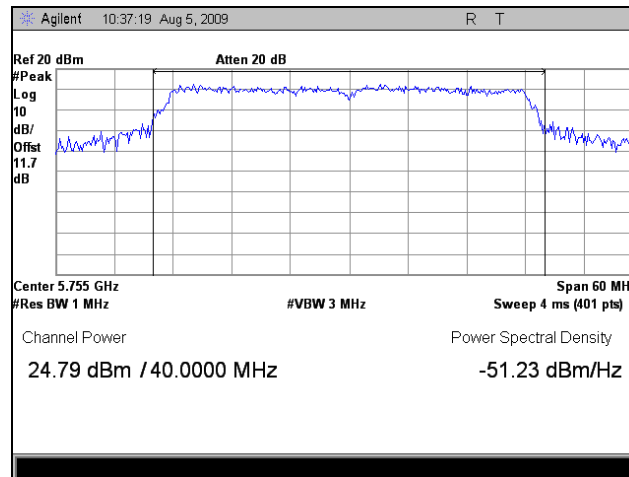


Plot 67. Peak Output Power, Low Channel, 5 GHz, Port 2, 802.11n 40MHz

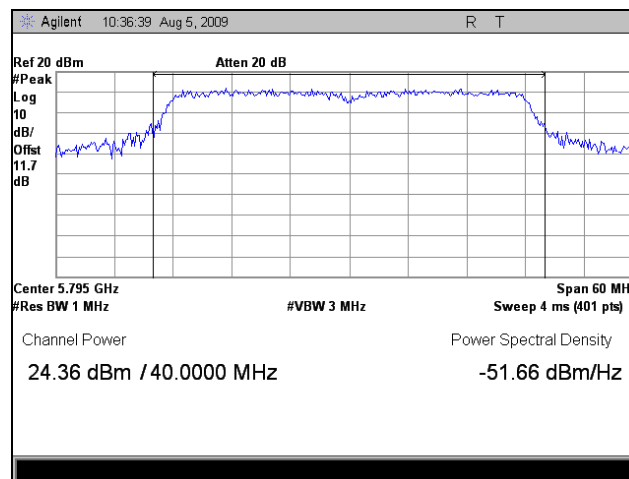


Plot 68. Peak Output Power, High Channel, 5 GHz, Port 2, 802.11n 40MHz


Peak Power Output, 5 GHz, Port 3

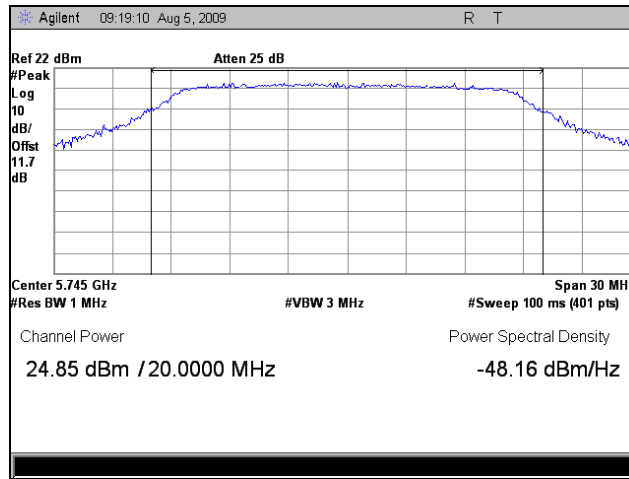


Plot 69. Peak Output Power, Low Channel, 5 GHz, Port 3, 802.11n 20MHz

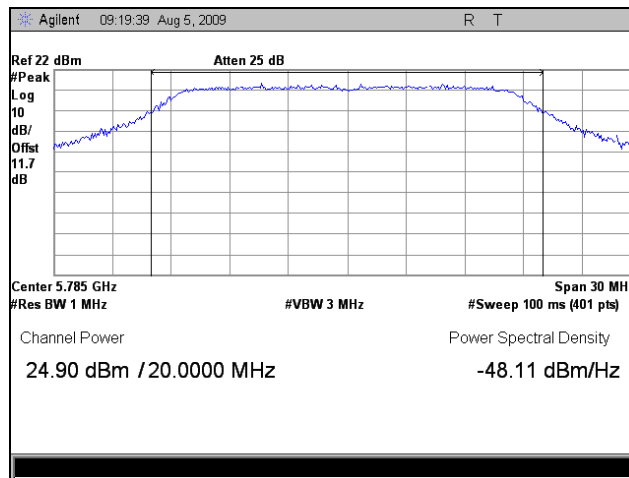


Plot 70. Peak Output Power, Mid Channel, 5 GHz, Port 3, 802.11n 20MHz

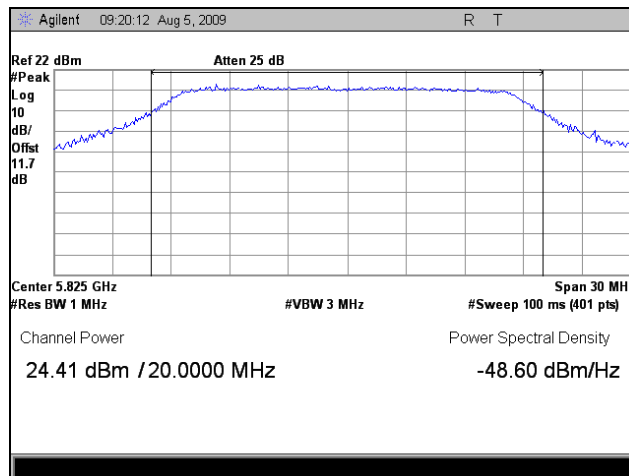

Plot 71. Peak Output Power, High Channel, 5 GHz, Port 3, 802.11n 20MHz

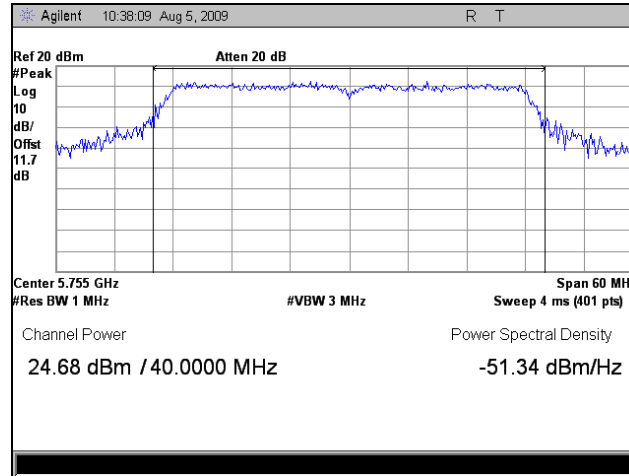

Plot 72. Peak Output Power, Low Channel, 5 GHz, Port 3, 802.11n 40MHz

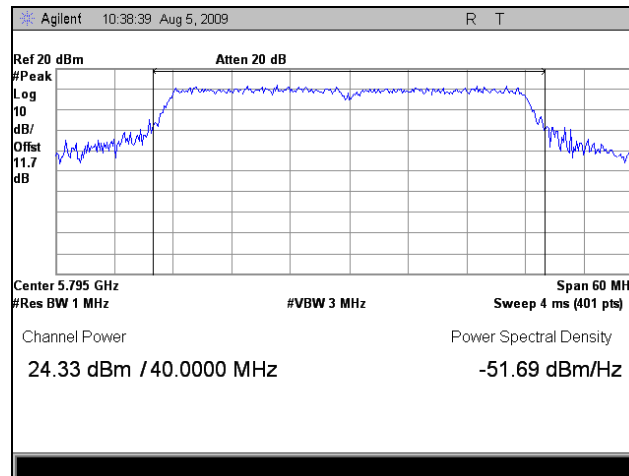

Plot 73. Peak Output Power, High Channel, 5 GHz, Port 3, 802.11n 40MHz

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(b) RF Exposure

RF Exposure Requirements: §1.1307(b)(1) and §1.1307(b)(2): Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

RF Radiation Exposure Limit: §1.1310: As specified in this section, the Maximum Permissible Exposure (MPE) Limit shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in Sec. 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of Sec. 2.1093 of this chapter.

MPE Limit Calculation: EUT's operating frequencies @ 2412-2462 MHz; highest conducted power = 28.13dBm (peak) therefore, **Limit for Uncontrolled exposure: 1 mW/cm² or 10 W/m²**

EUT maximum antenna gain = **5dBi Omni**

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2 \quad \text{or} \quad R = \sqrt{PG / 4\pi S}$$

where, S = Power Density (1 mW/cm²)
P = Power Input to antenna (650.13mW)
G = Antenna Gain (3.16 numeric)

$$S = (650.13 * 3.16 / 4 * 3.14 * 20.0^2) = (2055.89 / 5024) = \mathbf{0.409mW/cm^2 @ 20cm separation}$$

EUT maximum antenna gain = **13dBi Sector**

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2 \quad \text{or} \quad R = \sqrt{PG / 4\pi S}$$

where, S = Power Density (1 mW/cm²)
P = Power Input to antenna (650.13mW)
G = Antenna Gain (19.95 numeric)

$$R = (650.13 * 19.952 / 4 * 3.14 * 1.0)^{1/2} = (12971.79 / 12.56)^{1/2} = \mathbf{32.13 cm}$$

MPE Limit Calculation: EUT's operating frequencies @ 5745-5825 MHz; highest conducted power = 29.57dBm (peak) therefore, **Limit for Uncontrolled exposure: 1 mW/cm² or 10 W/m²**

EUT maximum antenna gain = **9dBi Omni.**

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2 \quad \text{or} \quad R = \sqrt{PG / 4\pi S}$$

where, S = Power Density (1 mW/cm²)
P = Power Input to antenna (905.73mW)
G = Antenna Gain (7.94 numeric)

$$R = (905.73 * 7.94 / 4 * 3.14 * 1.0)^{1/2} = (7194.49 / 12.56)^{1/2} = \mathbf{23.93cm}$$

EUT maximum antenna gain = **16dBi Sector.**

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2 \quad \text{or} \quad R = \sqrt{PG / 4\pi S}$$

where, S = Power Density (1 mW/cm²)
P = Power Input to antenna (905.73mW)
G = Antenna Gain (39.81 numeric)

$$R = (905.73 * 39.81 / 4 * 3.14 * 1.0)^{1/2} = (36057.86 / 12.56)^{1/2} = \mathbf{53.58cm}$$

EUT maximum antenna gain = **19dBi Panel.**

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2 \quad \text{or} \quad R = \sqrt{PG / 4\pi S}$$

where, S = Power Density (1 mW/cm²)
P = Power Input to antenna (905.73mW)
G = Antenna Gain (79.432 numeric)

$$R = (905.73 * 79.432 / 4 * 3.14 * 1.0)^{1/2} = (71944.9 / 12.56)^{1/2} = \mathbf{75.68cm}$$

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(d) Radiated Spurious Emissions Requirements and Band Edge

Test Requirements: §15.247(d); §15.205: Emissions outside the frequency band.

§15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a).

§15.205(a): Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090–0.110-----	16.42–16.423	399.9–410	4.5–5.15
¹ 0.495–0.505-----	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905-----	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128-----	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775-----	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775-----	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218-----	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825-----	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225-----	123–138	2200–2300	14.47–14.5
8.291–8.294-----	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366-----	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675-----	156.7–156.9	2655–2900	22.01–23.12
8.41425–8.41475-----	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293-----	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025-----	240–285	3345.8–3358.36	43–36.5
12.57675–12.57725-----	322–335.4	3600–4400	(²)

Table 32. Restricted Bands of Operation

¹ Until February 1, 1999, this restricted band shall be 0.490 – 0.510 MHz.

² Above 38.6

Test Requirement(s): § 15.209 (a): Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in Table 33.

Frequency (MHz)	§ 15.209(a), Radiated Emission Limits (dBµV) @ 3m
30 - 88	40.00
88 - 216	43.50
216 - 960	46.00
Above 960	54.00

Table 33. Radiated Emissions Limits Calculated from FCC Part 15, § 15.209 (a)

Test Procedures: The transmitter was set to the mid channel at the highest output power and placed on a 0.8 m high wooden table inside in a semi-anechoic chamber. Measurements were performed with the EUT rotated 360 degrees and varying the adjustable antenna mast with 1 m to 4 m height to determine worst case orientation for maximum emissions. Measurement were repeated the measurement at the low and highest channels.

For frequencies from 30 MHz to 1 GHz, measurements were made using a quasi-peak detector with a 120 kHz bandwidth.

For intentional radiators with a digital device portion which operates below 10 GHz, the spectrum was investigated as per §15.33(a)(1) and §15.33(a)(4); i.e., the lowest RF signal generated or used in the device up to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

In accordance with §15.35(b) the limit on the radio frequency emissions as measured using instrumentation with a peak detector function shall be 20 dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

EUT Field Strength Final Amplitude = Raw Amplitude – Preamp gain + Antenna Factor + Cable Loss

Test Results: The EUT was compliant with the Radiated Spurious Emission limits of § 15.247(d).

Test Engineer(s): Minh Ly

Test Date(s): 08/17/09

Harmonic Emissions Requirements – Radiated, 2.4 GHz, Port 1

Frequency (MHz)	Antenna Polarity (H/V)	Raw Amp. @ 1m	Pre Amp (dB)	Ant. Cor. Factor (dB)	Cable Loss (dB)	Dist. Cor. Factor (dB)	EUT Field Strength Final Amp. (dB μ V/m)	Limit @ 3m (dB μ V/m)	Margin (dB)
4.824	H	46.24	34.76	33.35	4.60	49.43	Peak	74	-24.57
4.824	H	34.65	34.76	33.35	4.60	37.84	Avg.	54	-16.16
7.236	H	42.67	35.01	35.80	10.48	53.94	Peak	74	-20.06
7.236	H	30.59	35.01	35.80	10.48	41.86	Avg.	54	-12.14
9.648	H	43.14	35.58	37.95	10.80	56.31	Peak	74	-17.69
9.648	H	30.67	35.58	37.95	10.80	43.84	Avg.	54	-10.16

Table 34. Radiated Harmonic Emissions, Low Channel, 2.4 GHz, Port 1, 802.11g, 13 dBi Sector

Note: All other emissions were measured at the noise floor of the spectrum analyzer.

Frequency (MHz)	Antenna Polarity (H/V)	Raw Amp. @ 1m	Pre Amp (dB)	Ant. Cor. Factor (dB)	Cable Loss (dB)	Dist. Cor. Factor (dB)	EUT Field Strength Final Amp. (dB μ V/m)	Limit @ 3m (dB μ V/m)	Margin (dB)
4.874	H	51.64	34.74	33.46	4.66	55.02	Peak	74	-18.98
4.874	H	38.98	34.74	33.46	4.66	42.36	Avg.	54	-11.64
7.311	H	42.61	35.02	35.96	10.65	54.20	Peak	74	-19.80
7.311	H	29.84	35.02	35.96	10.65	41.43	Avg.	54	-12.57
9.748	H	42.5	35.55	38.07	10.88	55.90	Peak	74	-18.10
9.748	H	31.01	35.55	38.07	10.88	44.41	Avg.	54	-9.59

Table 35. Radiated Harmonic Emissions, Mid Channel, 2.4 GHz, Port 1, 802.11g, 13 dBi Sector

Note: All other emissions were measured at the noise floor of the spectrum analyzer.

Frequency (MHz)	Antenna Polarity (H/V)	Raw Amp. @ 1m	Pre Amp (dB)	Ant. Cor. Factor (dB)	Cable Loss (dB)	Dist. Cor. Factor (dB)	EUT Field Strength Final Amp. (dB μ V/m)	Limit @ 3m (dB μ V/m)	Margin (dB)
4.924	H	51.56	34.73	33.56	4.75	55.15	Peak	74	-18.85
4.924	H	38.4	34.73	33.56	4.75	41.99	Avg.	54	-12.01
7.386	H	42.42	35.05	36.11	10.80	54.28	Peak	74	-19.72
7.386	H	31.6	35.05	36.11	10.80	43.46	Avg.	54	-10.54
9.848	H	42.39	35.54	38.19	10.96	56.00	Peak	74	-18.00
9.848	H	30.61	35.54	38.19	10.96	44.22	Avg.	54	-9.78

Table 36. Radiated Harmonic Emissions, High Channel, 2.4 GHz, Port 1, 802.11g, 13 dBi Sector

Note: All other emissions were measured at the noise floor of the spectrum analyzer.

Harmonic Emissions Requirements – Radiated, 2.4 GHz, Combined Ports

Frequency (MHz)	Antenna Polarity (H/V)	Raw Amp. @ 1m	Pre Amp (dB)	Ant. Cor. Factor (dB)	Cable Loss (dB)	Dist. Cor. Factor (dB)	EUT Field Strength Final Amp. (dBμV/m)	Limit @ 3m (dBμV/m)	Margin (dB)
4.824	H	45.48	34.76	33.35	4.60	48.67	Peak	74	-25.33
4.824	H	33.69	34.76	33.35	4.60	36.88	Avg.	54	-17.12
7.236	H	43.44	35.01	35.80	10.48	54.71	Peak	74	-19.29
7.236	H	30.75	35.01	35.80	10.48	42.02	Avg.	54	-11.98
9.648	H	43.02	35.58	37.95	10.80	56.19	Peak	74	-17.81
9.648	H	31.41	35.58	37.95	10.80	44.58	Avg.	54	-9.42

Table 37. Radiated Harmonic Emissions, Low Channel, 2.4 GHz, Combined Ports, 802.11n 20MHz, 13 dBi Sector

Note: All other emissions were measured at the noise floor of the spectrum analyzer.

Frequency (MHz)	Antenna Polarity (H/V)	Raw Amp. @ 1m	Pre Amp (dB)	Ant. Cor. Factor (dB)	Cable Loss (dB)	Dist. Cor. Factor (dB)	EUT Field Strength Final Amp. (dBμV/m)	Limit @ 3m (dBμV/m)	Margin (dB)
4.874	H	46.84	34.74	33.46	4.66	50.22	Peak	74	-23.78
4.874	H	39.41	34.74	33.46	4.66	42.79	Avg.	54	-11.21
7.311	H	43.3	35.02	35.96	10.65	54.89	Peak	74	-19.11
7.311	H	30	35.02	35.96	10.65	41.59	Avg.	54	-12.41
9.748	H	43.73	35.55	38.07	10.88	57.13	Peak	74	-16.87
9.748	H	31.34	35.55	38.07	10.88	44.74	Avg.	54	-9.26

Table 38. Radiated Harmonic Emissions, Mid Channel, 2.4 GHz, Combined Ports, 802.11n 20MHz, 13 dBi Sector

Note: All other emissions were measured at the noise floor of the spectrum analyzer.

Frequency (MHz)	Antenna Polarity (H/V)	Raw Amp. @ 1m	Pre Amp (dB)	Ant. Cor. Factor (dB)	Cable Loss (dB)	Dist. Cor. Factor (dB)	EUT Field Strength Final Amp. (dBμV/m)	Limit @ 3m (dBμV/m)	Margin (dB)
4.924	H	48.94	34.73	33.56	4.75	52.53	Peak	74	-21.47
4.924	H	36.09	34.73	33.56	4.75	39.68	Avg.	54	-14.32
7.386	H	43.66	35.05	36.11	10.80	55.52	Peak	74	-18.48
7.386	H	30.03	35.05	36.11	10.80	41.89	Avg.	54	-12.11
9.848	H	42.45	35.54	38.19	10.96	56.06	Peak	74	-17.94
9.848	H	30.58	35.54	38.19	10.96	44.19	Avg.	54	-9.81

Table 39. Radiated Harmonic Emissions, High Channel, 2.4 GHz, Combined Ports, 802.11n 20MHz, 13 dBi Sector

Note: All other emissions were measured at the noise floor of the spectrum analyzer.

Frequency (MHz)	Antenna Polarity (H/V)	Raw Amp. @ 1m	Pre Amp (dB)	Ant. Cor. Factor (dB)	Cable Loss (dB)	Dist. Cor. Factor (dB)	EUT Field Strength Final Amp. (dB μ V/m)	Limit @ 3m (dB μ V/m)	Margin (dB)
4.874	H	47.17	34.74	33.46	4.66	50.55	Peak	74	-23.45
4.874	H	34.73	34.74	33.46	4.66	38.11	Avg.	54	-15.89
7.311	H	41.3	35.02	35.96	10.65	52.89	Peak	74	-21.11
7.311	H	29.64	35.02	35.96	10.65	41.23	Avg.	54	-12.77
9.748	H	42.74	35.55	38.07	10.88	56.14	Peak	74	-17.86
9.748	H	31.09	35.55	38.07	10.88	44.49	Avg.	54	-9.51

Table 40. Radiated Harmonic Emissions, Mid Channel, 2.4 GHz, Combined Ports, 802.11n 40MHz, 5 dBi Omni

Note: All other emissions were measured at the noise floor of the spectrum analyzer.

Harmonic Emissions Requirements – Radiated, 5 GHz, Combined Ports

Frequency (MHz)	Antenna Polarity (H/V)	Raw Amp. @ 1m	Pre Amp (dB)	Ant. Cor. Factor (dB)	Cable Loss (dB)	Dist. Cor. Factor (dB)	EUT Field Strength Final Amp. (dB μ V/m)	Limit @ 3m (dB μ V/m)	Margin (dB)
11.49	V	47.16	34.86	39.79	7.68	59.77	Peak	74	-14.23
11.49	V	35.37	34.86	39.79	7.68	47.98	Avg.	54	-6.02
17.235	V	45.14	34.01	42.82	9.25	63.20	Peak	74	-10.80
17.235	V	30.95	34.01	42.82	9.25	49.01	Avg.	54	-4.99

Table 41. Radiated Harmonic Emissions, Low Channel, 5 GHz, Combined Ports, 802.11a, 9 dBi Omni

Note: All other emissions were measured at the noise floor of the spectrum analyzer.

Frequency (MHz)	Antenna Polarity (H/V)	Raw Amp. @ 1m	Pre Amp (dB)	Ant. Cor. Factor (dB)	Cable Loss (dB)	Dist. Cor. Factor (dB)	EUT Field Strength Final Amp. (dB μ V/m)	Limit @ 3m (dB μ V/m)	Margin (dB)
11.57	V	47.21	34.91	39.88	7.55	59.73	Peak	74	-14.27
11.57	V	35.5	34.91	39.88	7.55	48.02	Avg.	54	-5.98
17.355	V	42.66	33.93	43.15	9.58	61.46	Peak	74	-12.54
17.355	V	30.89	33.93	43.15	9.58	49.69	Avg.	54	-4.31

Table 42. Radiated Harmonic Emissions, Mid Channel, 5 GHz, Combined Ports, 802.11a, 9 dBi Omni

Note: All other emissions were measured at the noise floor of the spectrum analyzer.

Frequency (MHz)	Antenna Polarity (H/V)	Raw Amp. @ 1m	Pre Amp (dB)	Ant. Cor. Factor (dB)	Cable Loss (dB)	Dist. Cor. Factor (dB)	EUT Field Strength Final Amp. (dB μ V/m)	Limit @ 3m (dB μ V/m)	Margin (dB)
11.65	V	48.87	34.96	39.94	7.23	61.08	Peak	74	-12.92
11.65	V	37.06	34.96	39.94	7.23	49.27	Avg.	54	-4.73
17.475	V	43.1	33.89	43.59	10.28	63.07	Peak	74	-10.93
17.475	V	30.71	33.89	43.59	10.28	50.68	Avg.	54	-3.32

Table 43. Radiated Harmonic Emissions, High Channel, 5 GHz, Combined Ports, 802.11a, 9 dBi Omni

Note: All other emissions were measured at the noise floor of the spectrum analyzer.

Frequency (MHz)	Antenna Polarity (H/V)	Raw Amp. @ 1m	Pre Amp (dB)	Ant. Cor. Factor (dB)	Cable Loss (dB)	Dist. Cor. Factor (dB)	EUT Field Strength Final Amp. (dB μ V/m)	Limit @ 3m (dB μ V/m)	Margin (dB)
11.49	V	46.75	34.86	39.79	7.68	59.36	Peak	74	-14.64
11.49	V	33.2	34.86	39.79	7.68	45.81	Avg.	54	-8.19
17.235	V	43.13	34.01	42.82	9.25	61.19	Peak	74	-12.81
17.235	V	30.78	34.01	42.82	9.25	48.84	Avg.	54	-5.16

Table 44. Radiated Harmonic Emissions, Low Channel, 5 GHz, Combined Ports, 802.11a, 16 dBi Sector

Note: All other emissions were measured at the noise floor of the spectrum analyzer.

Frequency (MHz)	Antenna Polarity (H/V)	Raw Amp. @ 1m	Pre Amp (dB)	Ant. Cor. Factor (dB)	Cable Loss (dB)	Dist. Cor. Factor (dB)	EUT Field Strength Final Amp. (dB μ V/m)	Limit @ 3m (dB μ V/m)	Margin (dB)
11.57	V	46.54	34.91	39.88	7.55	59.06	Peak	74	-14.94
11.57	V	30.79	34.91	39.88	7.55	43.31	Avg.	54	-10.69
17.355	V	42.77	33.93	43.15	9.58	61.57	Peak	74	-12.43
17.355	V	330.78	33.93	43.15	9.58	349.58	Avg.	54	295.58

Table 45. Radiated Harmonic Emissions, Mid Channel, 5 GHz, Combined Ports, 802.11a, 16 dBi Sector

Note: All other emissions were measured at the noise floor of the spectrum analyzer.

Frequency (MHz)	Antenna Polarity (H/V)	Raw Amp. @ 1m	Pre Amp (dB)	Ant. Cor. Factor (dB)	Cable Loss (dB)	Dist. Cor. Factor (dB)	EUT Field Strength Final Amp. (dB μ V/m)	Limit @ 3m (dB μ V/m)	Margin (dB)
11.65	V	46.33	34.96	39.94	7.23	58.54	Peak	74	-15.46
11.65	V	35.61	34.96	39.94	7.23	47.82	Avg.	54	-6.18
17.475	V	43.03	33.89	43.59	10.28	63.00	Peak	74	-11.00
17.475	V	30.92	33.89	43.59	10.28	50.89	Avg.	54	-3.11

Table 46. Radiated Harmonic Emissions, High Channel, 5 GHz, Combined Ports, 802.11a, 16 dBi Sector

Note: All other emissions were measured at the noise floor of the spectrum analyzer.

Frequency (MHz)	Antenna Polarity (H/V)	Raw Amp. @ 1m	Pre Amp (dB)	Ant. Cor. Factor (dB)	Cable Loss (dB)	Dist. Cor. Factor (dB)	EUT Field Strength Final Amp. (dB μ V/m)	Limit @ 3m (dB μ V/m)	Margin (dB)
11.49	V	45.7	34.86	39.79	7.68	58.31	Peak	74	-15.69
11.49	V	33.91	34.86	39.79	7.68	46.52	Avg.	54	-7.48
17.235	V	42.03	34.01	42.82	9.25	60.09	Peak	74	-13.91
17.235	V	31.78	34.01	42.82	9.25	49.84	Avg.	54	-4.16

Table 47. Radiated Harmonic Emissions, Low Channel, 5 GHz, Combined Ports, 802.11a, 19 dBi Panel

Note: All other emissions were measured at the noise floor of the spectrum analyzer.

Frequency (MHz)	Antenna Polarity (H/V)	Raw Amp. @ 1m	Pre Amp (dB)	Ant. Cor. Factor (dB)	Cable Loss (dB)	Dist. Cor. Factor (dB)	EUT Field Strength Final Amp. (dB μ V/m)	Limit @ 3m (dB μ V/m)	Margin (dB)
11.57	V	47.69	34.91	39.88	7.55	60.21	Peak	74	-13.79
11.57	V	33.45	34.91	39.88	7.55	45.97	Avg.	54	-8.03
17.355	V	42.95	33.93	43.15	9.58	61.75	Peak	74	-12.25
17.355	V	30.57	33.93	43.15	9.58	49.37	Avg.	54	-4.63

Table 48. Radiated Harmonic Emissions, Mid Channel, 5 GHz, Combined Ports, 802.11a, 19 dBi Panel

Note: All other emissions were measured at the noise floor of the spectrum analyzer.

Frequency (MHz)	Antenna Polarity (H/V)	Raw Amp. @ 1m	Pre Amp (dB)	Ant. Cor. Factor (dB)	Cable Loss (dB)	Dist. Cor. Factor (dB)	EUT Field Strength Final Amp. (dB μ V/m)	Limit @ 3m (dB μ V/m)	Margin (dB)
11.65	V	47.62	34.96	39.94	7.23	59.83	Peak	74	-14.17
11.65	V	32.17	34.96	39.94	7.23	44.38	Avg.	54	-9.62
17.475	V	42.72	33.89	43.59	10.28	62.69	Peak	74	-11.31
17.475	V	30.58	33.89	43.59	10.28	50.55	Avg.	54	-3.45

Table 49. Radiated Harmonic Emissions, High Channel, 5 GHz, Combined Ports, 802.11a, 19 dBi Panel

Note: All other emissions were measured at the noise floor of the spectrum analyzer.

Frequency (MHz)	Antenna Polarity (H/V)	Raw Amp. @ 1m	Pre Amp (dB)	Ant. Cor. Factor (dB)	Cable Loss (dB)	Dist. Cor. Factor (dB)	EUT Field Strength Final Amp. (dB μ V/m)	Limit @ 3m (dB μ V/m)	Margin (dB)
11.49	V	46.11	34.86	39.79	7.68	58.72	Peak	74	-15.28
11.49	V	33.34	34.86	39.79	7.68	45.95	Avg.	54	-8.05
17.235	V	43.12	34.01	42.82	9.25	61.18	Peak	74	-12.82
17.235	V	30.88	34.01	42.82	9.25	48.94	Avg.	54	-5.06

Table 50. Radiated Harmonic Emissions, Low Channel, 5 GHz, Combined Ports, 802.11n 20MHz, 9 dBi Omni

Note: All other emissions were measured at the noise floor of the spectrum analyzer.

Frequency (MHz)	Antenna Polarity (H/V)	Raw Amp. @ 1m	Pre Amp (dB)	Ant. Cor. Factor (dB)	Cable Loss (dB)	Dist. Cor. Factor (dB)	EUT Field Strength Final Amp. (dB μ V/m)	Limit @ 3m (dB μ V/m)	Margin (dB)
11.57	V	46.84	34.91	39.88	7.55	59.36	Peak	74	-14.64
11.57	V	33.43	34.91	39.88	7.55	45.95	Avg.	54	-8.05
17.355	V	43.2	33.93	43.15	9.58	62.00	Peak	74	-12.00
17.355	V	30.9	33.93	43.15	9.58	49.70	Avg.	54	-4.30

Table 51. Radiated Harmonic Emissions, Mid Channel, 5 GHz, Combined Ports, 802.11n 20MHz, 9 dBi Omni

Note: All other emissions were measured at the noise floor of the spectrum analyzer.

Frequency (MHz)	Antenna Polarity (H/V)	Raw Amp. @ 1m	Pre Amp (dB)	Ant. Cor. Factor (dB)	Cable Loss (dB)	Dist. Cor. Factor (dB)	EUT Field Strength Final Amp. (dB μ V/m)	Limit @ 3m (dB μ V/m)	Margin (dB)
11.65	V	48.68	34.96	39.94	7.23	60.89	Peak	74	-13.11
11.65	V	36.29	34.96	39.94	7.23	48.50	Avg.	54	-5.50
17.475	V	42.84	33.89	43.59	10.28	62.81	Peak	74	-11.19
17.475	V	30.82	33.89	43.59	10.28	50.79	Avg.	54	-3.21

Table 52. Radiated Harmonic Emissions, High Channel, 5 GHz, Combined Ports, 802.11n 20MHz, 9 dBi Omni

Note: All other emissions were measured at the noise floor of the spectrum analyzer.

Frequency (MHz)	Antenna Polarity (H/V)	Raw Amp. @ 1m	Pre Amp (dB)	Ant. Cor. Factor (dB)	Cable Loss (dB)	Dist. Cor. Factor (dB)	EUT Field Strength Final Amp. (dB μ V/m)	Limit @ 3m (dB μ V/m)	Margin (dB)
11.49	V	45.64	34.86	39.79	7.68	58.25	Peak	74	-15.75
11.49	V	33.7	34.86	39.79	7.68	46.31	Avg.	54	-7.69
17.235	V	43.4	34.01	42.82	9.25	61.46	Peak	74	-12.54
17.235	V	30.9	34.01	42.82	9.25	48.96	Avg.	54	-5.04

Table 53. Radiated Harmonic Emissions, Low Channel, 5 GHz, Combined Ports, 802.11n 20MHz, 16 dBi Sector

Note: All other emissions were measured at the noise floor of the spectrum analyzer.

Frequency (MHz)	Antenna Polarity (H/V)	Raw Amp. @ 1m	Pre Amp (dB)	Ant. Cor. Factor (dB)	Cable Loss (dB)	Dist. Cor. Factor (dB)	EUT Field Strength Final Amp. (dB μ V/m)	Limit @ 3m (dB μ V/m)	Margin (dB)
11.57	V	45.9	34.91	39.88	7.55	58.42	Peak	74	-15.58
11.57	V	34.49	34.91	39.88	7.55	47.01	Avg.	54	-6.99
17.355	V	43.14	33.93	43.15	9.58	61.94	Peak	74	-12.06
17.355	V	30.73	33.93	43.15	9.58	49.53	Avg.	54	-4.47

Table 54. Radiated Harmonic Emissions, Mid Channel, 5 GHz, Combined Ports, 802.11n 20MHz, 16 dBi Sector

Note: All other emissions were measured at the noise floor of the spectrum analyzer.

Frequency (MHz)	Antenna Polarity (H/V)	Raw Amp. @ 1m	Pre Amp (dB)	Ant. Cor. Factor (dB)	Cable Loss (dB)	Dist. Cor. Factor (dB)	EUT Field Strength Final Amp. (dB μ V/m)	Limit @ 3m (dB μ V/m)	Margin (dB)
11.65	V	47.51	34.96	39.94	7.23	59.72	Peak	74	-14.28
11.65	V	35.88	34.96	39.94	7.23	48.09	Avg.	54	-5.91
17.475	V	44.28	33.89	43.59	10.28	64.25	Peak	74	-9.75
17.475	V	31.91	33.89	43.59	10.28	51.88	Avg.	54	-2.12

Table 55. Radiated Harmonic Emissions, High Channel, 5 GHz, Combined Ports, 802.11n 20MHz, 16 dBi Sector

Note: All other emissions were measured at the noise floor of the spectrum analyzer.

Frequency (MHz)	Antenna Polarity (H/V)	Raw Amp. @ 1m	Pre Amp (dB)	Ant. Cor. Factor (dB)	Cable Loss (dB)	Dist. Cor. Factor (dB)	EUT Field Strength Final Amp. (dB μ V/m)	Limit @ 3m (dB μ V/m)	Margin (dB)
11.49	V	45.62	34.86	39.79	7.68	58.23	Peak	74	-15.77
11.49	V	34.17	34.86	39.79	7.68	46.78	Avg.	54	-7.22
17.235	V	42.83	34.01	42.82	9.25	60.89	Peak	74	-13.11
17.235	V	30.9	34.01	42.82	9.25	48.96	Avg.	54	-5.04

Table 56. Radiated Harmonic Emissions, Low Channel, 5 GHz, Combined Ports, 802.11n 20MHz, 19 dBi Panel

Note: All other emissions were measured at the noise floor of the spectrum analyzer.

Frequency (MHz)	Antenna Polarity (H/V)	Raw Amp. @ 1m	Pre Amp (dB)	Ant. Cor. Factor (dB)	Cable Loss (dB)	Dist. Cor. Factor (dB)	EUT Field Strength Final Amp. (dB μ V/m)	Limit @ 3m (dB μ V/m)	Margin (dB)
11.57	V	46.26	34.91	39.88	7.55	58.78	Peak	74	-15.22
11.57	V	34.38	34.91	39.88	7.55	46.90	Avg.	54	-7.10
17.355	V	42.22	33.93	43.15	9.58	61.02	Peak	74	-12.98
17.355	V	31.45	33.93	43.15	9.58	50.25	Avg.	54	-3.75

Table 57. Radiated Harmonic Emissions, Mid Channel, 5 GHz, Combined Ports, 802.11n 20MHz, 19 dBi Panel

Note: All other emissions were measured at the noise floor of the spectrum analyzer.

Frequency (MHz)	Antenna Polarity (H/V)	Raw Amp. @ 1m	Pre Amp (dB)	Ant. Cor. Factor (dB)	Cable Loss (dB)	Dist. Cor. Factor (dB)	EUT Field Strength Final Amp. (dB μ V/m)	Limit @ 3m (dB μ V/m)	Margin (dB)
11.65	V	46.17	34.96	39.94	7.23	58.38	Peak	74	-15.62
11.65	V	36.17	34.96	39.94	7.23	48.38	Avg.	54	-5.62
17.475	V	43.23	33.89	43.59	10.28	63.20	Peak	74	-10.80
17.475	V	30.65	33.89	43.59	10.28	50.62	Avg.	54	-3.38

Table 58. Radiated Harmonic Emissions, High Channel, 5 GHz, Combined Ports, 802.11n 20MHz, 19 dBi Panel

Note: All other emissions were measured at the noise floor of the spectrum analyzer.

Frequency (MHz)	Antenna Polarity (H/V)	Raw Amp. @ 1m	Pre Amp (dB)	Ant. Cor. Factor (dB)	Cable Loss (dB)	Dist. Cor. Factor (dB)	EUT Field Strength Final Amp. (dB μ V/m)	Limit @ 3m (dB μ V/m)	Margin (dB)
11.51	V	42.42	34.88	39.81	7.67	55.03	Peak	74	-18.97
11.51	V	30.26	34.88	39.81	7.67	42.87	Avg.	54	-11.13
17.265	V	42.11	33.98	42.90	9.30	60.32	Peak	74	-13.68
17.265	V	30.58	33.98	42.90	9.30	48.79	Avg.	54	-5.21

Table 59. Radiated Harmonic Emissions, Low Channel, 5 GHz, Combined Ports, 802.11n 40MHz, 9 dBi Omni

Note: All other emissions were measured at the noise floor of the spectrum analyzer.

Frequency (MHz)	Antenna Polarity (H/V)	Raw Amp. @ 1m	Pre Amp (dB)	Ant. Cor. Factor (dB)	Cable Loss (dB)	Dist. Cor. Factor (dB)	EUT Field Strength Final Amp. (dB μ V/m)	Limit @ 3m (dB μ V/m)	Margin (dB)
11.59	V	45.59	34.92	39.89	7.49	58.05	Peak	74	-15.95
11.59	V	33.72	34.92	39.89	7.49	46.18	Avg.	54	-7.82
17.385	V	42.79	33.92	43.24	9.72	61.84	Peak	74	-12.16
17.385	V	30.98	33.92	43.24	9.72	50.03	Avg.	54	-3.97

Table 60. Radiated Harmonic Emissions, High Channel, 5 GHz, Combined Ports, 802.11n 40MHz, 5 dBi Omni

Note: All other emissions were measured at the noise floor of the spectrum analyzer.

Frequency (MHz)	Antenna Polarity (H/V)	Raw Amp. @ 1m	Pre Amp (dB)	Ant. Cor. Factor (dB)	Cable Loss (dB)	Dist. Cor. Factor (dB)	EUT Field Strength Final Amp. (dB μ V/m)	Limit @ 3m (dB μ V/m)	Margin (dB)
11.51	V	39.38	34.88	39.81	7.67	51.99	Peak	74	-22.01
11.51	V	30.4	34.88	39.81	7.67	43.01	Avg.	54	-10.99
17.265	V	43.43	33.98	42.90	9.30	61.64	Peak	74	-12.36
17.265	V	31.02	33.98	42.90	9.30	49.23	Avg.	54	-4.77

Table 61. Radiated Harmonic Emissions, Low Channel, 5 GHz, Combined Ports, 802.11n 40MHz, 16 dBi Sector

Note: All other emissions were measured at the noise floor of the spectrum analyzer.

Frequency (MHz)	Antenna Polarity (H/V)	Raw Amp. @ 1m	Pre Amp (dB)	Ant. Cor. Factor (dB)	Cable Loss (dB)	Dist. Cor. Factor (dB)	EUT Field Strength Final Amp. (dB μ V/m)	Limit @ 3m (dB μ V/m)	Margin (dB)
11.59	V	42.23	34.92	39.89	7.49	54.69	Peak	74	-19.31
11.59	V	30.5	34.92	39.89	7.49	42.96	Avg.	54	-11.04
17.385	V	43.67	33.92	43.24	9.72	62.72	Peak	74	-11.28
17.385	V	30.81	33.92	43.24	9.72	49.86	Avg.	54	-4.14

Table 62. Radiated Harmonic Emissions, High Channel, 5 GHz, Combined Ports, 802.11n 40MHz, 16 dBi Sector

Note: All other emissions were measured at the noise floor of the spectrum analyzer.

Frequency (MHz)	Antenna Polarity (H/V)	Raw Amp. @ 1m	Pre Amp (dB)	Ant. Cor. Factor (dB)	Cable Loss (dB)	Dist. Cor. Factor (dB)	EUT Field Strength Final Amp. (dB μ V/m)	Limit @ 3m (dB μ V/m)	Margin (dB)
11.51	V	44.91	34.88	39.81	7.67	57.52	Peak	74	-16.48
11.51	V	33.54	34.88	39.81	7.67	46.15	Avg.	54	-7.85
17.265	V	43.5	33.98	42.90	9.30	61.71	Peak	74	-12.29
17.265	V	30.64	33.98	42.90	9.30	48.85	Avg.	54	-5.15

Table 63. Radiated Harmonic Emissions, Low Channel, 5 GHz, Combined Ports, 802.11n 40MHz, 19 dBi Panel


Note: All other emissions were measured at the noise floor of the spectrum analyzer.

Frequency (MHz)	Antenna Polarity (H/V)	Raw Amp. @ 1m	Pre Amp (dB)	Ant. Cor. Factor (dB)	Cable Loss (dB)	Dist. Cor. Factor (dB)	EUT Field Strength Final Amp. (dB μ V/m)	Limit @ 3m (dB μ V/m)	Margin (dB)
11.59	V	45.05	34.92	39.89	7.49	57.51	Peak	74	-16.49
11.59	V	31.98	34.92	39.89	7.49	44.44	Avg.	54	-9.56
17.385	V	43.87	33.92	43.24	9.72	62.92	Peak	74	-11.08
17.385	V	30.7	33.92	43.24	9.72	49.75	Avg.	54	-4.25


Table 64. Radiated Harmonic Emissions, High Channel, 5 GHz, Combined Ports, 802.11n 40MHz, 19 dBi Panel

Note: All other emissions were measured at the noise floor of the spectrum analyzer.


Radiated Spurious Emissions, 802.11g, 2.4 GHz, Combined Ports

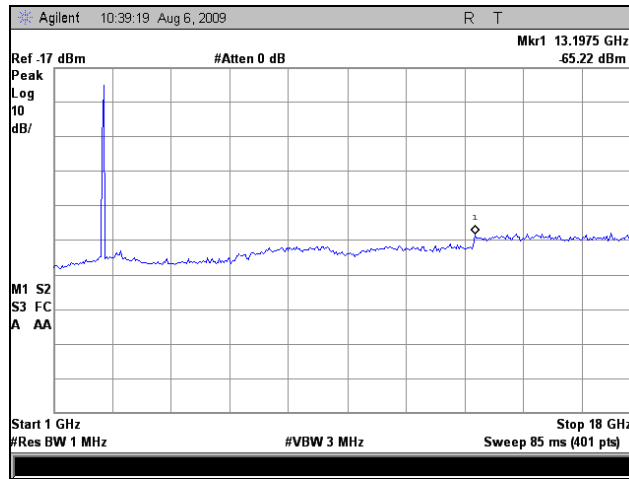


Plot 74. Radiated Spurious Emissions, Low Channel, 2.4 GHz, 802.11g, 13 dBi Sector

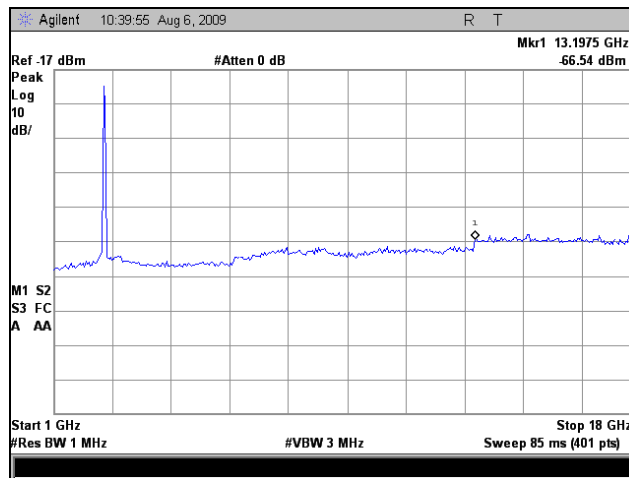


Plot 75. Radiated Spurious Emissions, Mid Channel, 2.4 GHz, 802.11g, 13 dBi Sector

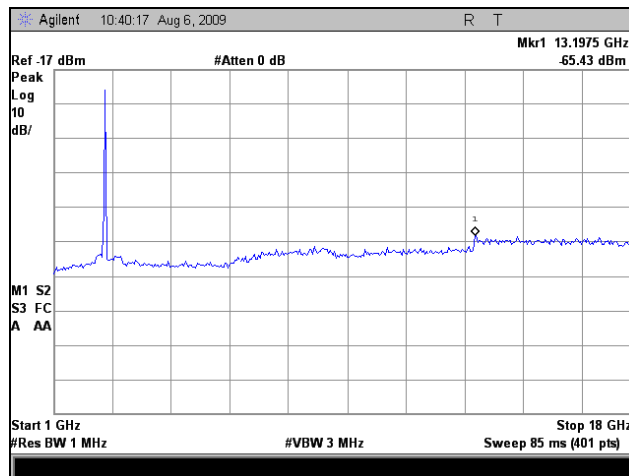


Plot 76. Radiated Spurious Emissions, High Channel, 2.4 GHz, 802.11g, 13 dBi Sector

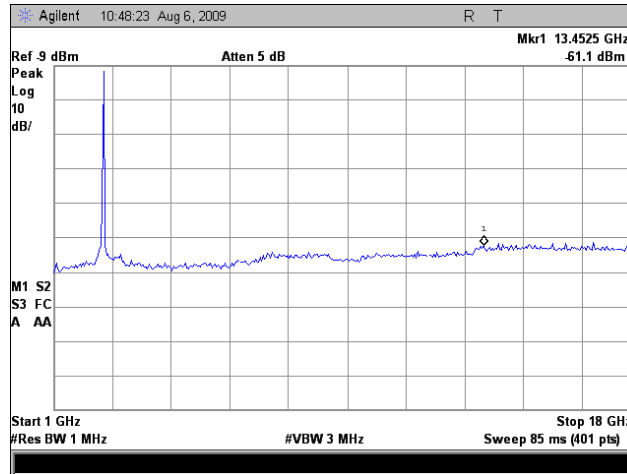


Plot 77. Radiated Spurious Emissions, Low Channel, 2.4 GHz, Combined Ports, 802.11n 20MHz, 13 dBi Sector

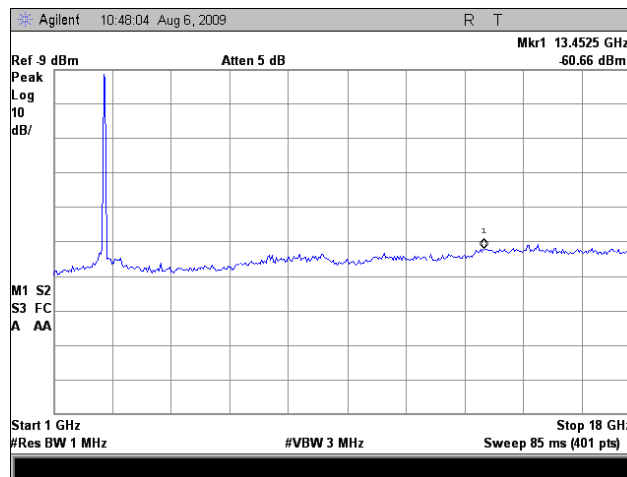

Plot 78. Radiated Spurious Emissions, Mid Channel, 2.4 GHz, Combined Ports, 802.11n 20MHz, 13 dBi Sector

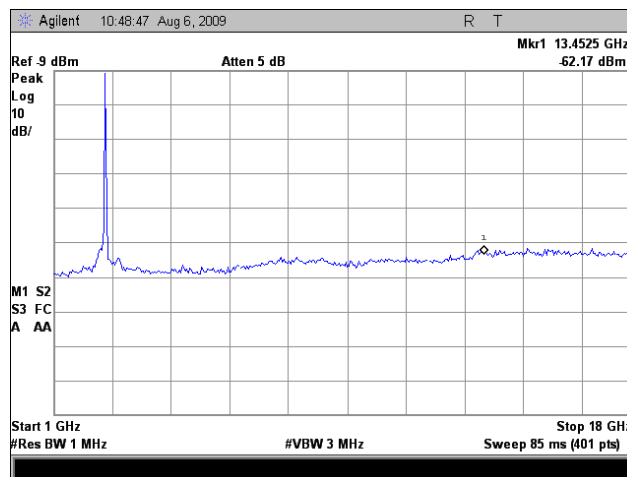


Plot 79. Radiated Spurious Emissions, High Channel, 2.4 GHz, Combined Ports, 802.11n 20MHz, 13 dBi Sector

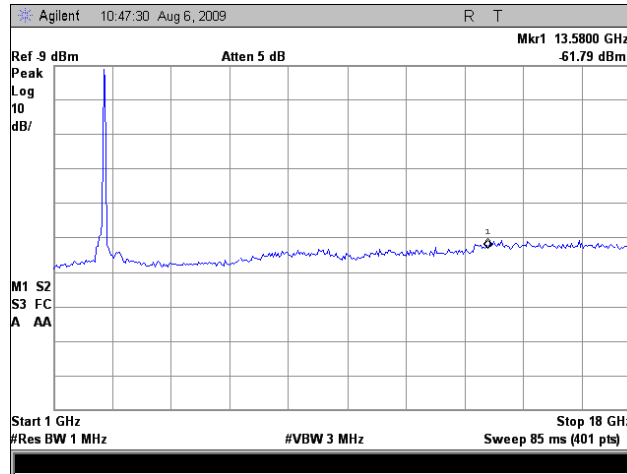


Plot 80. Radiated Spurious Emissions, Mid Channel, 2.4 GHz, Combined Ports, 802.11n 40MHz, 13 dBi Sector


Radiated Band Edge Measurements, 802.11g, Port 1

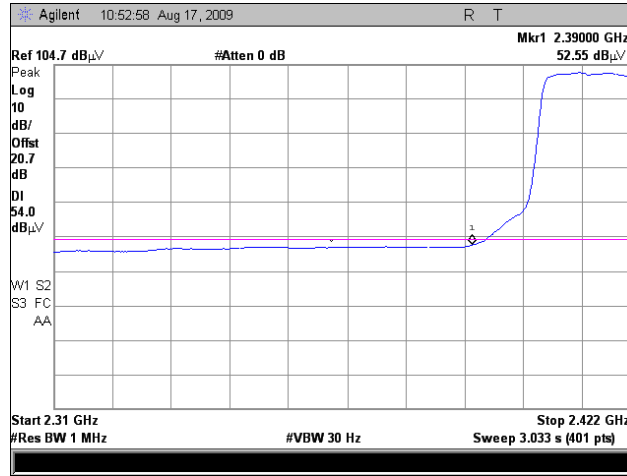


Plot 81. Lower Band Edge, Average, 2.4 GHz, 802.11g 20MHz, Port 1, 13 dBi Sector

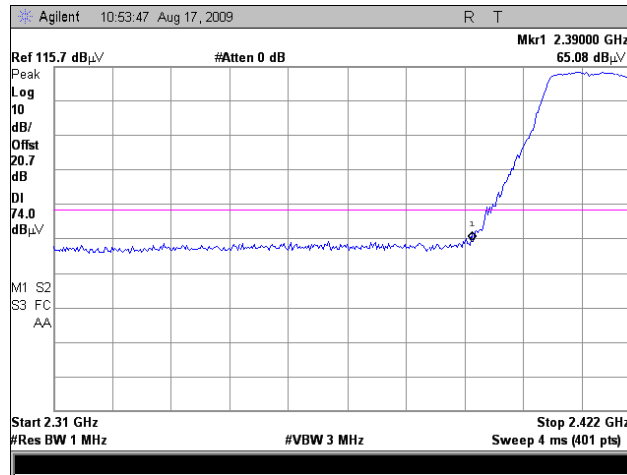

Plot 82. Lower Band Edge, Peak, 2.4 GHz, 802.11g 20MHz, Port 1, 13 dBi Sector

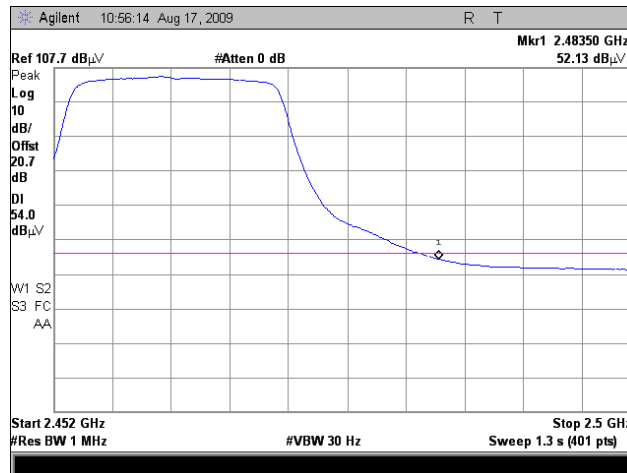


Plot 83. Upper Band Edge, Average, 2.4 GHz, 802.11g 20MHz, Port 1, 13 dBi Sector

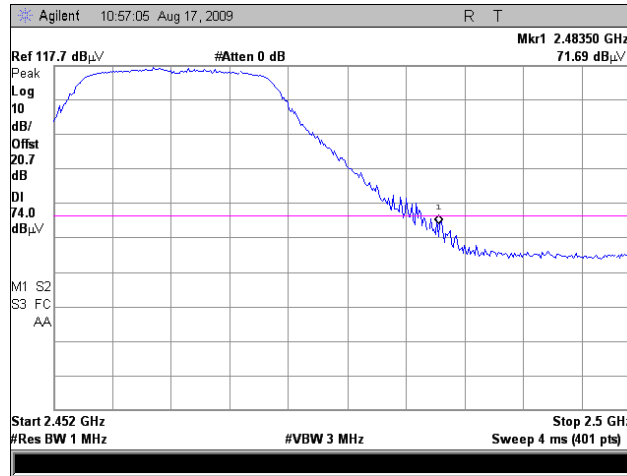


Plot 84. Upper Band Edge, Peak, 2.4 GHz, 802.11g 20MHz, Port 1, 13 dBi Sector


Radiated Band Edge Measurements, 2.4 GHz, Combined Ports

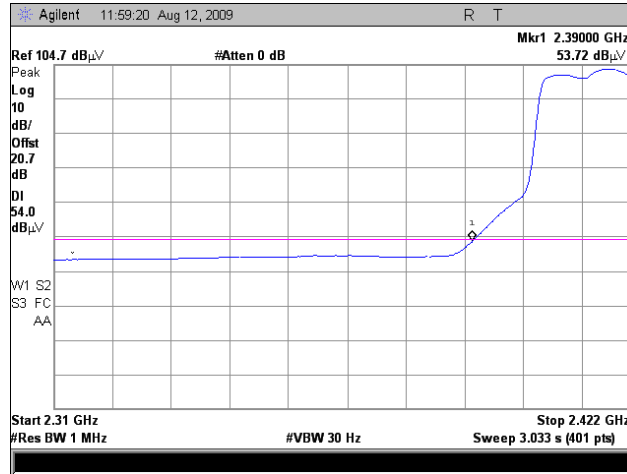


Plot 85. Lower Band Edge, Average, 2.4 GHz, Combined Ports, 802.11n 20MHz, 13 dBi Sector

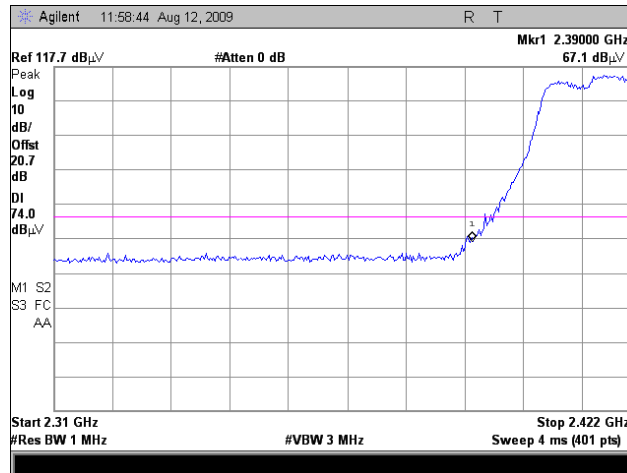


Plot 86. Lower Band Edge, Peak, 2.4 GHz, Combined Ports, 802.11n 20MHz, 13 dBi Sector

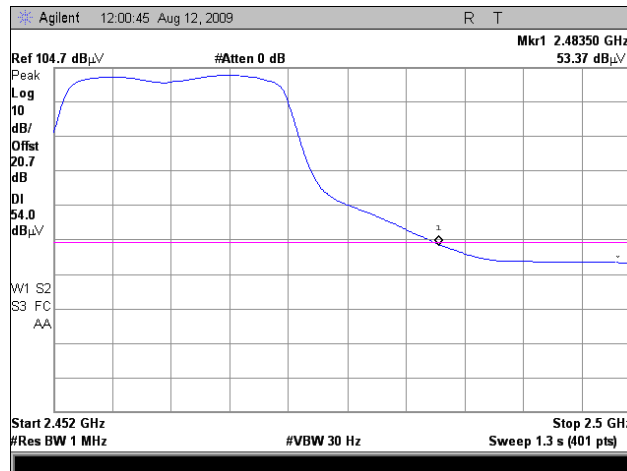


Plot 87. Upper Band Edge, Average, 2.4 GHz, Combined Ports, 802.11n 20MHz, 13 dBi Sector

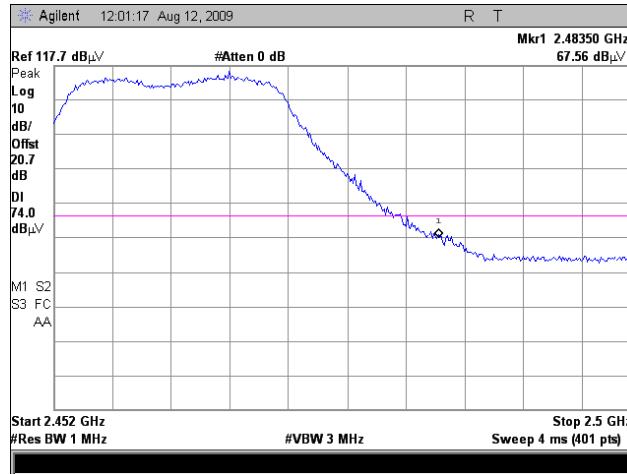


Plot 88. Upper Band Edge, Peak, 2.4 GHz, Combined Ports, 802.11n 20MHz, 13 dBi Sector

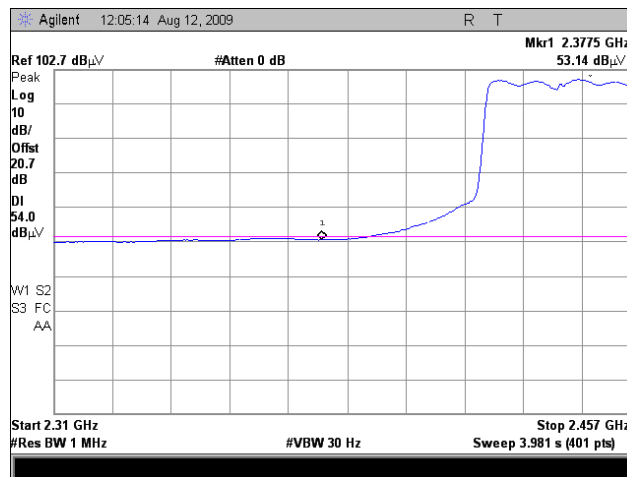


Plot 89. Lower Band Edge, Average, 2.4 GHz, Combined Ports, 802.11n 40MHz, 13 dBi Sector

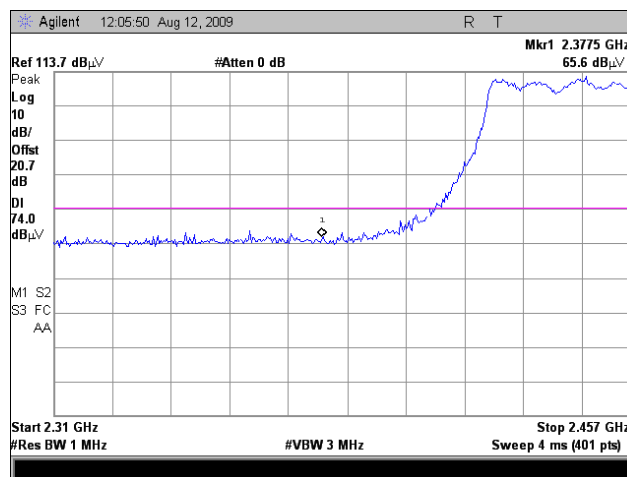

Plot 90. Lower Band Edge, Peak, 2.4 GHz, Combined Ports, 802.11n 40MHz, 13 dBi Sector

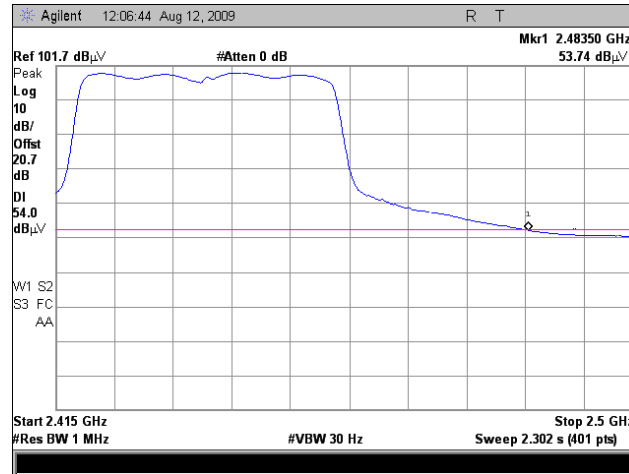


Plot 91. Upper Band Edge, Average, 2.4 GHz, Combined Ports, 802.11n 40MHz, 13 dBi Sector

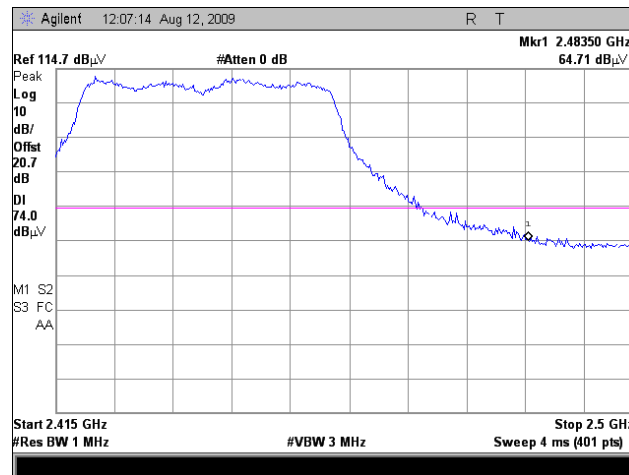


Plot 92. Upper Band Edge, Peak, 2.4 GHz, Combined Ports, 802.11n 40MHz, 13 dBi Sector


Radiated Spurious Emissions, 5 GHz, Combined Ports

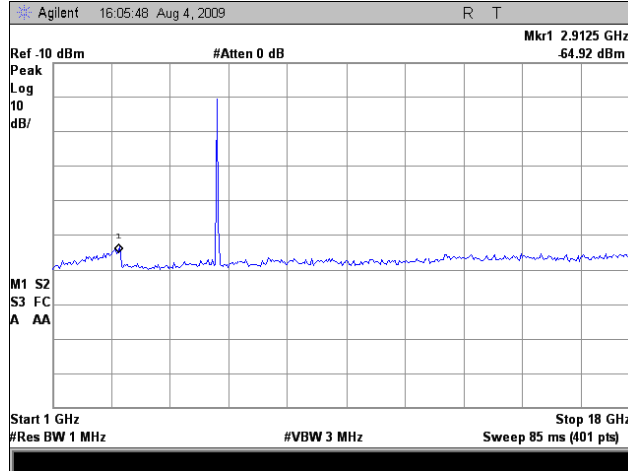


Plot 93. Radiated Spurious Emissions, Low Channel, 5 GHz, 802.11a 20MHz, 9 dBi Omni

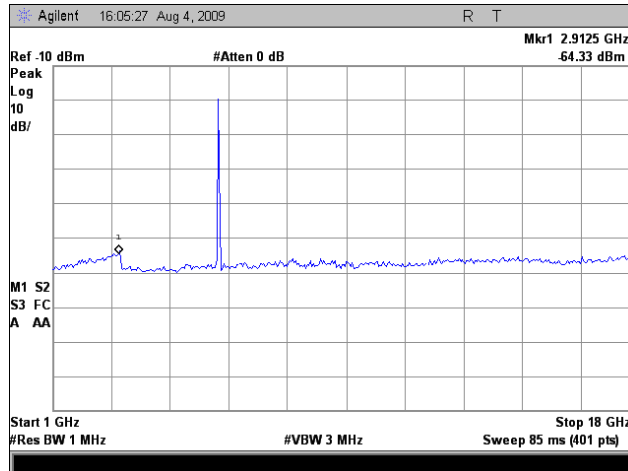


Plot 94. Radiated Spurious Emissions, Mid Channel, 5 GHz, 802.11a 20MHz, 9 dBi Omni

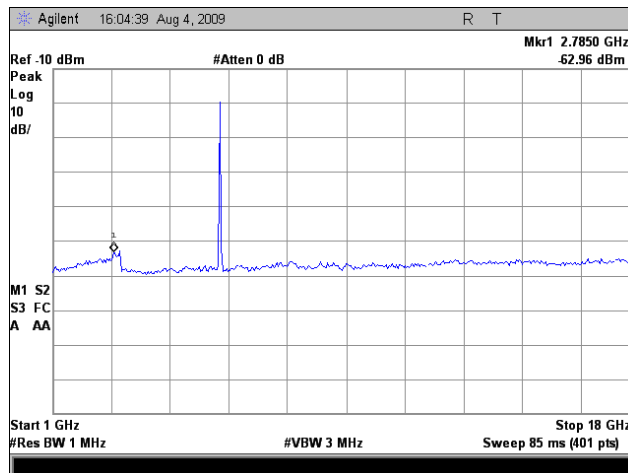


Plot 95. Radiated Spurious Emissions, High Channel, 5 GHz, 802.11a 20MHz, 9 dBi Omni

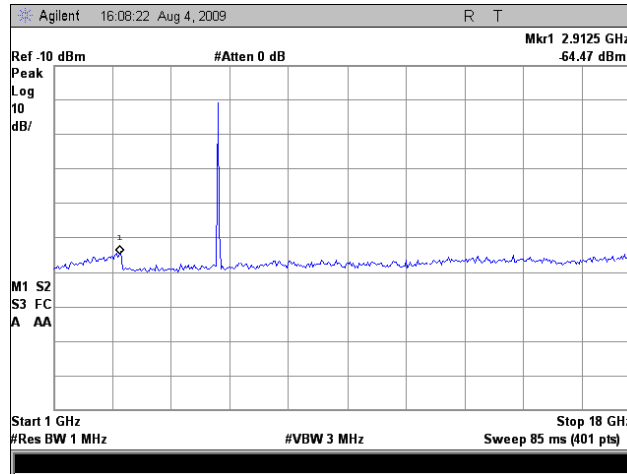


Plot 96. Radiated Spurious Emissions, Low Channel, 5 GHz, Combined Ports, 802.11n 20MHz, 9 dBi Omni

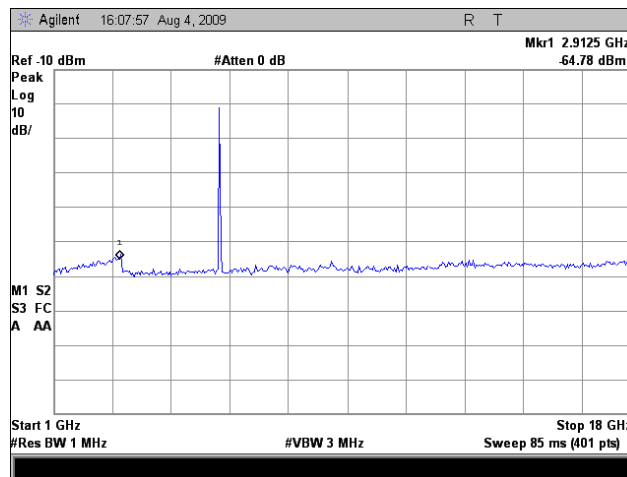


Plot 97. Radiated Spurious Emissions, Mid Channel, 5 GHz, Combined Ports, 802.11n 20MHz, 9 dBi Omni

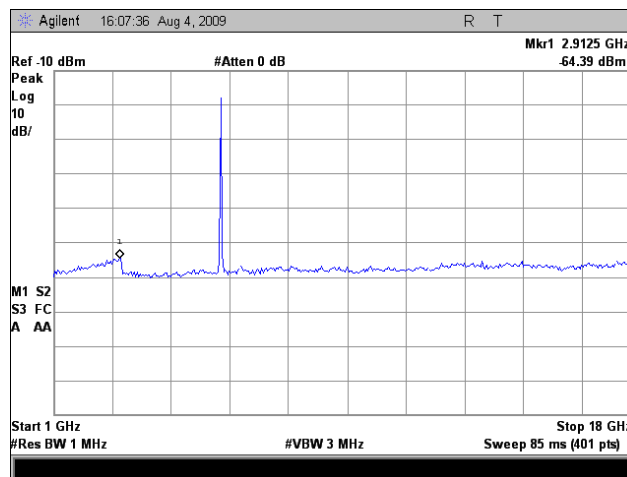


Plot 98. Radiated Spurious Emissions, High Channel, 5 GHz, Combined Ports, 802.11n 20MHz, 9 dBi Omni

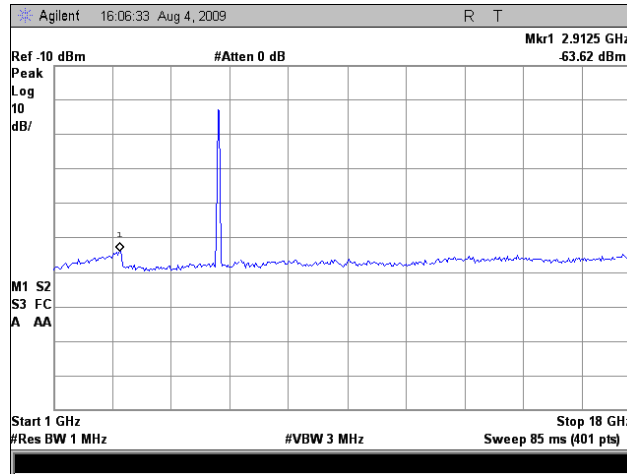


Plot 99. Radiated Spurious Emissions, Low Channel, 5 GHz, Combined Ports, 802.11n 40MHz, 9 dBi Omni

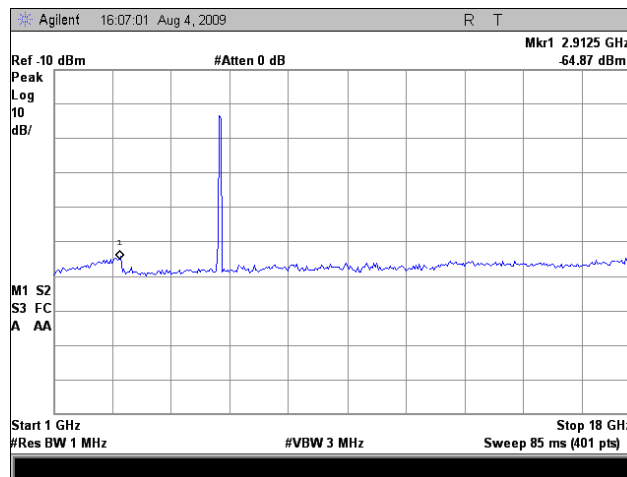


Plot 100. Radiated Spurious Emissions, High Channel, 5 GHz, Combined Ports, 802.11n 40MHz, 9 dBi Omni

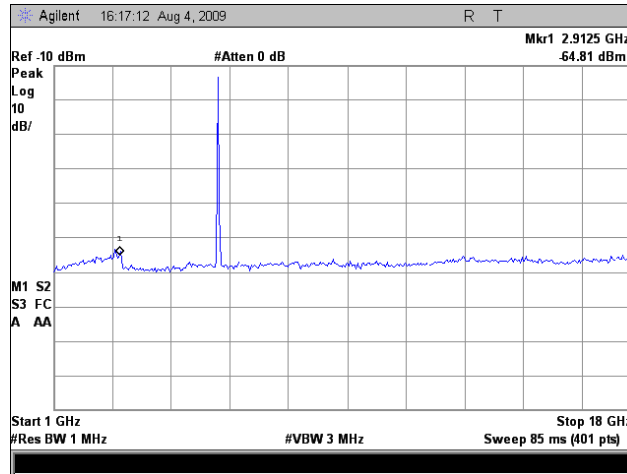


Plot 101. Radiated Spurious Emissions, Low Channel, 5 GHz, 802.11a 20MHz, 16 dBi Sector

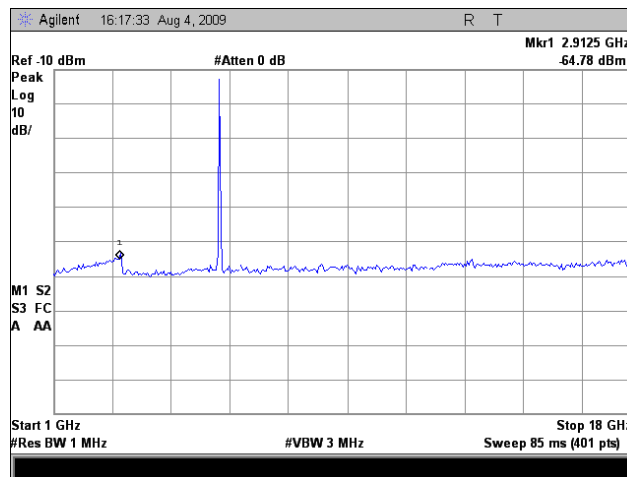


Plot 102. Radiated Spurious Emissions, Mid Channel, 5 GHz, 802.11a 20MHz, 16 dBi Sector

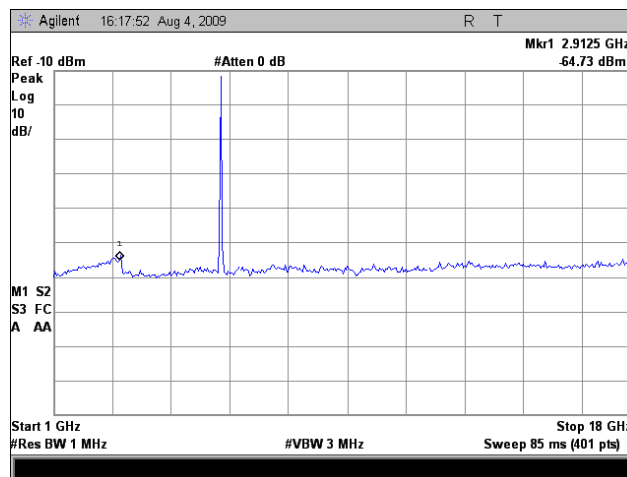


Plot 103. Radiated Spurious Emissions, High Channel, 5 GHz, 802.11a 20MHz, 16 dBi Sector

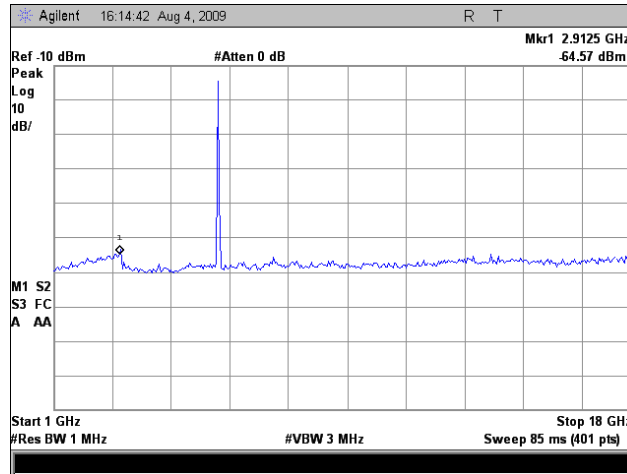


Plot 104. Radiated Spurious Emissions, Low Channel, 5 GHz, Combined Ports, 802.11n 20MHz, 16 dBi Sector

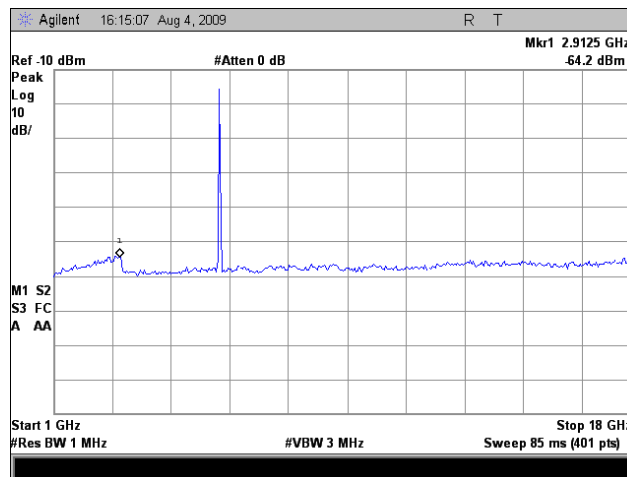


Plot 105. Radiated Spurious Emissions, Mid Channel, 5 GHz, Combined Ports, 802.11n 20MHz, 16 dBi Sector

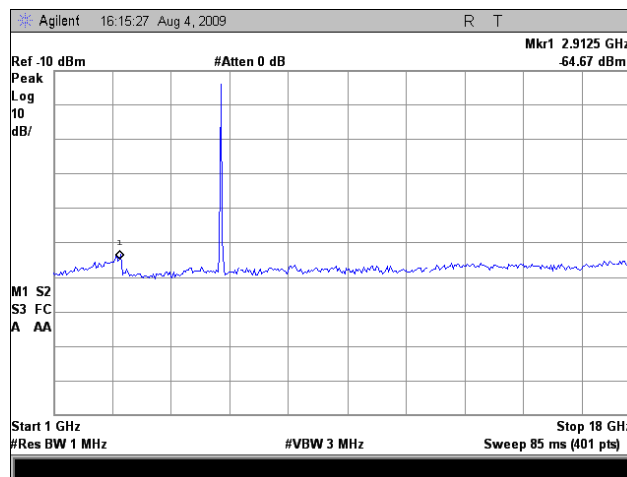


Plot 106. Radiated Spurious Emissions, High Channel, 5 GHz, Combined Ports, 802.11n 20MHz, 16 dBi Sector

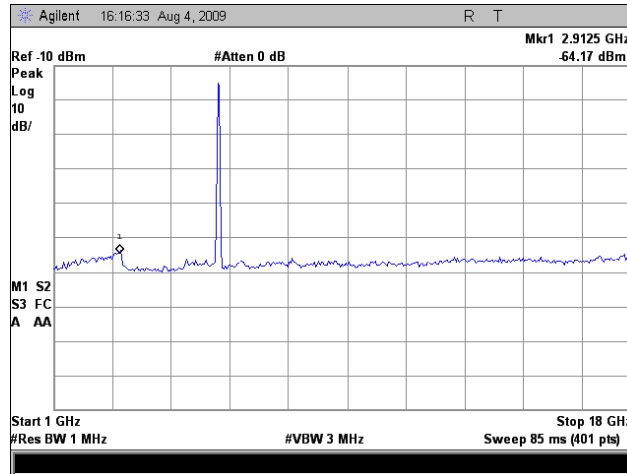


Plot 107. Radiated Spurious Emissions, Low Channel, 5 GHz, Combined Ports, 802.11n 40MHz, 16 dBi Sector

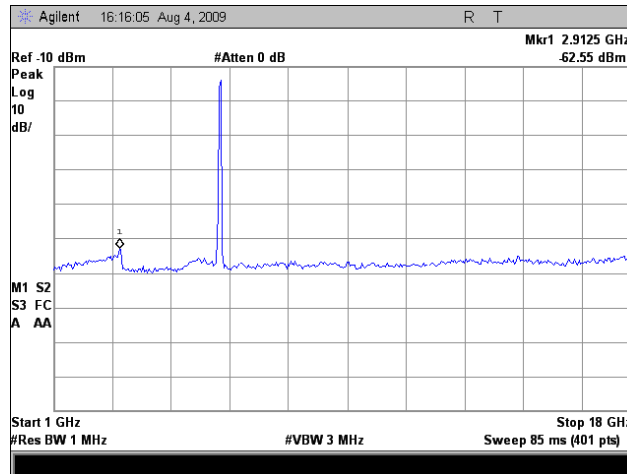


Plot 108. Radiated Spurious Emissions, High Channel, 5 GHz, Combined Ports, 802.11n 40MHz, 16 dBi Sector

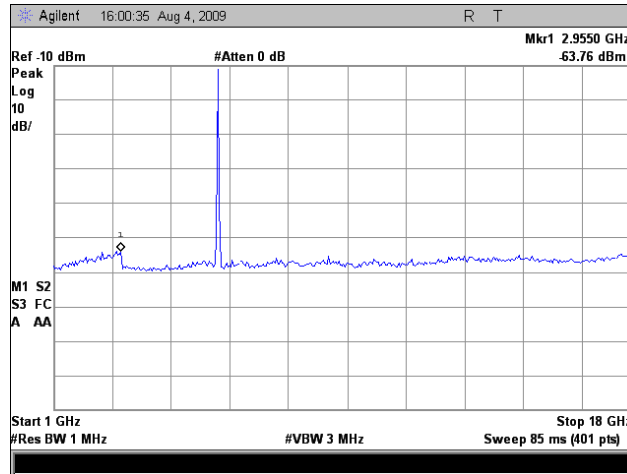


Plot 109. Radiated Spurious Emissions, Low Channel, 5 GHz, 802.11a 20MHz, 19 dBi Panel

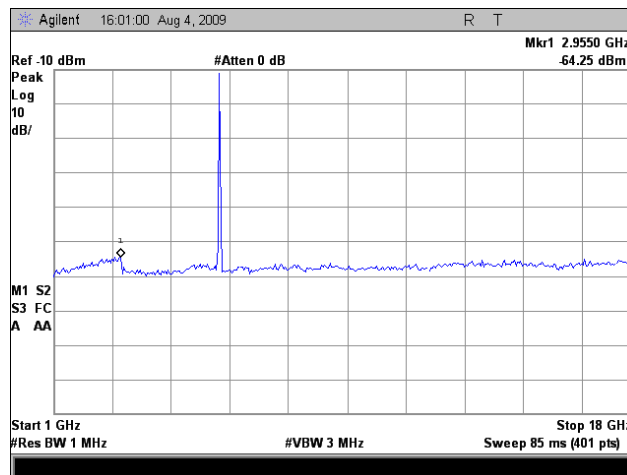


Plot 110. Radiated Spurious Emissions, Mid Channel, 5 GHz, 802.11a 20MHz, 19 dBi Panel

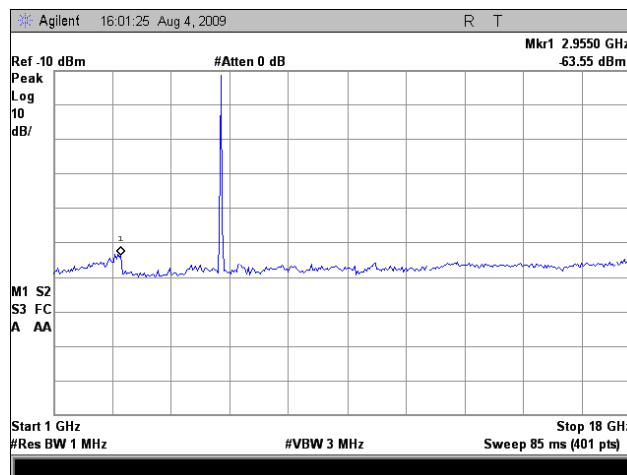


Plot 111. Radiated Spurious Emissions, High Channel, 5 GHz, 802.11a 20MHz, 19 dBi Panel

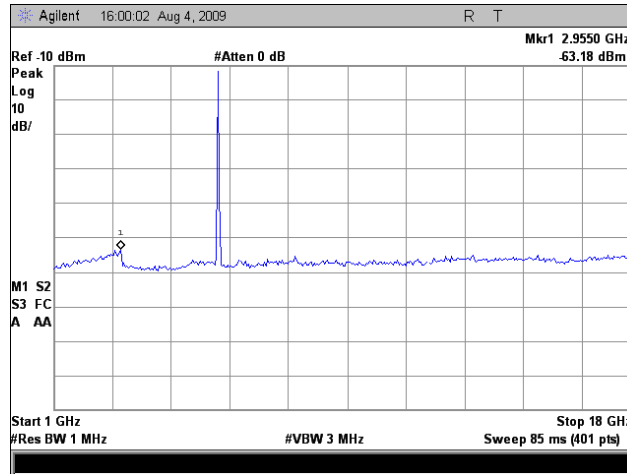


Plot 112. Radiated Spurious Emissions, Low Channel, 5 GHz, Combined Ports, 802.11n 20MHz, 19 dBi Panel

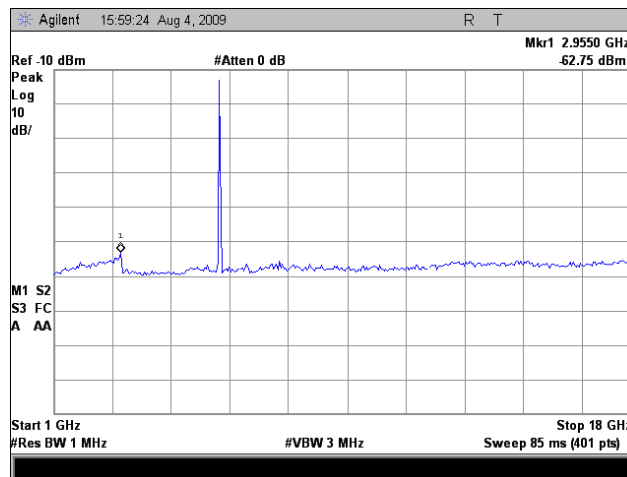


Plot 113. Radiated Spurious Emissions, Mid Channel, 5 GHz, Combined Ports, 802.11n 20MHz, 19 dBi Panel

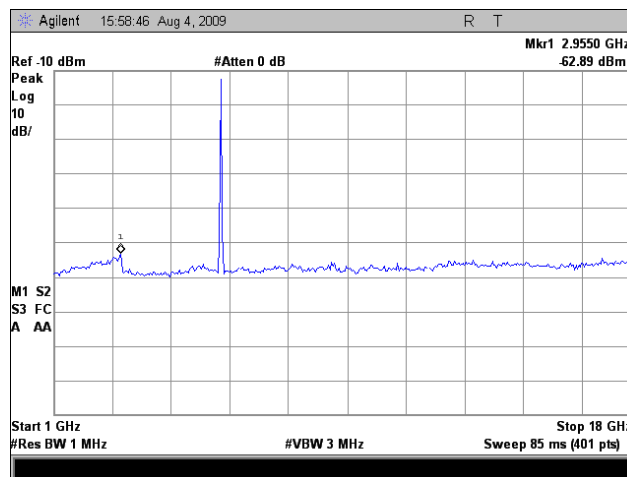

Plot 114. Radiated Spurious Emissions, High Channel, 5 GHz, Combined Ports, 802.11n 20MHz, 19 dBi Panel

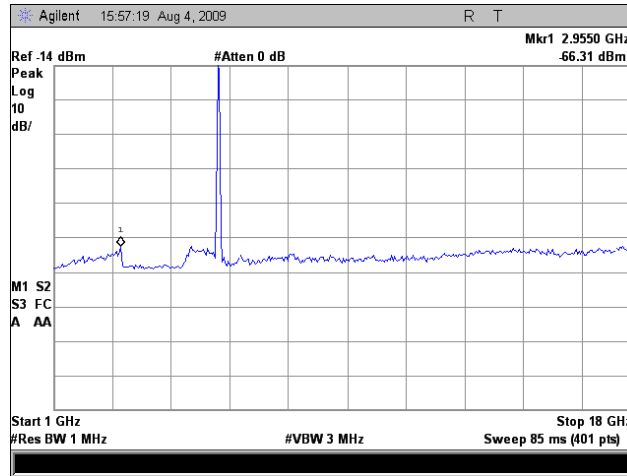

Plot 115. Radiated Spurious Emissions, Low Channel, 5 GHz, Combined Ports, 802.11n 40MHz, 19 dBi Panel

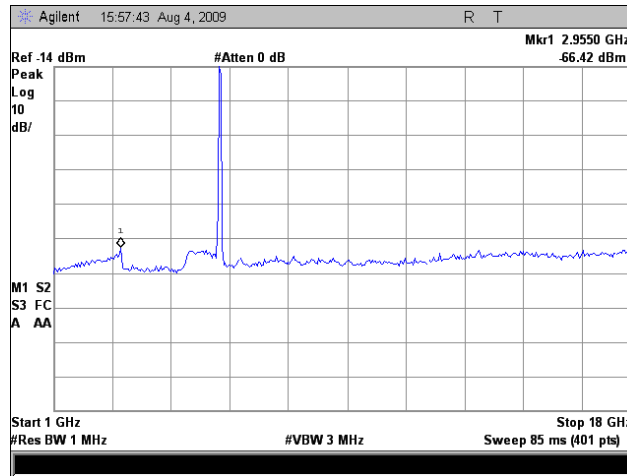

Plot 116. Radiated Spurious Emissions, High Channel, 5 GHz, Combined Ports, 802.11n 40MHz, 19 dBi Panel

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(d) RF Conducted Spurious Emissions Requirements and Band Edge

Test Requirement: **15.247(d)** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Test Procedure: For intentional radiators with a digital device portion which operates below 10 GHz, the spectrum was investigated as per §15.33(a)(1) and §15.33(a)(4); i.e., the lowest RF signal generated or used in the device up to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.


See following pages for detailed test results with RF Conducted Spurious Emissions.

Test Results: The EUT was compliant with the Conducted Spurious Emission limits of **§15.247(d)**.


Test Engineer(s): Minh Ly

Test Date(s): 08/17/09


RF Conducted Spurious Emissions Requirements, 2.4 GHz, 802.11g, Port 1

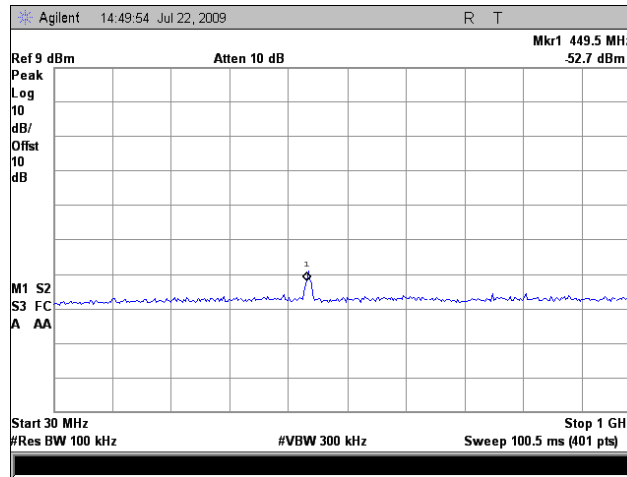


Plot 117. Conducted Emissions, Low Channel, 2.4 GHz, 802.11g, Port 1, 30 MHz – 1 GHz

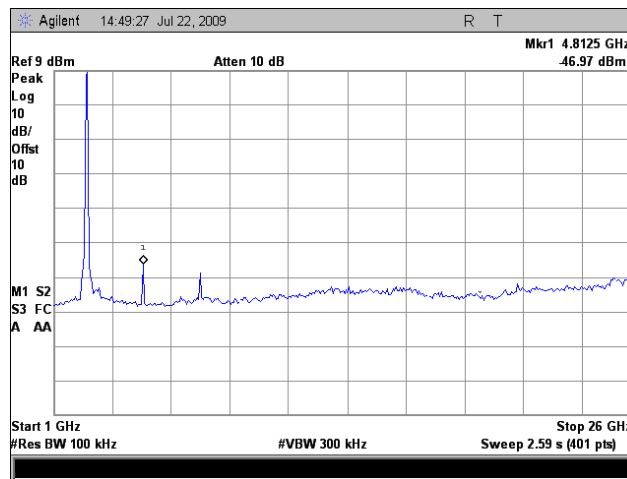


Plot 118. Conducted Emissions, Low Channel, 2.4 GHz, 802.11g, Port 1, 1 GHz – 26 GHz

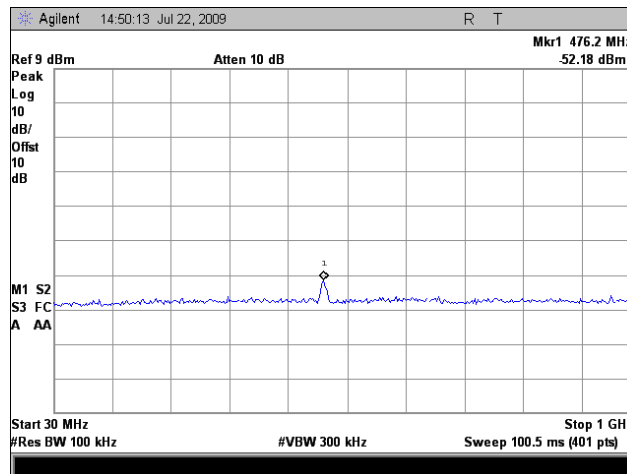


Plot 119. Conducted Emissions, Mid Channel, 2.4 GHz, 802.11g, Port 1, 30 MHz – 1 GHz

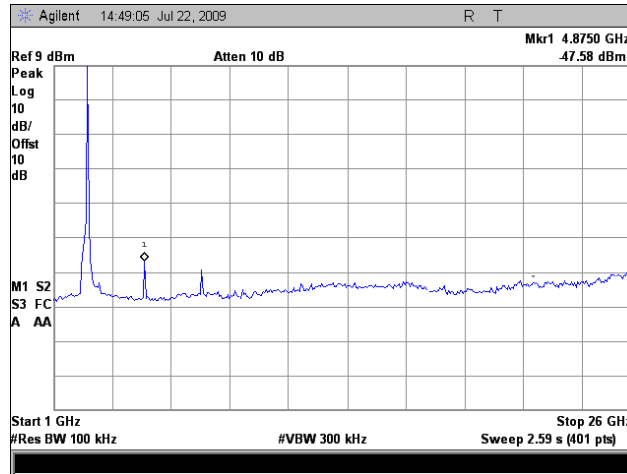


Plot 120. Conducted Emissions, Mid Channel, 2.4 GHz, 802.11g, Port 1, 1 GHz – 26 GHz

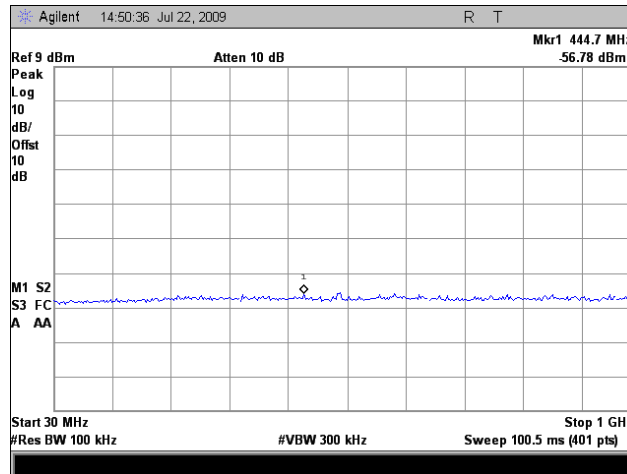


Plot 121. Conducted Emissions, High Channel, 2.4 GHz, 802.11g, Port 1, 30 MHz – 1 GHz

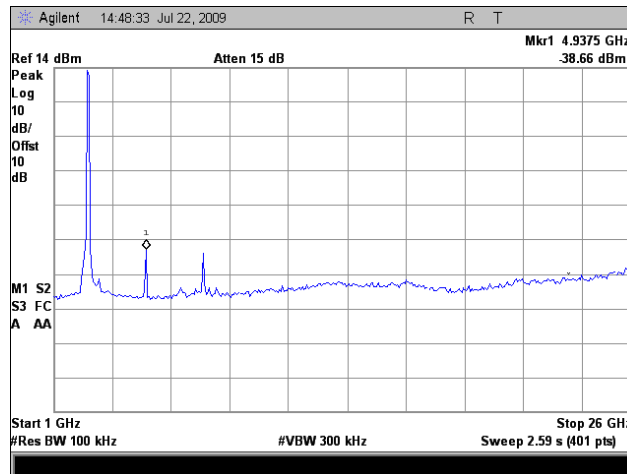


Plot 122. Conducted Emissions, High Channel, 2.4 GHz, 802.11g, Port 1, 1 GHz – 26 GHz

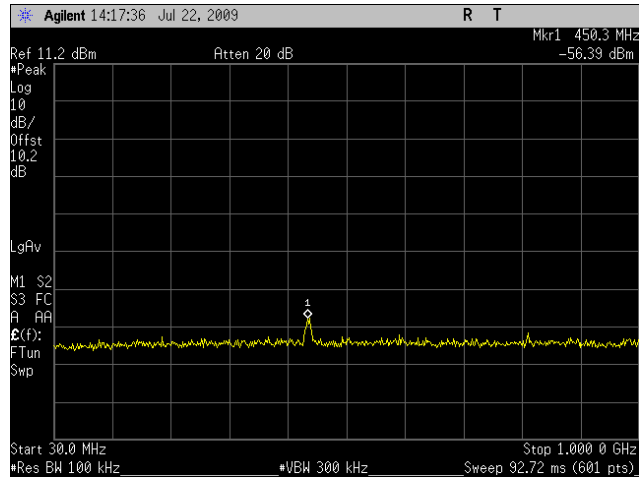


Plot 123. Conducted Emissions, Low Channel, 2.4 GHz, Port 1, 802.11n 20MHz, 30 MHz – 1 GHz

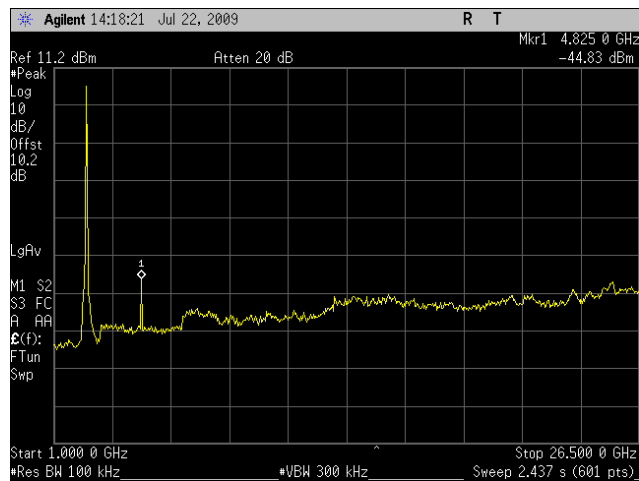


Plot 124. Conducted Emissions, Low Channel, 2.4 GHz, Port 1, 802.11n 20MHz, 1 GHz – 26.5 GHz

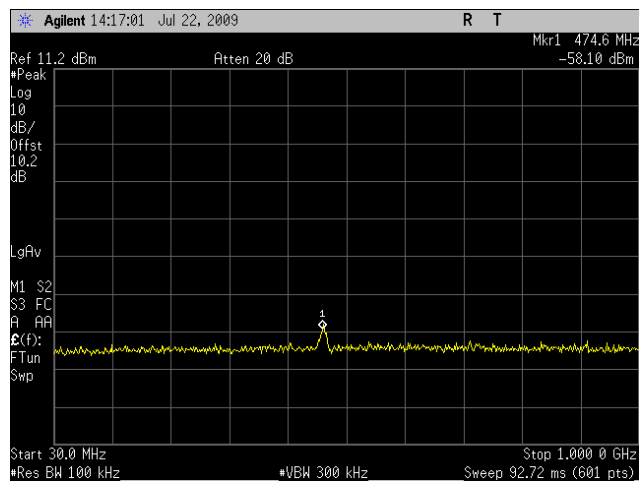


Plot 125. Conducted Emissions, Mid Channel, 2.4 GHz, Port 1, 802.11n 20MHz, 30 MHz – 1 GHz

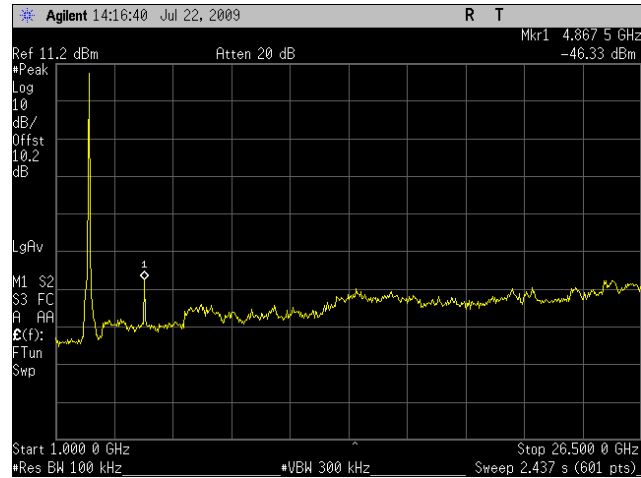


Plot 126. Conducted Emissions, Mid Channel, 2.4 GHz, Port 1, 802.11n 20MHz, 1 GHz – 26.5 GHz

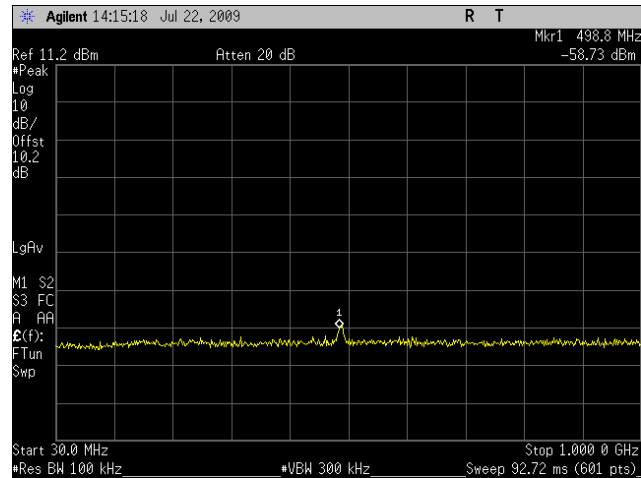


Plot 127. Conducted Emissions, High Channel, 2.4 GHz, Port 1, 802.11n 20MHz, 30 MHz – 1 GHz

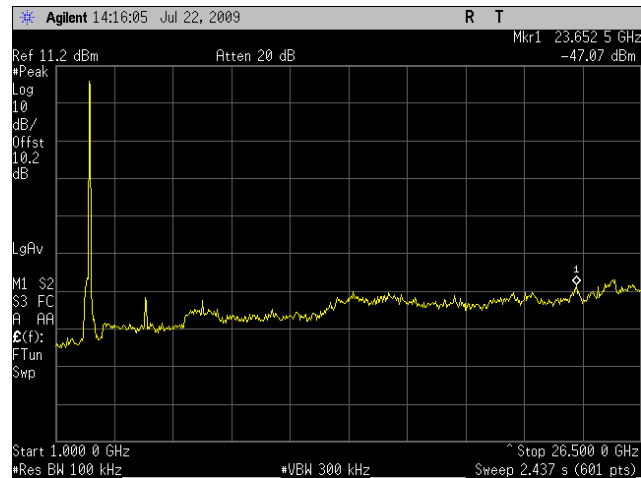

Plot 128. Conducted Emissions, High Channel, 2.4 GHz, Port 1, 802.11n 20MHz, 1 GHz – 26.5 GHz

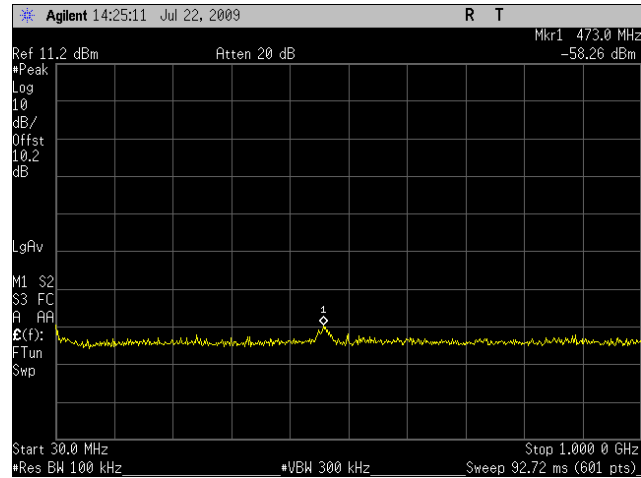


Plot 129. Conducted Emissions, Mid Channel, 2.4 GHz, Port 1, 802.11n 40MHz, 30 MHz – 1 GHz

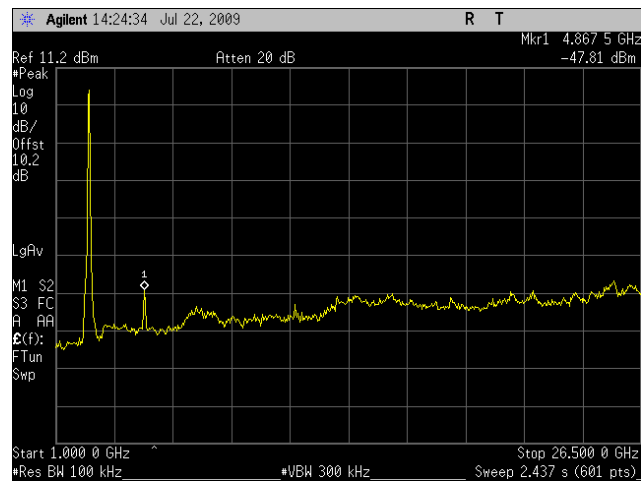


Plot 130. Conducted Emissions, Mid Channel, 2.4 GHz, Port 1, 802.11n 40MHz, 1 GHz – 26.5 GHz


RF Conducted Spurious Emissions Requirements, 2.4 GHz, Port 2

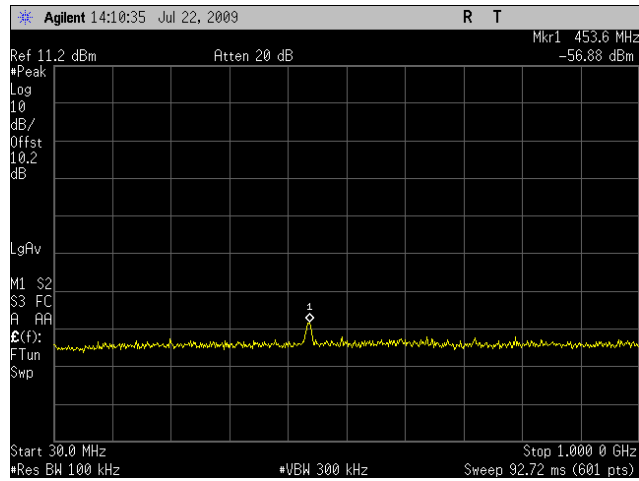


Plot 131. Conducted Emissions, Low Channel, 2.4 GHz, Port 2, 802.11n 20MHz, 30 MHz – 1 GHz

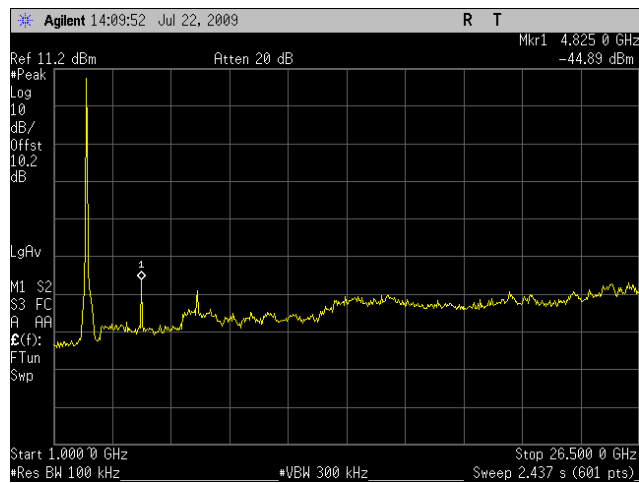


Plot 132. Conducted Emissions, Low Channel, 2.4 GHz, Port 2, 802.11n 20MHz, 1 GHz – 26.5 GHz

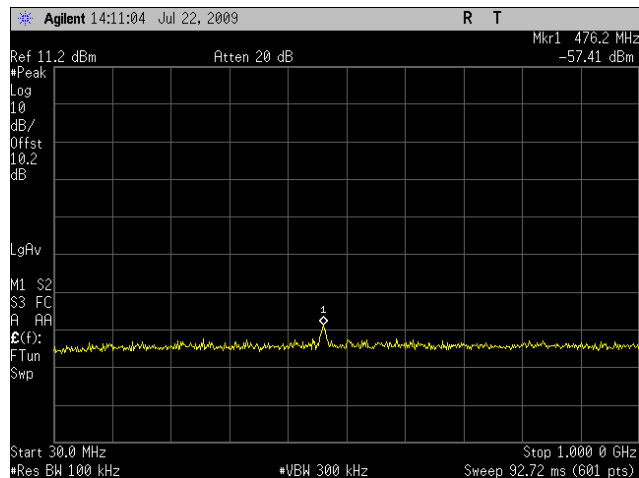


Plot 133. Conducted Emissions, Mid Channel, 2.4 GHz, Port 2, 802.11n 20MHz, 30 MHz – 1 GHz

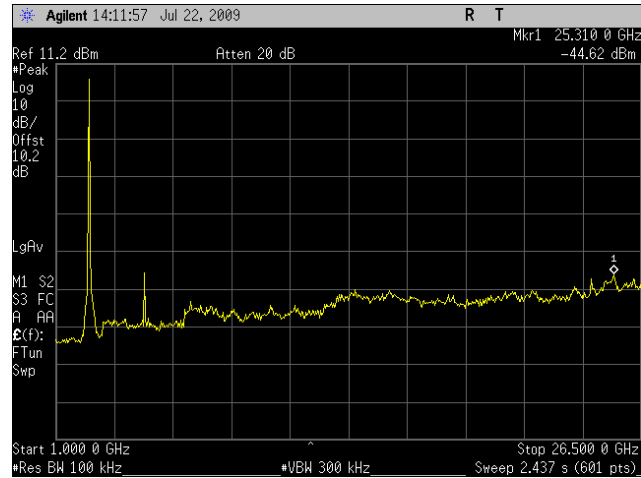


Plot 134. Conducted Emissions, Mid Channel, 2.4 GHz, Port 2, 802.11n 20MHz, 1 GHz – 26.5 GHz

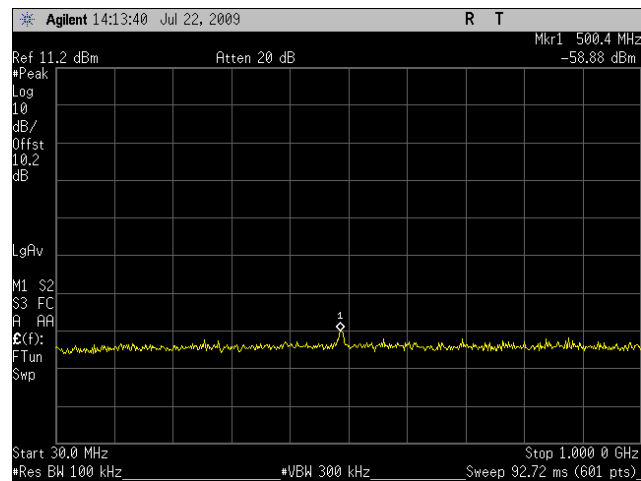


Plot 135. Conducted Emissions, High Channel, 2.4 GHz, Port 2, 802.11n 20MHz, 30 MHz – 1 GHz

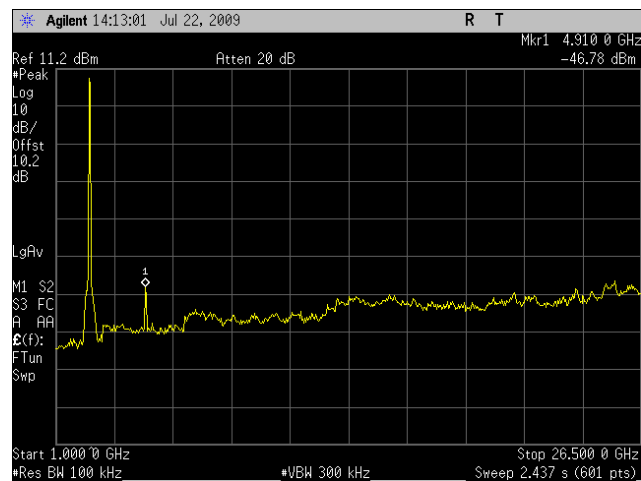

Plot 136. Conducted Emissions, High Channel, 2.4 GHz, Port 2, 802.11n 20MHz, 1 GHz – 26.5 GHz

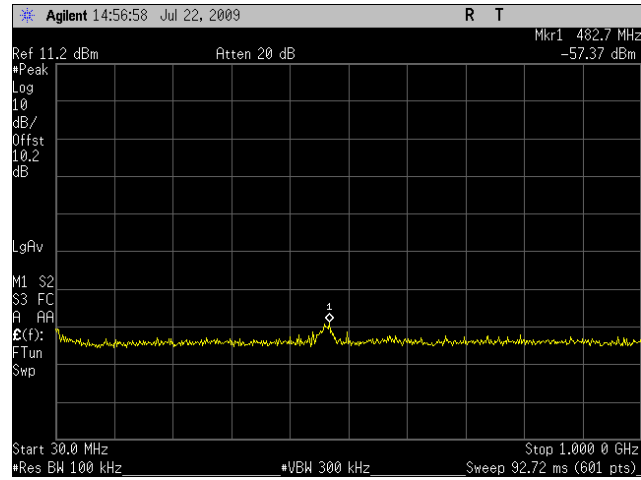


Plot 137. Conducted Emissions, Mid Channel, 2.4 GHz, Port 2, 802.11n 40MHz, 30 MHz – 1 GHz

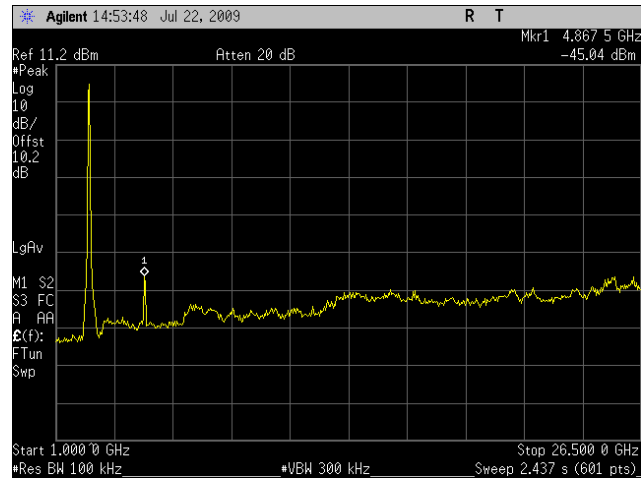


Plot 138. Conducted Emissions, Mid Channel, 2.4 GHz, Port 2, 802.11n 40MHz, 1 GHz – 26.5 GHz


RF Conducted Spurious Emissions Requirements, 2.4 GHz, Port 3

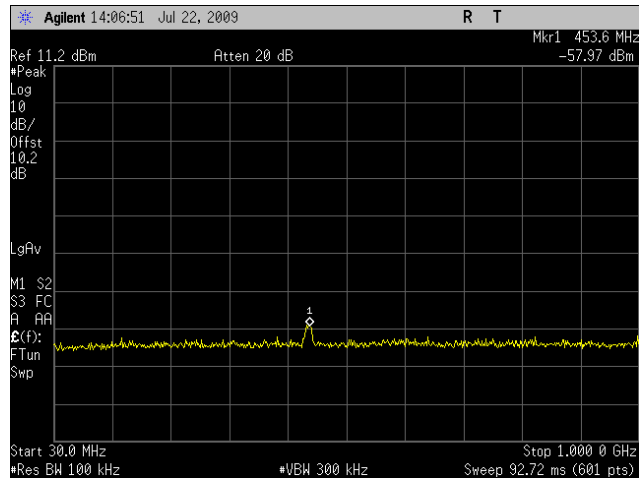


Plot 139. Conducted Emissions, Low Channel, 2.4 GHz, Port 3, 802.11n 20MHz, 30 MHz – 1 GHz

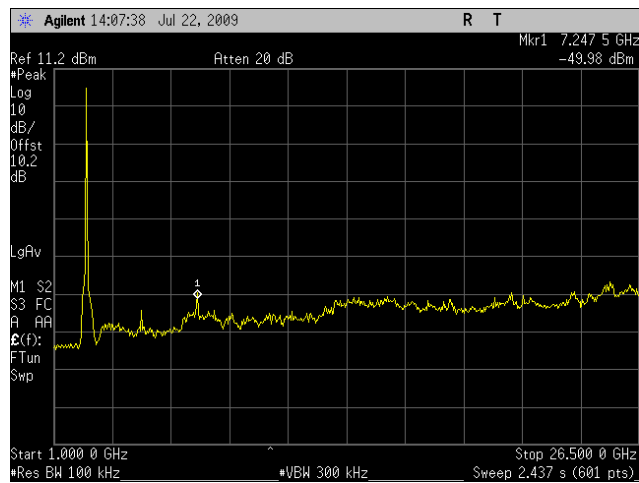


Plot 140. Conducted Emissions, Low Channel, 2.4 GHz, Port 3, 802.11n 20MHz, 1 GHz – 26.5 GHz

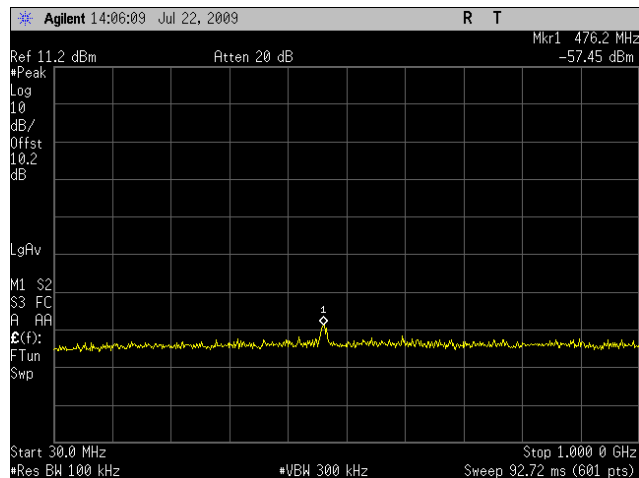


Plot 141. Conducted Emissions, Mid Channel, 2.4 GHz, Port 3, 802.11n 20MHz, 30 MHz – 1 GHz

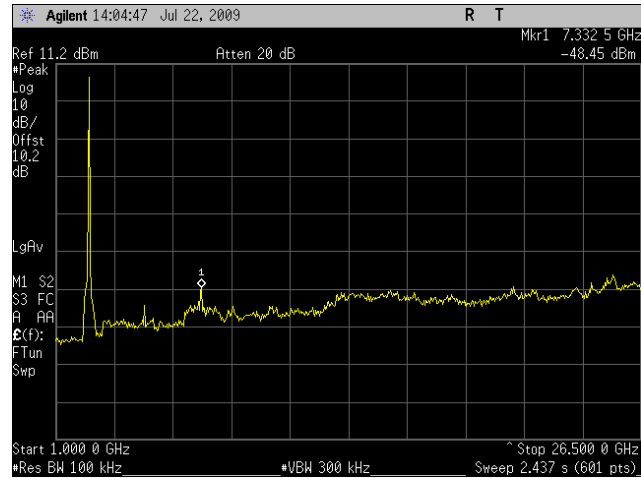


Plot 142. Conducted Emissions, Mid Channel, 2.4 GHz, Port 3, 802.11n 20MHz, 1 GHz – 26.5 GHz

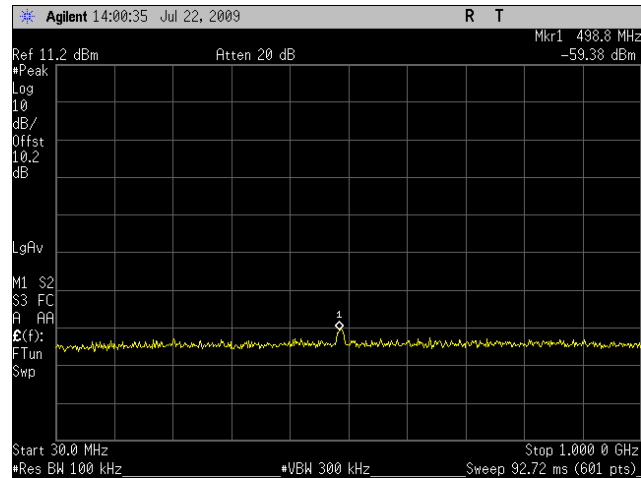


Plot 143. Conducted Emissions, High Channel, 2.4 GHz, Port 3, 802.11n 20MHz 30 MHz – 1 GHz

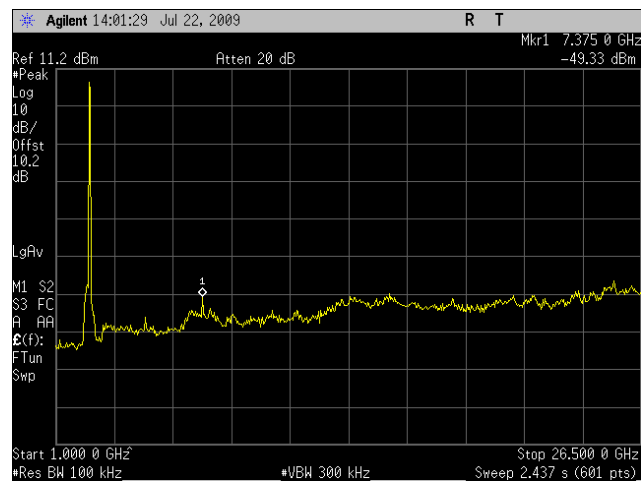

Plot 144. Conducted Emissions, High Channel, 2.4 GHz, Port 3, 802.11n 20MHz, 1 GHz – 26.5 GHz

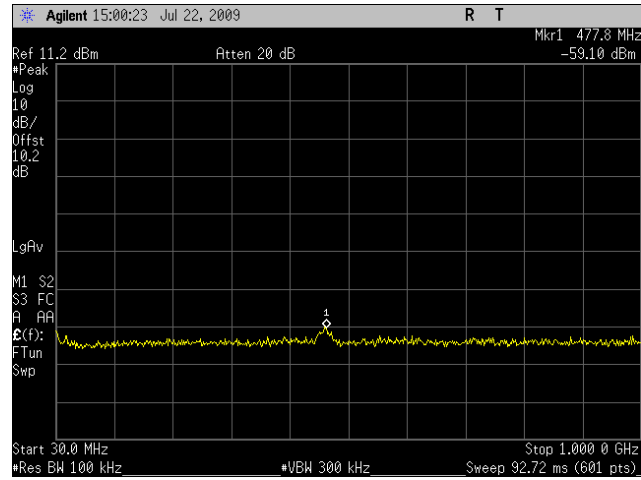


Plot 145. Conducted Emissions, Mid Channel, 2.4 GHz, Port 3, 802.11n 40MHz, 30 MHz – 1 GHz

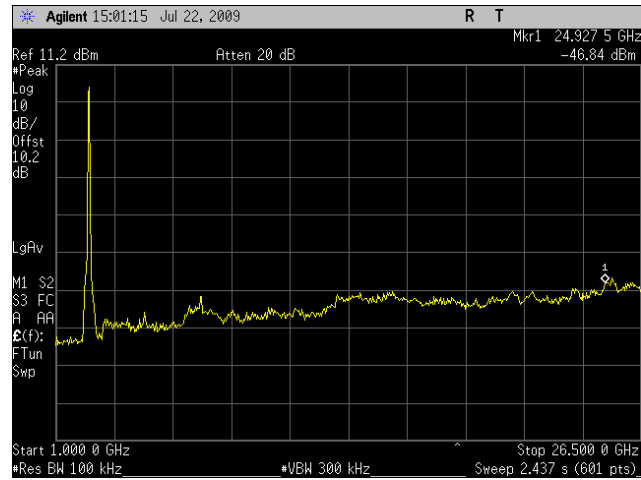


Plot 146. Conducted Emissions, Mid Channel, 2.4 GHz, Port 3, 802.11n 40MHz, 1 GHz – 26.5 GHz


Receiver Spurious Emissions

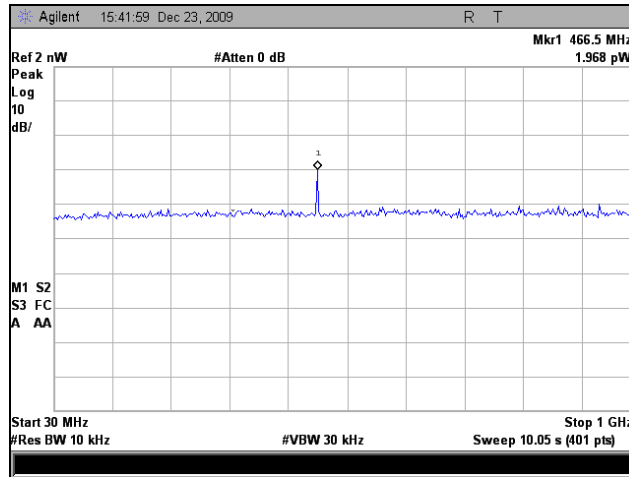


Plot 147. Conducted Spurious Emissions, Port 1, 30 MHz – 1 GHz

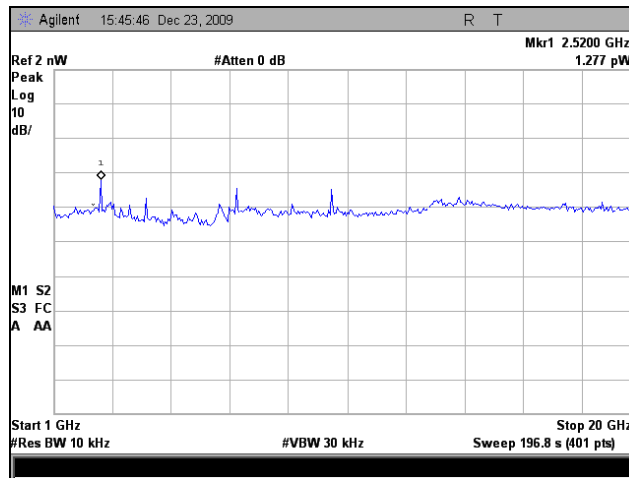


Plot 148. Conducted Spurious Emissions, Port 1, 1 GHz – 20 GHz

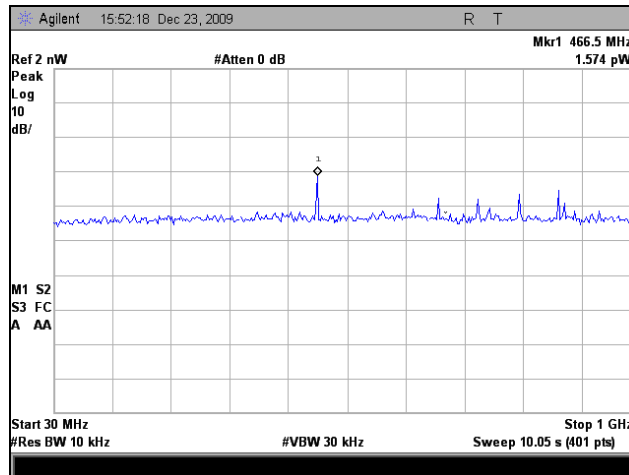


Plot 149. Conducted Spurious Emissions, Port 2, 30 MHz – 1 GHz

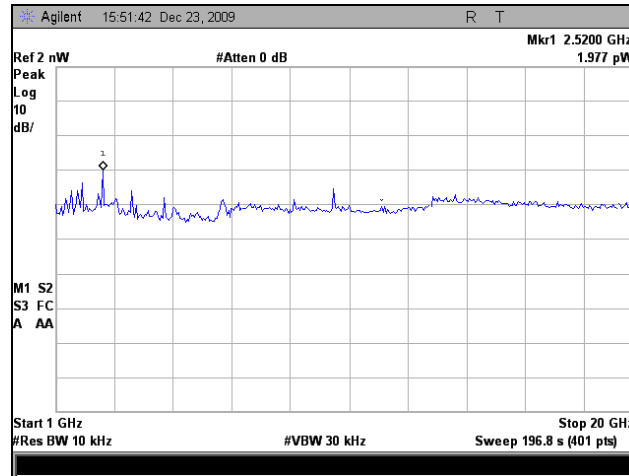

Plot 150. Conducted Spurious Emissions, Port 2, 1 GHz – 20 GHz

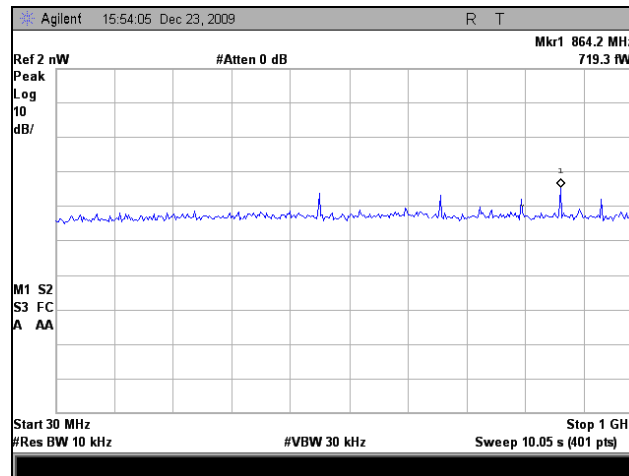


Plot 151. Conducted Spurious Emissions, Port 3, 30 MHz – 1 GHz

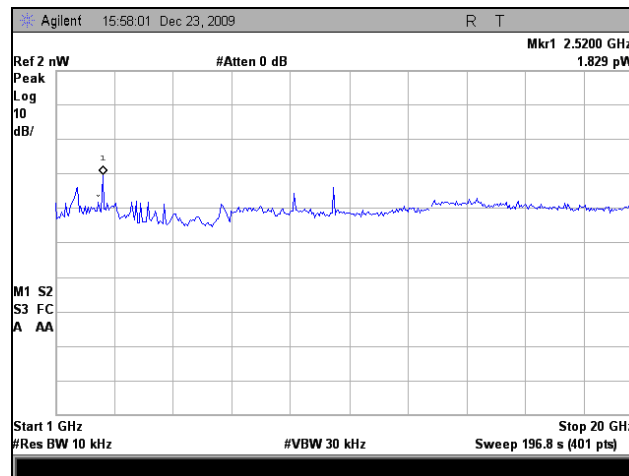


Plot 152. Conducted Spurious Emissions, Port 3, 1 GHz – 20 GHz


Conducted Band Edge, 2.4 GHz, Port 1

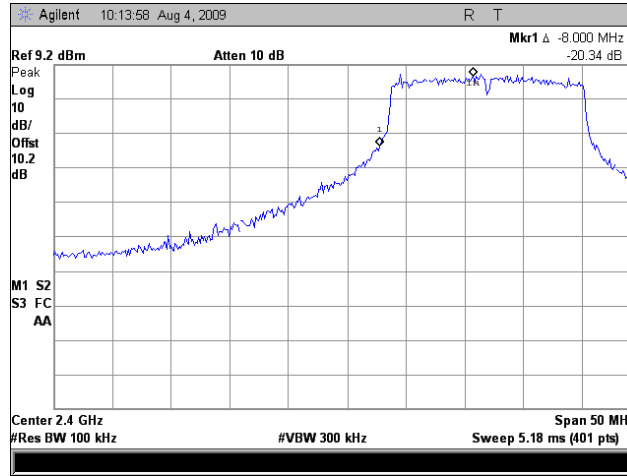


Plot 153. Lower Conducted Band Edge, 2.4 GHz, Port 1, 802.11g

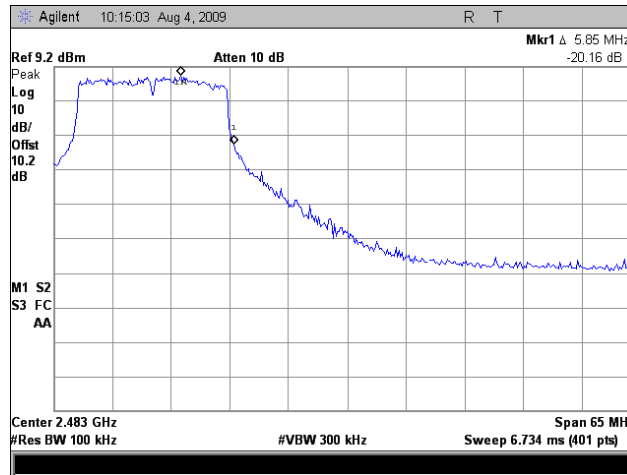


Plot 154. Upper Conducted Band Edge, 2.4 GHz, Port 1, 802.11g

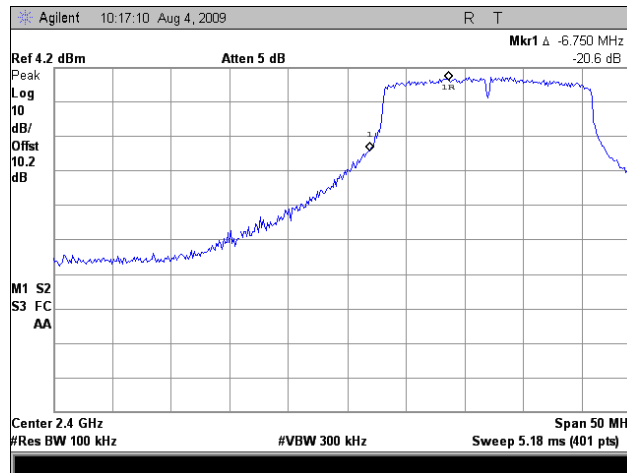


Plot 155. Lower Conducted Band Edge, 2.4 GHz, Port 1, 802.11n 20MHz

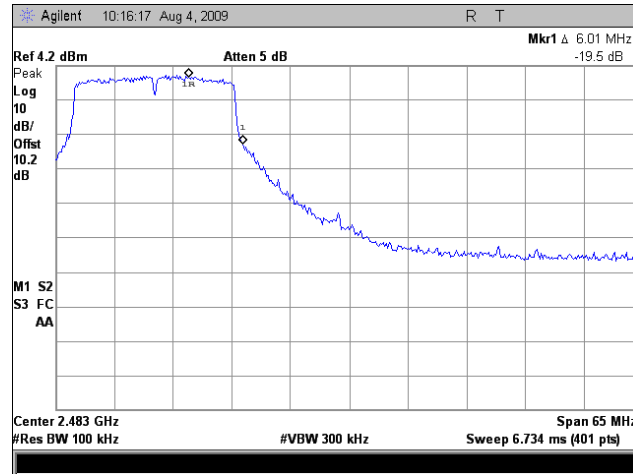

Plot 156. Upper Conducted Band Edge, 2.4 GHz, Port 1, 802.11n 20MHz

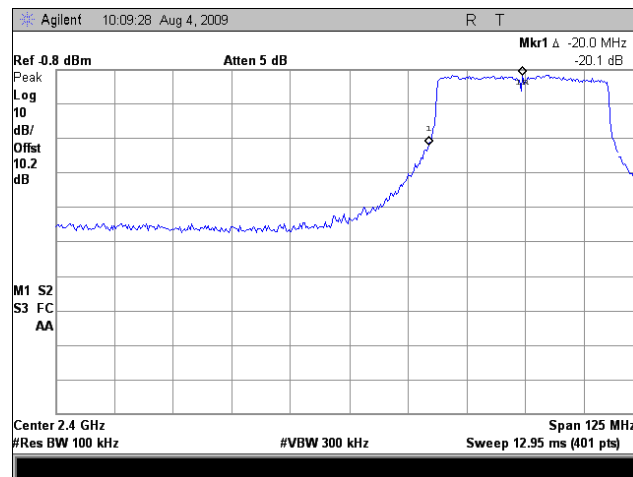


Plot 157. Lower Conducted Band Edge, 2.4 GHz, Port 1, 802.11n 40MHz

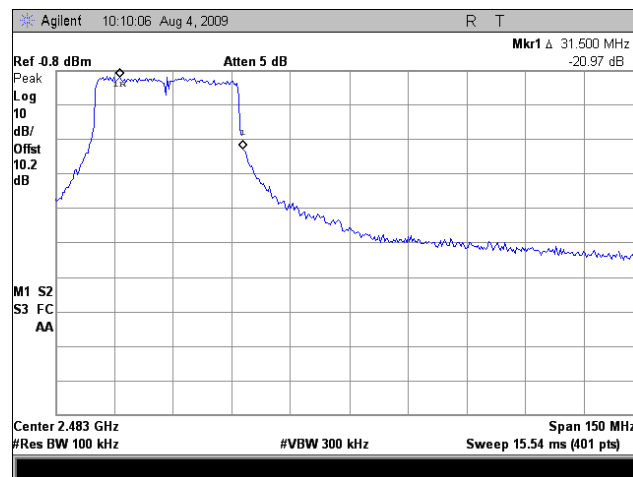


Plot 158. Upper Conducted Band Edge, 2.4 GHz, Port 1, 802.11n 40MHz


Conducted Band Edge, 2.4 GHz, Port 2

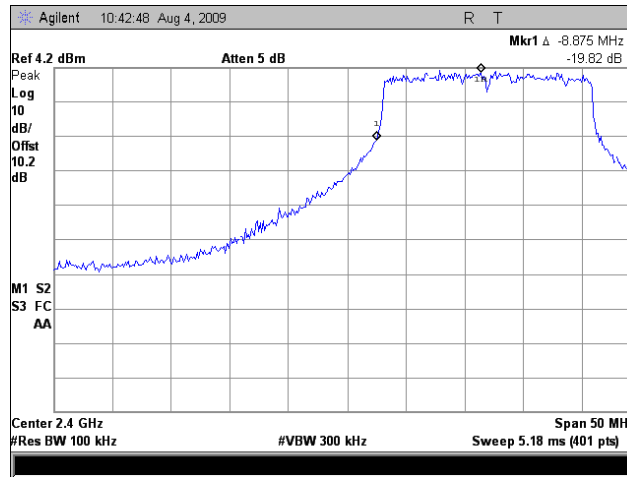


Plot 159. Lower Conducted Band Edge, 2.4 GHz, Port 2, 802.11n 20MHz

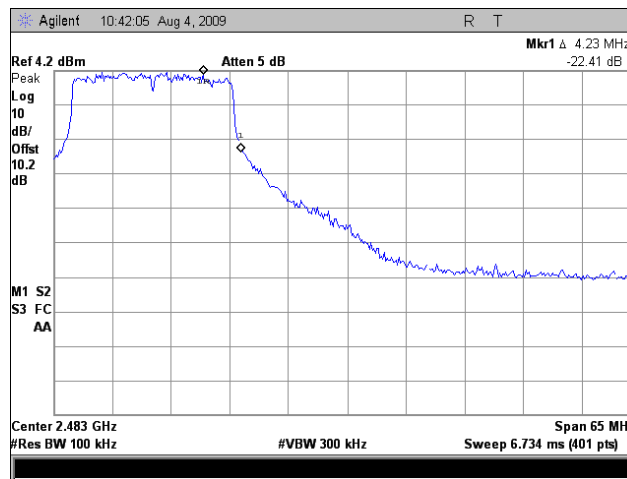

Plot 160. Upper Conducted Band Edge, 2.4 GHz, Port 2, 802.11n 20MHz

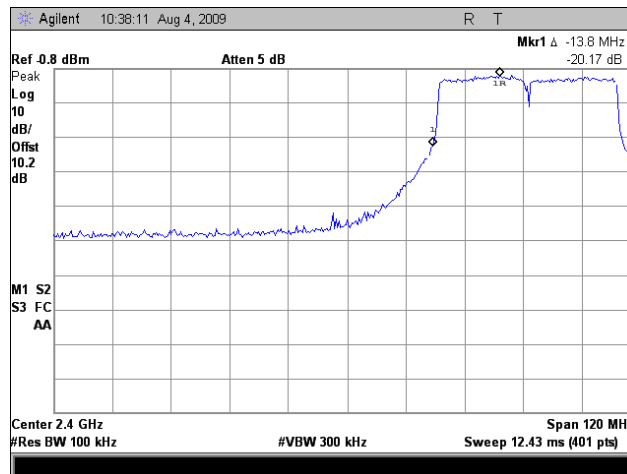


Plot 161. Lower Conducted Band Edge, 2.4 GHz, Port 2, 802.11n 40MHz

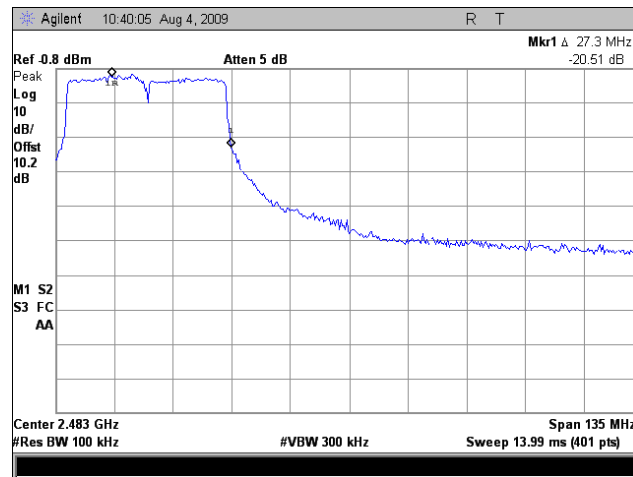


Plot 162. Upper Conducted Band Edge, 2.4 GHz, Port 2, 802.11n 40MHz


Conducted Band Edge, 2.4 GHz, Port 3

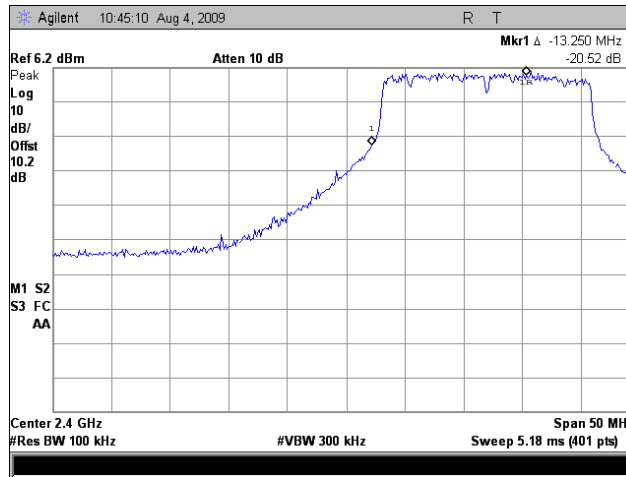


Plot 163. Lower Conducted Band Edge, 2.4 GHz, Port 3, 802.11n 20MHz

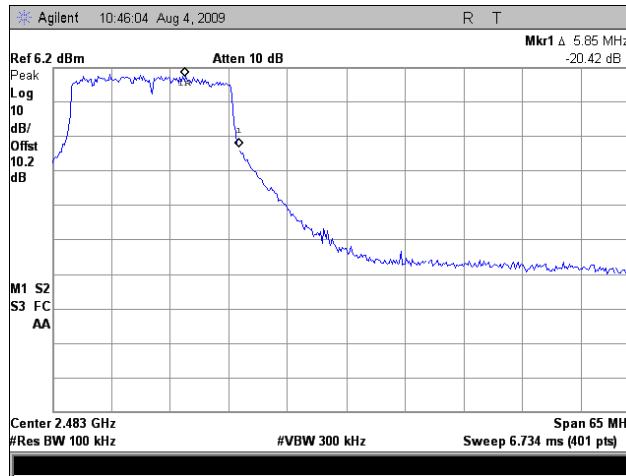

Plot 164. Upper Conducted Band Edge, 2.4 GHz, Port 3, 802.11n 20MHz

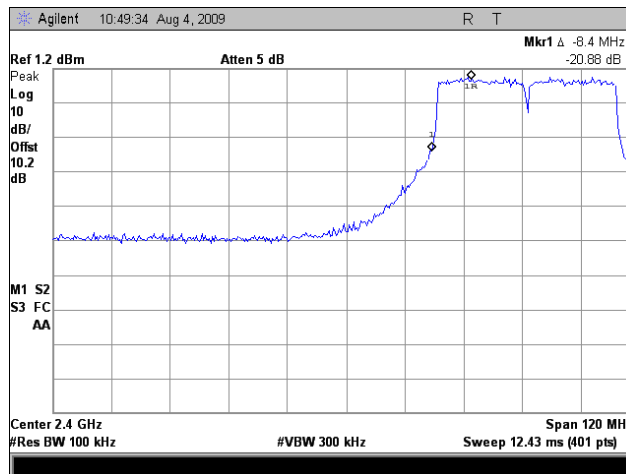


Plot 165. Lower Conducted Band Edge, 2.4 GHz, Port 3, 802.11n 40MHz

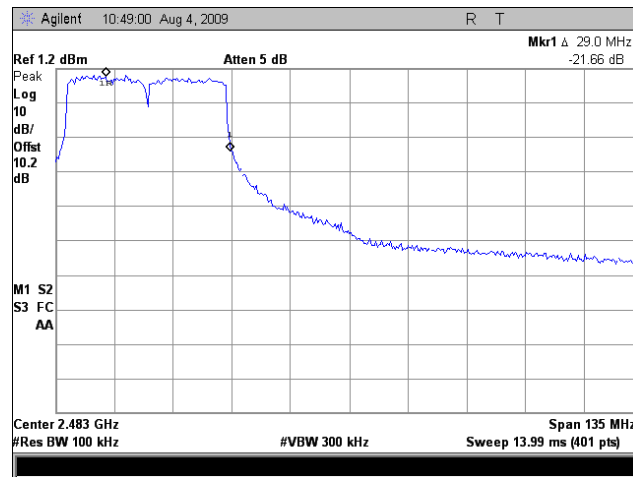


Plot 166. Upper Conducted Band Edge, 2.4 GHz, Port 3, 802.11n 40MHz


RF Conducted Spurious Emissions Requirements, 5 GHz, Port 1

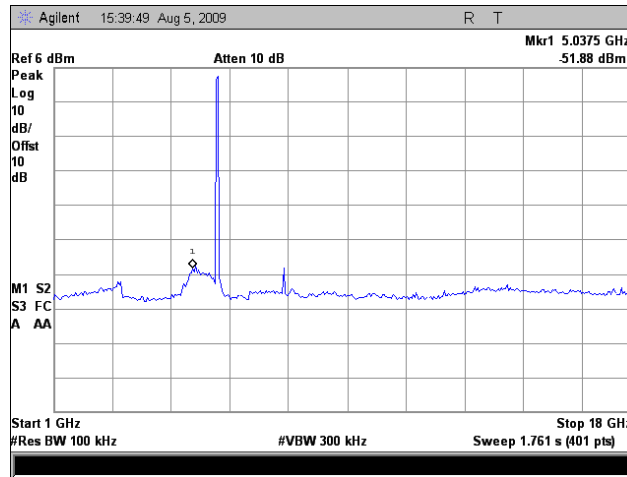


Plot 167. Conducted Emissions, Low Channel, 5 GHz, Port 1, 802.11a, 1 GHz – 18 GHz

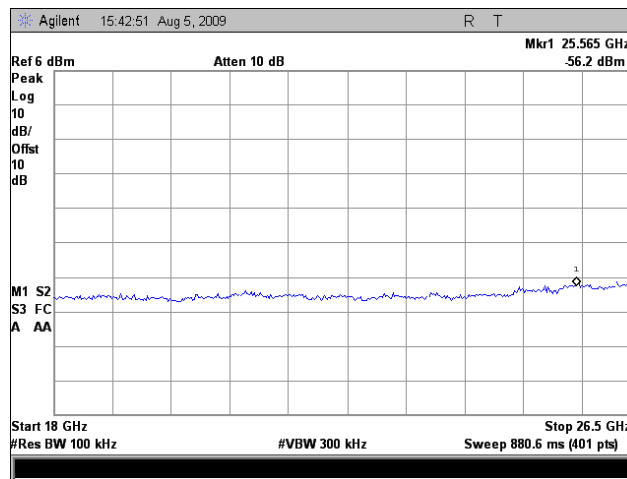


Plot 168. Conducted Emissions, Low Channel, 5 GHz, Port 1, 802.11a, 18 GHz – 26.5 GHz

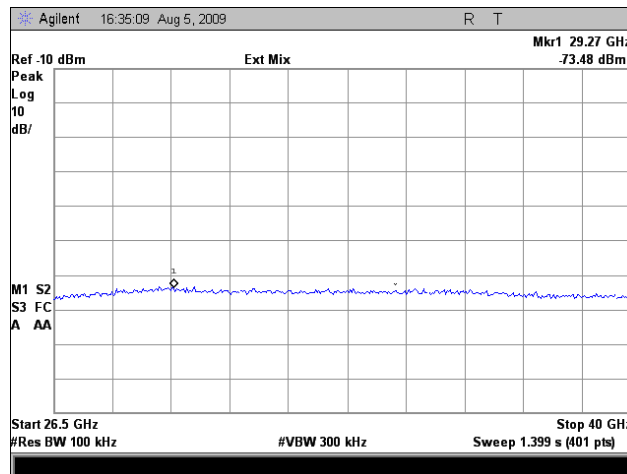


Plot 169. Conducted Emissions, Low Channel, 5 GHz, Port 1, 802.11a, 26.5 GHz – 40 GHz

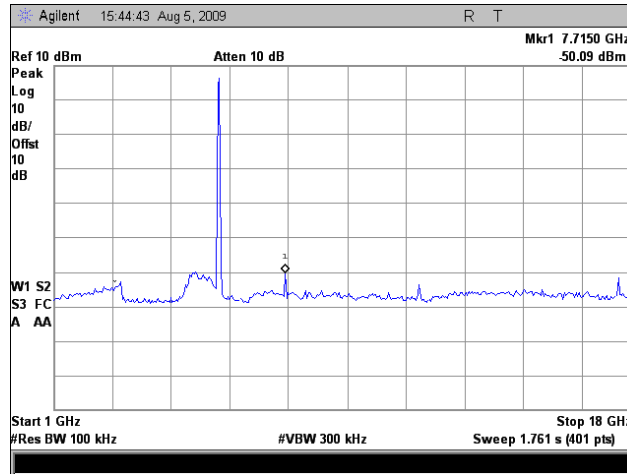


Plot 170. Conducted Emissions, Mid Channel, 5 GHz, Port 1, 802.11a, 1 GHz – 18 GHz

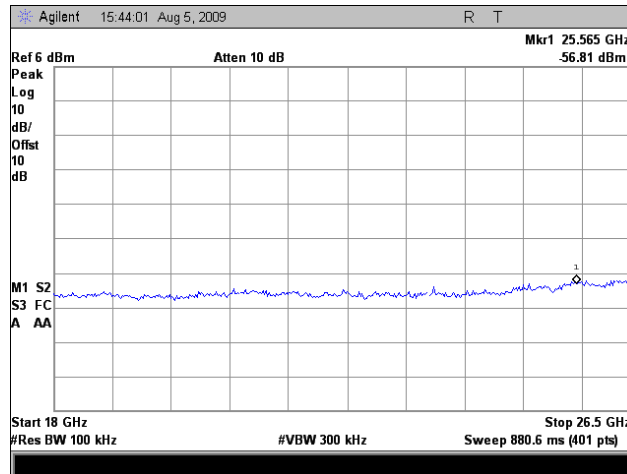


Plot 171. Conducted Emissions, Mid Channel, 5 GHz, Port 1, 802.11a, 18 GHz – 26 GHz

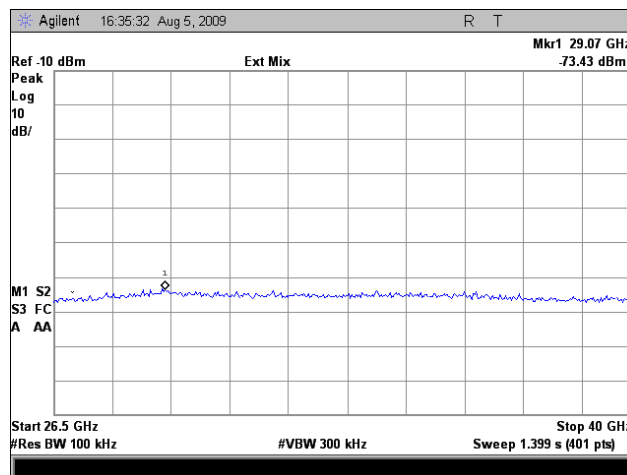


Plot 172. Conducted Emissions, Mid Channel, 5 GHz, Port 1, 802.11a, 26 GHz – 40 GHz

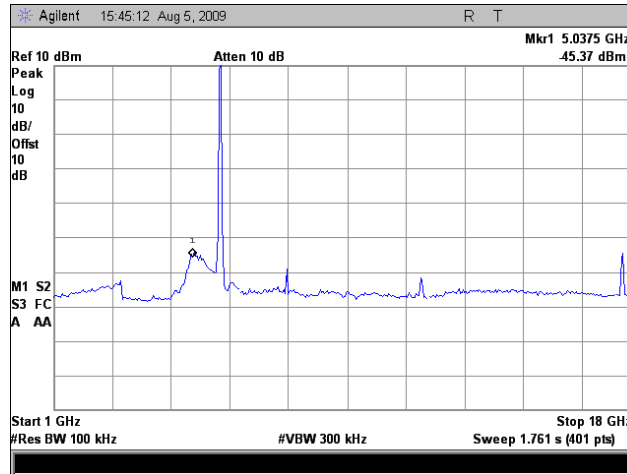


Plot 173. Conducted Emissions, High Channel, 5 GHz, Port 1, 802.11a, 1 GHz – 18 GHz

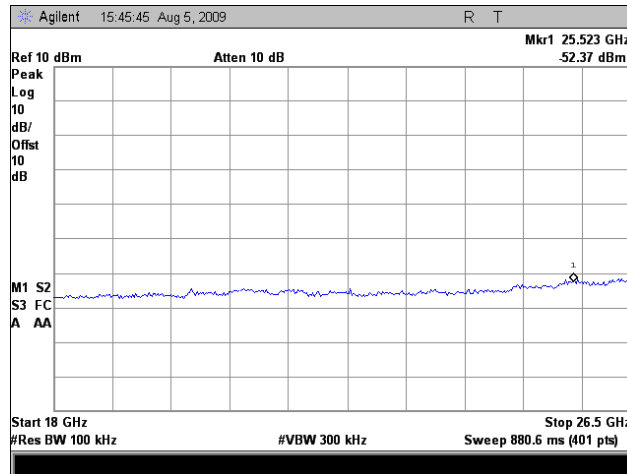


Plot 174. Conducted Emissions, High Channel, 5 GHz, Port 1, 802.11a, 18 GHz – 26 GHz

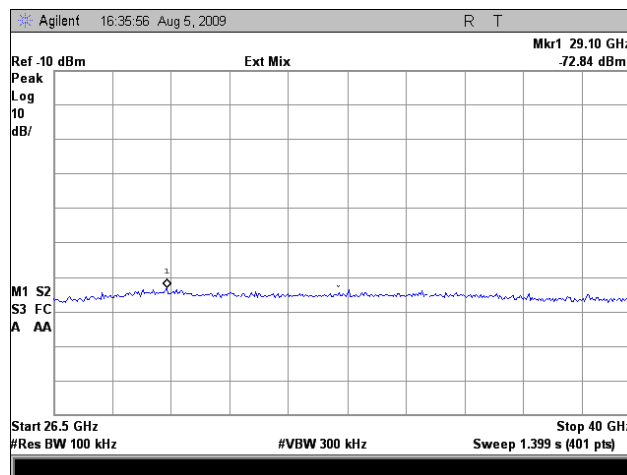


Plot 175. Conducted Emissions, High Channel, 5 GHz, Port 1, 802.11a, 26 GHz – 40 GHz

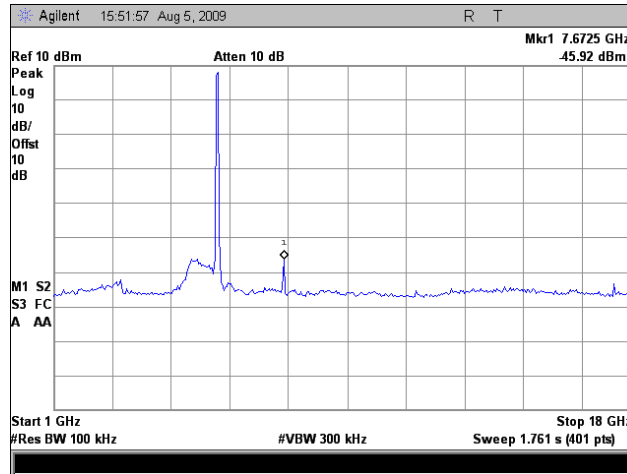


Plot 176. Conducted Emissions, Low Channel, 5 GHz, Port 1, 802.11n 20MHz, 1 GHz – 18 GHz

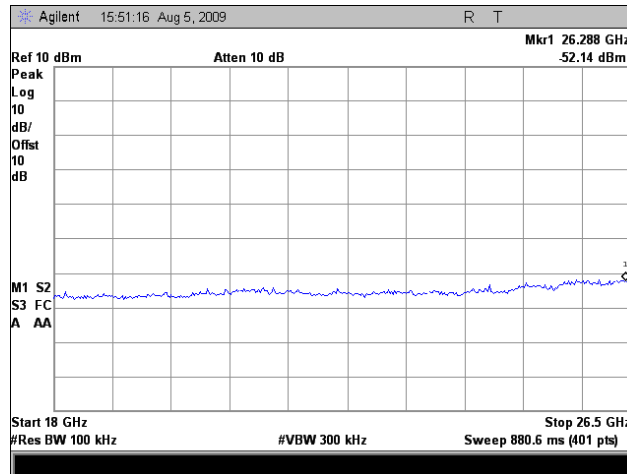


Plot 177. Conducted Emissions, Low Channel, 5 GHz, Port 1, 802.11n 20MHz, 18 GHz – 26.5 GHz

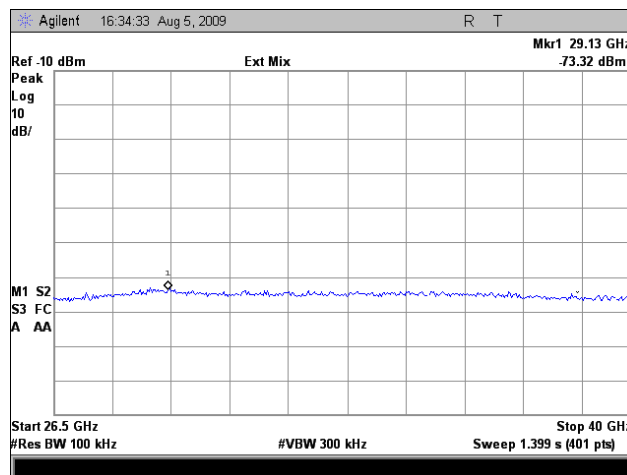


Plot 178. Conducted Emissions, Low Channel, 5 GHz, Port 1, 802.11n 20MHz, 26.5 GHz – 40 GHz

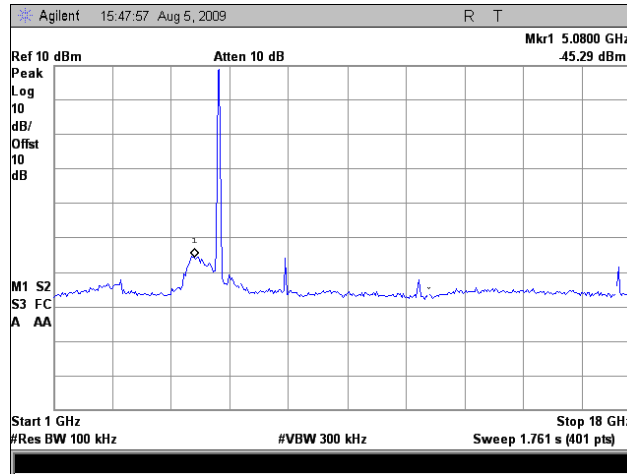


Plot 179. Conducted Emissions, Mid Channel, 5 GHz, Port 1, 802.11n 20MHz, 1 GHz – 18 GHz

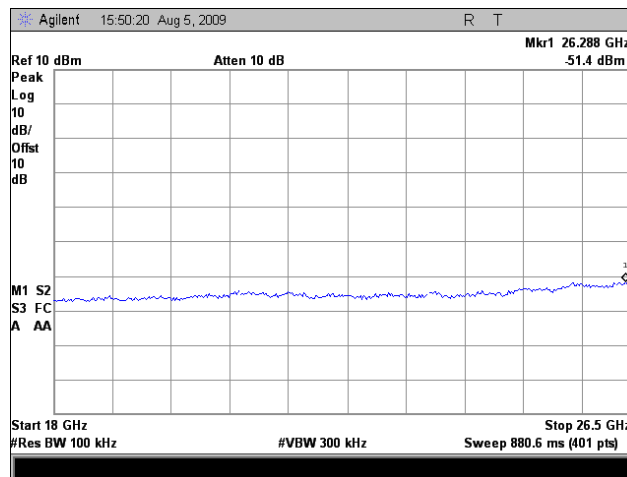


Plot 180. Conducted Emissions, Mid Channel, 5 GHz, Port 1, 802.11n 20MHz, 18 GHz – 26.5 GHz

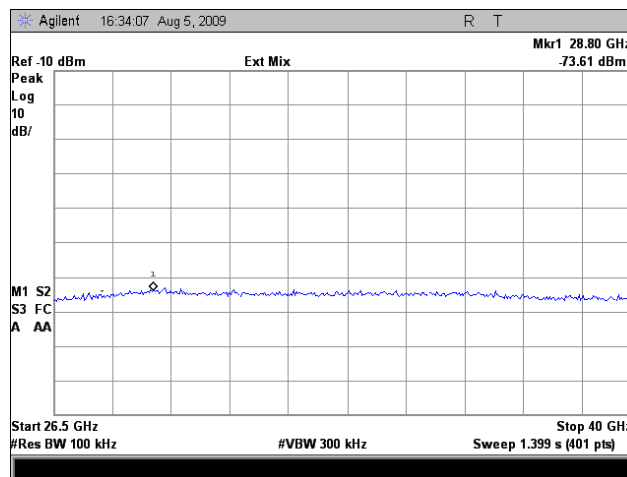


Plot 181. Conducted Emissions, Mid Channel, 5 GHz, Port 1, 802.11n 20MHz, 26.5 GHz – 40 GHz

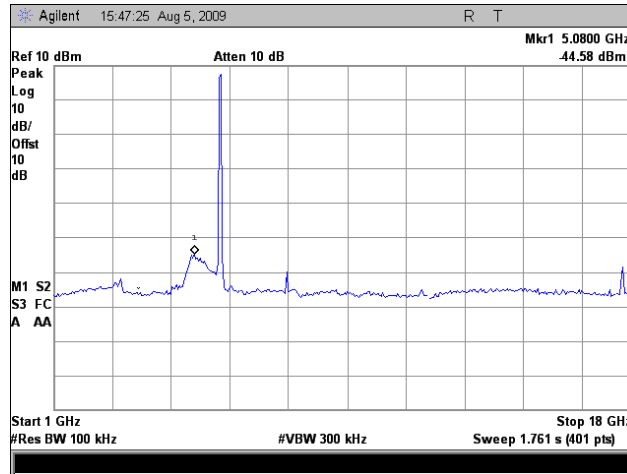


Plot 182. Conducted Emissions, High Channel, 5 GHz, Port 1, 802.11n 20MHz, 1 GHz – 18 GHz

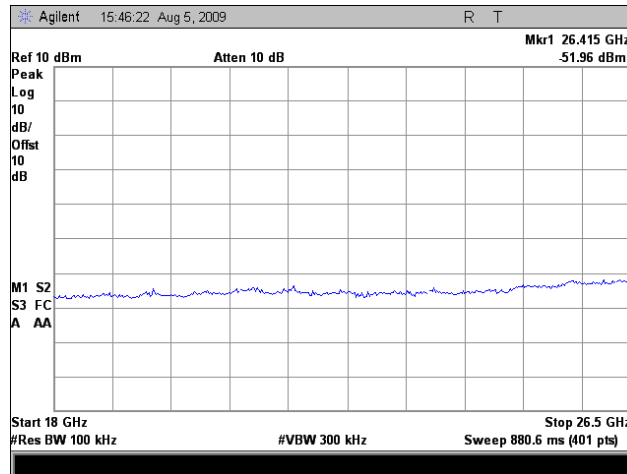


Plot 183. Conducted Emissions, High Channel, 5 GHz, Port 1, 802.11n 20MHz, 18 GHz – 26.5 GHz

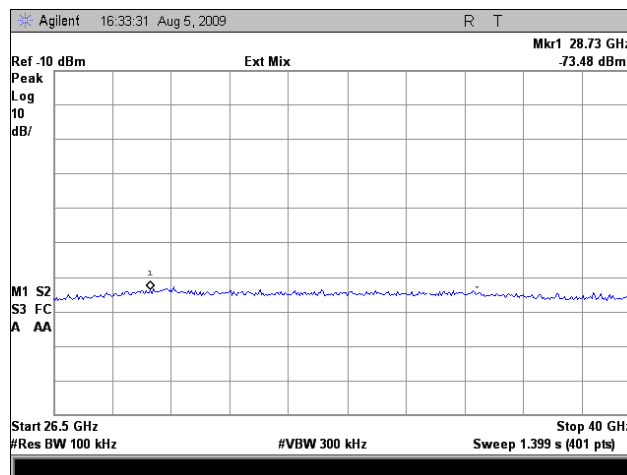


Plot 184. Conducted Emissions, High Channel, 5 GHz, Port 1, 802.11n 20MHz, 26.5 GHz – 40 GHz

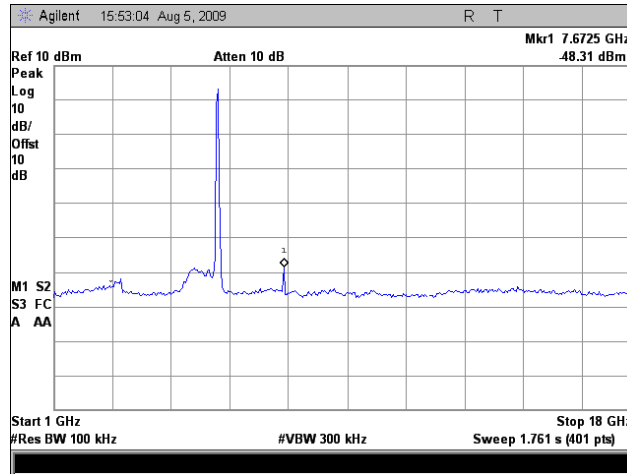


Plot 185. Conducted Emissions, Low Channel, 5 GHz, Port 1, 802.11n 40MHz, 1 GHz – 18 GHz

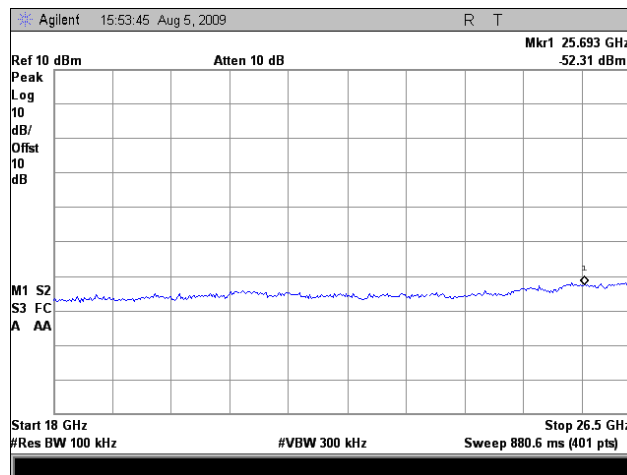


Plot 186. Conducted Emissions, Low Channel, 5 GHz, Port 1, 802.11n 40MHz, 18 GHz – 26.5 GHz

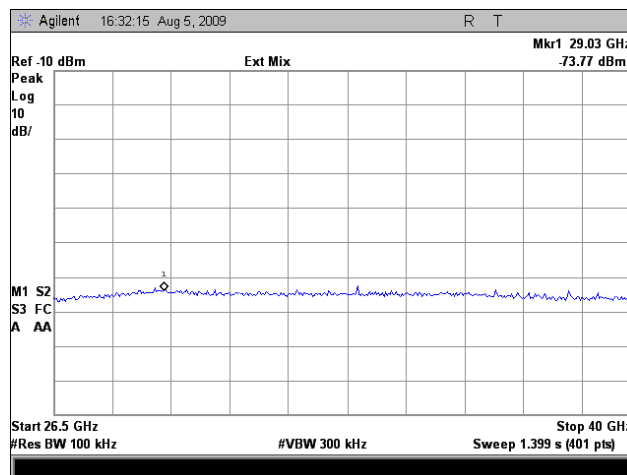


Plot 187. Conducted Emissions, Low Channel, 5 GHz, Port 1, 802.11n 40MHz, 26.5 GHz – 40 GHz

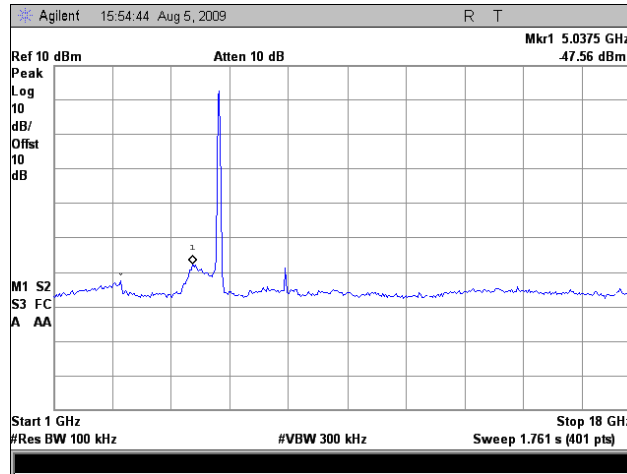

Plot 188. Conducted Emissions, High Channel, 5 GHz, Port 1, 802.11n 40MHz, 1 GHz – 18 GHz

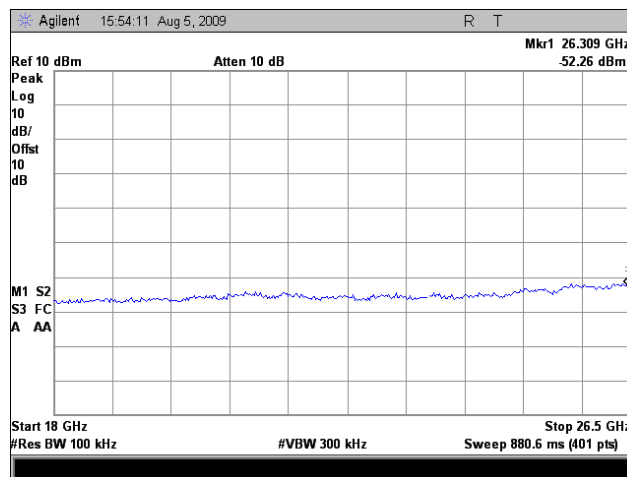


Plot 189. Conducted Emissions, High Channel, 5 GHz, Port 1, 802.11n 40MHz, 18 GHz – 26.5 GHz

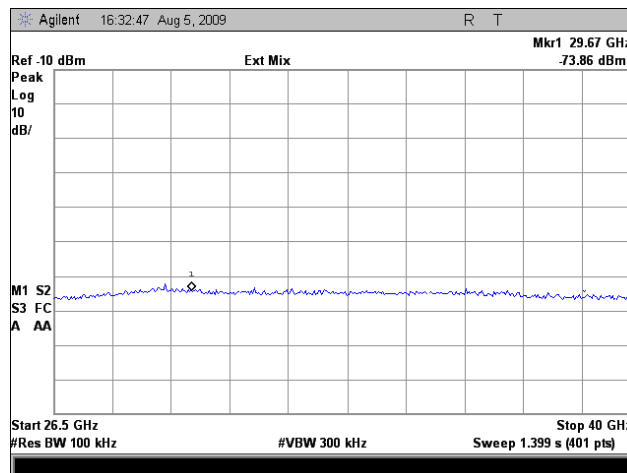


Plot 190. Conducted Emissions, High Channel, 5 GHz, Port 1, 802.11n 40MHz, 26.5 GHz – 40 GHz


RF Conducted Spurious Emissions Requirements, 5 GHz, Port 2

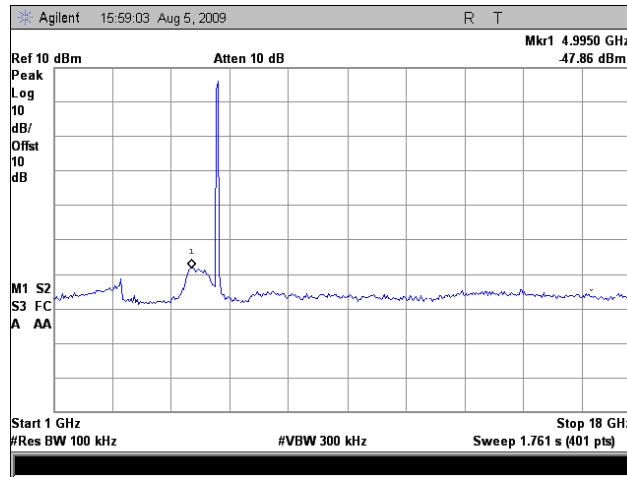


Plot 191. Conducted Emissions, Low Channel, 5 GHz, Port 2, 802.11n 20MHz, 1 GHz – 18 GHz

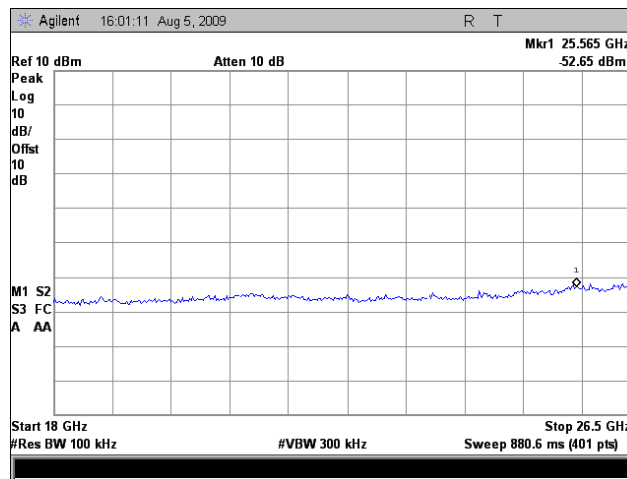


Plot 192. Conducted Emissions, Low Channel, 5 GHz, Port 2, 802.11n 20MHz, 18 GHz – 26.5 GHz

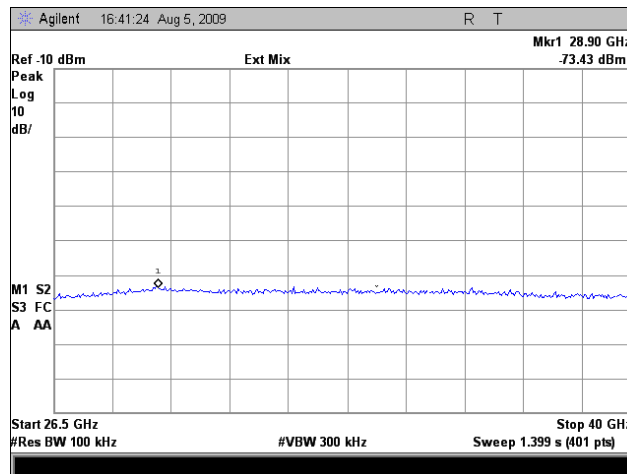


Plot 193. Conducted Emissions, Low Channel, 5 GHz, Port 2, 802.11n 20MHz, 26.5 GHz – 40 GHz

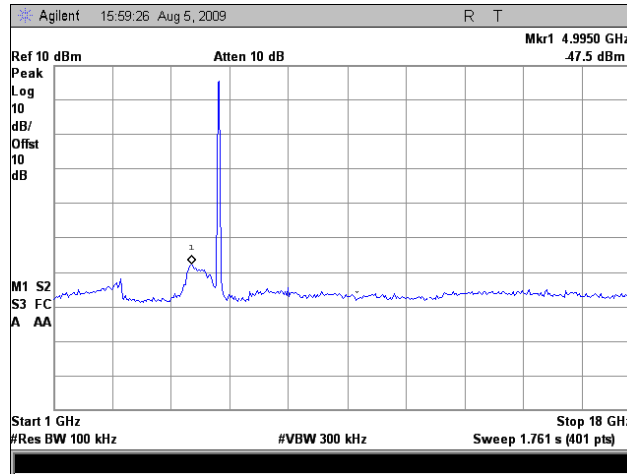


Plot 194. Conducted Emissions, Mid Channel, 5 GHz, Port 2, 802.11n 20MHz, 1 GHz – 18 GHz

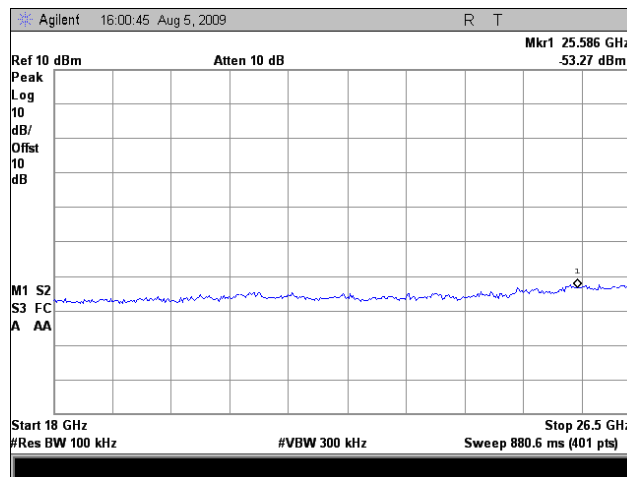


Plot 195. Conducted Emissions, Mid Channel, 5 GHz, Port 2, 802.11n 20MHz, 18 GHz – 26.5 GHz

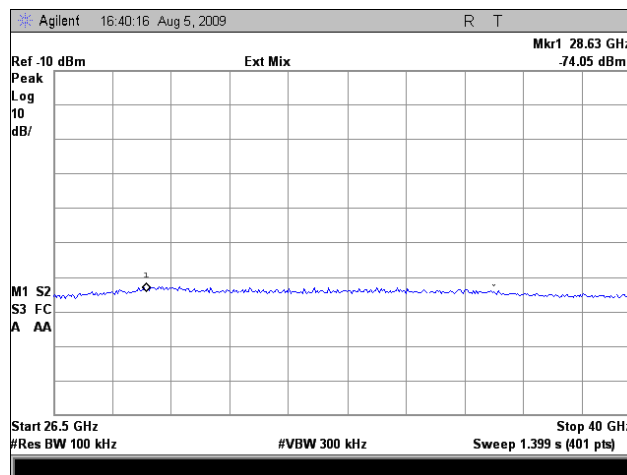


Plot 196. Conducted Emissions, Mid Channel, 5 GHz, Port 2, 802.11n 20MHz, 26.5 GHz – 40 GHz

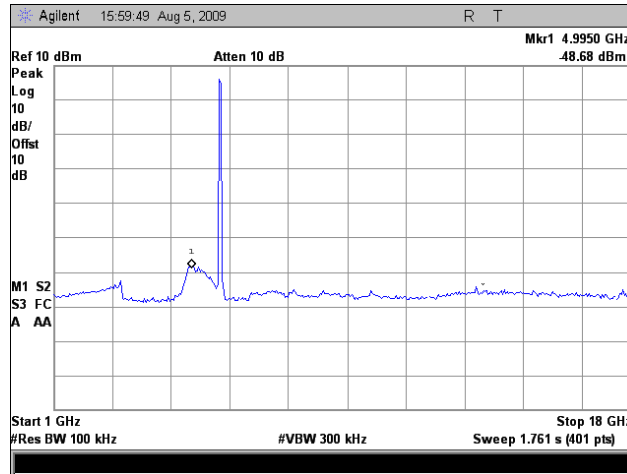


Plot 197. Conducted Emissions, High Channel, 5 GHz, Port 2, 802.11n 20MHz, 1 GHz – 18 GHz

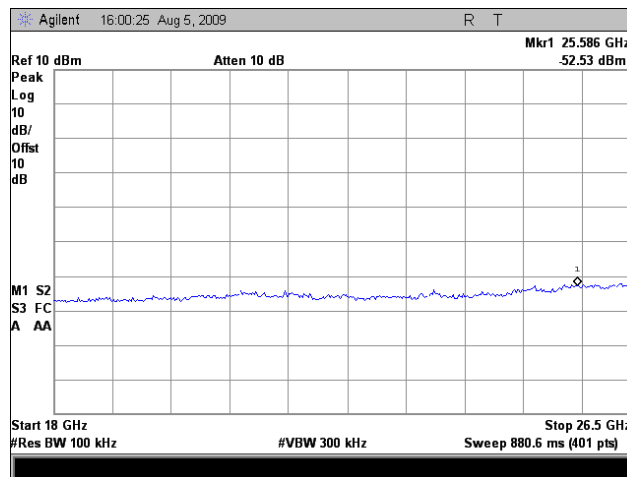


Plot 198. Conducted Emissions, High Channel, 5 GHz, Port 2, 802.11n 20MHz, 18 GHz – 26.5 GHz

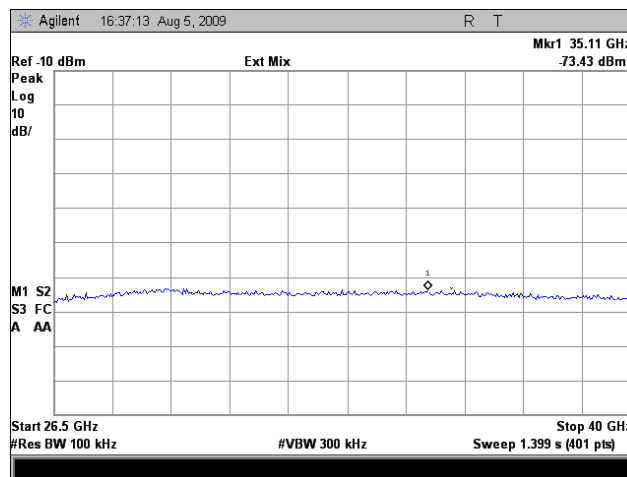


Plot 199. Conducted Emissions, High Channel, 5 GHz, Port 2, 802.11n 20MHz, 26.5 GHz – 40 GHz

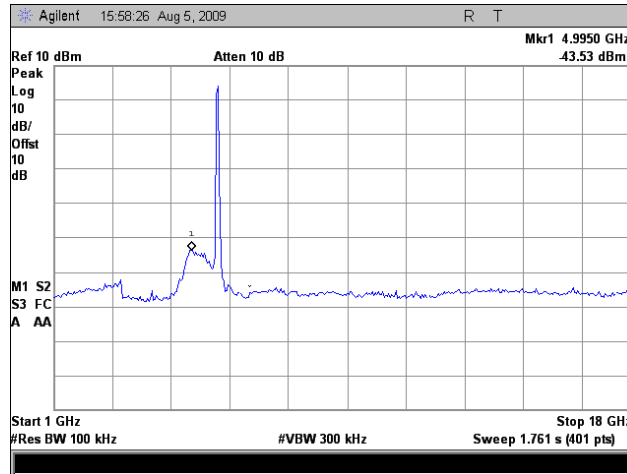


Plot 200. Conducted Emissions, Low Channel, 5 GHz, Port 2, 802.11n 40MHz, 1 GHz – 18 GHz

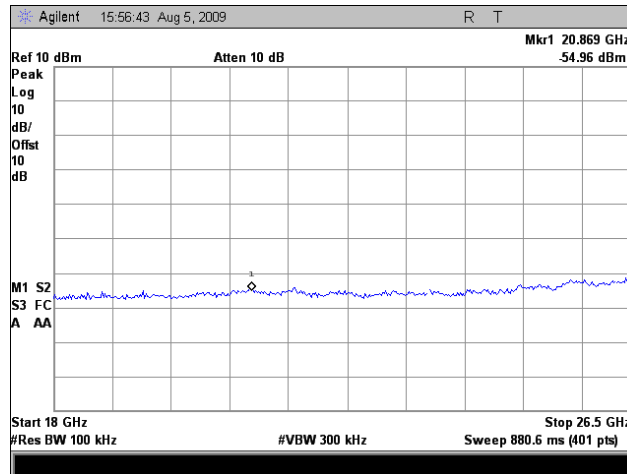


Plot 201. Conducted Emissions, Low Channel, 5 GHz, Port 2, 802.11n 40MHz, 18 GHz – 26.5 GHz

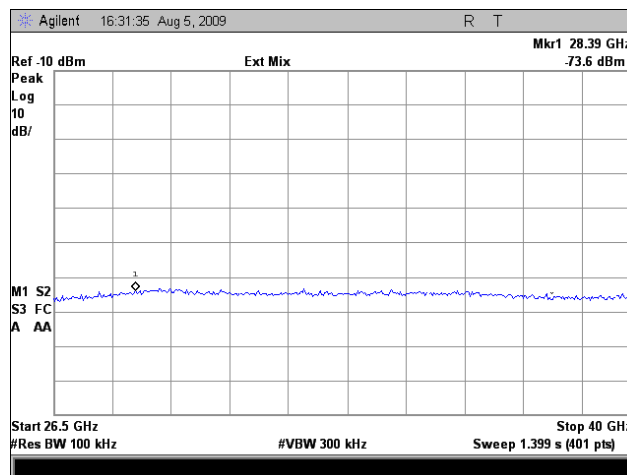


Plot 202. Conducted Emissions, Low Channel, 5 GHz, Port 2, 802.11n 40MHz, 26.5 GHz – 40 GHz

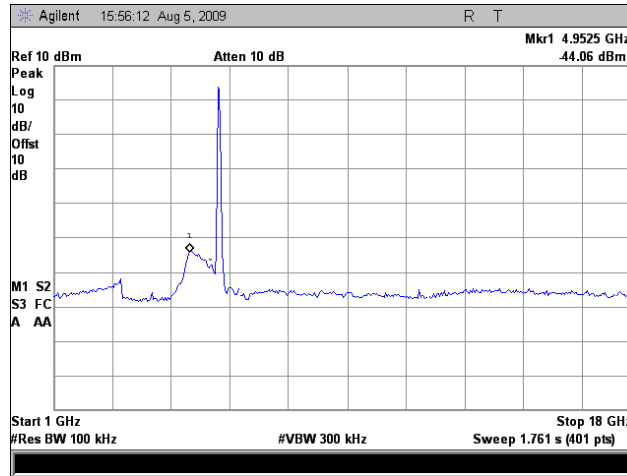

Plot 203. Conducted Emissions, High Channel, 5 GHz, Port 2, 802.11n 40MHz, 1 GHz – 18 GHz

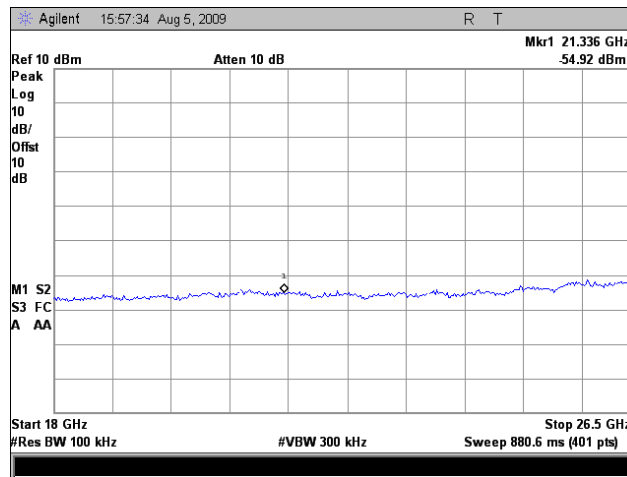


Plot 204. Conducted Emissions, High Channel, 5 GHz, Port 2, 802.11n 40MHz, 18 GHz – 26.5 GHz

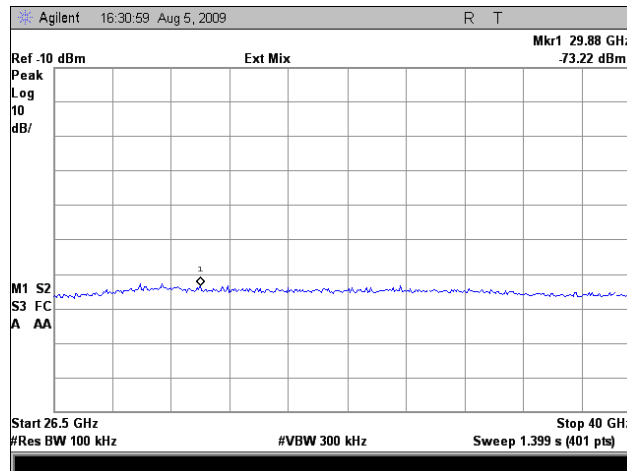


Plot 205. Conducted Emissions, High Channel, 5 GHz, Port 2, 802.11n 40MHz, 26.5 GHz – 40 GHz


RF Conducted Spurious Emissions Requirements, 5 GHz, Port 3

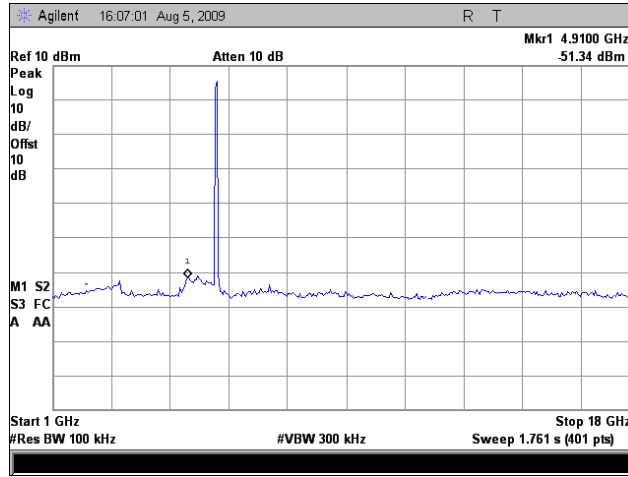


Plot 206. Conducted Emissions, Low Channel, 5 GHz, Port 3, 802.11n 20MHz, 1 GHz – 18 GHz

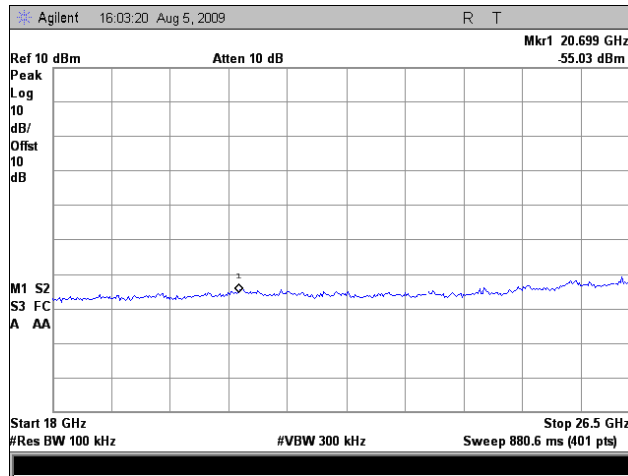


Plot 207. Conducted Emissions, Low Channel, 5 GHz, Port 3, 802.11n 20MHz, 18 GHz – 26.5 GHz

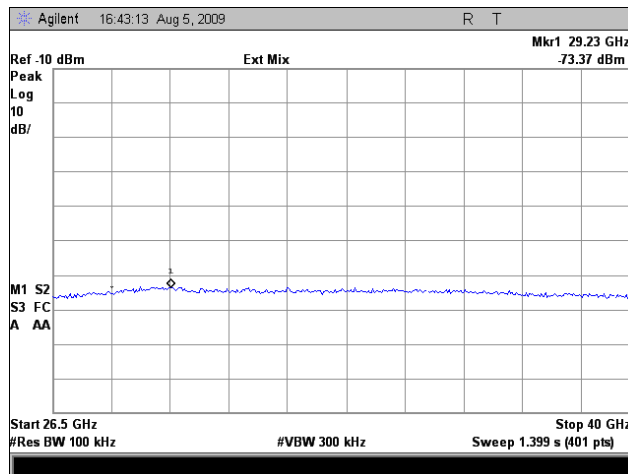


Plot 208. Conducted Emissions, Low Channel, 5 GHz, Port 3, 802.11n 20MHz, 26.5 GHz – 40 GHz

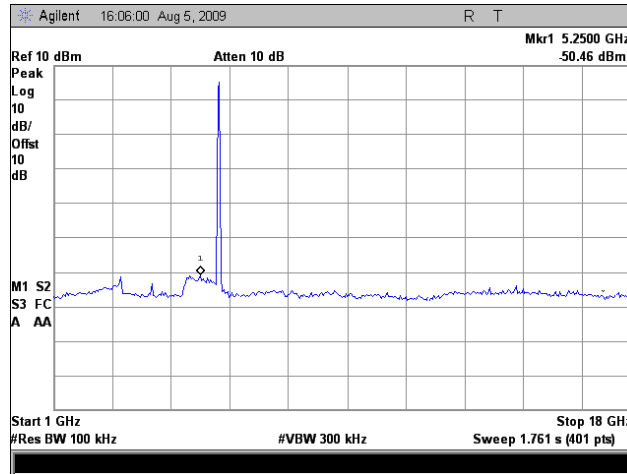


Plot 209. Conducted Emissions, Mid Channel, 5 GHz, Port 3, 802.11n 20MHz, 1 GHz – 18 GHz

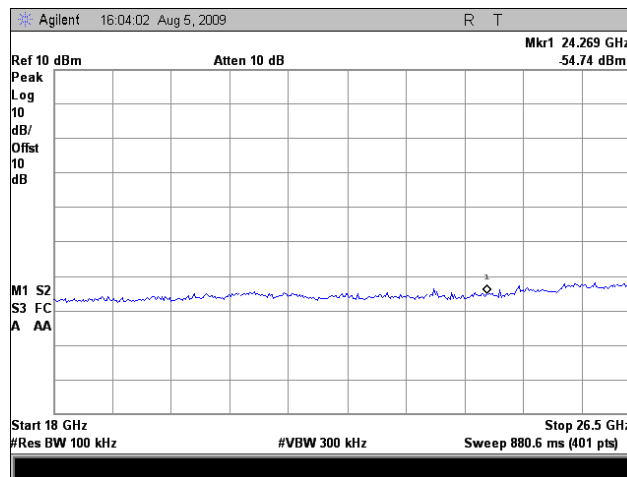


Plot 210. Conducted Emissions, Mid Channel, 5 GHz, Port 3, 802.11n 20MHz, 18 GHz – 26.5 GHz

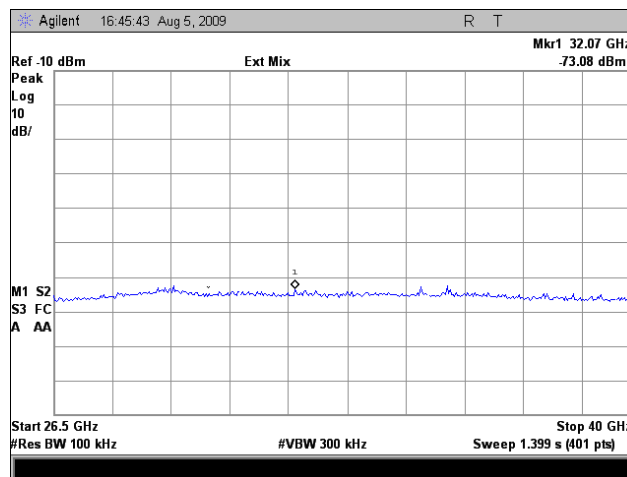


Plot 211. Conducted Emissions, Mid Channel, 5 GHz, Port 3, 802.11n 20MHz, 26.5 GHz – 40 GHz

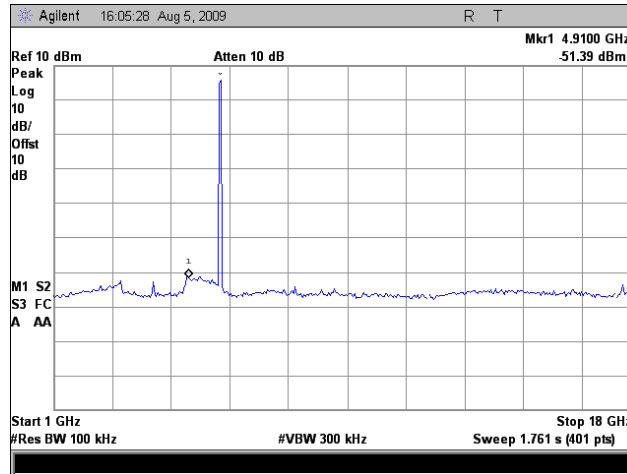


Plot 212. Conducted Emissions, High Channel, 5 GHz, Port 3, 802.11n 20MHz, 1 GHz – 18 GHz

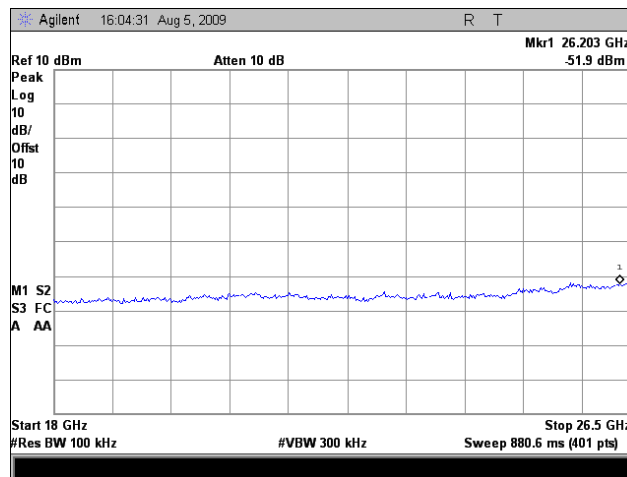


Plot 213. Conducted Emissions, High Channel, 5 GHz, Port 3, 802.11n 20MHz, 18 GHz – 26.5 GHz

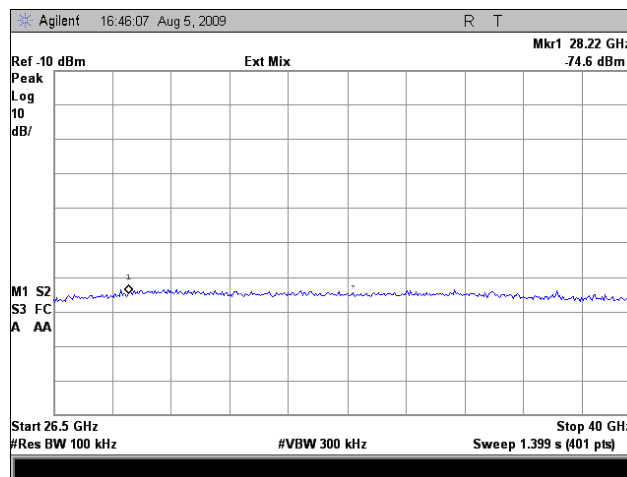


Plot 214. Conducted Emissions, High Channel, 5 GHz, Port 3, 802.11n 20MHz, 26.5 GHz – 40 GHz

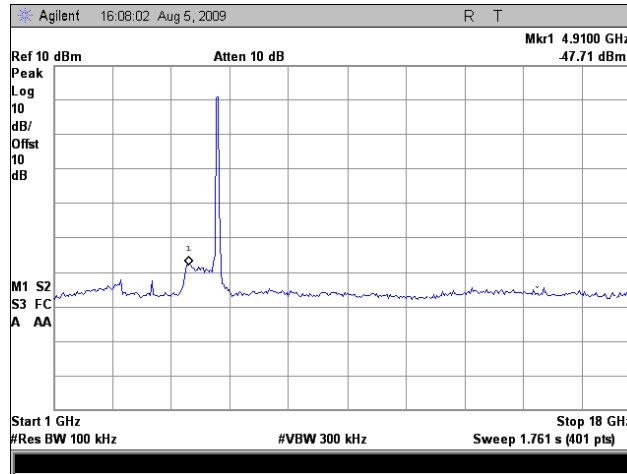


Plot 215. Conducted Emissions, Low Channel, 5 GHz, Port 3, 802.11n 40MHz, 1 GHz – 18 GHz

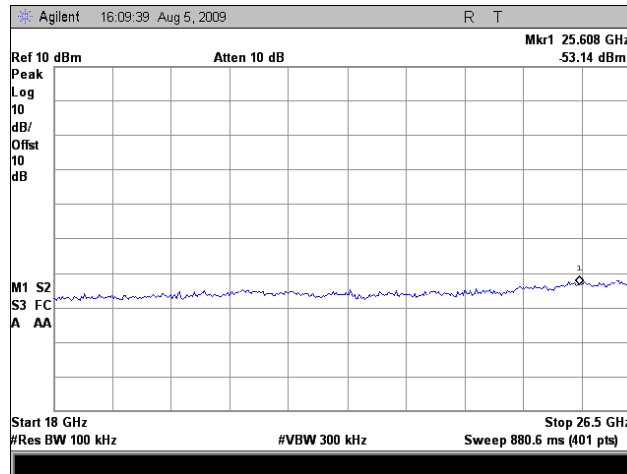


Plot 216. Conducted Emissions, Low Channel, 5 GHz, Port 3, 802.11n 40MHz, 18 GHz – 26.5 GHz

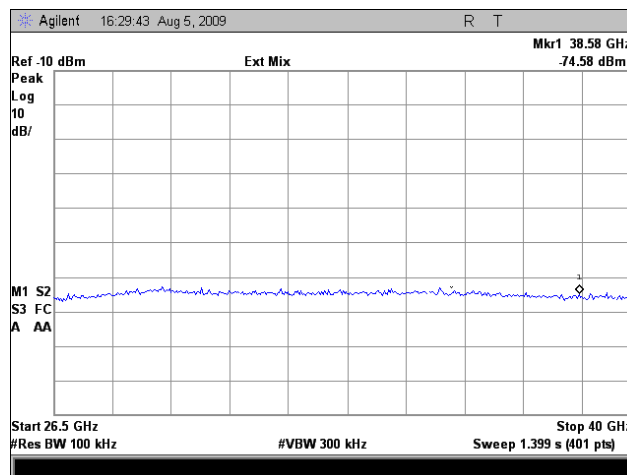


Plot 217. Conducted Emissions, Low Channel, 5 GHz, Port 3, 802.11n 40MHz, 26.5 GHz – 40 GHz

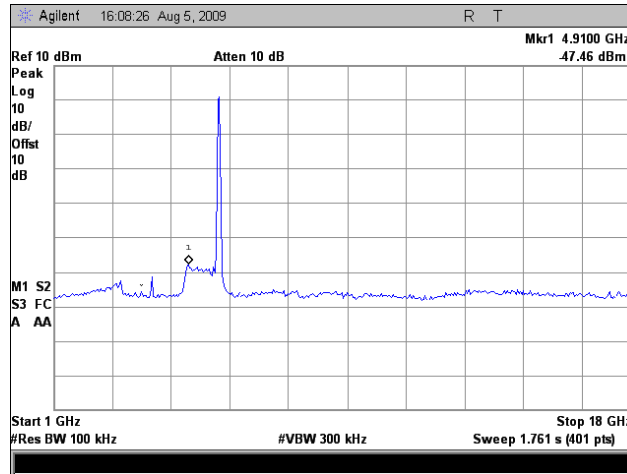

Plot 218. Conducted Emissions, High Channel, 5 GHz, Port 3, 802.11n 40MHz, 1 GHz – 18 GHz

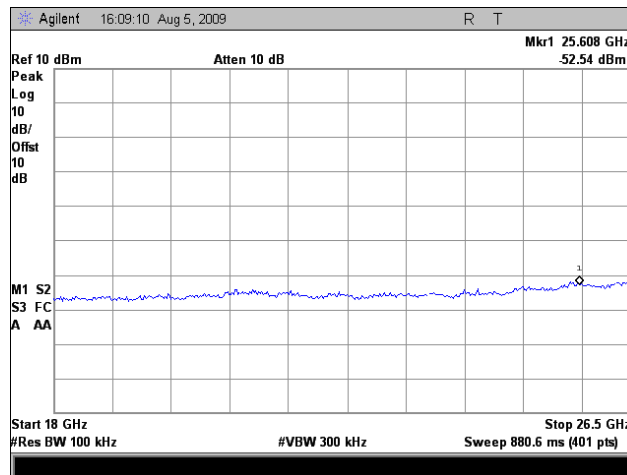


Plot 219. Conducted Emissions, High Channel, 5 GHz, Port 3, 802.11n 40MHz, 18 GHz – 26.5 GHz

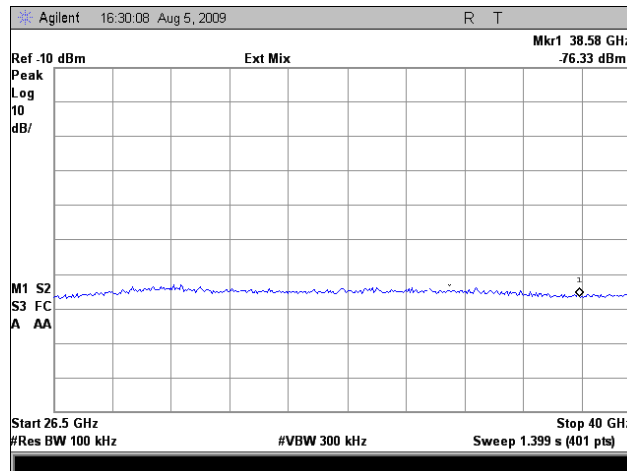


Plot 220. Conducted Emissions, High Channel, 5 GHz, Port 3, 802.11n 40MHz, 26.5 GHz – 40 GHz


Conducted Band Edge, 5 GHz, Port 1

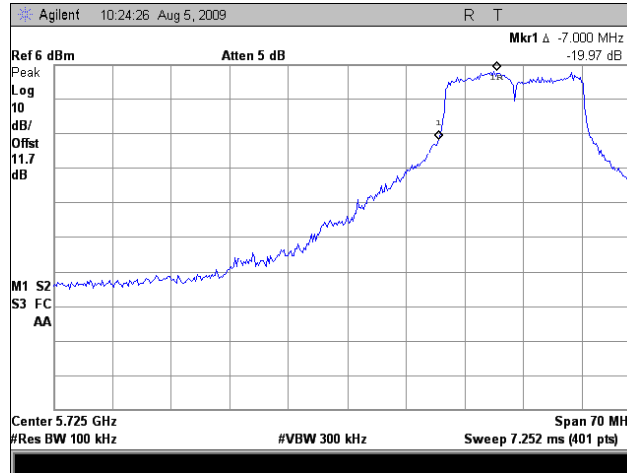


Plot 221. Lower Conducted Band Edge, 5 GHz, Port 1, 802.11a

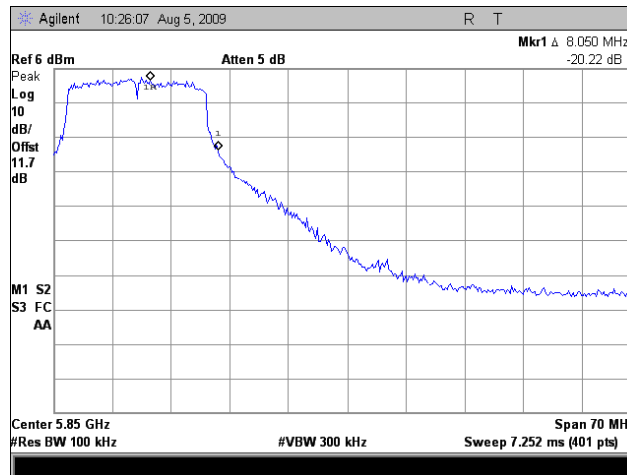


Plot 222. Upper Conducted Band Edge, 5 GHz, Port 1, 802.11a

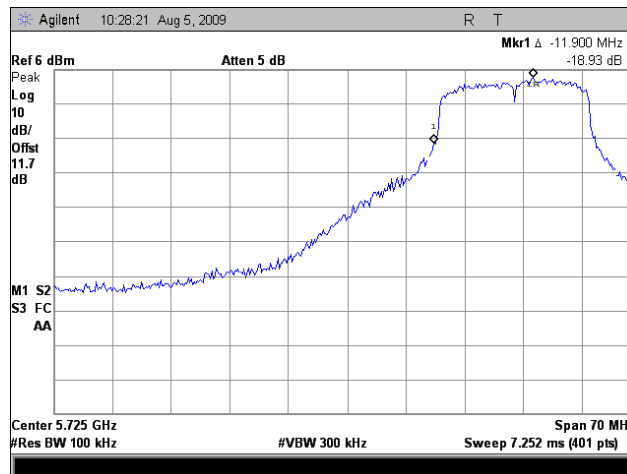


Plot 223. Lower Conducted Band Edge, 5 GHz, Port 1, 802.11n 20MHz

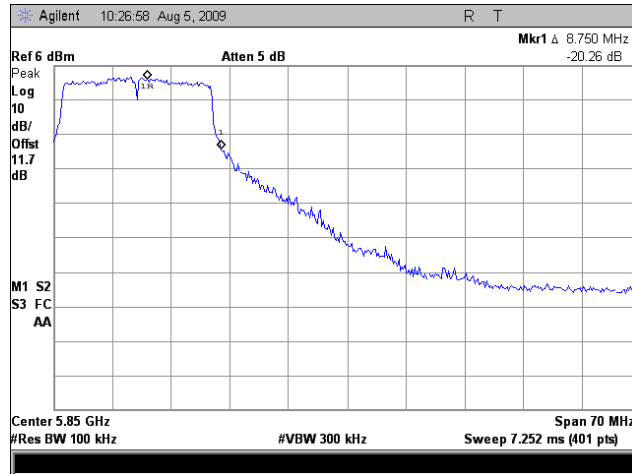

Plot 224. Upper Conducted Band Edge, 5 GHz, Port 1, 802.11n 20MHz

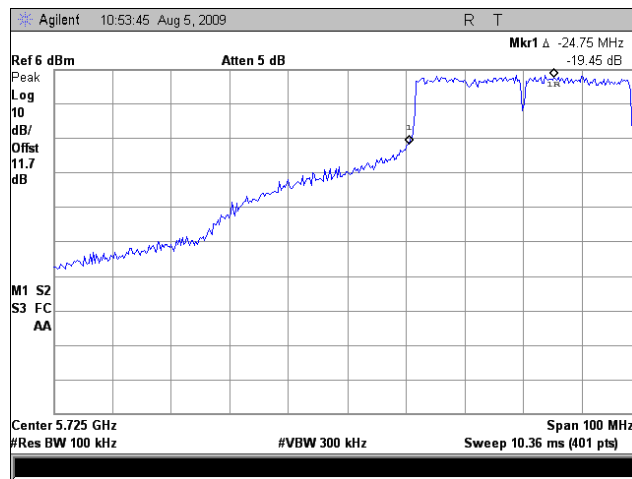


Plot 225. Lower Conducted Band Edge, 5 GHz, Port 1, 802.11n 40MHz

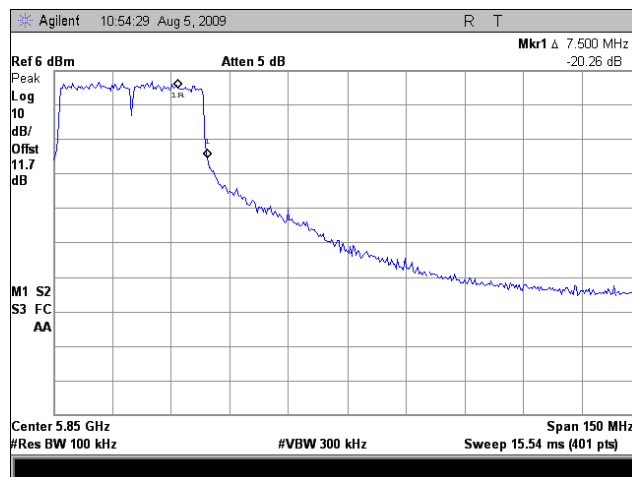


Plot 226. Upper Conducted Band Edge, 5 GHz, Port 1, 802.11n 40MHz


Conducted Band Edge, 5 GHz, Port 2

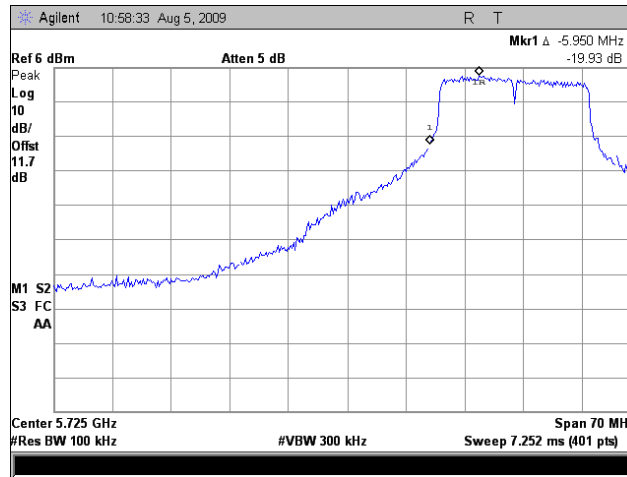


Plot 227. Lower Conducted Band Edge, 5 GHz, Port 2, 802.11n 20MHz

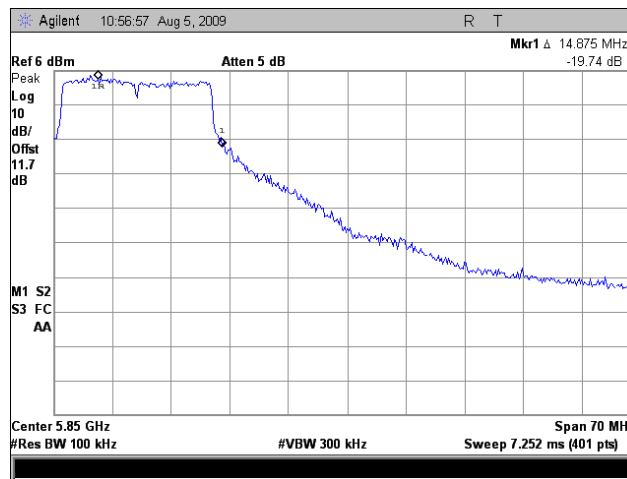

Plot 228. Upper Conducted Band Edge, 5 GHz, Port 2, 802.11n 20MHz

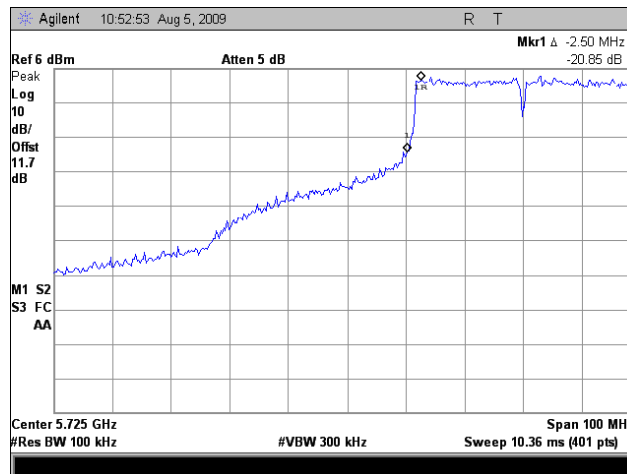


Plot 229. Lower Conducted Band Edge, 5 GHz, Port 2, 802.11n 40MHz

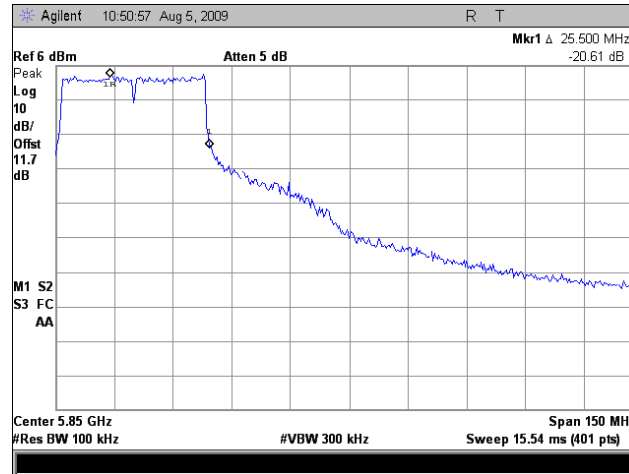


Plot 230. Upper Conducted Band Edge, 5 GHz, Port 2, 802.11n 40MHz


Conducted Band Edge, 5 GHz, Port 3

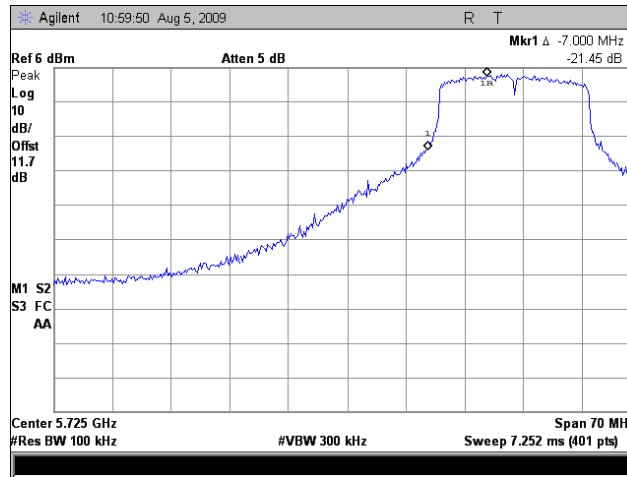


Plot 231. Lower Conducted Band Edge, 5 GHz, Port 3, 802.11n 20MHz

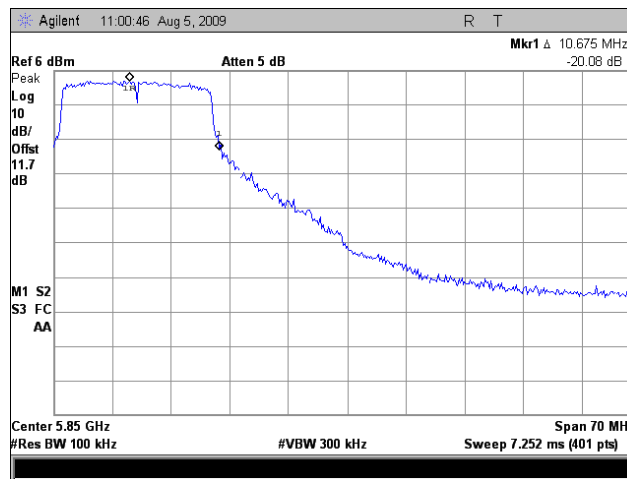

Plot 232. Upper Conducted Band Edge, 5 GHz, Port 3, 802.11n 20MHz

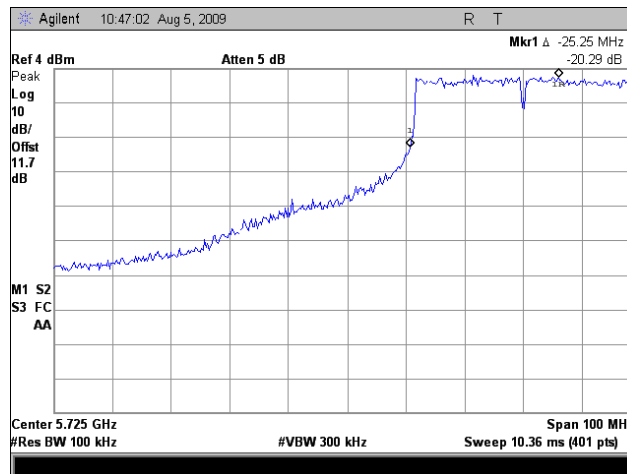

Plot 233. Lower Conducted Band Edge, 5 GHz, Port 3, 802.11n 40MHz

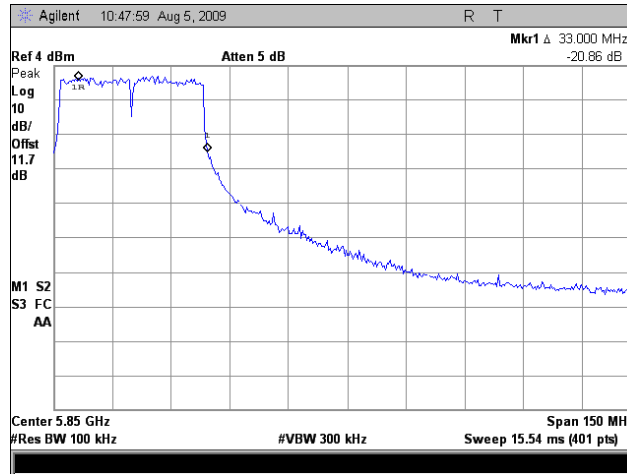

Plot 234. Upper Conducted Band Edge, 5 GHz, Port 3, 802.11n 40MHz

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(e) Peak Power Spectral Density

Test Requirements: §15.247(e): For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

Test Procedure: The transmitter was connected directly to a Spectrum Analyzer through an attenuator. The power level was set to the maximum level throughout each of the 100 sweeps of power averaging. The RBW was set to 3 kHz and a VBW set to 9 kHz or greater. The spectrum analyzer was set to an auto sweep time and a peak detector was used. Measurements were carried out at the low, mid and high channels.

Test Results: The EUT was compliant with the peak power spectral density limits of § 15.247 (e).
The peak power spectral density was determined from plots on the following page(s).

Test Engineer: Minh Ly

Test Date: 08/17/09

Peak Power Spectral Density, 2.4 GHz, Port 1					
Mode	Carrier Channel	Frequency (MHz)	Measured PPSD (dBm)	Limit (dBm)	Margin (dB)
802.11g	Low	2412	-2.275	8	10.275
	Mid	2437	-1.931	8	9.931
	High	2462	-2.119	8	10.119
802.11n 20MHz	Low	2412	-2.082	8	10.082
	Mid	2437	-1.727	8	9.727
	High	2462	-0.622	8	8.622
802.11n 40MHz	Mid	2412	-3.58	8	11.58

Table 65. Peak Power Spectral Density, Test Results, 2.4 GHz, Port 1

Peak Power Spectral Density, 2.4 GHz, Port 2					
Mode	Carrier Channel	Frequency (MHz)	Measured PPSD (dBm)	Limit (dBm)	Margin (dB)
802.11n 20MHz	Low	2412	-2.695	8	10.695
	Mid	2437	-2.359	8	10.359
	High	2462	-1.526	8	9.526
802.11n 4MHz	Mid	2412	-3.306	8	11.306

Table 66. Peak Power Spectral Density, Test Results, 2.4 GHz, Port 2

Peak Power Spectral Density, 2.4 GHz, Port 3					
Mode	Carrier Channel	Frequency (MHz)	Measured PPSD (dBm)	Limit (dBm)	Margin (dB)
802.11n 20MHz	Low	2412	-2.63	8	10.63
	Mid	2437	-1.18	8	9.18
	High	2462	-0.90	8	8.90
802.11n 40MHz	Mid	2412	-7.92	8	15.92

Table 67. Peak Power Spectral Density, Test Results, 2.4 GHz, Port 3

Peak Power Spectral Density, 2.4 GHz, Combined Ports					
Mode	Carrier Channel	Frequency (MHz)	Measured PPSD (dBm)	Limit (dBm)	Margin (dB)
802.11n 20MHz	Low	2412	3.91	8	4.09
	Mid	2437	3.68	8	4.32
	High	2462	3.47	8	4.53
802.11n 40MHz	Mid	2412	1.72	8	6.28

Table 68. Peak Power Spectral Density, Test Results, 2.4 GHz, Combined Ports

Peak Power Spectral Density, 5 GHz, Port 1					
Mode	Carrier Channel	Frequency (MHz)	Measured PPSD (dBm)	Limit (dBm)	Margin (dB)
802.11a	Low	5745	-8.054	8	16.054
	Mid	5785	-7.195	8	15.195
	High	5825	-6.632	8	14.632
802.11n 20MHz	Low	5745	-6.409	8	14.409
	Mid	5785	-6.886	8	14.886
	High	5825	-6.471	8	14.471
802.11n 40MHz	Low	5755	-8.285	8	16.285
	High	5795	-9.881	8	17.881

Table 69. Peak Power Spectral Density, Test Results, 5 GHz, Port 1

Peak Power Spectral Density, 5 GHz, Port 2					
Mode	Carrier Channel	Frequency (MHz)	Measured PPSD (dBm)	Limit (dBm)	Margin (dB)
802.11n 20MHz	Low	5745	-7.41	8	15.41
	Mid	5785	-7.445	8	15.445
	High	5825	-6.819	8	14.819
802.11n 40Mhz	Low	5755	-9.474	8	17.474
	High	5795	-8.649	8	16.649

Table 70. Peak Power Spectral Density, Test Results, 5 GHz, Port 2


Peak Power Spectral Density, 5 GHz, Port 3					
Mode	Carrier Channel	Frequency (MHz)	Measured PPSD (dBm)	Limit (dBm)	Margin (dB)
802.11n 20MHz	Low	5745	-7.379	8	15.379
	Mid	5785	-6.757	8	14.757
	High	5825	-7.983	8	15.983
802.11n 40MHz	Low	5755	-9.001	8	17.001
	High	5795	-8.733	8	16.733

Table 71. Peak Power Spectral Density, Test Results, 5 GHz, Port 3


Peak Power Spectral Density, 5 GHz, Combined Ports					
Mode	Carrier Channel	Frequency (MHz)	Measured PPSD (dBm)	Limit (dBm)	Margin (dB)
802.11n 20MHz	Low	5745	-1.01	8	9.01
	Mid	5785	-0.63	8	8.63
	High	5825	-0.707	8	8.707
802.11n 4MHz	Low	5755	-1.885	8	9.885
	High	5795	-2.769	8	10.769

Table 72. Peak Power Spectral Density, Test Results, 5 GHz, Combined Ports


Peak Power Spectral Density, 2.4 GHz, Port 1

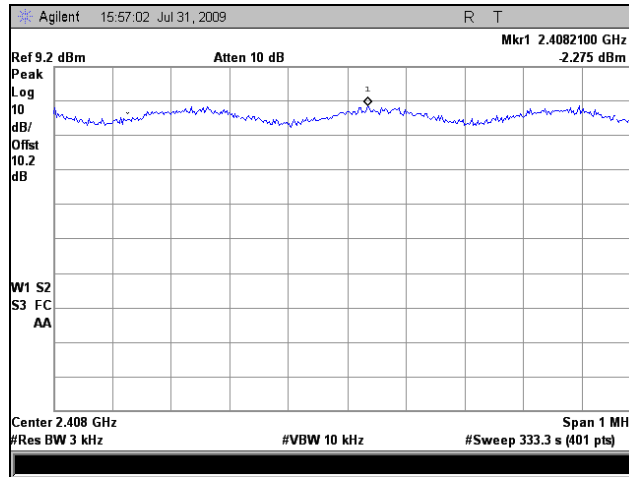


Plot 235. Peak Power Spectral Density, Low Channel, 2.4 GHz, Port 1, 802.11g

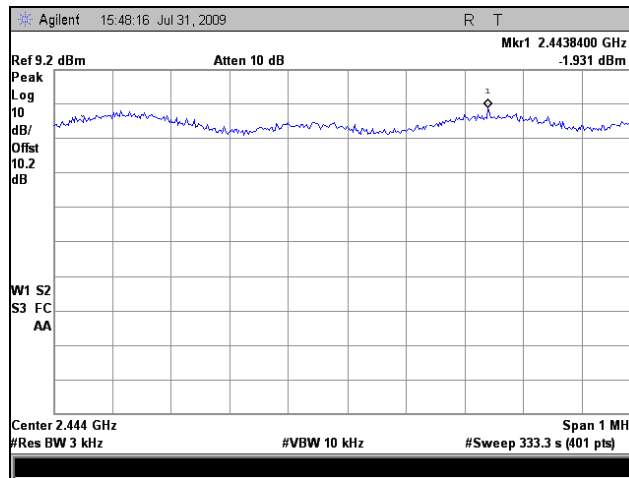


Plot 236. Peak Power Spectral Density, Mid Channel, 2.4 GHz, Port 1, 802.11g

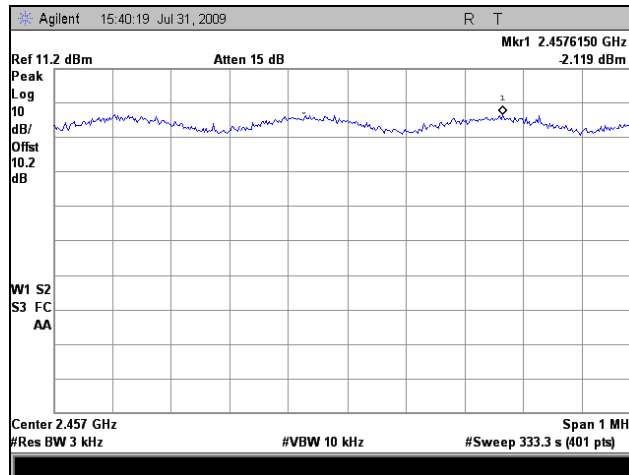


Plot 237. Peak Power Spectral Density, High Channel, 2.4 GHz, Port 1, 802.11g

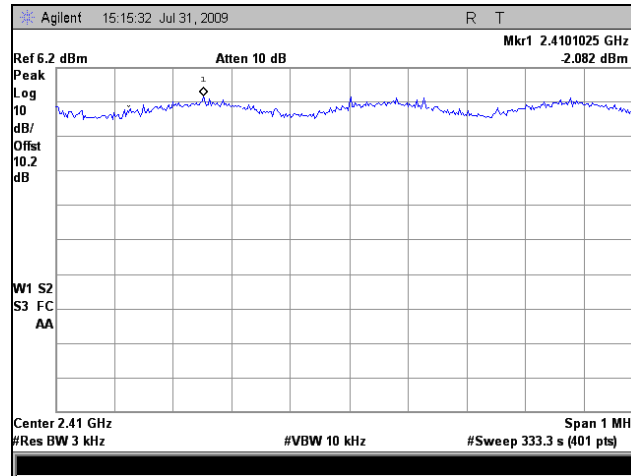


Plot 238. Peak Power Spectral Density, Low Channel, 2.4 GHz, Port 1, 802.11n 20MHz

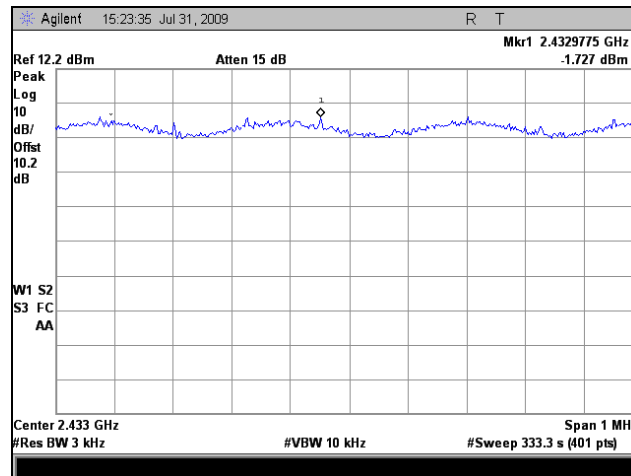

Plot 239. Peak Power Spectral Density, Mid Channel, 2.4 GHz, Port 1, 802.11n 20MHz

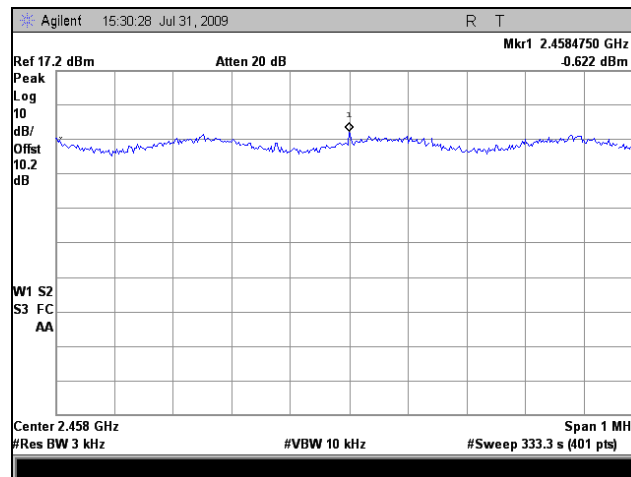


Plot 240. Peak Power Spectral Density, High Channel, 2.4 GHz, Port 1, 802.11n 20MHz

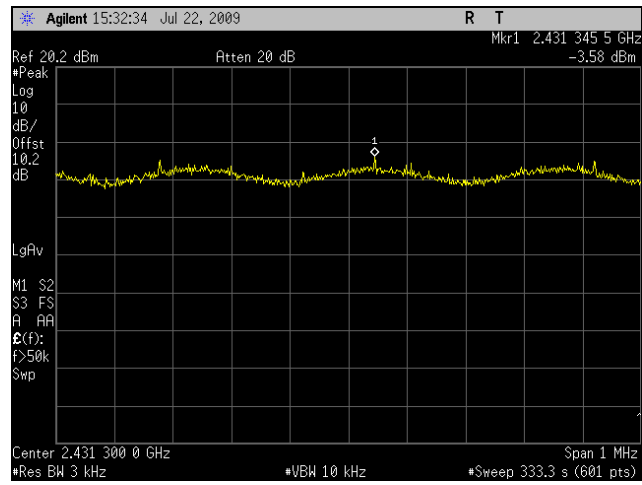


Plot 241. Peak Power Spectral Density, Mid Channel, 2.4 GHz, Port 1, 802.11n 40MHz


Peak Power Spectral Density, 2.4 GHz, Port 2

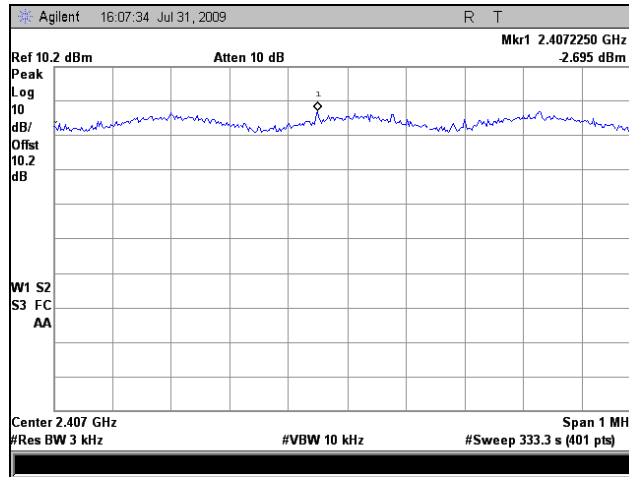


Plot 242. Peak Power Spectral Density, Low Channel, 2.4 GHz, Port 2, 802.11n 20MHz

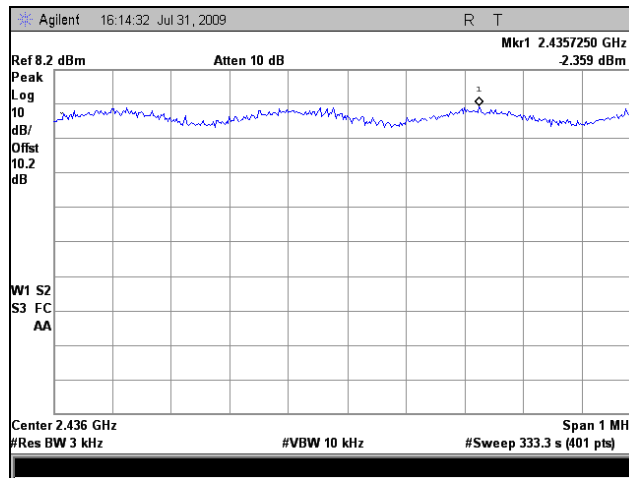

Plot 243. Peak Power Spectral Density, Mid Channel, 2.4 GHz, Port 2, 802.11n 20MHz

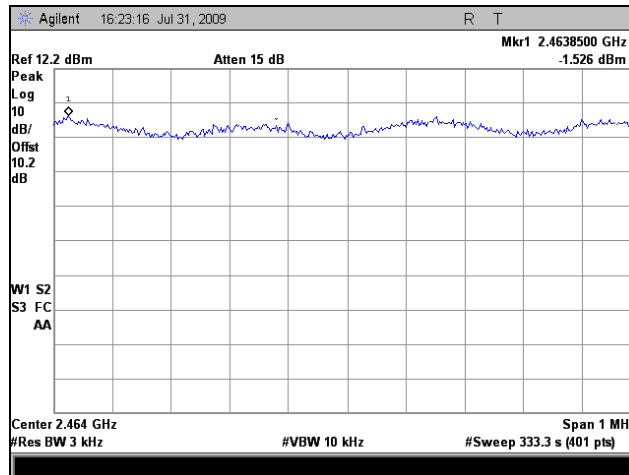


Plot 244. Peak Power Spectral Density, High Channel, 2.4 GHz, Port 2, 802.11n 20MHz

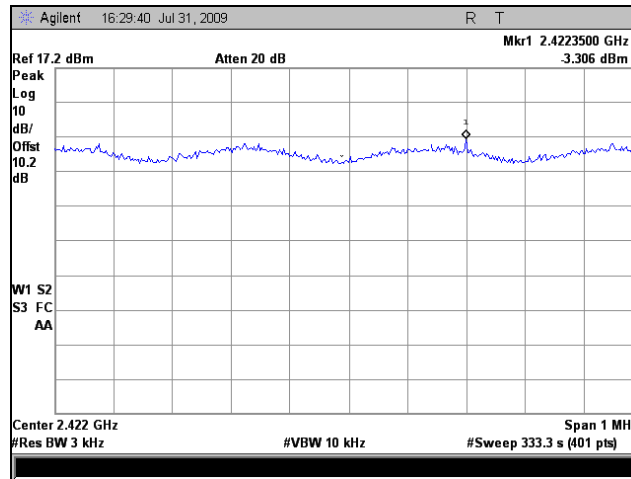


Plot 245. Peak Power Spectral Density, Mid Channel, 2.4 GHz, Port 2, 802.11n 40MHz


Peak Power Spectral Density, 2.4 GHz, Port 3

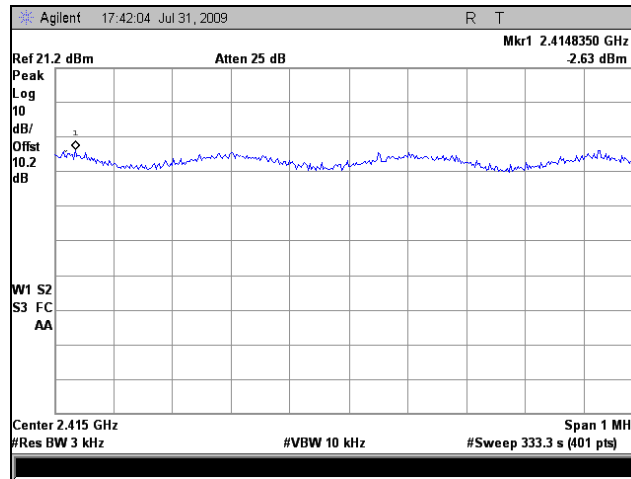


Plot 246. Peak Power Spectral Density, Low Channel, 2.4 GHz, Port 3, 802.11n 20MHz

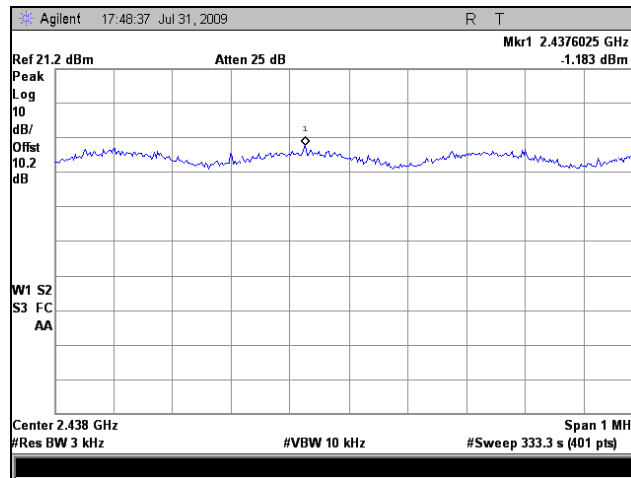

Plot 247. Peak Power Spectral Density, Mid Channel, 2.4 GHz, Port 3, 802.11n 20MHz

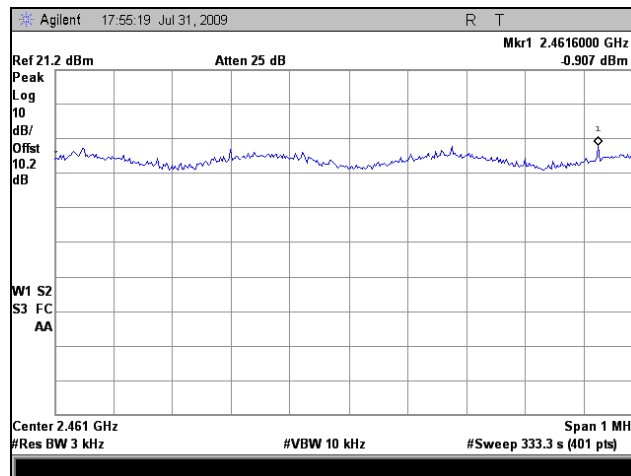


Plot 248. Peak Power Spectral Density, High Channel, 2.4 GHz, Port 3, 802.11n 20MHz

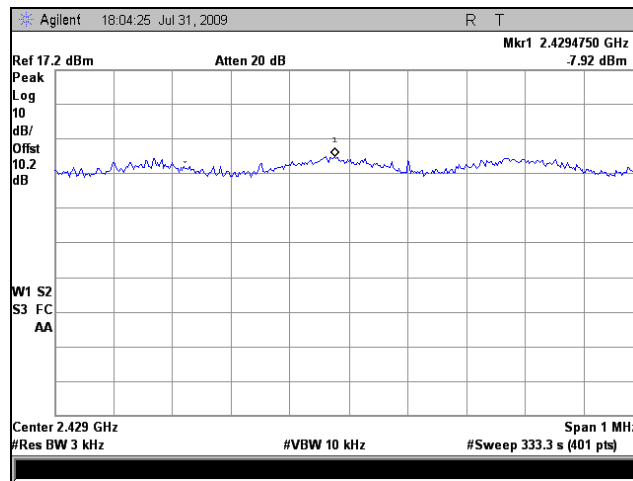


Plot 249. Peak Power Spectral Density, Mid Channel, 2.4 GHz, Port 3, 802.11n 40MHz


Peak Power Spectral Density, 2.4 GHz, Combined Ports

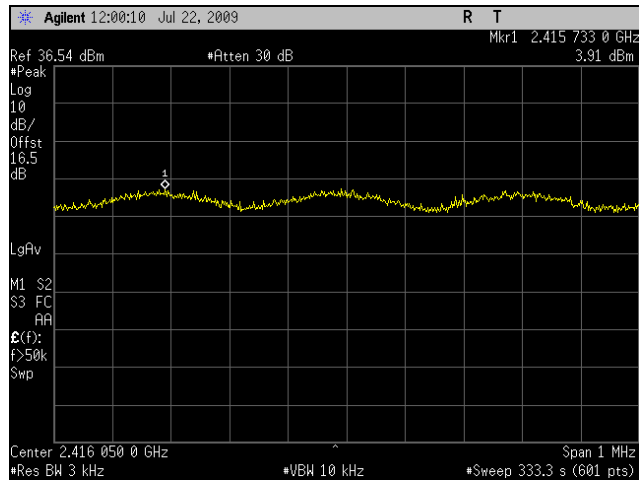


Plot 250. Peak Power Spectral Density, Low Channel, 2.4 GHz, Combined Ports, 802.11n 20MHz

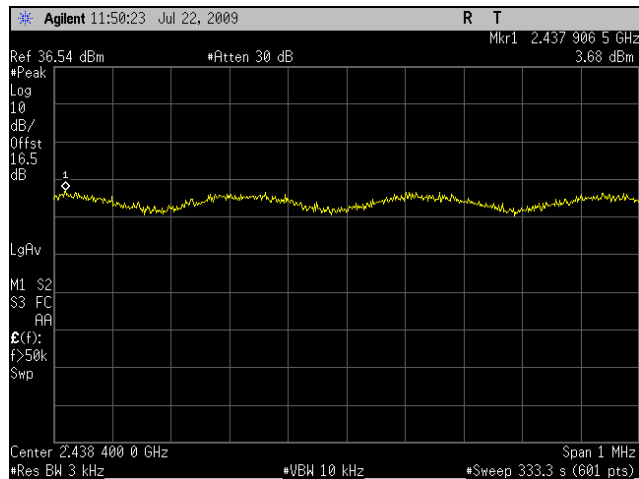

Plot 251. Peak Power Spectral Density, Mid Channel, 2.4 GHz, Combined Ports, 802.11n 20MHz

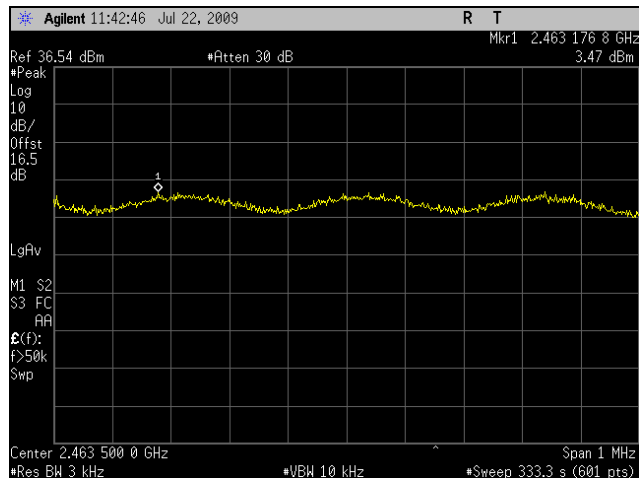


Plot 252. Peak Power Spectral Density, High Channel, 2.4 GHz, Combined Ports, 802.11n 20MHz

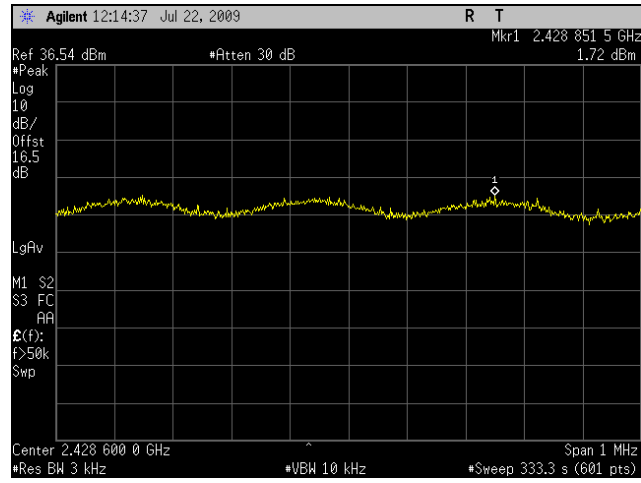


Plot 253. Peak Power Spectral Density, Mid Channel, 2.4 GHz, Combined Ports, 802.11n 40MHz


Peak Power Spectral Density, 5 GHz, Port 1

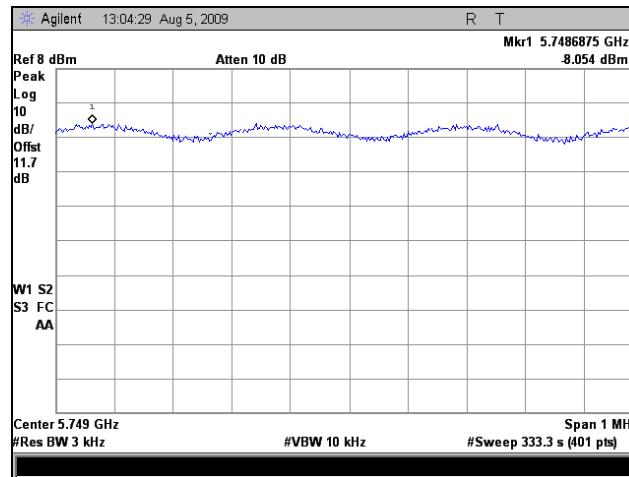


Plot 254. Peak Power Spectral Density, Low Channel, 5 GHz, Port 1, 802.11a

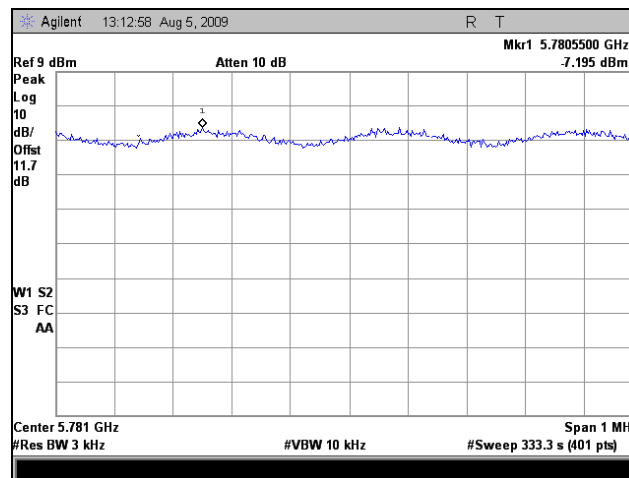


Plot 255. Peak Power Spectral Density, Mid Channel, 5 GHz, Port 1, 802.11a

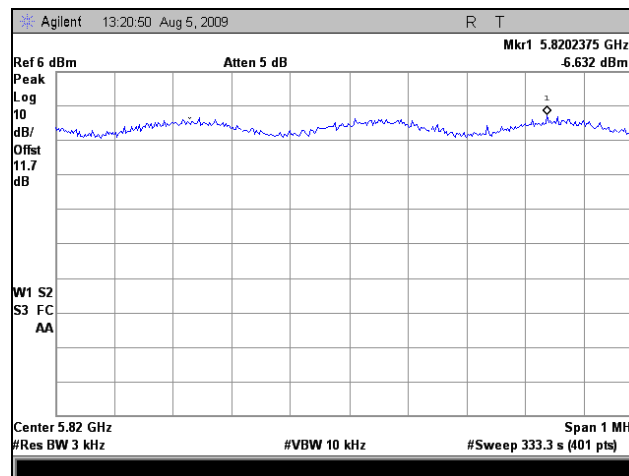


Plot 256. Peak Power Spectral Density, High Channel, 5 GHz, Port 1, 802.11a

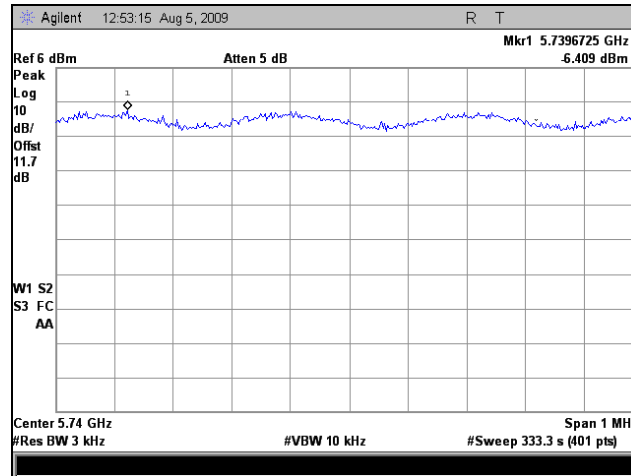


Plot 257. Peak Power Spectral Density, Low Channel, 5 GHz, Port 1, 802.11n 20MHz

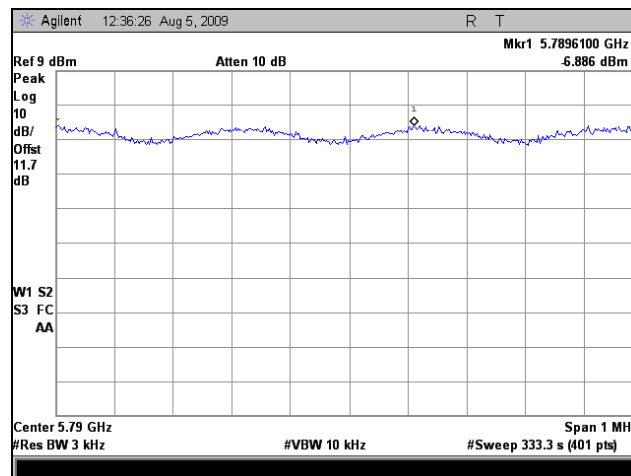


Plot 258. Peak Power Spectral Density, Mid Channel, 5 GHz, Port 1, 802.11n 20MHz

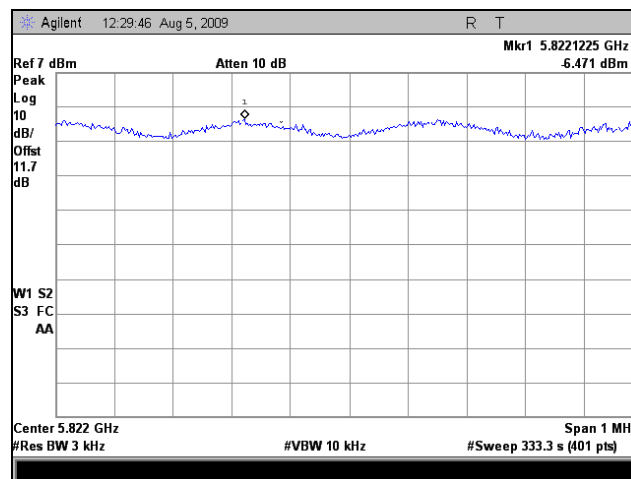

Plot 259. Peak Power Spectral Density, High Channel, 5 GHz, Port 1, 802.11n 20MHz

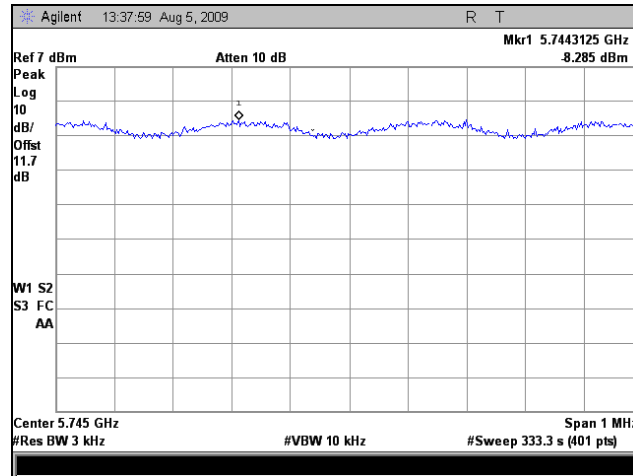


Plot 260. Peak Power Spectral Density, Low Channel, 5 GHz, Port 1, 802.11n 40MHz

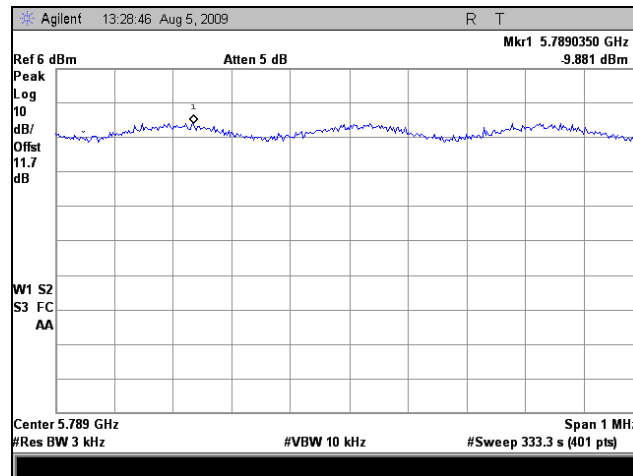


Plot 261. Peak Power Spectral Density, High Channel, 5 GHz, Port 1, 802.11n 40MHz


Peak Power Spectral Density, 5 GHz, Port 2

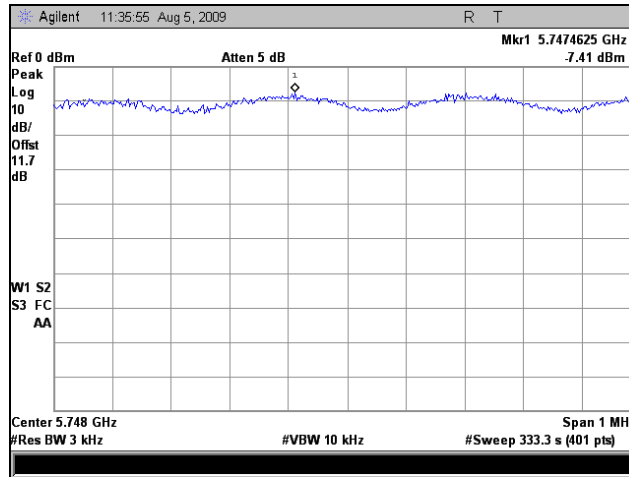


Plot 262. Peak Power Spectral Density, Low Channel, 5 GHz, Port 2, 802.11n 20MHz

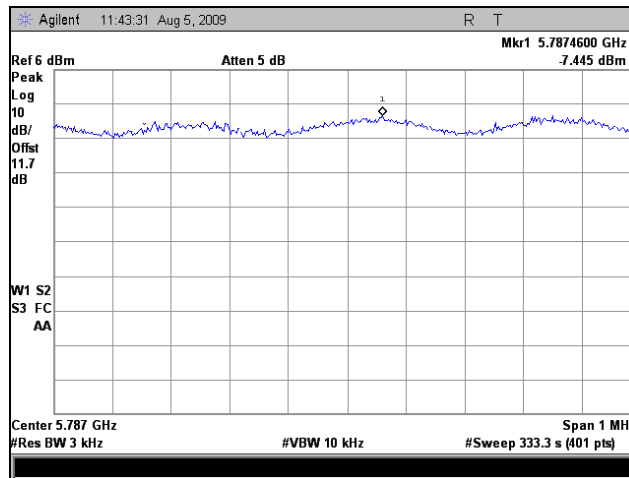


Plot 263. Peak Power Spectral Density, Mid Channel, 5 GHz, Port 2, 802.11n 20MHz

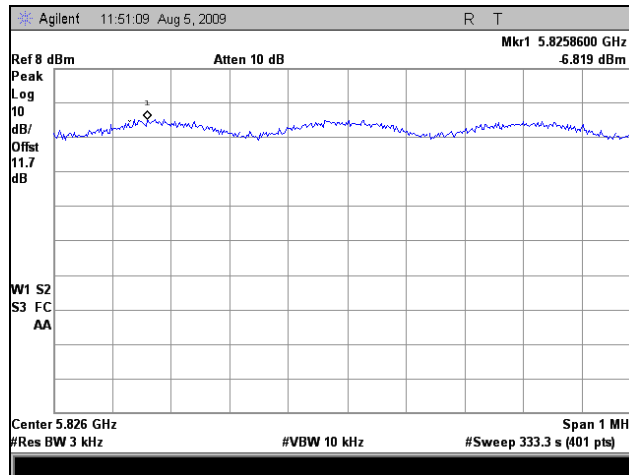

Plot 264. Peak Power Spectral Density, High Channel, 5 GHz, Port 2, 802.11n 20MHz

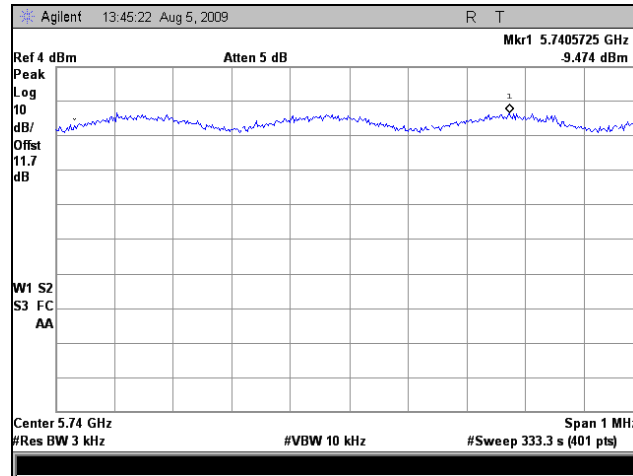


Plot 265. Peak Power Spectral Density, Low Channel, 5 GHz, Port 2, 802.11n 40MHz

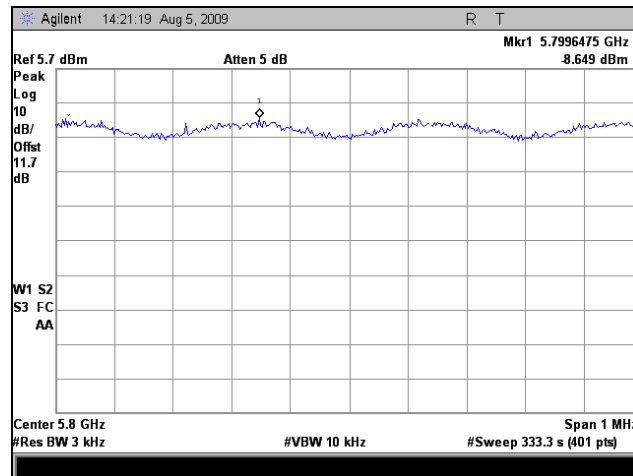


Plot 266. Peak Power Spectral Density, High Channel, 5 GHz, Port 2, 802.11n 40MHz


Peak Power Spectral Density, 5 GHz, Port 3

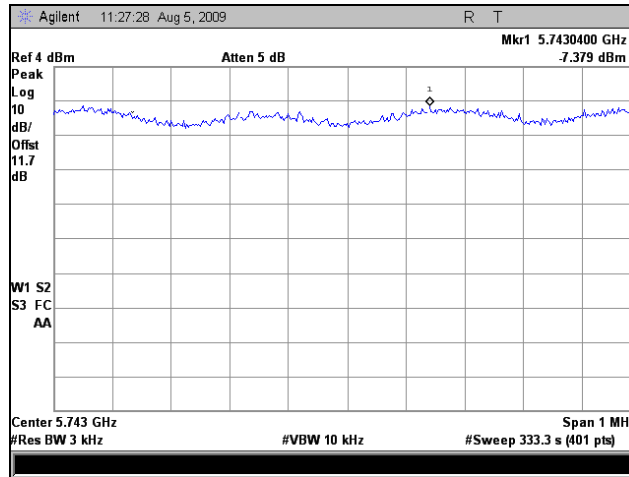


Plot 267. Peak Power Spectral Density, Low Channel, 5 GHz, Port 3, 802.11n 20MHz

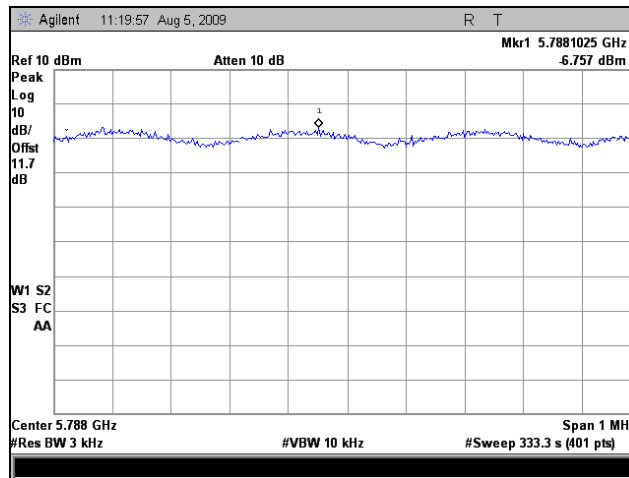


Plot 268. Peak Power Spectral Density, Mid Channel, 5 GHz, Port 3, 802.11n 20MHz

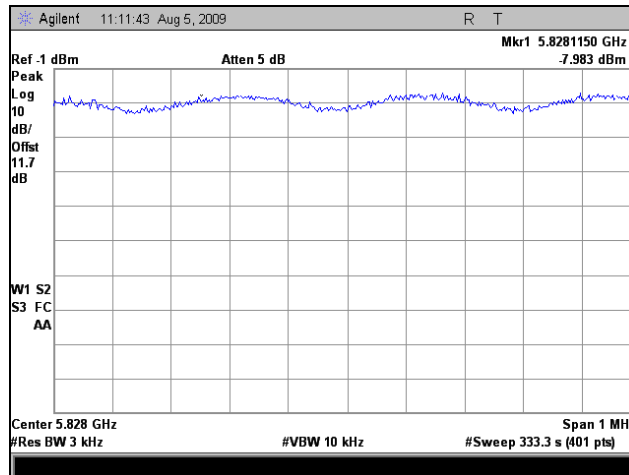

Plot 269. Peak Power Spectral Density, High Channel, 5 GHz, Port 3, 802.11n 20MHz

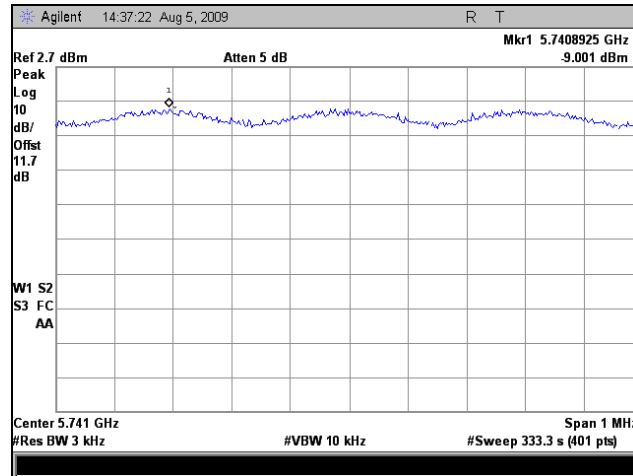


Plot 270. Peak Power Spectral Density, Low Channel, 5 GHz, Port 3, 802.11n 40MHz

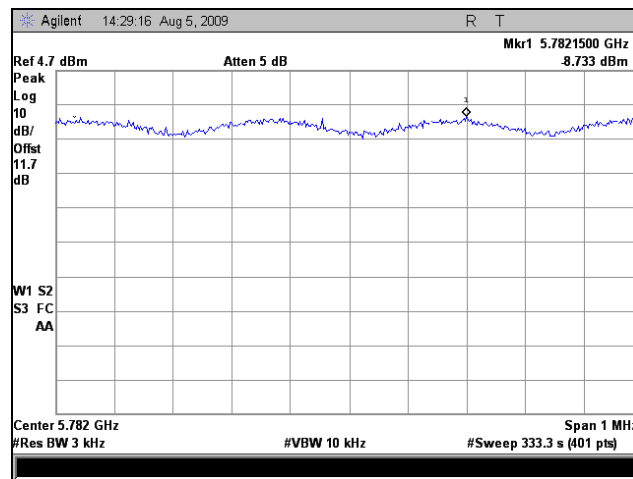


Plot 271. Peak Power Spectral Density, High Channel, 5 GHz, Port 3, 802.11n 40MHz


Peak Power Spectral Density, 5 GHz, Combined Ports

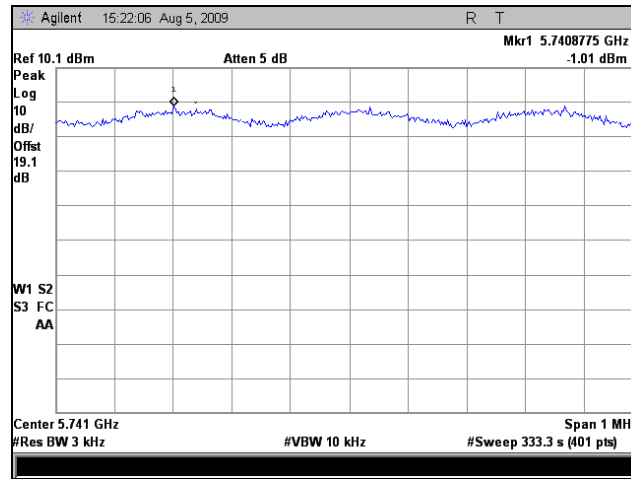


Plot 272. Peak Power Spectral Density, Low Channel, 5 GHz, Combined Ports, 802.11n 20MHz

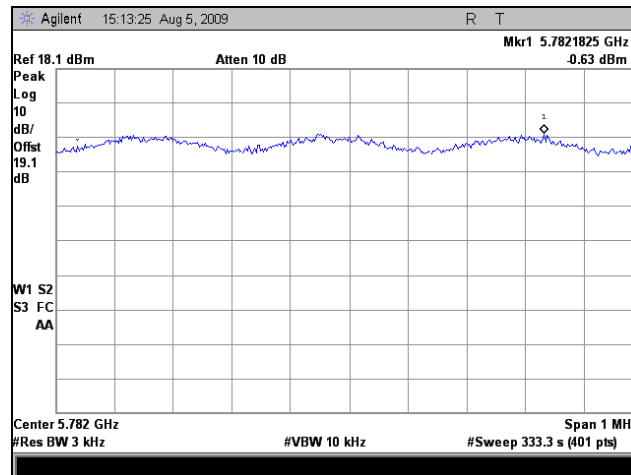


Plot 273. Peak Power Spectral Density, Mid Channel, 5 GHz, Combined Ports, 802.11n 20MHz

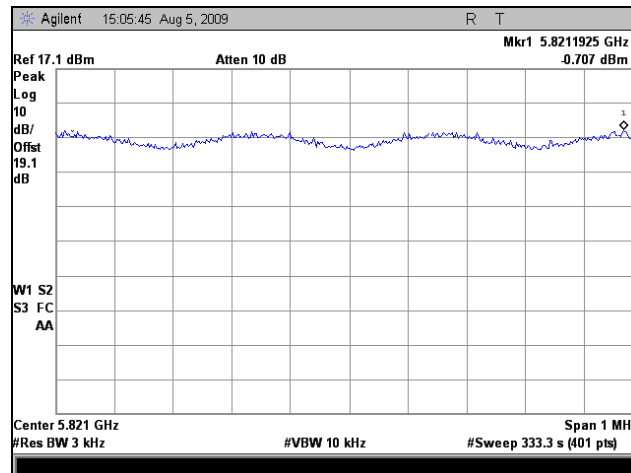

Plot 274. Peak Power Spectral Density, High Channel, 5 GHz, Combined Ports, 802.11n 20MHz

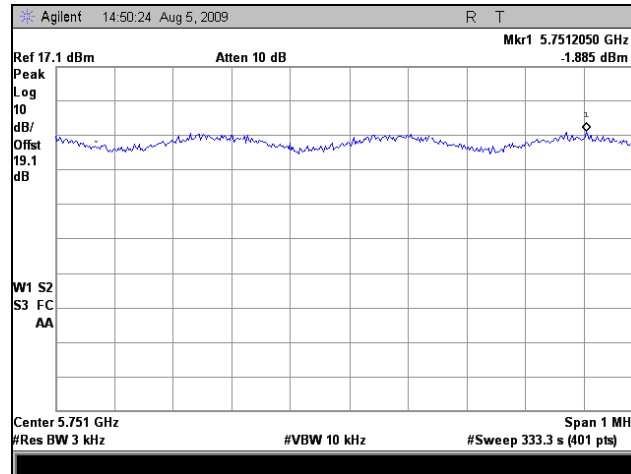

Plot 275. Peak Power Spectral Density, Low Channel, 5 GHz, Combined Ports, 802.11n 40MHz

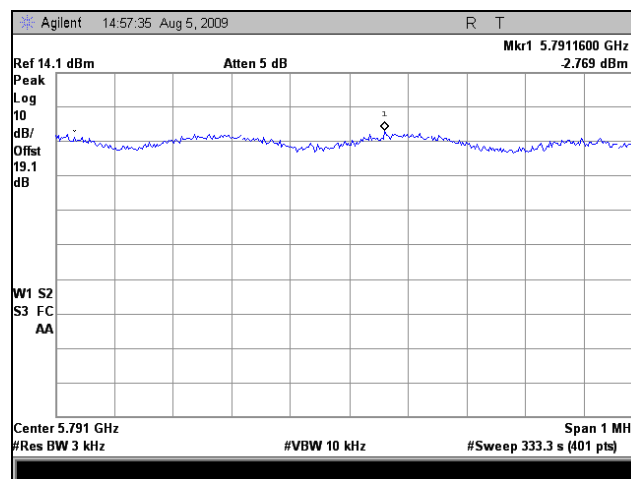

Plot 276. Peak Power Spectral Density, High Channel, 5 GHz, Combined Ports, 802.11n 40MHz

IV. Test Equipment

Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ANSI/NCSL Z540-1-1994 and ANSI/ISO/IEC 17025:2000.

MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1S2421	EMI RECEIVER	ROHDE&SCHWARZ	ESIB 7	05/27/2009	05/27/2010
1S2121	PRE-AMPLIFIER	HEWLETT PACKARD	8449B	SEE NOTE	
1S2198	HORN ANTENNA	EMCO	3115	09/10/2008	09/10/2009
1S2202	ANTENNA, HORN, 1 METER	EMCO	3116	04/10/2007	04/10/2010
N/A	HIGH PASS FILTER	MICRO-TRONICS	HPM13146	SEE NOTE	
1S2481	CHAMBER, 10 METER	ETS-LINDGREN	DKE 8X8 DBL	12/26/2008	12/26/2009
1S2041	COUPLER, BI DIRECTIONAL COAXIAL	NARDA	N/A	SEE NOTE	
1S2460	ANALYZER, SPECTRUM 9 KHZ-40GHZ	AGILENT	E4407B	04/14/2009	04/14/2010
1S2034	COUPLER, DIRECTIONAL 1-20 GHZ	KRYTAR	101020020	SEE NOTE	
1S2464	LISN	SOLAR ELECTRONICS	9252-50-R24-BNC	09/26/2008	09/26/2009
1S2512	TRANSIENT LIMITER	AGILENT	11947A	SEE NOTE	
1S2520	THERMO-HYGROMETER	FISHER SCIENTIFIC	11-661-7D	11/14/2007	11/13/2009
1S2482	CHAMBER, 5 METER	PANASHIELD	641431	11/22/2008	11/22/2009
1S2108	RECIEVER, EMI, RF FILTER SECTION	HP	85460A	11/06/2008	11/06/2009
1S2399	TURNTABLE CONTROLLER	SUNOL SCIENCE	SC99V	SEE NOTE	
1S2485	BILOG ANTENNA	TESEQ	CBL6112D	03/20/2009	03/20/2010
N/A	2-6GHZ COMBINER	MINI CIRCUITS	ZN4PD-1-63-S+	SEE NOTE	
1S2108	RF FILTER SECTION	HEWLETT PACKARD	85460A	11/6/08	11/6/09
1S2041	COUPLER, BI DIRECTIONAL COAXIAL	NARDA	N/A	SEE NOTE	
1S2128	HARMONIC MIXER	HEWLETT PACKARD	11970A	11/22/2008	11/22/2010
1S2129	HARMONIC MIXER	HEWLETT PACKARD	11970K	11/22/2008	11/22/2010

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

V. Certification & User's Manual Information

Certification & User's Manual Information

A. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

§ 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of Emitting radio-frequency energy by radiation, conduction, or other means. Radio- frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

§ 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
 - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
 - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.

- (e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:
- (i) *Compliance testing*;
 - (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
 - (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
 - (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production states; or
 - (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.
- (e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.
- (f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.

Certification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:

§ 2.901 Basis and Purpose

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.¹ *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer, be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.*
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

§ 2.907 Certification.

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

¹ In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.

Certification & User's Manual Information

§ 2.948 Description of measurement facilities.

- (a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.
- (1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.
- (i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*
- (ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.
- (2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.

Certification & User's Manual Information

Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

§ 15.19 Labeling requirements.

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

- (1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

- (2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

- (3) All other devices shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

- (4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

- (5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

§ 15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Verification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

§ 15.105 Information to the user.

- (a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at own expense.

- (b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

ICES-003 Procedural & Labeling Requirements

From the Industry Canada Electromagnetic Compatibility Advisory Bulletin entitled, "Implementation and Interpretation of the Interference-Causing Equipment Standard for Digital Apparatus, ICES-003" (EMCAB-3, Issue 2, July 1995):

"At present, CISPR 22: 2002 and ICES technical requirements are essentially equivalent. Therefore, if you have CISPR 22: 2002 approval by meeting CISPR Publication 22, the only additional requirements are: to attach a note to the report of the test results for compliance, indicating that these results are deemed satisfactory evidence of compliance with ICES-003 of the Canadian Interference-Causing Equipment Regulations; to maintain these records on file for the requisite five year period; and to provide the device with a notice of compliance in accordance with ICES-003."

Procedural Requirements:

According to Industry Canada's Interference Causing Equipment Standard for Digital Apparatus ICES-003 Issue 4, February 2004:

- Section 6.1: A record of the measurements and results, showing the date that the measurements were completed, shall be retained by the manufacturer or importer for a period of at least five years from the date shown in the record and made available for examination on the request of the Minister.
- Section 6.2: A written notice indicating compliance must accompany each unit of digital apparatus to the end user. The notice shall be in the form of a label that is affixed to the apparatus. Where because of insufficient space or other constraints it is not feasible to affix a label to the apparatus, the notice may be in the form of a statement in the user's manual.

Labeling Requirements:

The suggested text for the notice, in English and in French, is provided below, from the Annex of ICES-003:

This Class [²] digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe [¹] est conforme à la norme NMB-003 du Canada.

² Insert either A or B but not both as appropriate for the equipment requirements.

End of Report