

Test Report of FCC Part 15 C for FCC Certificate

On Behalf of

TIANJIN CHINA SILICON MICROELECTRONICS CO.,LTD

Product description: Wireless Optical Mouse

Model No.: TCM1212/1216

FCC ID: U3T-TCM1212

Prepared for: TIANJIN CHINA SILICON MICROELECTRONICS CO.,LTD

3F East, No.211 Bld., No.216 Hongqi Road, Nankai District, Tianjin,
China

Prepared by: Bontek Compliance Laboratory Ltd

Rm 802~804, 8/F, Jinmin Bld., Zizhu 6th Rd., Zhuzi Lin, Futian,
Shenzhen 518040, P.R. China.


Tel: 86-755-82871080 Fax: 86-755-82871368

Issue Date: April 23, 2007


Test Date: February 9 ~ April 20, 2007

Test by:

Reviewed By:



Kendy Wang



Tony Wu

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	3
1.1 Product Description for Equipment Under Test (EUT).....	3
1.2 Related Submittal(s) / Grant (s)	3
1.3 Test Methodology	3
1.4 Test Facility.....	4
2. SYSTEM TEST CONFIGURATION	5
2.1 EUT Configuration	5
2.2 EUT Exercise	5
2.3 General Test Procedures.....	5
2.4 List of Measuring Equipments Used	6
3. SUMMARY OF TEST RESULTS	7
4. TEST OF CONDUCTED EMISSION.....	8
4.1 Applicable Standard.....	8
4.2 Test Setup Diagram	8
5- RADIATED EMISSIONS.....	9
5.1 Limit of Radiated Emissions.....	9
5.2 Test Equipment Used	9
5.3 EUT Setup	10
5.4 Test Procedure	11
5.5 Test Result.....	11
6- EMISSIONS WITHIN BAND EDGES.....	17
6.1 Limit of Emissions within Band Edges	17
6.2 Test Equipment Used	17
6.3 Test Procedure	17
6.4 Emissions within Band Edges Test Result.....	17

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Applicant:	TIANJIN CHINA SILICON MICROELECTRONICS CO.,LTD
Address of applicant:	3F East, No.211 Bld., No.216 Hongqi Road, Nankai District, Tianjin, China.
Manufacturer:	TIANJIN CHINA SILICON MICROELECTRONICS CO.,LTD
Address of manufacturer:	3F East, No.211 Bld., No.216 Hongqi Road, Nankai District, Tianjin, China.
EUT Description:	Wireless Optical Mouse
Trade Name:	N/A
Model No.:	TCM1212/1216
Rated Voltage	DC 3V (2 x1.5VAA alkaline battery) for Transmitter
Frequency range	27.047MHz
Number of channels	1
Channel Separation	None
Product Class:	Low Power Communication Device Transmitter
Measurement Procedure	ANSI C63.4-2003

Remark: * *The test data gathered are from the production sample provided by the manufacturer.*

1.2 Related Submittal(s) / Grant (s)

This submittal(s) is a test report based on the Electromagnetic Interference (EMI) tests performed on the EUT. The EMI measurements were performed according to the measurement procedure described in ANSI C63.4 - 2003.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.227 rules.

1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 - 2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4 Test Facility

All measurement required was performed at laboratory of Shenzhen Huatongwei International Inspection Co., Ltd at Keji Nan No.12 Road, Hi-tech Park, Shenzhen, China

The test facility is recognized, certified, or accredited by the following organizations:

FCC – Registration No.: 662850

Shenzhen Huatongwei International Inspection Co., Ltd, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 662850, November 17, 2003.

2. SYSTEM TEST CONFIGURATION

The tests documented in this report were performed in accordance with ANSI C63.4-2003 and FCC CFR 47 Part 15 Subpart C.

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The calibrated antennas used to sample the radiated field strength are mounted on a non-conductive, motorized antenna mast 3 or 10 meters from the leading edge of the turntable.

2.3 General Test Procedures

Conducted Emissions The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 7.1 of ANSI C63.4-2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak detector mode.

Radiated Emissions The EUT is placed on the turntable, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4-2003.

2.4 List of Measuring Equipments Used

Items	Equipment	Manufacturer	Model No.	Last Cal	Calibration Period
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCS30	2006/11	1 year
2	EMI Test Receiver	ROHDE & SCHWARZ	ESI 26	2006/11	1 year
3	Spectrum Analyzer	ADVANTEST	R3263	2006/8	1 year
4	Receiver/ Spectrum Analyzer	ROHDE & SCHWARZ	ESCI	2006/11	1 year
5	Artificial Mains	ROHDE & SCHWARZ	ESH2-Z5	2006/11	1 year
6	Pulse Limiter	ROHDE & SCHWARZ	ESHSZ2	2006/11	1 year
7	LISN	COM Power	LI-200	2006/11	1 year
8	LISN	COM Power	LI-200	2006/11	1 year
9	3m/5m Semi- Anechoic Chamber	ETS	N/A	2006/11	1 year
10	Ultra-Broadband Antenna	ROHDE & SCHWARZ	HL562	2006/11	1 year
11	Loop Antenna	ROHDE & SCHWARZ	HFH2-Z2	2006/11	1 year
12	RF Test Panel	R/S	TS / RSP	N/A	N/A
13	Turntable	ETS	2088	N/A	N/A
14	Antenna Mast	ETS	2075	N/A	N/A

3. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
15.207	Disturbance Voltage at The Mains Terminals	N/A, without AC power supply
15.227	Radiation Emission	Pass
15.227	Emissions within Band Edges	Pass


4. TEST OF CONDUCTED EMISSION

4.1 Applicable Standard

Section 15.207: For a Low-power Radio-frequency Device is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency Range (MHz)	Limits (dBuV)	
	Quasi-Peak	Average
0.150~0.500	66~56	56~46
0.500~5.000	56	46
5.000~30.00	60	50

4.2 Test Setup Diagram

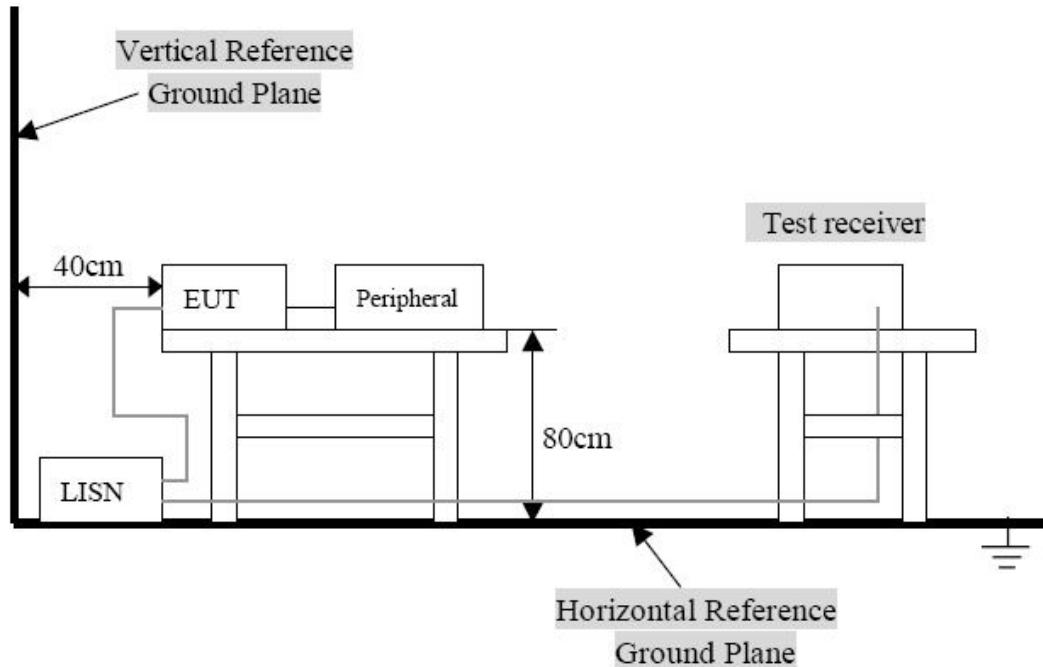

Remark:

1. The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC 15.207 limits.
2. The EUT is excluded from investigation of Disturbance Voltage at The Mains Terminals, for it is powered by DC 3V (2 x1.5VAA alkaline) battery. According to the Section 15.207(d), measurement to demonstrate compliance with the limits of Disturbance Voltage at The Mains Terminals are not required to the devices which only employed battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

5- RADIATED EMISSIONS

5.1 Limit of Radiated Emissions

Limit of Field Strength of Fundamental Emissions (FCC 47CFR 15.227):

Frequency Range (MHz)	Field Strength of Fundamental Emission (Peak) (μ V/m)	Field Strength of Fundamental Emission (Average) (μ V/m)
26.96-27.28	100,000 μ V/m (100dB μ V/m)	10,000 μ V/m (80dB μ V/m)

Limits of Spurious Emissions (FCC 47 CFR 15.209 Class B):

Frequency (MHz)	Distance (Meters)	Field Strengths Limits (dB μ V/m)
30 ~ 88	3	40
88~216	3	43.5
216 ~ 960	3	46
960 ~ 1000	3	54

Note: (1) The tighter limit shall apply at the edge between two frequency bands.

(2) The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

5.2 Test Equipment Used

Equipment	Manufacturer	Model No.	Last Cal	Calibration Period
EMI Test Receiver	ROHDE & SCHWARZ	ESI 26	2006/11	1 year
Loop Antenna	ROHDE & SCHWARZ	HFH2-Z2	2006/11	1 year
Ultra-Broadband Antenna	ROHDE & SCHWARZ	HL562	2006/11	1 year
RF Test Panel	ROHDE & SCHWARZ	TS / RSP	N/A	N/A
Turntable	ETS	2088	N/A	N/A
Antenna Mast	ETS	2075	N/A	N/A
RF Test Panel	R/S	TS / RSP	N/A	N/A

5.3 EUT Setup

Radiated Measurement Setup

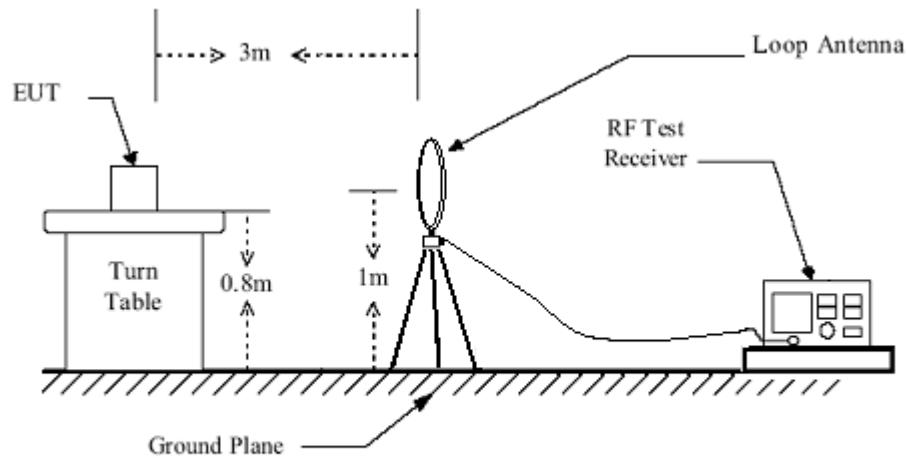


Figure 2 : Frequencies measured below 30 MHz configuration

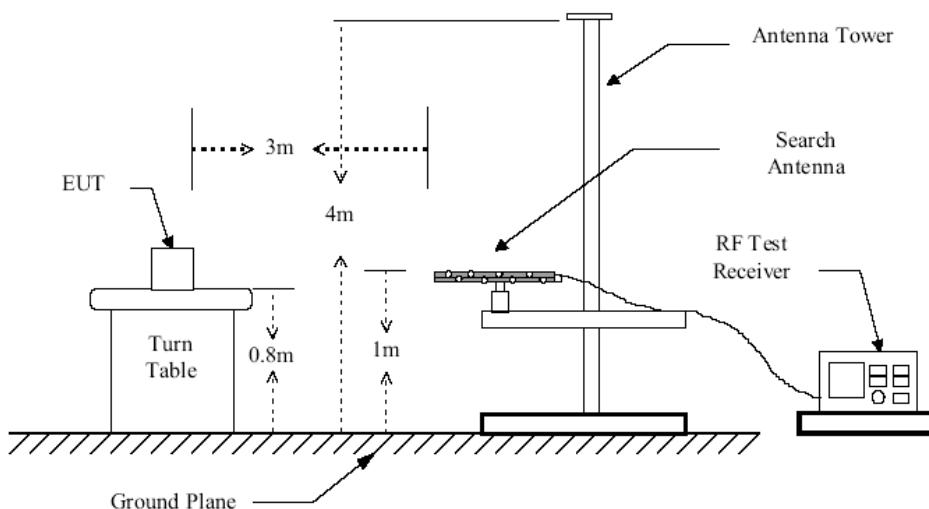


Figure 1 : Frequencies measured below 1 GHz configuration

5.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

- 1). Configure the EUT according to ANSI C63.4:2003.
- 2). The EUT was placed on the top of the turntable 0.8 meter above ground.
- 3). The receiving antenna was placed 3 meters far away from the turntable.
- 4). The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 5). For Spurious Emissions test, The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization. For each suspected emission, the antenna tower was scanned (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 6). For Field Strength of Fundamental Emissions test, Positioned the loop antenna with its plane vertical at the specified distance of 3 meters between its center and the EUT. The center of the loop antenna is set with 1m above the grounded plane. Then rotated about its vertical axis for finding out the maximum emission level of the EUT.

5.5 Test Result

Temperature (°C) : 22~23	EUT: Wireless Optical Mouse		
Humidity (%RH): 50~54	M/N: TCM1212/1216		
Barometric Pressure (mbar): 950~1000	Operation Condition: Continuous Transmitting		

Fundamental Emission Test Data

Test Frequency (MHz)	Peak Measurement				
	Measuring Level (dB μ V/m)		Limits (dB μ V/m)	Margin (dB)	
	Vertical	Horizontal		Vertical	Horizontal
27.0472	76.1	69.8	100	23.9	30.2
Average Measurement					
27.0472	74.5	68.2	80	5.5	11.8

Remark: Duty Cycle Correction

Each function key sends a different series of characters, but each packet period (8 msec) never exceeds a series of 2 long (0.43 msec) and 6 medium (0.40 msec) and 13 short (0.26 msec) pulses. Assuming any combination of short, medium and long pulses may be obtained due to encoding the worst case transmit duty cycle would be considered $2 \times 0.43 \text{ msec} + 6 \times 0.40 \text{ msec} + 13 \times 0.26 \text{ msec} = 83\% \text{ duty cycle}$.

Duty Cycle Correction = $20\log(0.83) = -5.51\text{dB}$



The following figures show the characteristics of the pulse train for one of these functions.



So, the Vertical Radiation(average)= $76.1+20*\log(0.83)=74.5(\text{dB}\mu\text{V}/\text{m})$

Horizontal Radiation(average) = $69.8+20*\log(0.83)=68.2(\text{dB}\mu\text{V}/\text{m})$

The following Figures show the characteristics of the pulse train for one of these functions.

Result: The field strength of any emission within the operation band did not exceed $80(\text{dB}\mu\text{V}/\text{m})$ for average value or $100 \text{ dB}(\text{dB}\mu\text{V}/\text{m})$ for peak value.

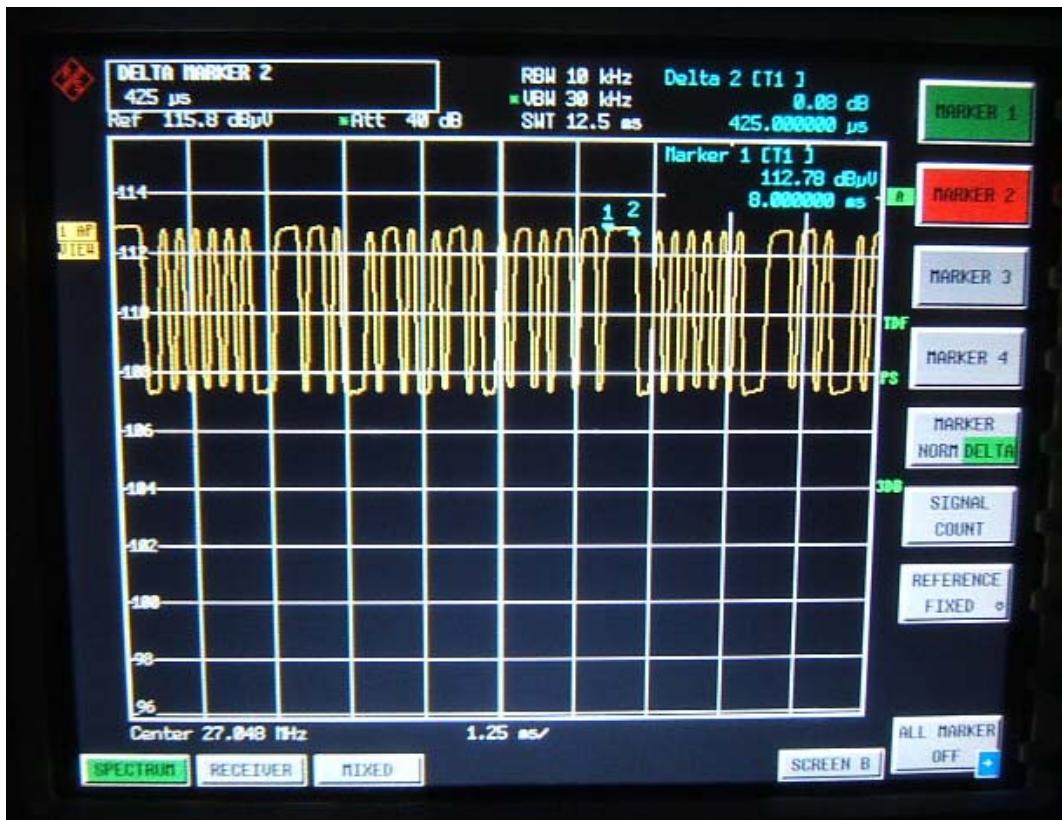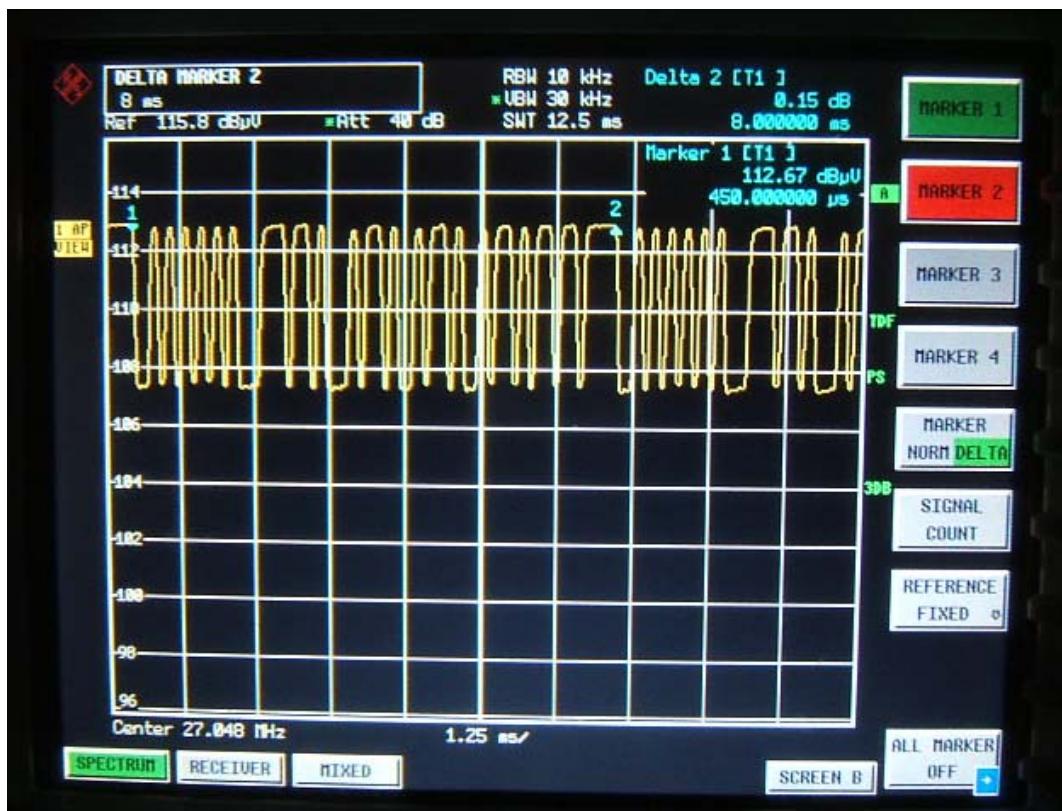

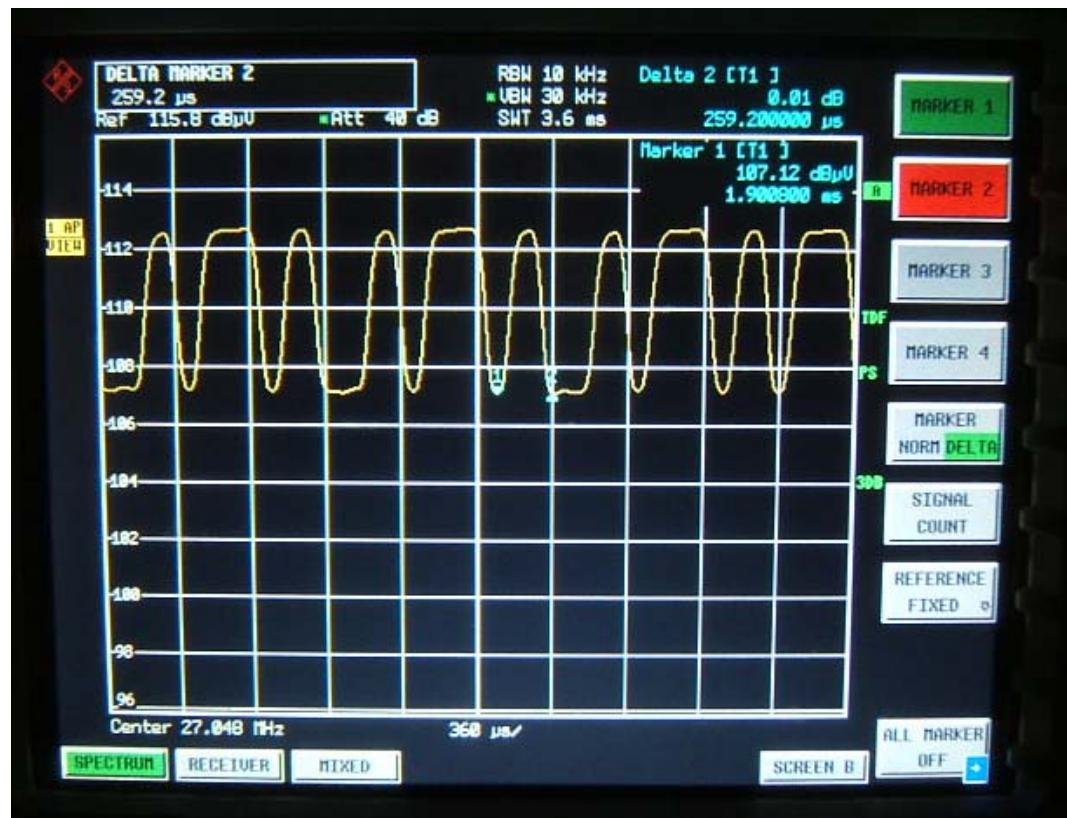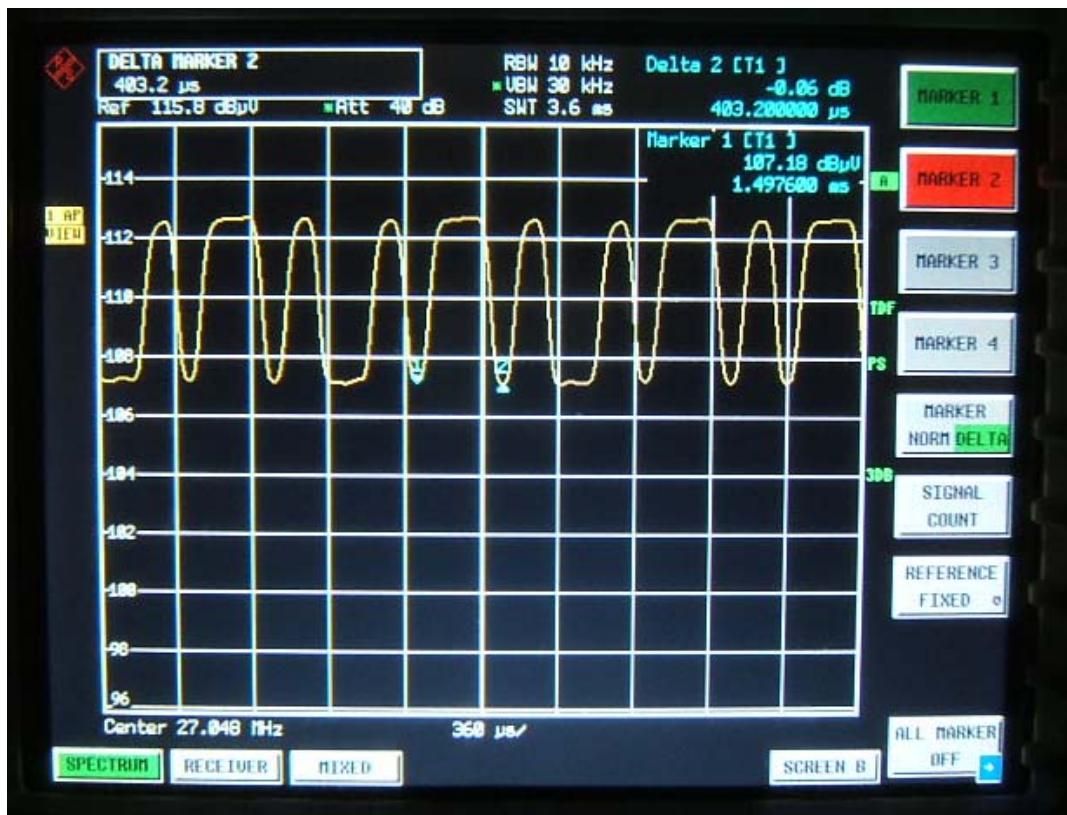


Harmonics & Spurious Emission

RADIATED EMISSION TEST DATA

EUT: Wireless Optical Mouse
Operating Condition: Continuous Transmitting
Test Site: 3m CHAMBER
Operator: Jimmy
Test Specification: DC 3V
Comment: Polarisation:H
Start of Test: 02/15/07 / 10:29:17AM

SWEEP TABLE: "test (30M-1G)"

Start Frequency	Stop Frequency	Detector	Meas.	IF Time	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	120 kHz	HL562new

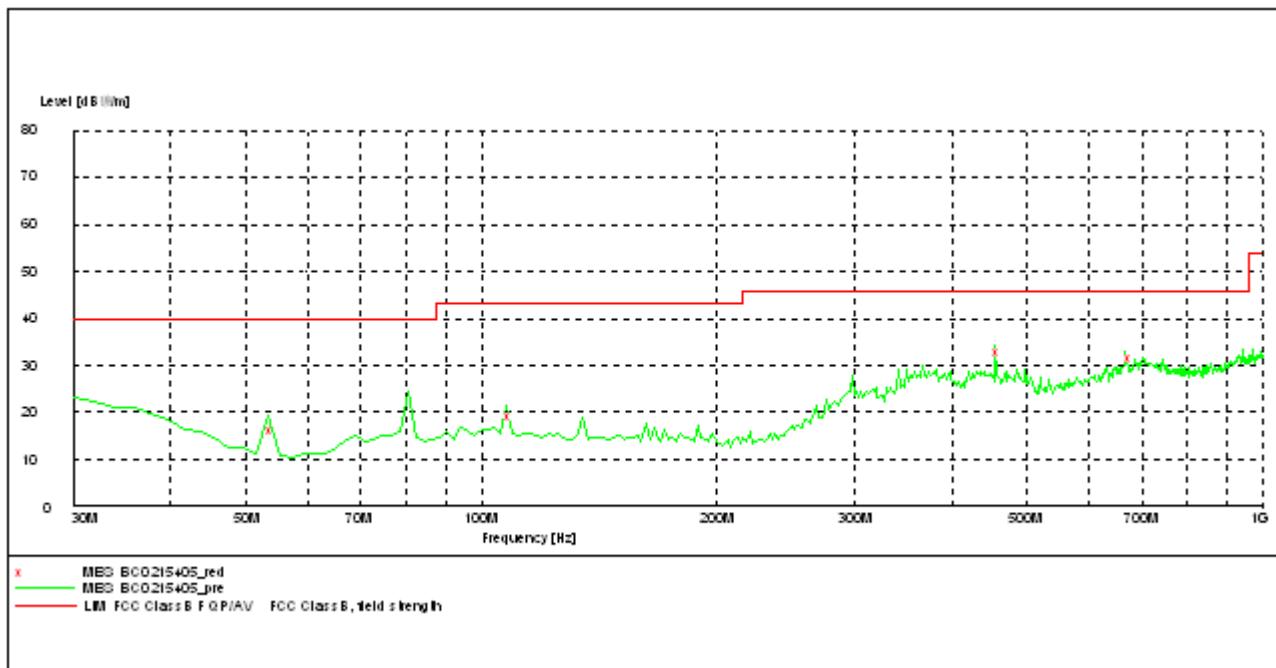

MEASUREMENT RESULT: "BC0215405_red QP"

02/15/07 10:34AM

Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
53.326653	17.20	12.3	53.0	35.8	QP	160.0	179.00	HORIZONTAL
107.755511	19.75	11.7	53.0	33.2	QP	160.0	179.00	HORIZONTAL
455.711423	32.60	20.2	71.0	38.4	QP	150.0	135.00	HORIZONTAL
675.398798	30.97	26.2	53.0	22.0	QP	150.0	99.00	HORIZONTAL


Harmonics & Spurious Emission

RADIATED EMISSION TEST DATA

EUT: Wireless Optical Mouse
Operating Condition: Continuous Transmitting
Test Site: 3m CHAMBER
Operator: Jimmy
Test Specification: DC 3V
Comment: Polarisation:V
Start of Test: 02/15/07 / 10:21:46AM

SWEEP TABLE: "test (30M-1G)"

Start Frequency	Stop Frequency	Detector	Meas.	IF Time	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	120 kHz	HL562new

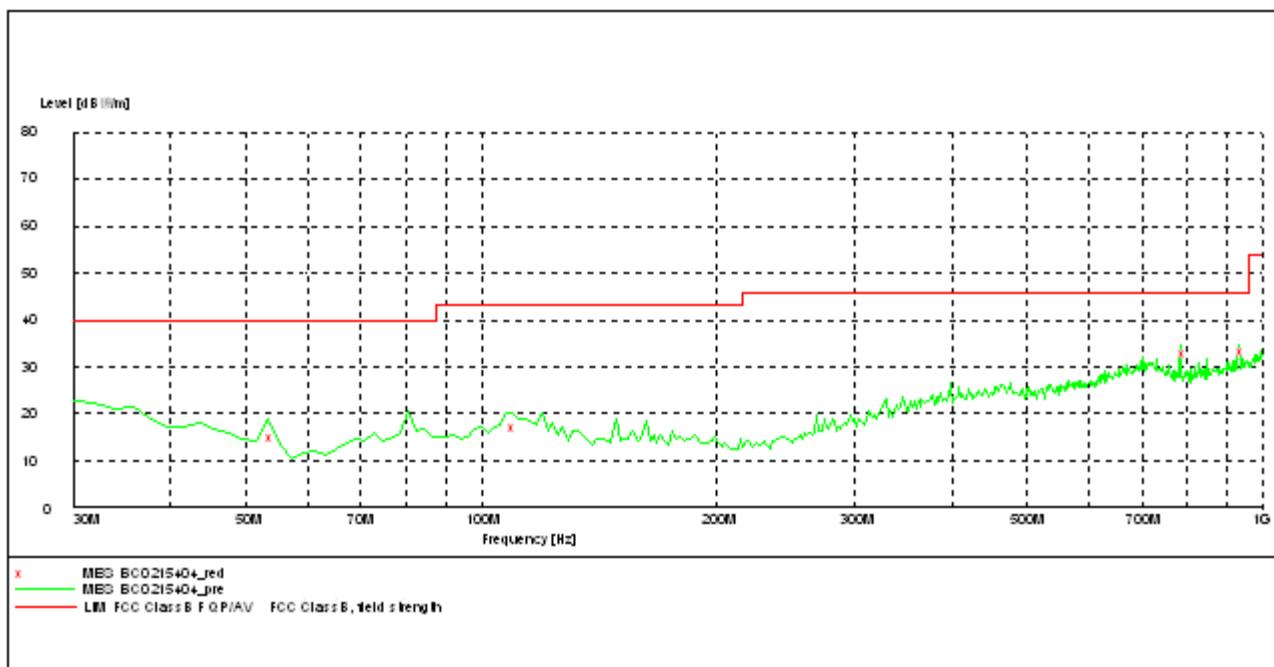

MEASUREMENT RESULT: "BC0215404_red QP"

02/15/07 10:26AM

Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
53.326653	15.13	8.3	53.0	37.9	QP	160.0	180.00	VERTICAL
107.755511	17.95	11.7	53.0	35.0	QP	160.0	180.00	VERTICAL
784.228457	32.70	24.1	53.0	20.3	QP	210.0	82.00	VERTICAL
933.907816	33.68	26.1	71.0	37.3	QP	210.0	242.00	VERTICAL

6- EMISSIONS WITHIN BAND EDGES

6.1 Limit of Emissions within Band Edges

According to the section 15.227 of FCC Part 15 Subpart C, The field strength of any emission within this band shall not exceed 10,000 microvolts/ meter at 3 meter. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.

6.2 Test Equipment Used

Equipment	Manufacturer	Model No.	Last Cal	Calibration Period
Loop Antenna	ROHDE & SCHWARZ	HFH2-Z2	2006/11	1 year
Spectrum Analyzer	ADVANTEST	R3263	2006/8	1 year
EMI Test Receiver	ROHDE & SCHWARZ	ESI 26	2006/11	1 year
RF Test Panel	ROHDE & SCHWARZ	TS / RSP	N/A	N/A
Turntable	ETS	2088	N/A	N/A
Antenna Mast	ETS	2075	N/A	N/A

6.3 Test Procedure

Positioned the loop antenna with its plane vertical at the specified distance of 3 meters between its center and the EUT. The center of the loop antenna is set with 1m above the grounded plane. Then rotated about its vertical axis for finding out the maximum emission level of the EUT. (Details refer to the relevant sections of the standard ANSI C63.4-2003 'Methods of Measurement of Radio Noise Emissions from Low –Voltage Electrical and Electronic Equipment in the Range of 9KHz to 40GHz'.)

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

6.4 Emissions within Band Edges Test Result

Temperature (°C) : 22~23	EUT: Wireless Optical Mouse
Humidity (%RH) : 50~54	M/N: TCM1212/1216
Barometric Pressure (mbar) : 950~1000	Operation Condition: Continuous Transmitting

Test plots see following:

