

# ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

Test Report No. : OT-18O-RWD-009  
AGR No. : A188A-406  
Applicant : BLUECOM Co., Ltd.  
Address : 116, Venture-ro, Yeonsu-gu, Incheon, Korea  
Manufacturer : BLUECOM Co., Ltd.  
Address : 116, Venture-ro, Yeonsu-gu, Incheon, Korea  
Type of Equipment : Bluetooth Headset  
FCC ID. : U3WBCS200  
Model Name : BCS-200  
Multiple Model Name: BCS-100  
Serial number : N/A  
Total page of Report : 88 pages (including this page)  
Date of Incoming : August 28, 2018  
Date of issue : October 04, 2018

## SUMMARY

The equipment complies with the regulation; *FCC PART 15 SUBPART C Section 15.247*

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.

Reviewed by:



Jae-Ho Lee / Chief Engineer  
ONETECH Corp.

Approved by:



Keun-Young, Choi / Vice President  
ONETECH Corp.

## CONTENTS

	<b>PAGE</b>
<b>1. VERIFICATION OF COMPLIANCE .....</b>	<b>6</b>
<b>2. TEST SUMMARY .....</b>	<b>7</b>
<b>2.1 TEST ITEMS AND RESULTS .....</b>	<b>7</b>
<b>2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS .....</b>	<b>7</b>
<b>2.3 RELATED SUBMITTAL(S) / GRANT(S) .....</b>	<b>7</b>
<b>2.4 PURPOSE OF THE TEST .....</b>	<b>7</b>
<b>2.5 TEST METHODOLOGY .....</b>	<b>7</b>
<b>2.6 TEST FACILITY .....</b>	<b>8</b>
<b>3. GENERAL INFORMATION .....</b>	<b>9</b>
<b>3.1 PRODUCT DESCRIPTION .....</b>	<b>9</b>
<b>3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT .....</b>	<b>9</b>
<b>4. EUT MODIFICATIONS .....</b>	<b>9</b>
<b>5. SYSTEM TEST CONFIGURATION .....</b>	<b>10</b>
<b>5.1 JUSTIFICATION .....</b>	<b>10</b>
<b>5.2 PERIPHERAL EQUIPMENT .....</b>	<b>10</b>
<b>5.3 MODE OF OPERATION DURING THE TEST .....</b>	<b>11</b>
<b>5.4 CONFIGURATION OF TEST SYSTEM .....</b>	<b>11</b>
<b>5.5 ANTENNA REQUIREMENT .....</b>	<b>11</b>
<b>6. PRELIMINARY TEST .....</b>	<b>12</b>
<b>6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS .....</b>	<b>12</b>
<b>6.2 GENERAL RADIATED EMISSIONS TESTS .....</b>	<b>12</b>
<b>7. MINIMUM 20 DB BANDWIDTH .....</b>	<b>13</b>
<b>7.1 OPERATING ENVIRONMENT .....</b>	<b>13</b>
<b>7.2 TEST SET-UP .....</b>	<b>13</b>
<b>7.3 TEST EQUIPMENT USED .....</b>	<b>13</b>
<b>7.4 TEST DATA FOR 1 MBPS .....</b>	<b>14</b>
<b>7.5 TEST DATA FOR 2 MBPS .....</b>	<b>16</b>
<b>7.6 TEST DATA FOR 3 MBPS .....</b>	<b>18</b>
<b>8. HOPPING FREQUENCY SEPARATION .....</b>	<b>20</b>
<b>8.1 OPERATING ENVIRONMENT .....</b>	<b>20</b>
<b>8.2 TEST SET-UP .....</b>	<b>20</b>
<b>8.3 TEST EQUIPMENT USED .....</b>	<b>20</b>

8.4 TEST DATA FOR 1 MBPS .....	21
8.5 TEST DATA FOR 2 MBPS .....	22
8.6 TEST DATA FOR 3 MBPS .....	23
<b>9. NUMBER OF HOPPING CHANNELS .....</b>	<b>24</b>
9.1 OPERATING ENVIRONMENT .....	24
9.2 TEST SET-UP .....	24
9.3 TEST EQUIPMENT USED .....	24
9.4 TEST DATA FOR 1 MBPS .....	25
9.5 TEST DATA FOR 2 MBPS .....	28
9.6 TEST DATA FOR 3 MBPS .....	31
<b>10. TIME OF OCCUPANCY .....</b>	<b>34</b>
10.1 OPERATING ENVIRONMENT .....	34
10.2 TEST SET-UP .....	34
10.3 TEST EQUIPMENT USED .....	34
10.4 TEST DATA FOR 1 MBPS .....	35
10.5 TEST DATA FOR 2 MBPS .....	38
10.6 TEST DATA FOR 3 MBPS .....	41
<b>11. MAXIMUM PEAK OUTPUT POWER .....</b>	<b>44</b>
11.1 OPERATING ENVIRONMENT .....	44
11.2 TEST SET-UP .....	44
11.3 TEST EQUIPMENT USED .....	44
11.4 TEST DATA FOR 1 MBPS .....	45
11.5 TEST DATA FOR 2 MBPS .....	48
11.6 TEST DATA FOR 3 MBPS .....	51
<b>12. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND .....</b>	<b>54</b>
12.1 OPERATING ENVIRONMENT .....	54
12.2 TEST SET-UP FOR CONDUCTED MEASUREMENT .....	54
12.3 TEST SET-UP FOR RADIATED MEASUREMENT .....	54
12.4 TEST EQUIPMENT USED .....	54
12.5 TEST DATA FOR CONDUCTED EMISSION .....	55
12.5.1 Test data for 1 Mbps .....	55
12.5.2 Test data for 2 Mbps .....	61
12.5.3 Test data for 3 Mbps .....	67
12.6 TEST DATA FOR TRANSMITTING MODE RADIATED EMISSION .....	73
12.6.1 Radiated Emission which fall in the Restricted Band .....	73
12.6.2 Spurious & Harmonic Radiated Emission above 1 GHz .....	76

*12.6.3 Spurious Radiated Emission* ..... 79

**13. CONDUCTED EMISSION TEST** ..... **84**

**13.1 OPERATING ENVIRONMENT** ..... 84

**13.2 TEST SET-UP** ..... 84

**13.3 TEST EQUIPMENT USED** ..... 84

**13.4 TEST DATA FOR CHARGING MODE** ..... 85

### Revision History

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-18O-RWD-009	October 04, 2018	Initial Issue	All

## 1. VERIFICATION OF COMPLIANCE

APPLICANT : BLUECOM Co., Ltd.  
 ADDRESS : 116, Venture-ro, Yeonsu-gu, Incheon, Korea  
 CONTACT PERSON : Ki-eok Park / Principal Engineer  
 TELEPHONE NO : 82-32-8100-582  
 FCC ID : U3WBCS200  
 MODEL NAME : BCS-200  
 SERIAL NUMBER : N/A  
 DATE : October 04, 2018

EQUIPMENT CLASS	<b><i>DSS – PART 15 SPREAD SPECTRUM TRANSMITTER</i></b>
KIND OF EQUIPMENT	Bluetooth Headset
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	None
FINAL TEST WAS CONDUCTED ON	3 m Semi Anechoic Chamber

- The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

## 2. TEST SUMMARY

### 2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (1)	Carrier Frequency Separation	Met the Limit / PASS
15.247 (a) (1) (iii)	Minimum Number of Hopping Channels	Met the Limit / PASS
15.247 (a) (1) (iii)	Average Time of Occupancy	Met the Limit / PASS
15.247 (b) (1)	Maximum Peak Conducted Output Power	Met the Limit / PASS
15.247 (d)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (d)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.209	Radiated Emission Limits, General Requirement	Met the Limit / PASS
15.207	Conducted Limits	Met the Limit / PASS
15.203	Antenna Requirement	Met requirement / PASS

### 2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

### 2.3 Related Submittal(s) / Grant(s)

Original submittal only

### 2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247

### 2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

## 2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea

- Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-4112/ C-14617/ G-10666 / T-1842

IC (Industry Canada) – Registration No. Site# 3736A-3

- Site Accreditation:

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

### 3. GENERAL INFORMATION

#### 3.1 Product Description

The BLUECOM Co., Ltd., Model BCS-200 (referred to as the EUT in this report) is a Bluetooth Headset. The product specification described herein was obtained from product data sheet or user’s manual.

DEVICE TYPE	Bluetooth Headset	
OPERATING FREQUENCY	2 402 MHz ~ 2 480 MHz	
RF OUTPUT POWER	1 Mbps	5.84 dBm
	2 Mbps	5.66 dBm
	3 Mbps	5.85 dBm
NUMBER OF CHANNEL	79 Channels	
MODULATION TYPE	GFSK for 1 Mbps, $\pi/4$ -DQPSK for 2 Mbps, 8-DPSK for 3Mbps	
ANTENNA TYPE	FPCB Antenna	
ANTENNA GAIN	5.07 dBi	
LIST OF EACH OSC. OR CRYSTAL. FREQ.(FREQ.>=1 MHz)	16 MHz	
RATED SUPPLY VOLTAGE	DC 3.7 V	

#### 3.2 Alternative type(s)/model(s); also covered by this test report.

- The following lists consist of the added model and their differences.

Model Name	Differences	Tested
BCS-200	Basic Model	<input checked="" type="checkbox"/>
BCS-100	This model is multiple model due to differences in appearance from basic model.	<input type="checkbox"/>

### 4. EUT MODIFICATIONS

- None

## 5. SYSTEM TEST CONFIGURATION

### 5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	N/A	N/A	N/A
Sub Board	N/A	N/A	N/A
Battery	N/A	N/A	N/A

### 5.2 Peripheral equipment

Model	Manufacturer	Description	Connected to
HP Pavilion g series	HP	Notebook PC	Notebook PC
Series PPP009L-E	LIE-ON TECHNOLOGY (CHANGZHOU)CO.,LTD.	AC Adapter	Notebook PC

### 5.3 Mode of operation during the test

For Bluetooth function testing, software used to control the EUT for staying in continuous transmitting and receiving mode is programmed. The EUT was set at Low Channel (2 402 MHz), Middle Channel (2 441 MHz), and High Channel (2 480 MHz) with each data transfer rate, 1 Mbps, 2 Mbps, and 3 Mbps. To get a maximum radiated emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XY” axis, but the worst data was recorded in this test report.

### 5.4 Configuration of Test System

**Line Conducted Test:** The EUT was tested in a Charging mode. The EUT was connected to USB and the power of USB was connected to Notebook PC. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions.

**Radiated Emission Test:** The EUT was tested in a Charging & Transmitting mode. Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 m Semi Anechoic Chamber.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

### 5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

**Antenna Construction:**

The transmitter antenna of the EUT is a FPCB Antenna, so no consideration of replacement by the user.

## 6. PRELIMINARY TEST

### 6.1 AC Power line Conducted Emissions Tests

During Preliminary Tests, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
Charging Mode	X

### 6.2 General Radiated Emissions Tests

During Preliminary Tests, the following operating modes were investigated

Operation Mode	The Worse operating condition (Please check one only)
Transmitting mode	X
Charging Mode	X


## 7. MINIMUM 20 DB BANDWIDTH

### 7.1 Operating environment

Temperature : 22 °C  
 Relative humidity : 47 % R.H.

### 7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 10 kHz, and peak detection was used. The 20 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 20 dB.



### 7.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV30	Rohde & Schwarz	Signal Analyzer	101200	Aug. 23, 2018 (1Y)


All test equipment used is calibrated on a regular basis.


**7.4 Test data for 1 Mbps**

- Test Date : September 17, 2018


CHANNEL	FREQUENCY (MHz)	20 dB Bandwidth (kHz)
Low	2 402	656.30
Middle	2 441	656.30
High	2 480	656.30

Tested by: Ju Yun Park / Assistant Manager

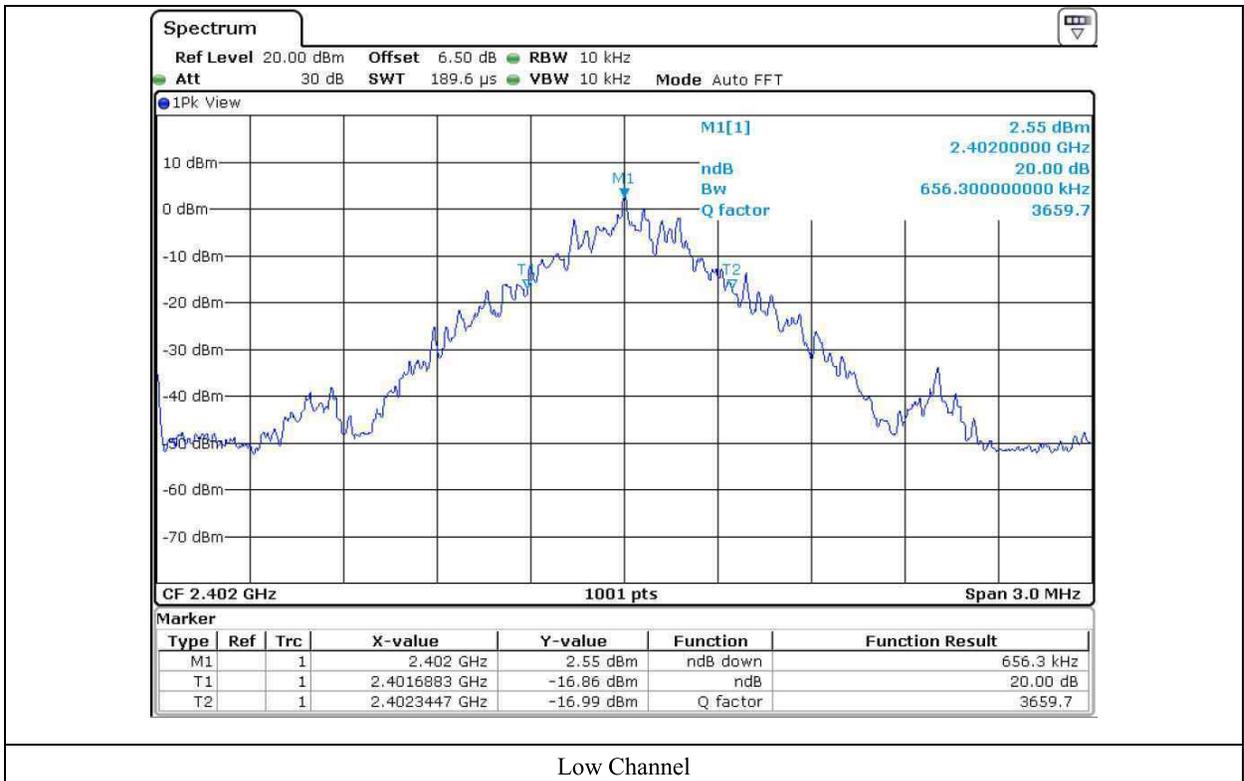

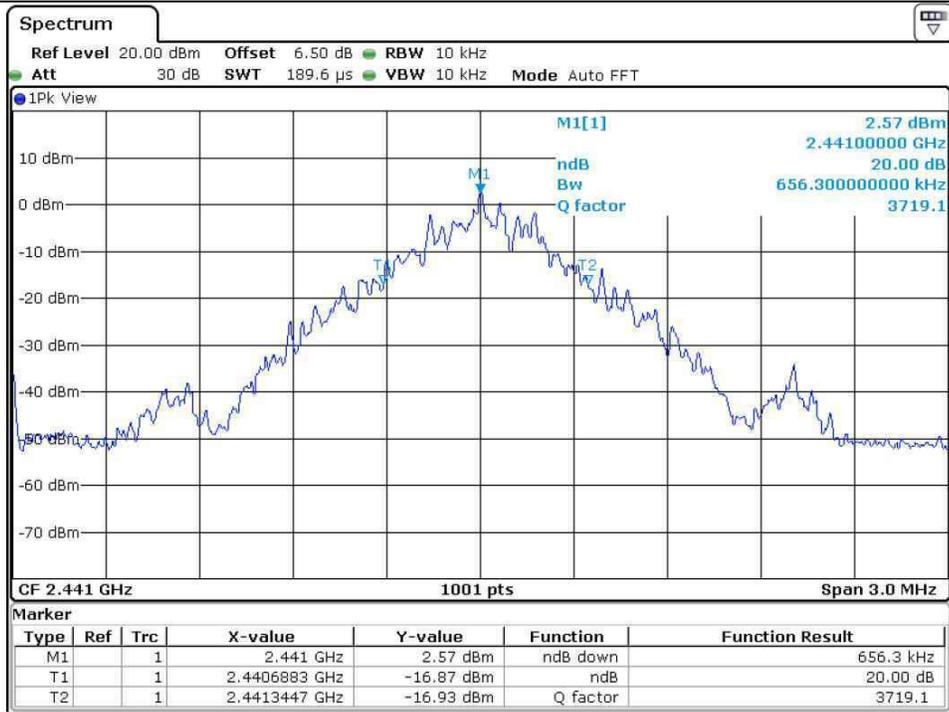

Middle Channel

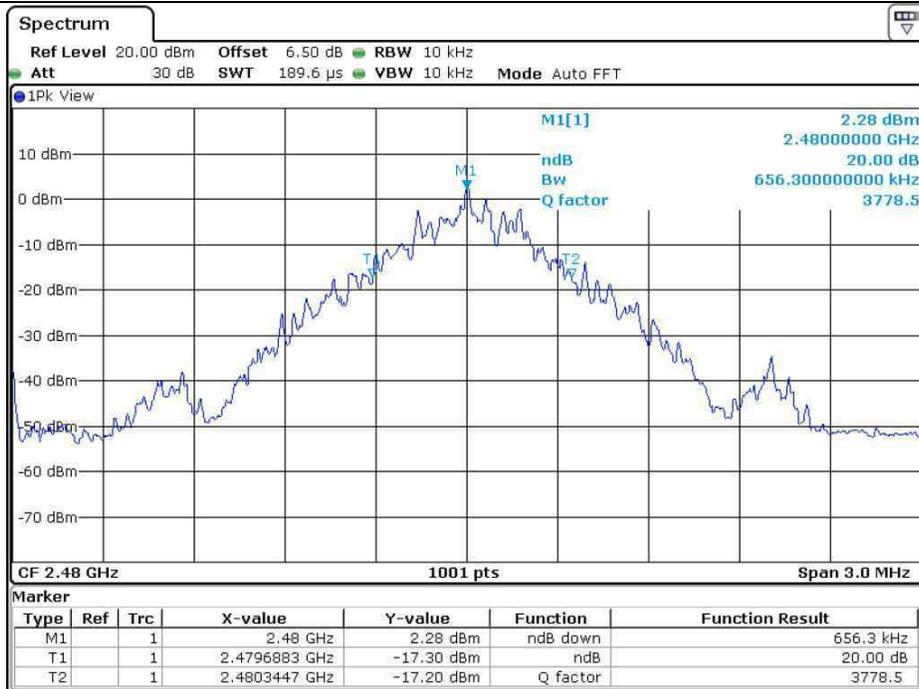


High Channel


### 7.5 Test data for 2 Mbps

- Test Date : September 17, 2018


CHANNEL	FREQUENCY (MHz)	20 dB Bandwidth (kHz)
Low	2 402	1134.90
Middle	2 441	1134.90
High	2 480	1134.90

Tested by: Ju Yun Park / Assistant Manager

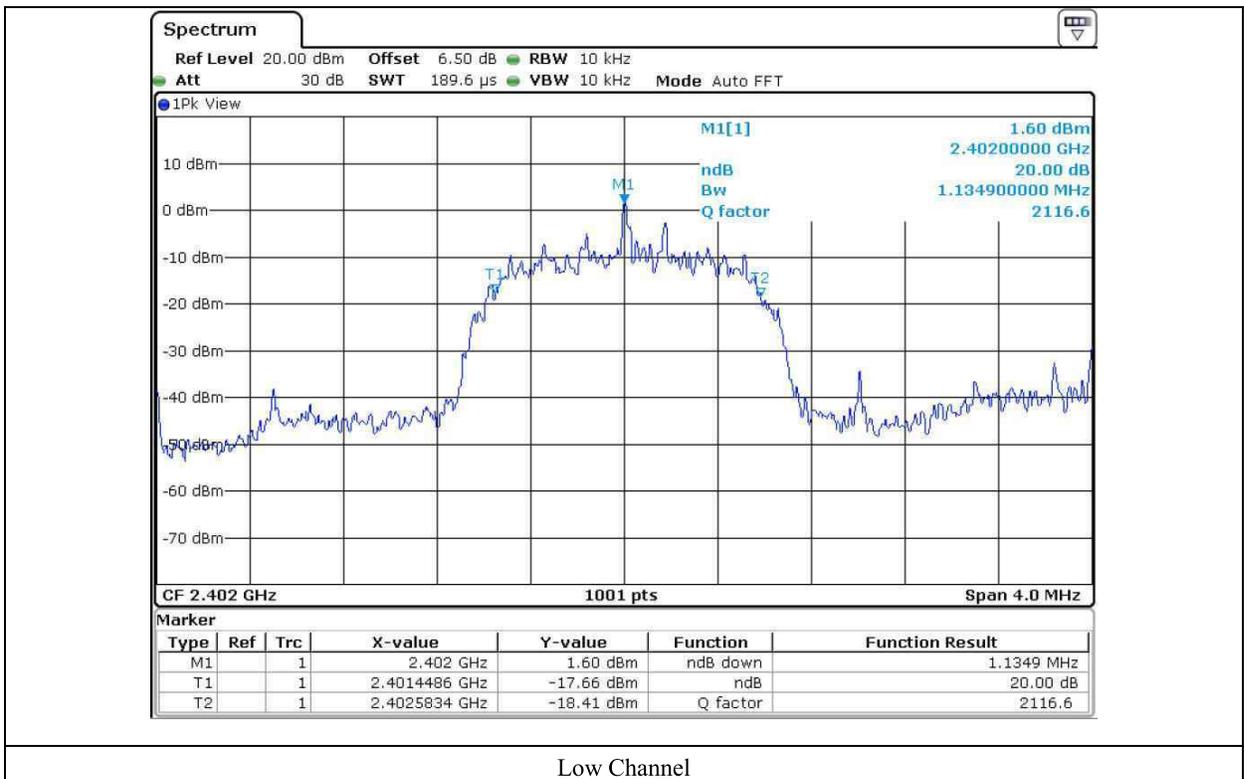

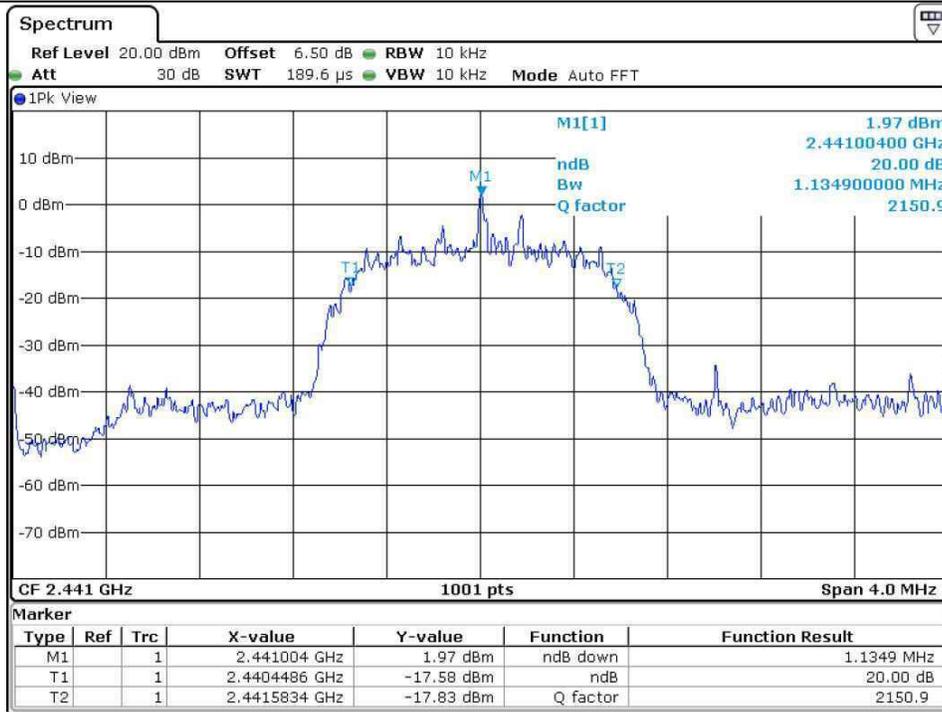

Middle Channel

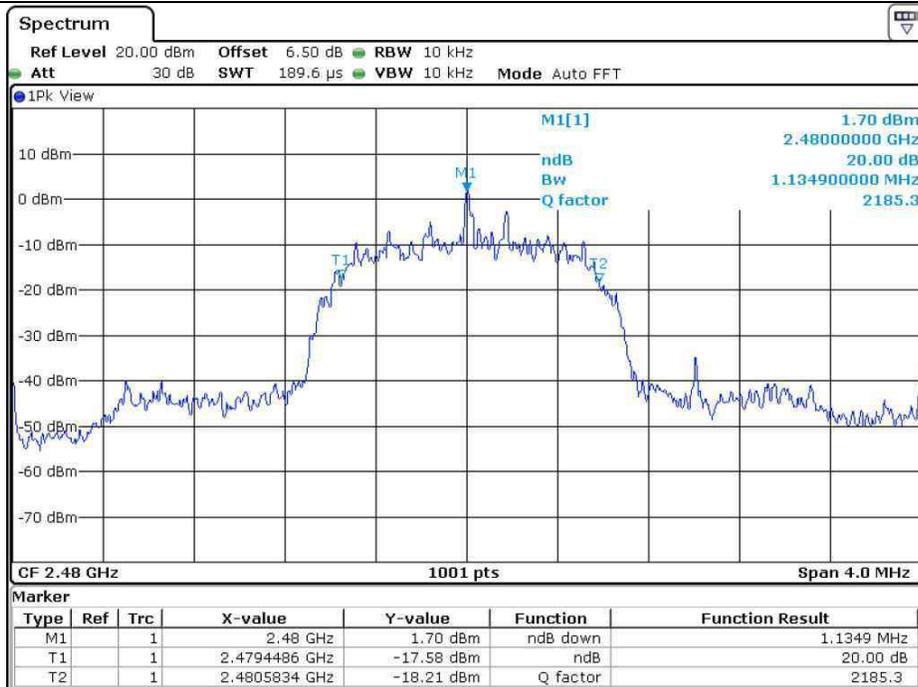


High Channel


### 7.6 Test data for 3 Mbps

- Test Date : September 17, 2018


CHANNEL	FREQUENCY (MHz)	20 dB Bandwidth (kHz)
Low	2 402	1146.90
Middle	2 441	1146.90
High	2 480	1146.90

Tested by: Ju Yun Park / Assistant Manager

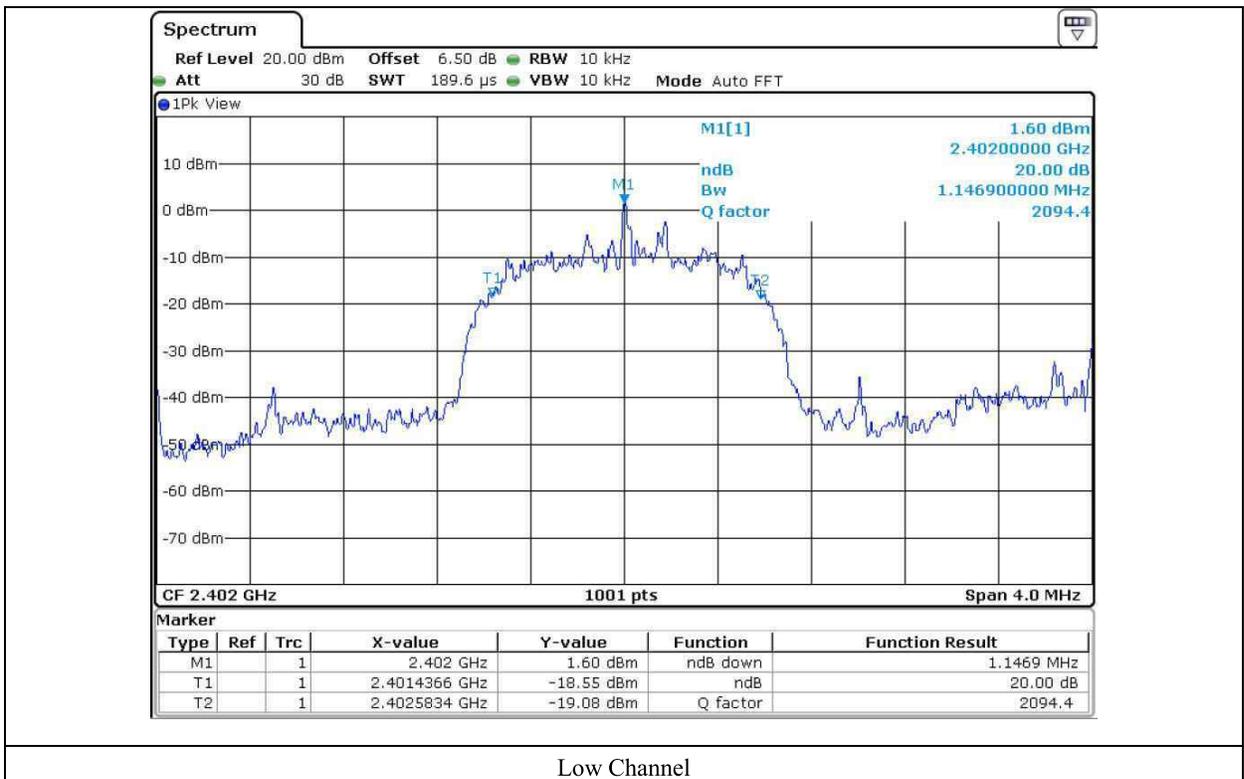

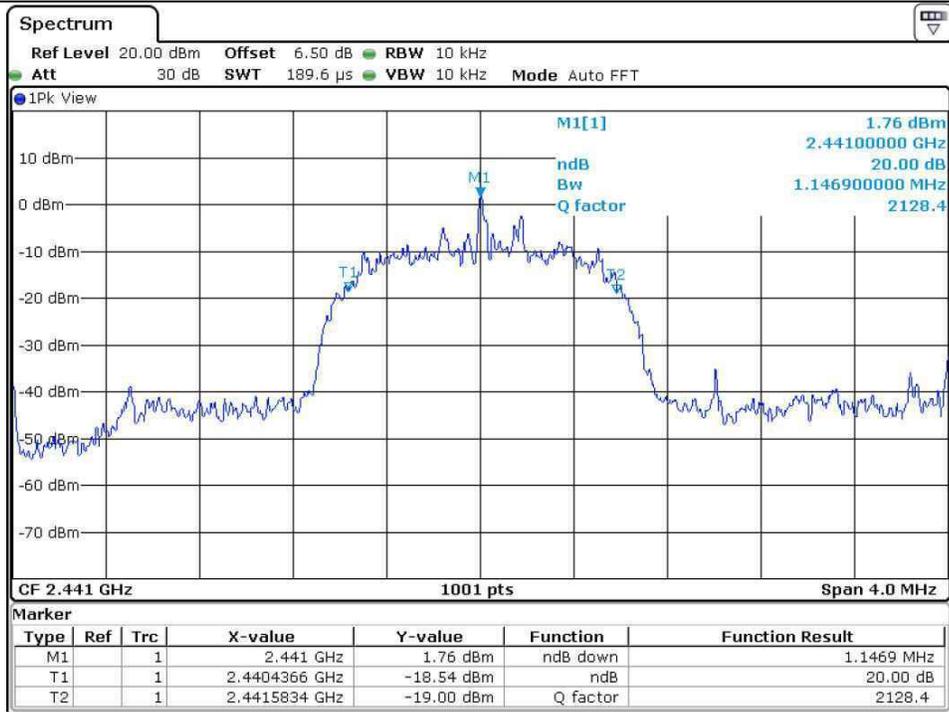

Middle Channel

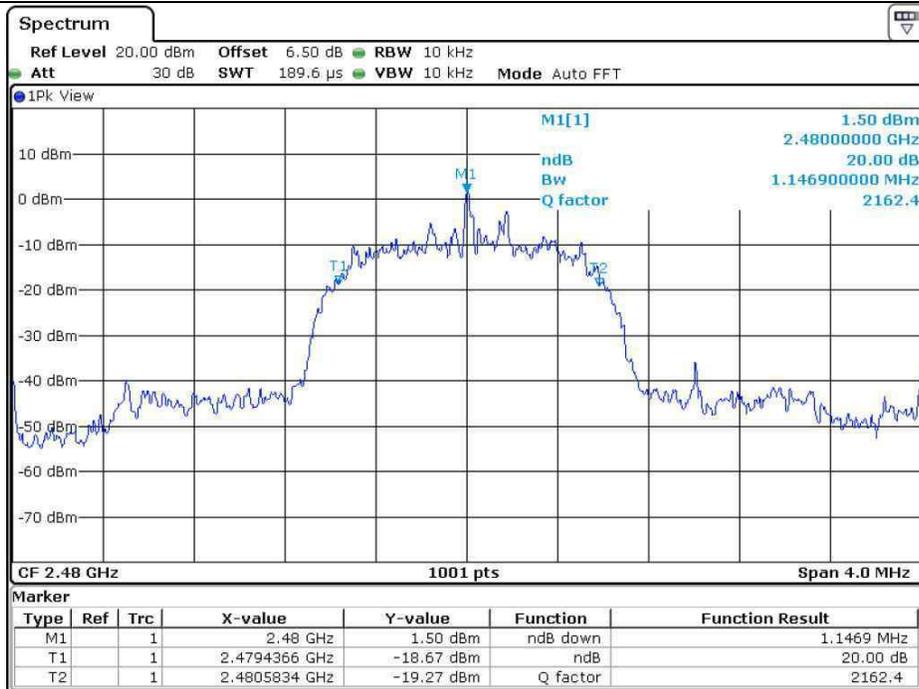

High Channel


## 8. HOPPING FREQUENCY SEPARATION

### 8.1 Operating environment

Temperature : 22 °C  
 Relative humidity : 47 % R.H.

### 8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The frequency span is set to 5 MHz. The analyzer is set to peak hold then a pseudo-random hopping sequence of the transmitter is captured. The mark delta function was used to measure the frequency separation between two adjacent hopping channels.



### 8.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV30	Rohde & Schwarz	Signal Analyzer	101200	Aug. 23, 2018 (1Y)


All test equipment used is calibrated on a regular basis.

### 8.4 Test data for 1 Mbps

- Test Date : September 17, 2018
- Test Result : Pass

MEASURED VLAUE (kHz)	Two-third of 20 dB Bandwidth (kHz)	LIMIT
999.00	437.53	Separated by a minimum of 25 kHz

Tested by: Ju Yun Park / Assistant Manager

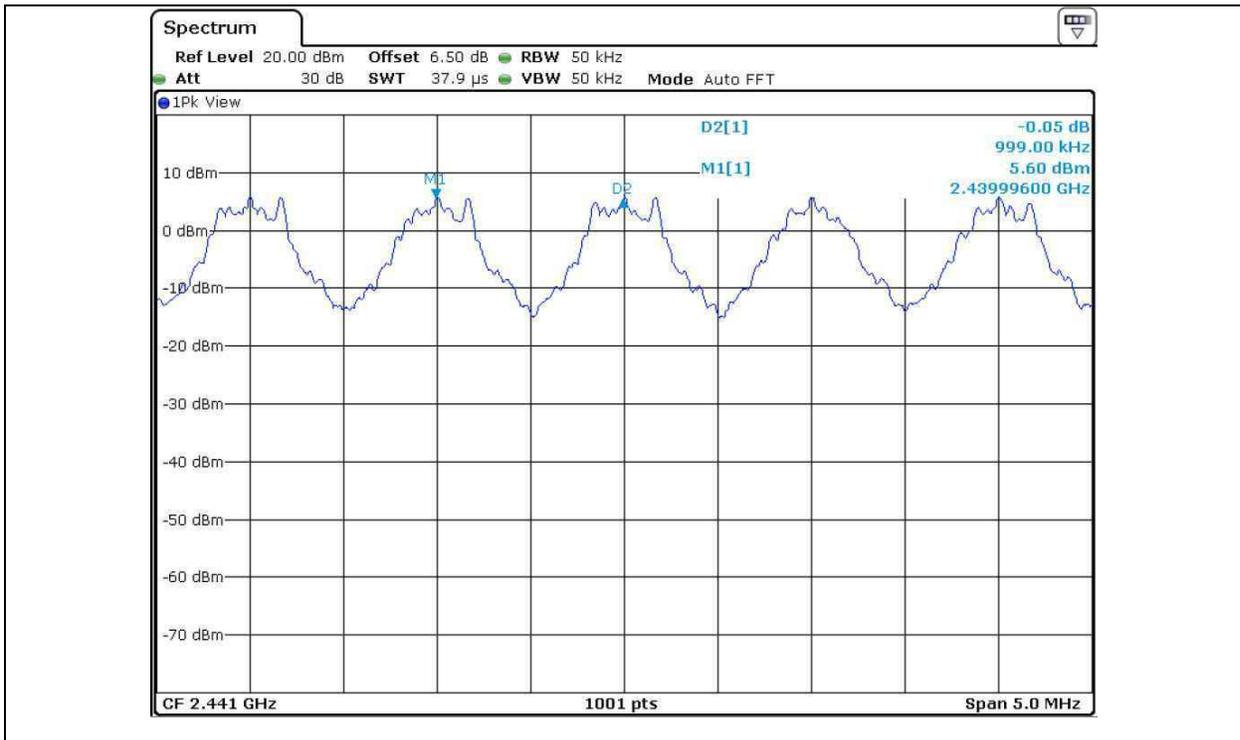




### 8.6 Test data for 3 Mbps

- Test Date : September 17, 2018
- Test Result : Pass

MEASURED VLAUE (kHz)	Two-third of 20 dB Bandwidth (kHz)	LIMIT
999.00	764.60	Separated by a minimum of 25 kHz

Tested by: Ju Yun Park / Assistant Manager

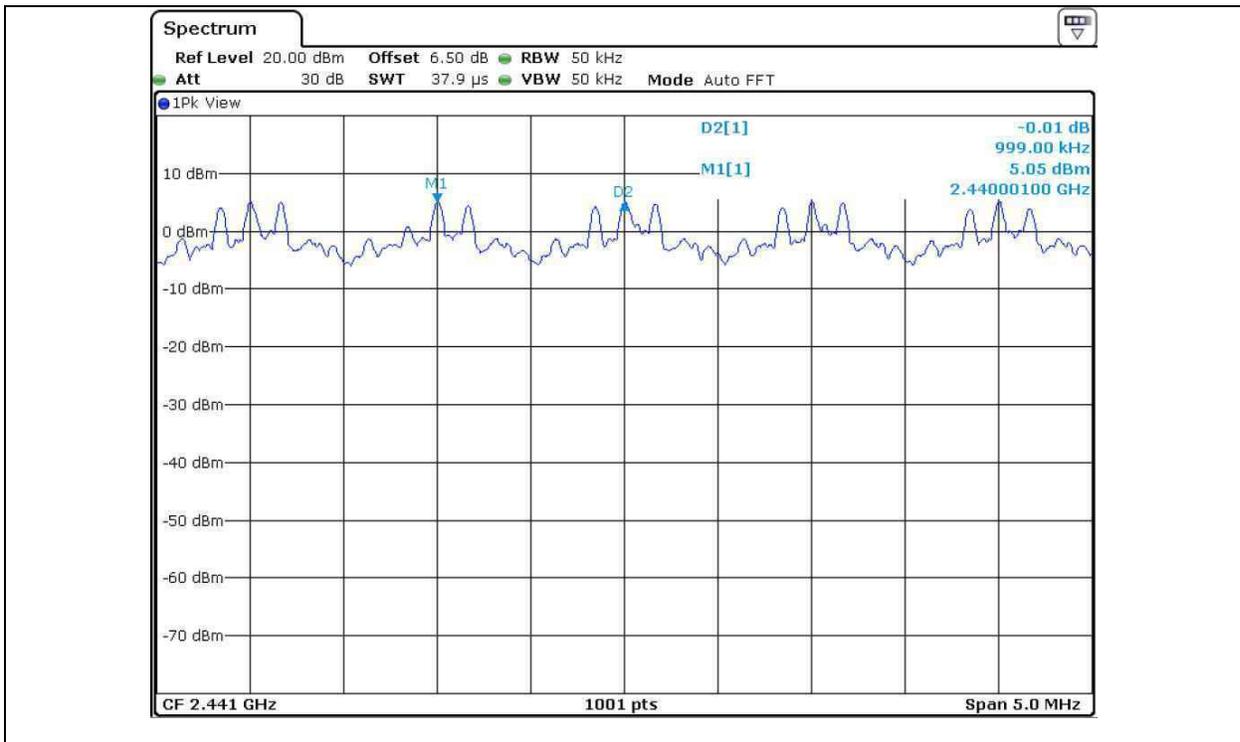


## 9. NUMBER OF HOPPING CHANNELS

### 9.1 Operating environment

Temperature : 22 °C  
 Relative humidity : 47 % R.H.

### 9.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The frequency span is set to frequency band of operation and the resolution bandwidth is set to 100 kHz. The analyzer is set to peak hold and then complete pseudo-random hopping sequence of the transmitter is captured.



### 9.3 Test equipment used

Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ - FSV30	Rohde & Schwarz	Signal Analyzer	101200	Aug. 23, 2018 (1Y)


All test equipment used is calibrated on a regular basis.


### 9.4 Test data for 1 Mbps

- Test Date : September 17, 2018
- Test Result : Pass


Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
1 Mbps	79	Minimum of 15	64

**Tested by: Ju Yun Park / Assistant Manager**

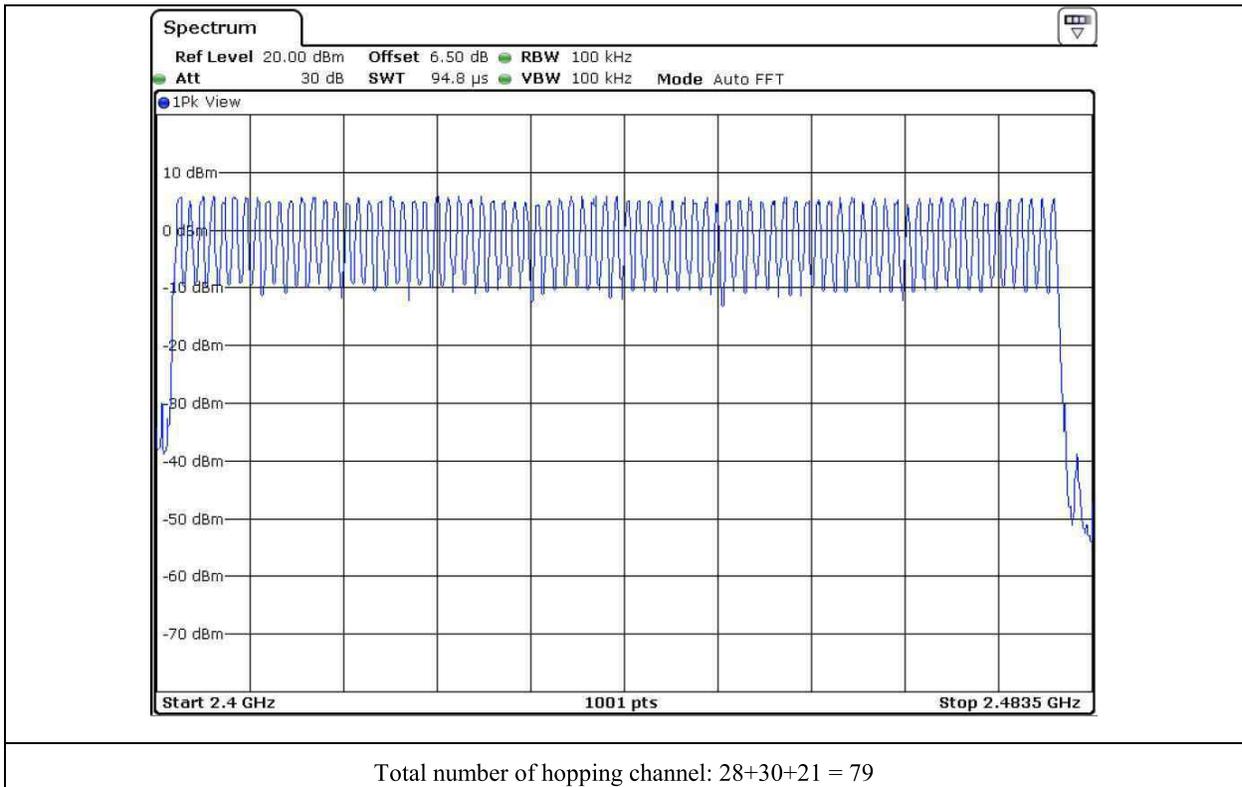


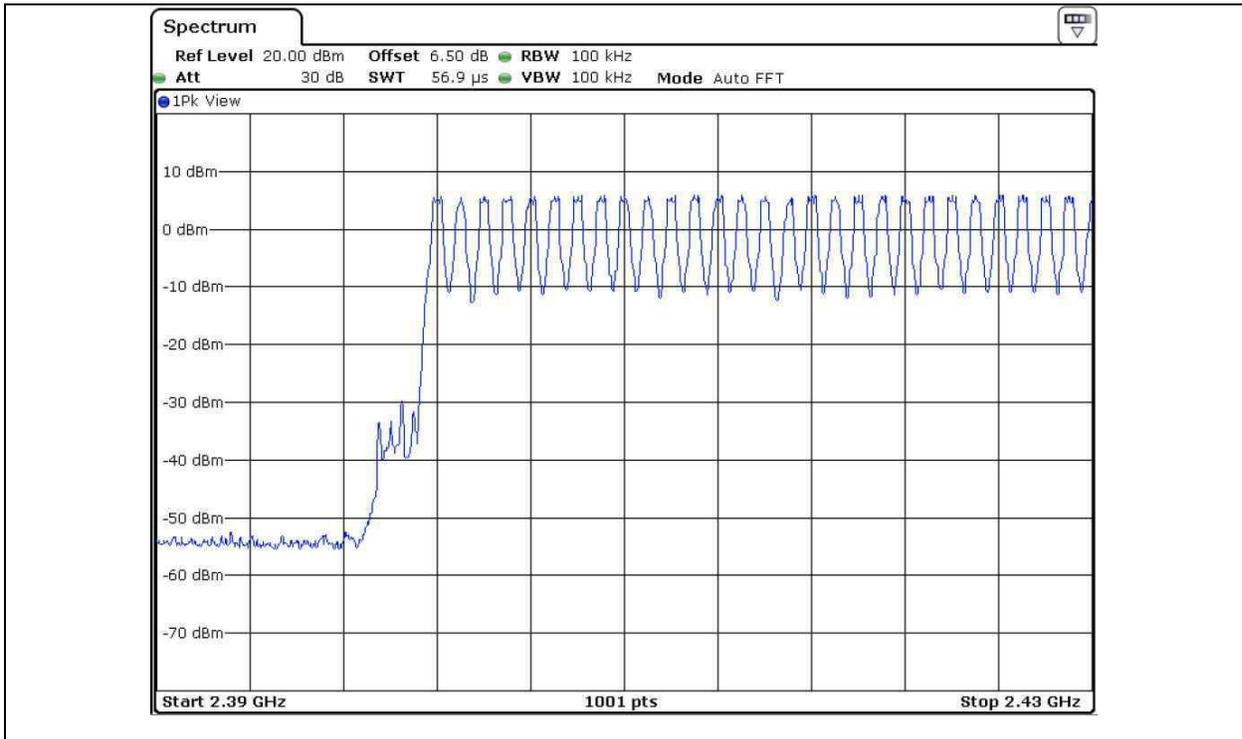

Number of hopping channel: 28

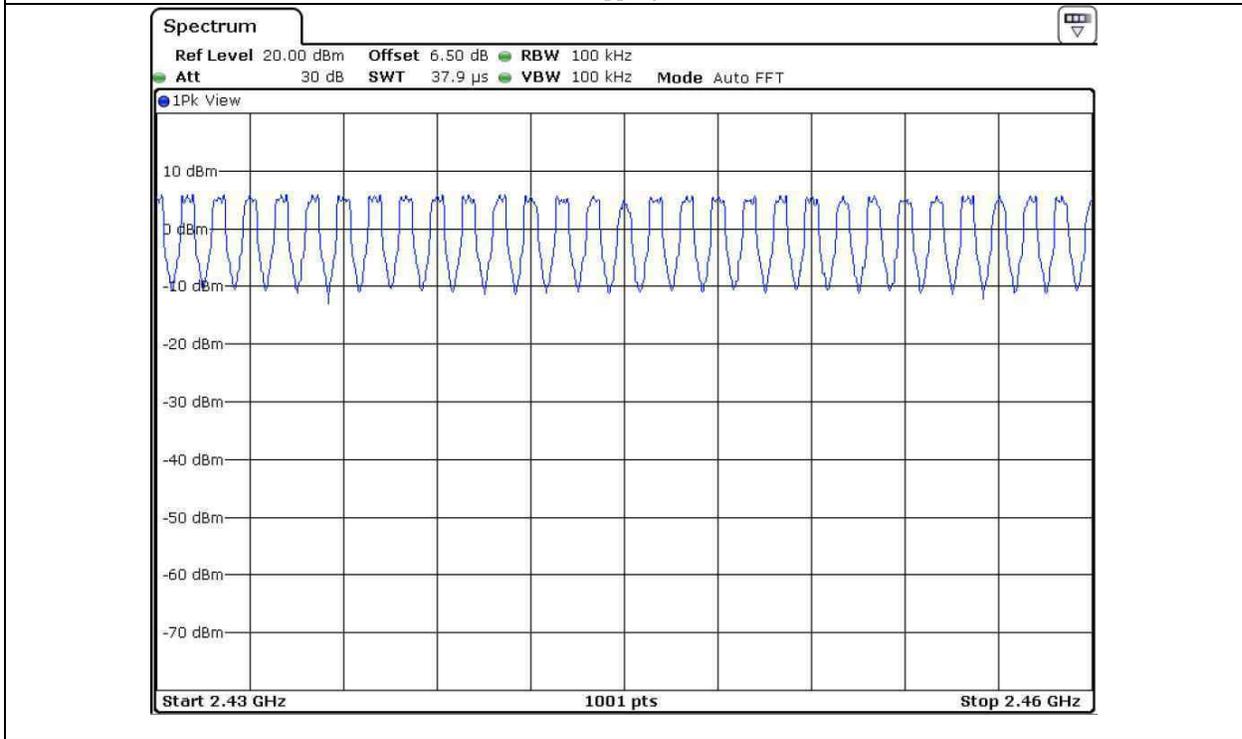

Number of hopping channel: 30

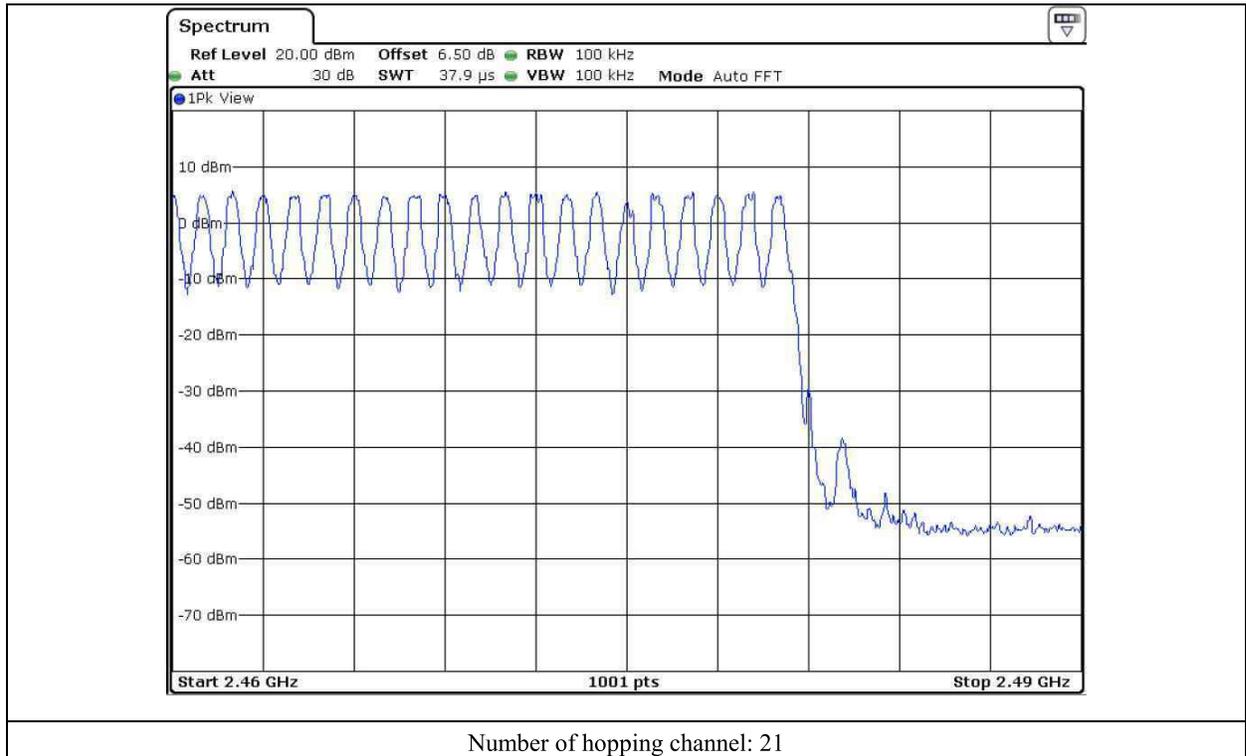



### 9.5 Test data for 2 Mbps

- Test Date : September 17, 2018
- Test Result : Pass


Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
2 Mbps	79	Minimum of 15	64

Tested by: Ju Yun Park / Assistant Manager

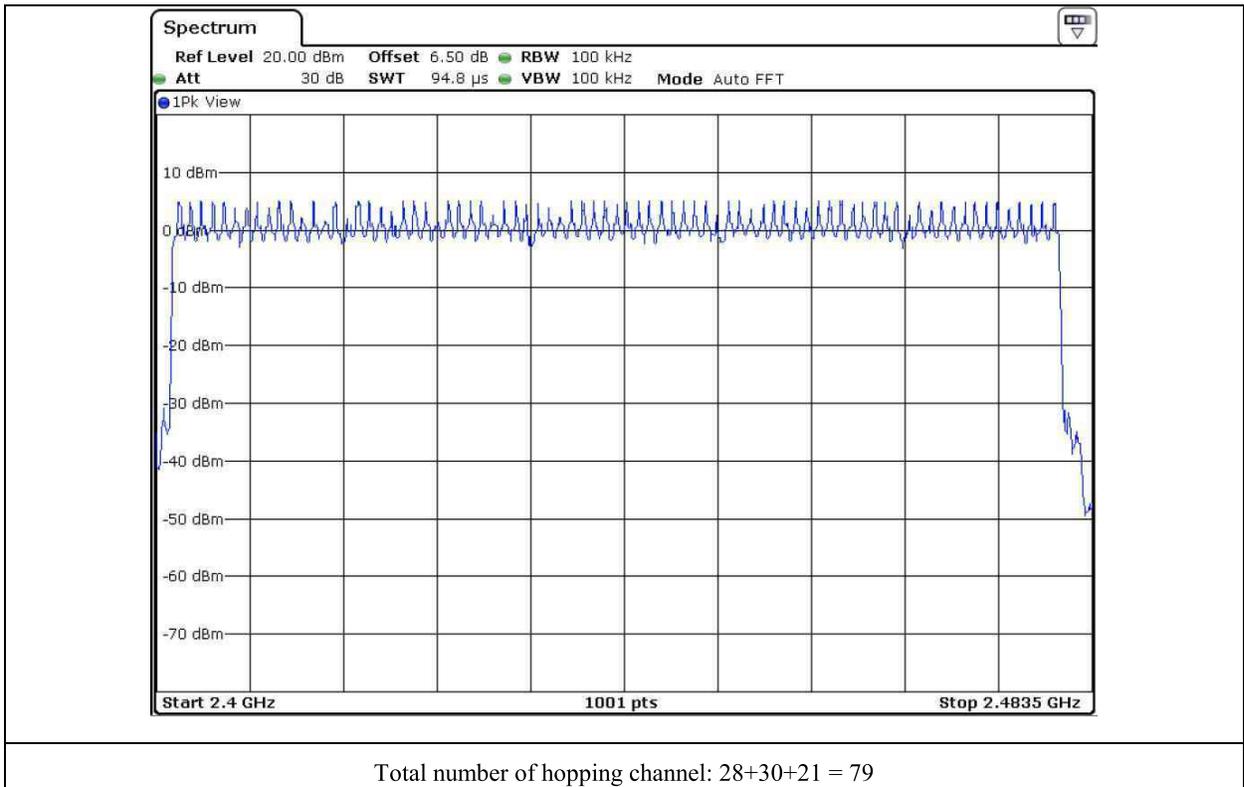


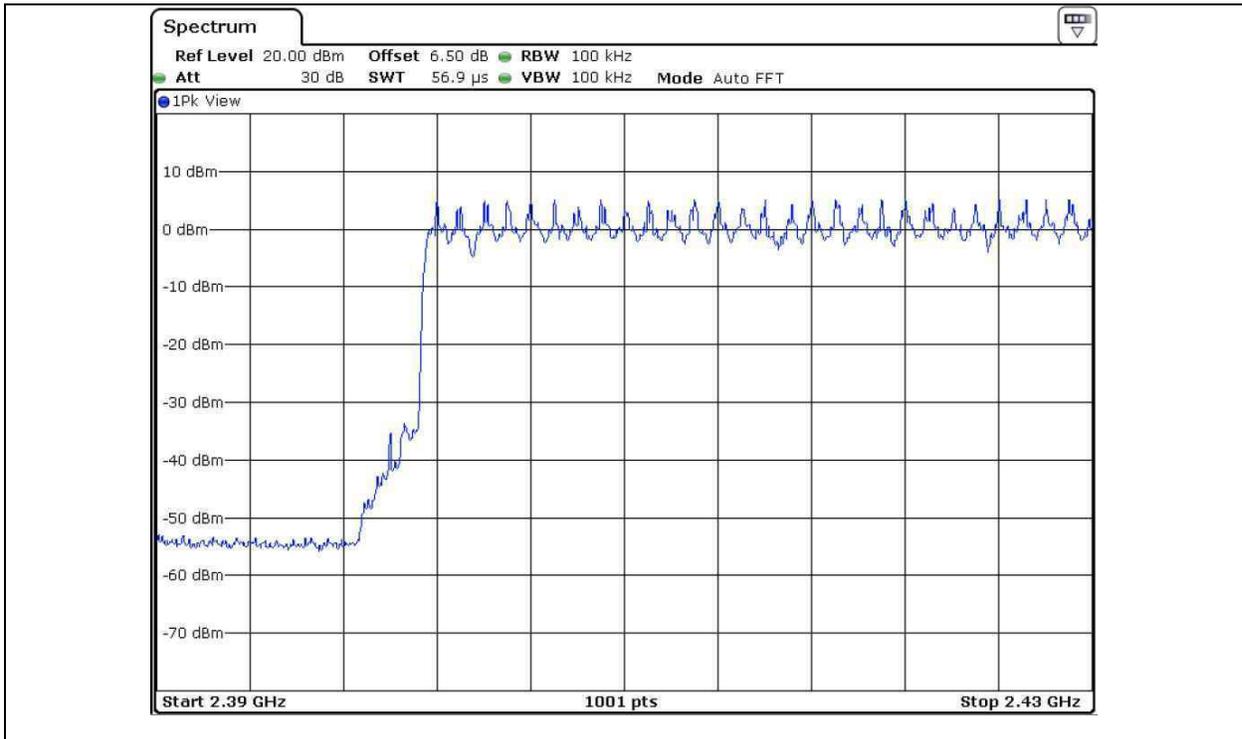

Number of hopping channel: 28

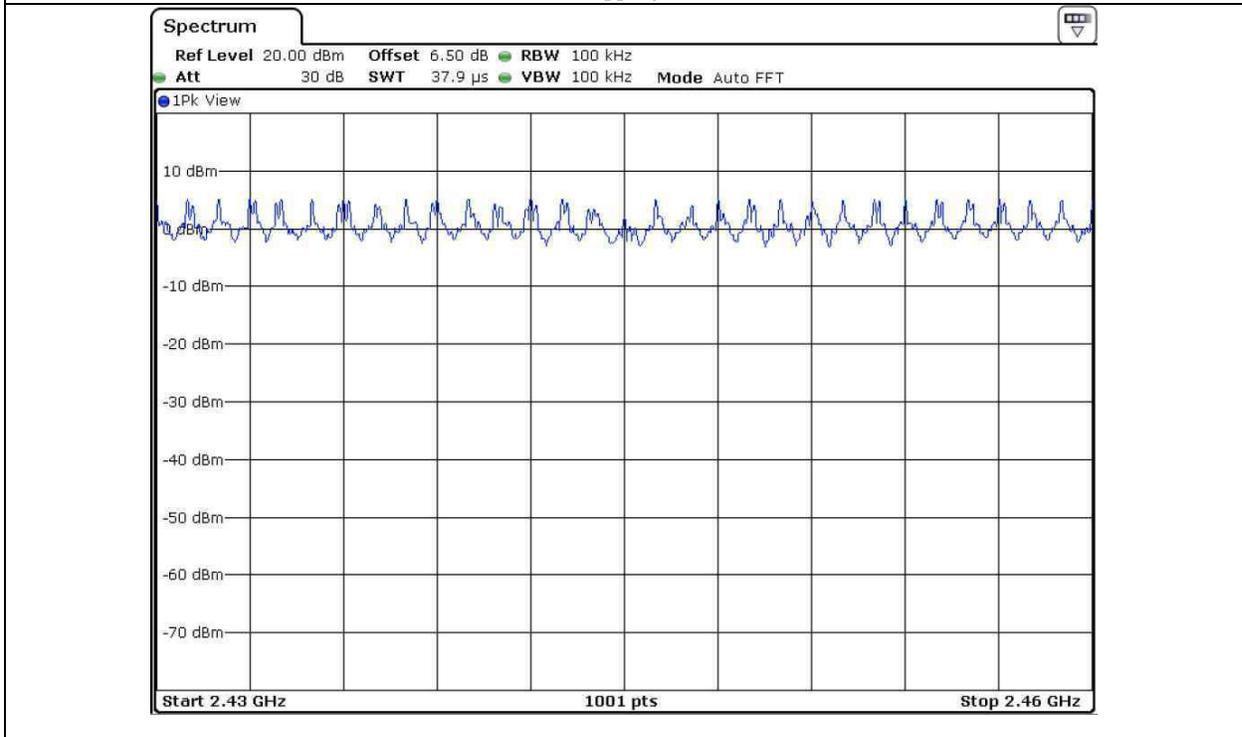

Number of hopping channel: 30

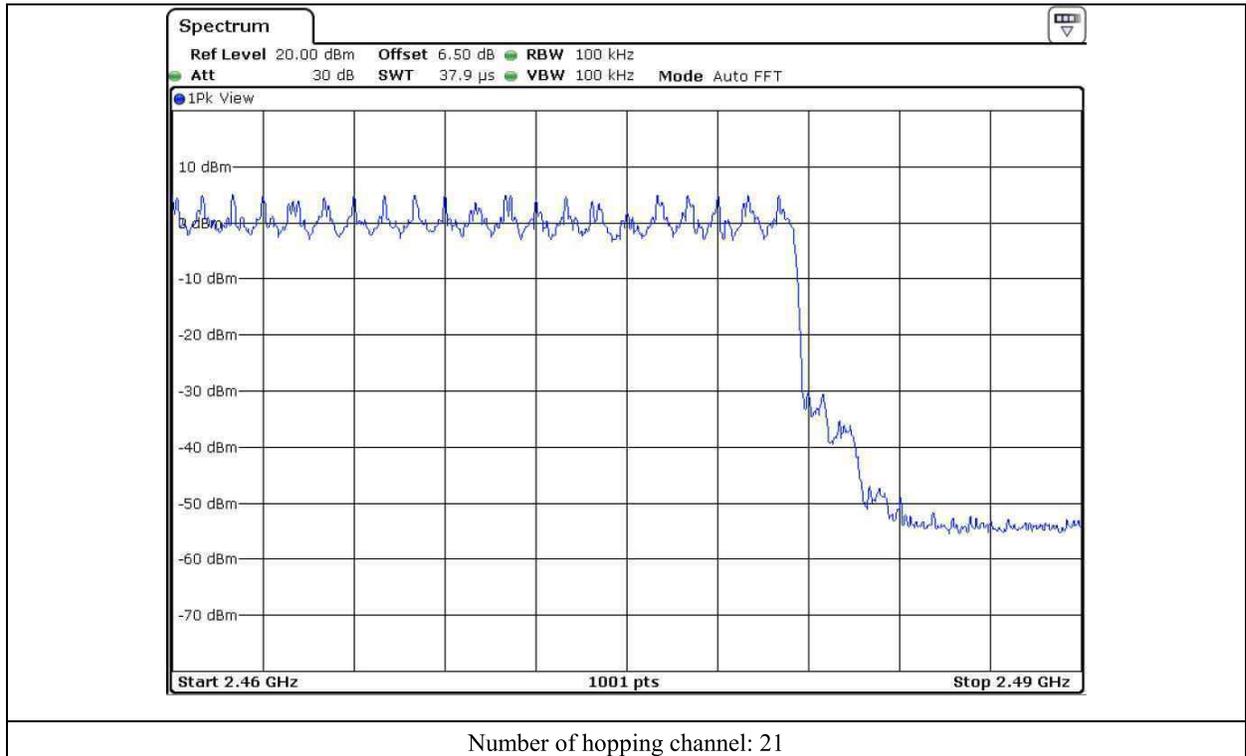


**9.6 Test data for 3 Mbps**

- Test Date : September 17, 2018
- Test Result : Pass


Data Transfer Rate	Measured value (Number)	Limit (Number)	Margin (Number)
3 Mbps	79	Minimum of 15	64



**Tested by: Ju Yun Park / Assistant Manager**

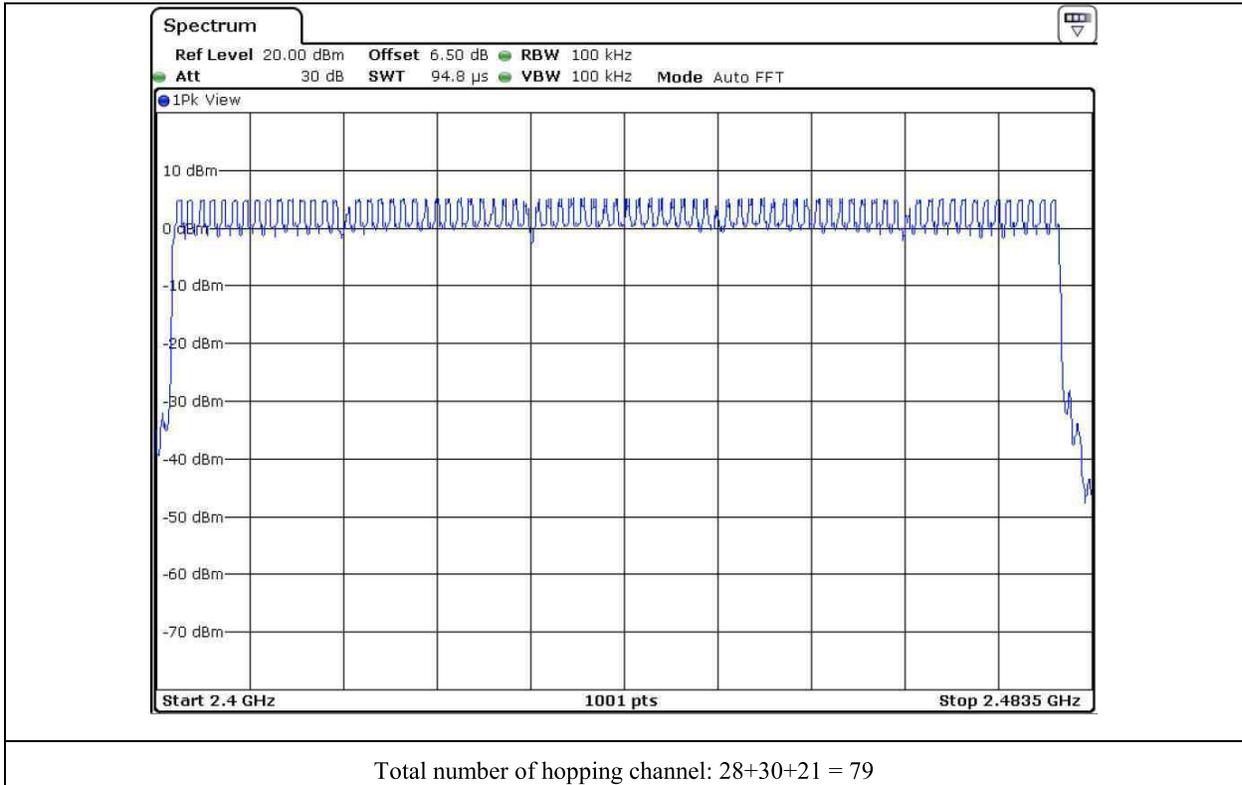



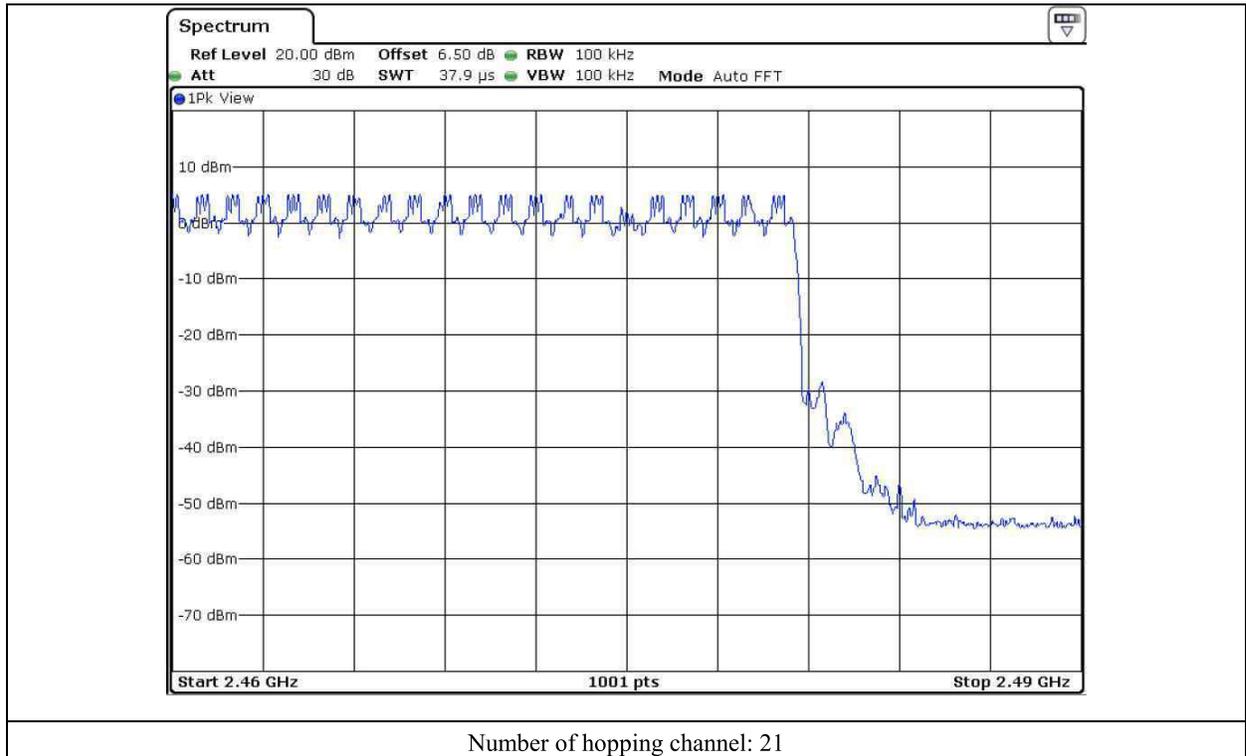


## 10. TIME OF OCCUPANCY

### 10.1 Operating environment

Temperature : 22 °C  
 Relative humidity : 47 % R.H.

### 10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The transmitter is set to operate in its normal frequency hopping mode. The center frequency of the spectrum analyzer is set to one of hopping channels near the center of the operating band and span is set to zero Hz. The sweep time is set to display one complete pulse. The mark delta function is used to measure the duration of the pulses.



### 10.3 Test equipment used

	<b>Model Number</b>	<b>Manufacturer</b>	<b>Description</b>	<b>Serial Number</b>	<b>Last Cal.</b>
■ -	FSV30	Rohde & Schwarz	Signal Analyzer	101200	Aug. 23, 2018 (1Y)

All test equipment used is calibrated on a regular basis.

**10.4 Test data for 1 Mbps**

- Test Date : September 17, 2018

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μs with 79 channels.

For DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second (= 1 600/2/79) for DH1, and 5.06 times (= 1 600/4/79) for DH3, and 3.38 times (= 1 600/6/79) for DH5.

Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (s)	Total Dwell Time (ms)	Limit (ms)	Test Result
DH1	0.420	10.13	31.6	134.45	400	PASS
DH3	1.670	5.060	31.6	267.03	400	
DH5	2.930	3.38	31.6	312.95	400	


Total dwell time is calculated as following.

Total Dwell Time = Pulse time \* Hops per second with channels \* period time


Remark: See next page for an overview sweep performed with peak detector.




Tested by: Ju Yun Park / Assistant Manager

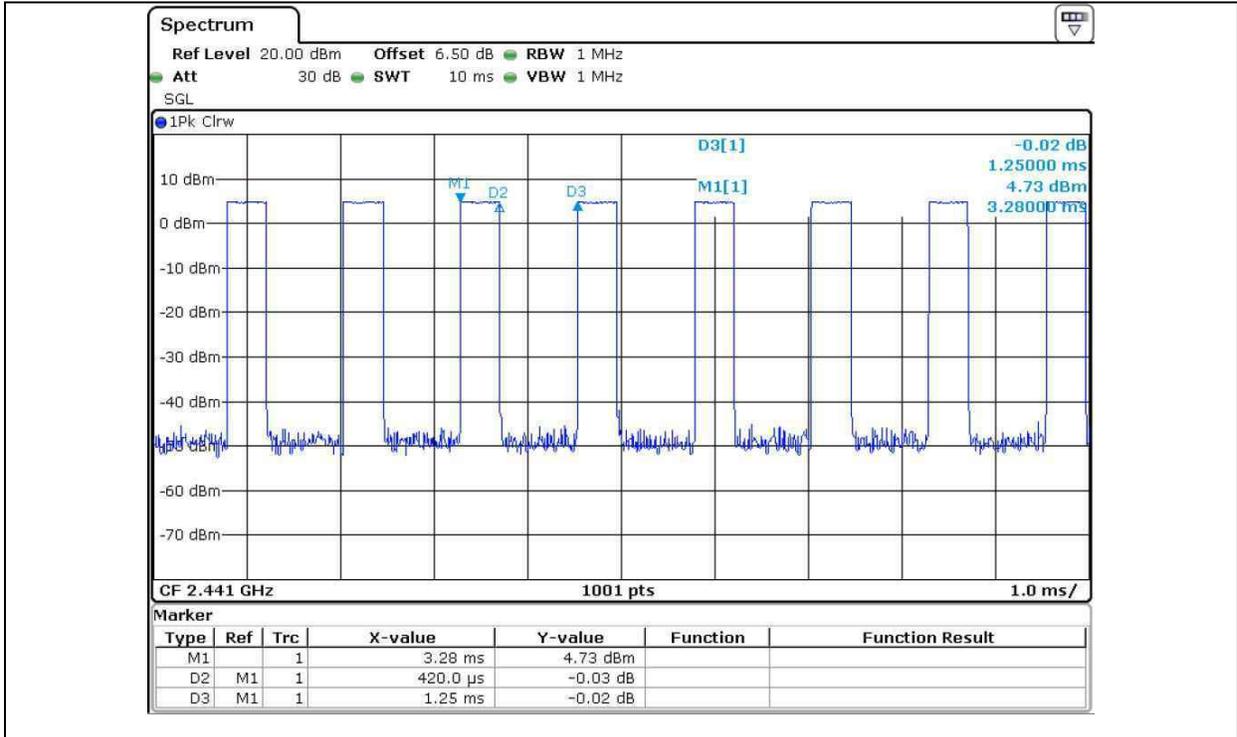

DH1

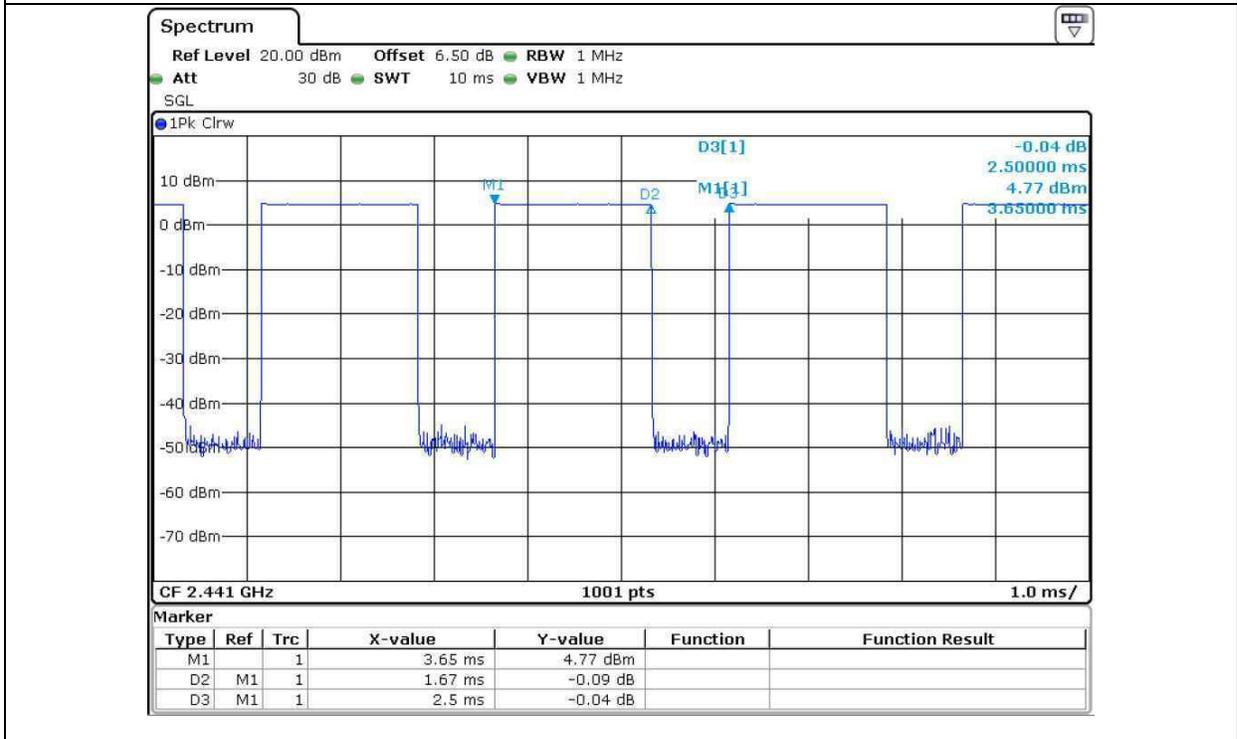

DH3

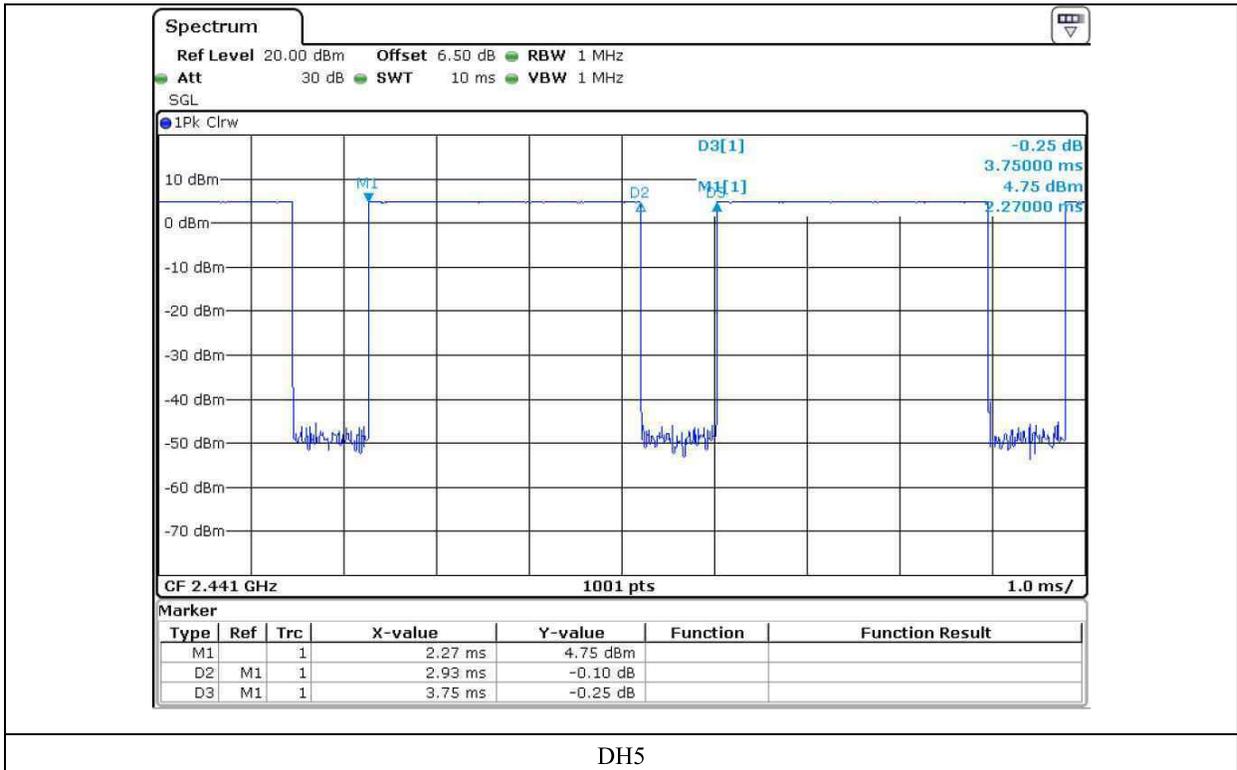

DH5

**10.5 Test data for 2 Mbps**

- Test Date : September 17, 2018

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μs with 79 channels.

For 2-DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for 2-DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and 2-DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second (= 1 600/2/79) for 2-DH1, and 5.06 times (= 1 600/4/79) for 2-DH3, and 3.38 times (= 1 600/6/79) for 2-DH5.

Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (s)	Total Dwell Time (ms)	Limit (ms)	Test Result
2-DH1	0.420	10.13	31.6	134.45	400	PASS
2-DH3	1.680	5.060	31.6	268.63	400	
2-DH5	2.930	3.38	31.6	312.95	400	


Total dwell time is calculated as following.

Total Dwell Time = Pulse time \* Hops per second with channels \* period time


Remark: See next page for an overview sweep performed with peak detector.




**Tested by: Ju Yun Park / Assistant Manager**

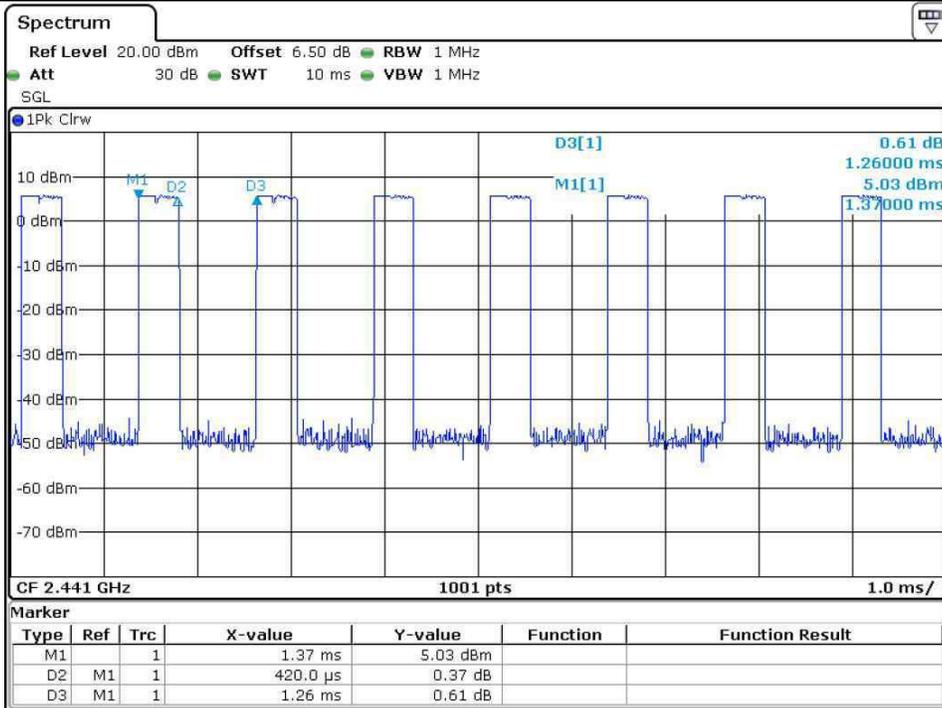

2-DH1

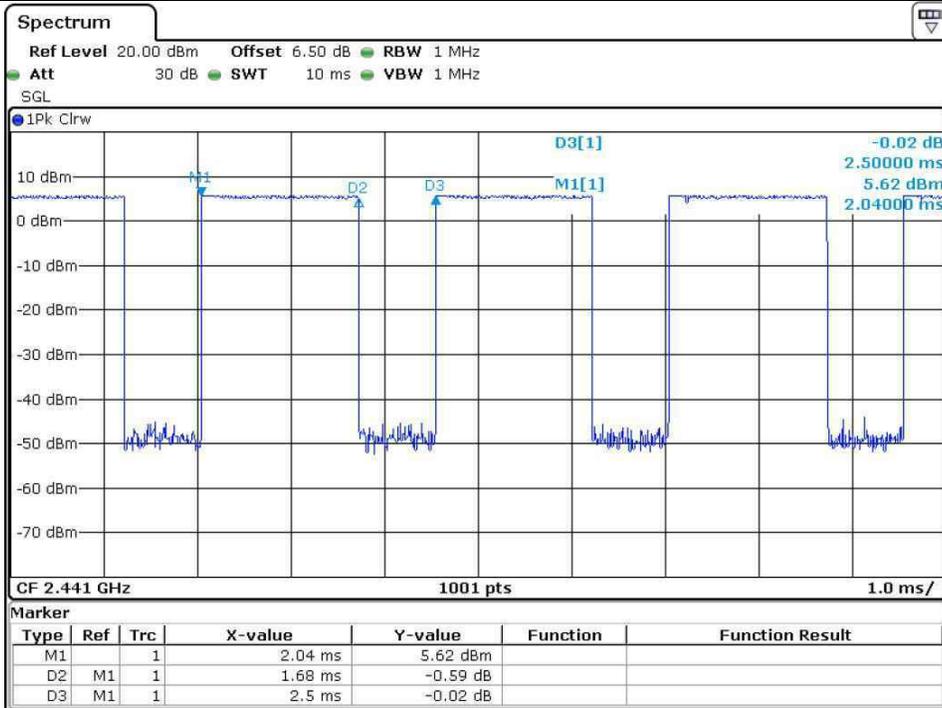

2-DH3

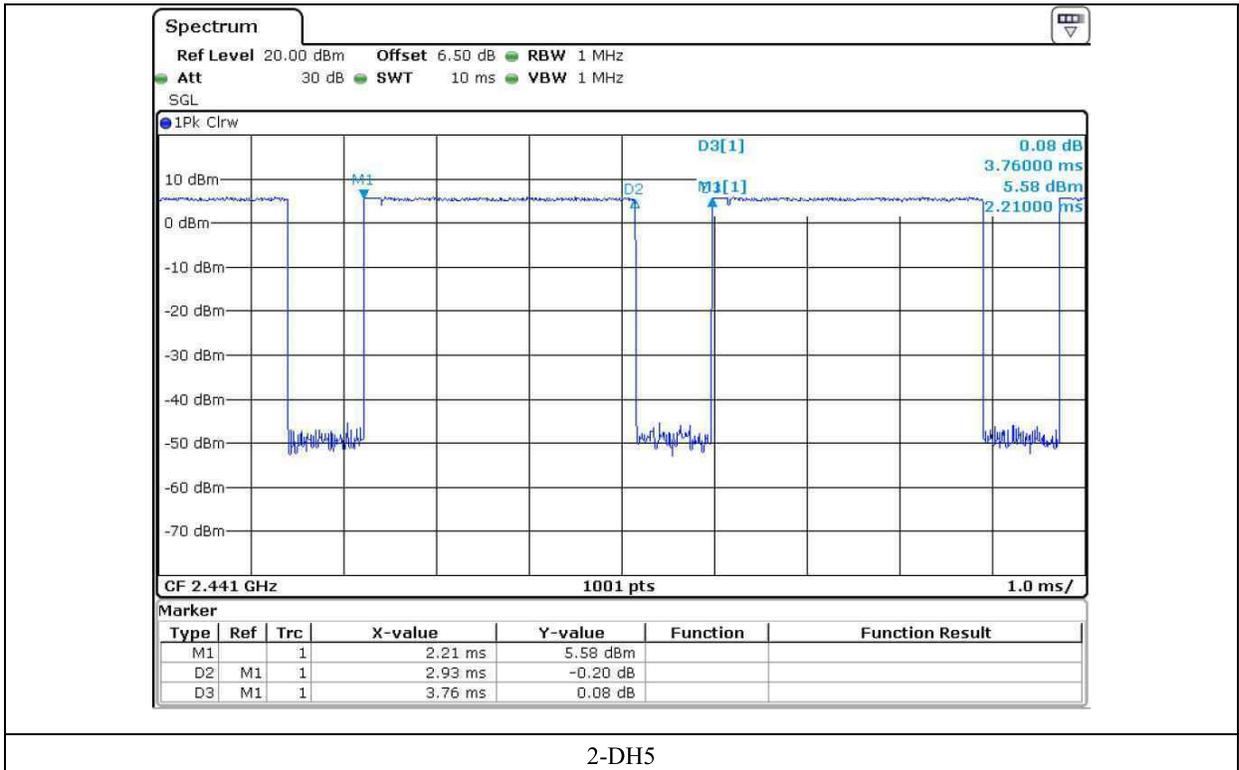

**10.6 Test data for 3 Mbps**

- Test Date : September 17, 2018

The system makes worst case 1 600 hops per second or 1 time slot has a length of 625 μs with 79 channels.

For 3-DH1 packet type, the EUT needs 1 time slot for transmitting and 1 time slot for receiving and for 3-DH3 packet type, the EUT needs 3 times slots for transmitting and 1 time slot for receiving, and 3-DH5 packet needs 5 times slots for transmitting and 1 time slot for receiving. So The EUT has each channel for 10.13 times per second (= 1 600/2/79) for 3-DH1, and 5.06 times (= 1 600/4/79) for 3-DH3, and 3.38 times (= 1 600/6/79) for 3-DH5.

Packet Type	Pulse Time (ms)	Hops per second with channels	Period Time (s)	Total Dwell Time (ms)	Limit (ms)	Test Result
3-DH1	0.430	10.13	31.6	137.65	400	PASS
3-DH3	1.670	5.060	31.6	267.03	400	
3-DH5	2.930	3.38	31.6	312.95	400	


Total dwell time is calculated as following.

Total Dwell Time = Pulse time \* Hops per second with channels \* period time


Remark: See next page for an overview sweep performed with peak detector.




**Tested by: Ju Yun Park / Assistant Manager**

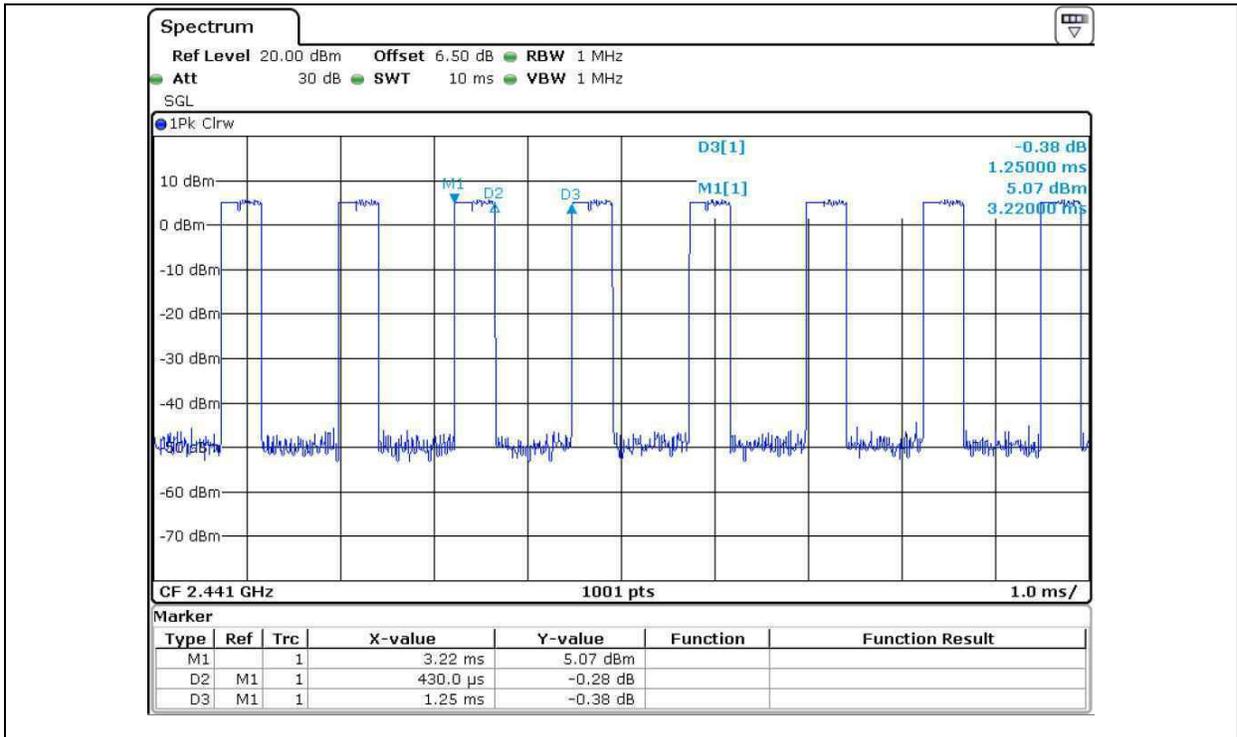

3-DH1

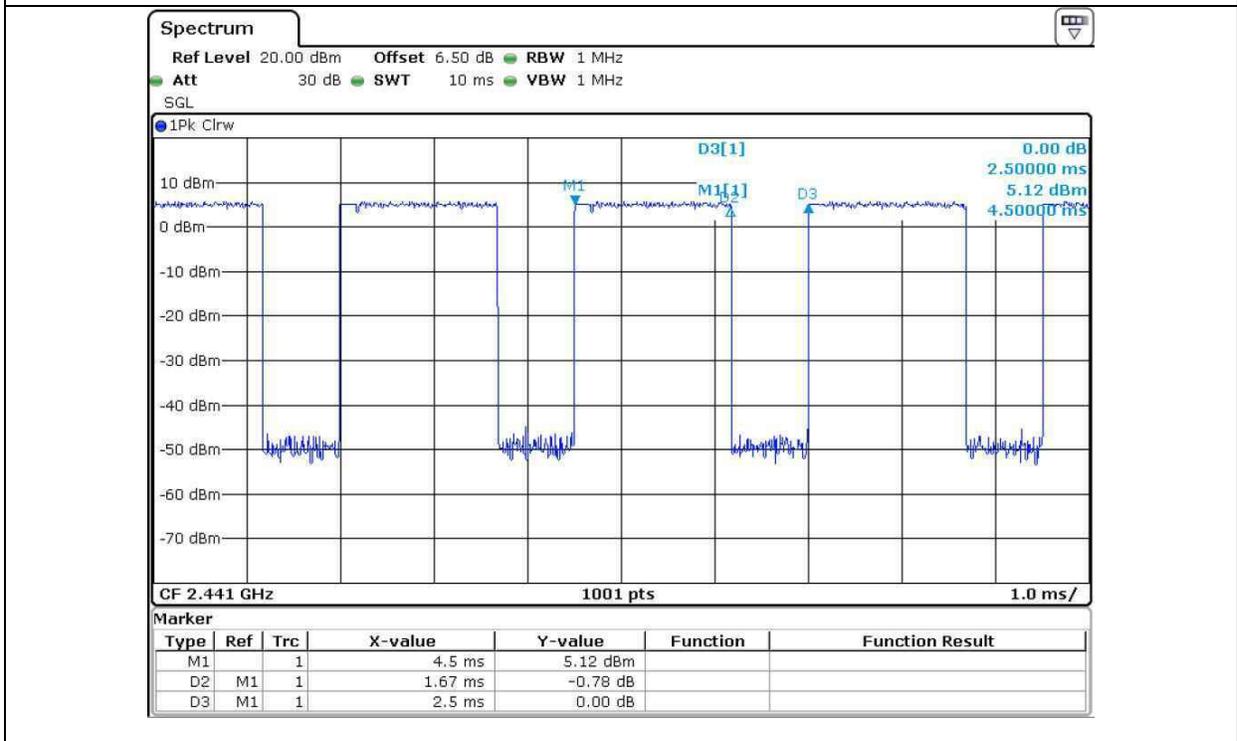

3-DH3

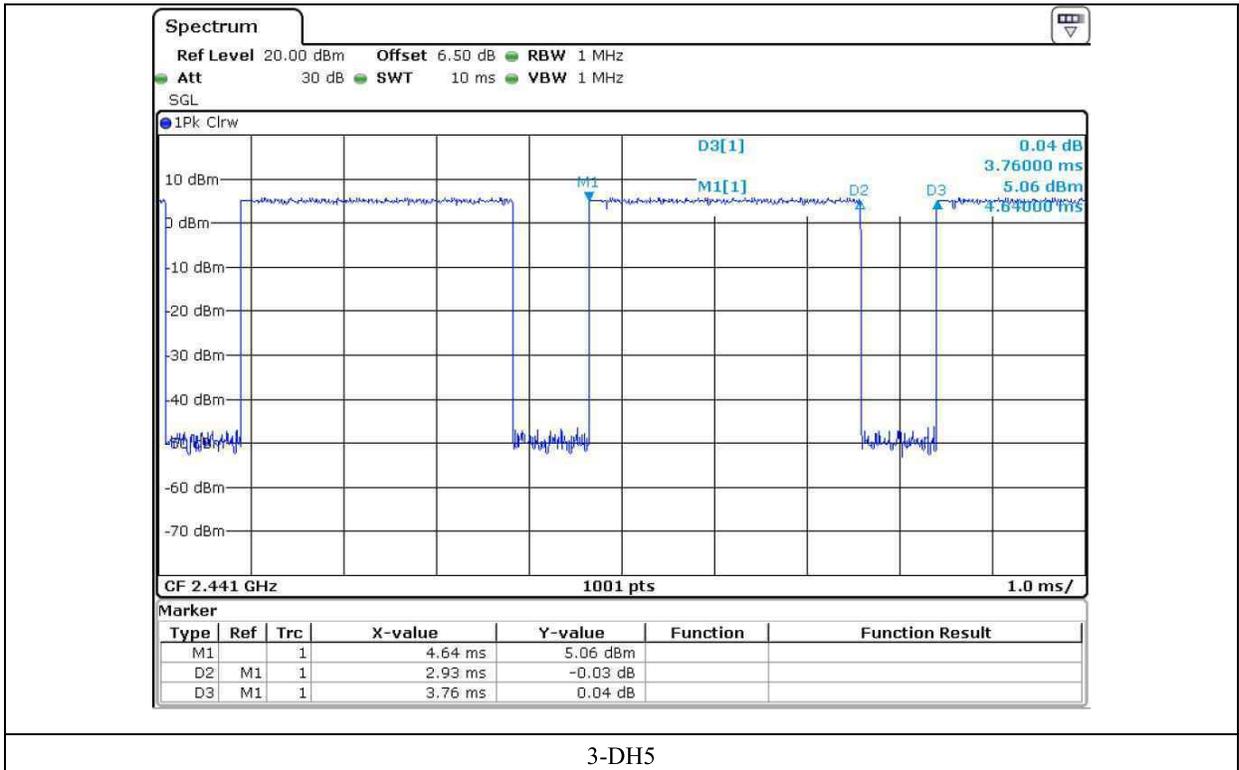


## 11. MAXIMUM PEAK OUTPUT POWER

### 11.1 Operating environment

Temperature : 22 °C  
 Relative humidity : 47 % R.H

### 11.2 Test set-up

The maximum peak output power was measured with the spectrum analyzer connected to the antenna output of the EUT. The EUT was operating in transmit mode at the appropriate center frequency.



### 11.3 Test equipment used

	Model Number	Manufacturer	Description	Serial Number	Last Cal.
■ -	FSV30	Rohde & Schwarz	Signal Analyzer	101200	Aug. 23, 2018 (1Y)

All test equipment used is calibrated on a regular basis.

**11.4 Test data for 1 Mbps**

- Test Date : September 17, 2018


- Test Result : Pass

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402	5.79	21.00	15.21
MIDDLE	2 441	5.84	21.00	15.16
HIGH	2 480	5.51	21.00	15.49


Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)




Tested by: **Ju Yun Park / Assistant Manager**

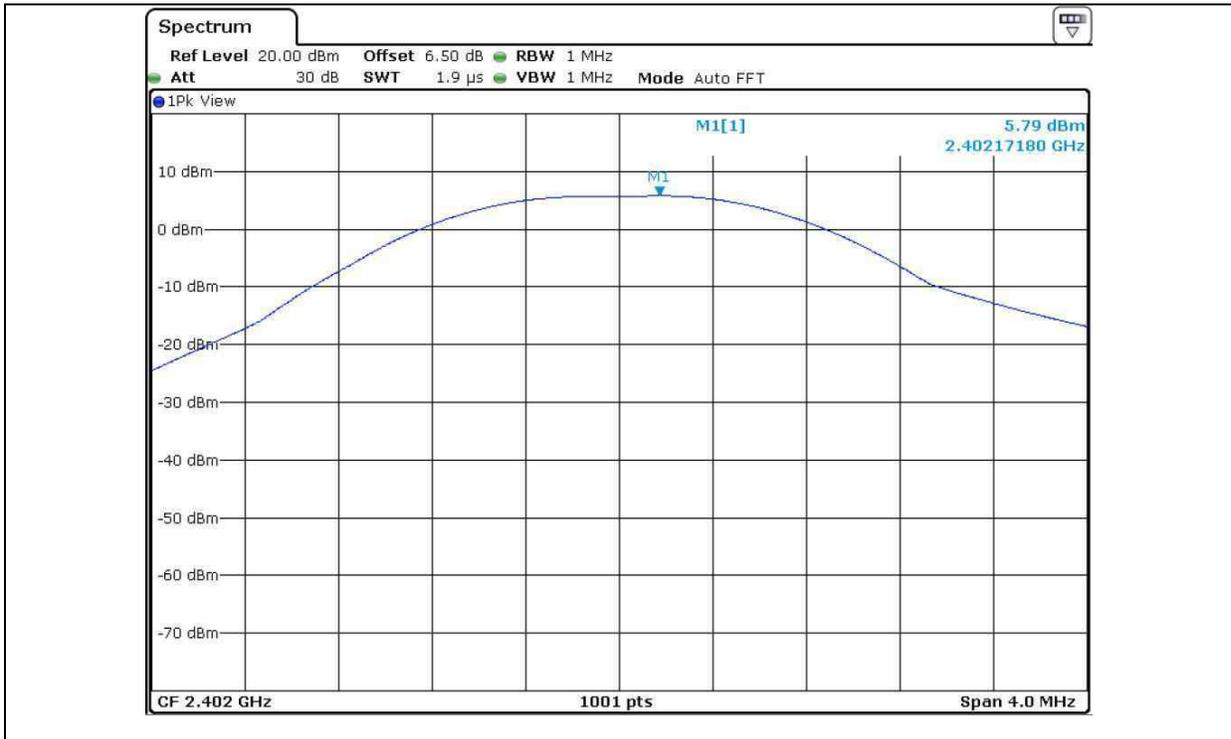

Low Channel

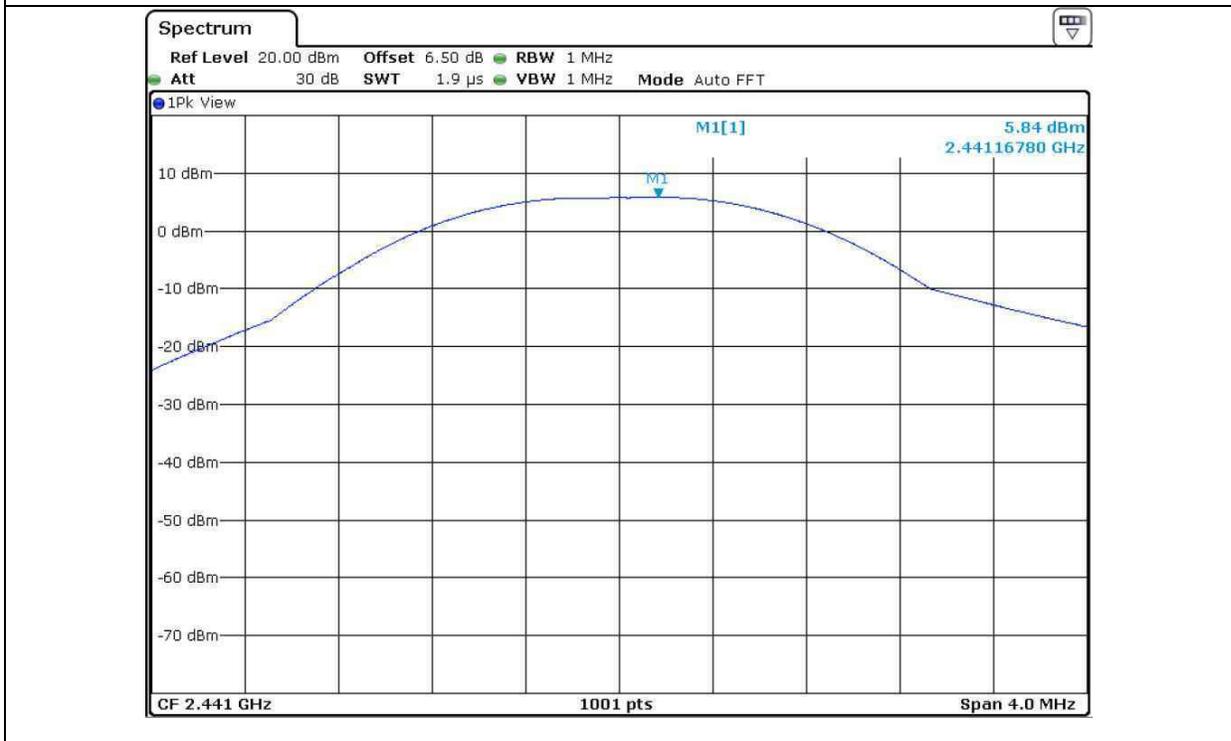

Middle Channel

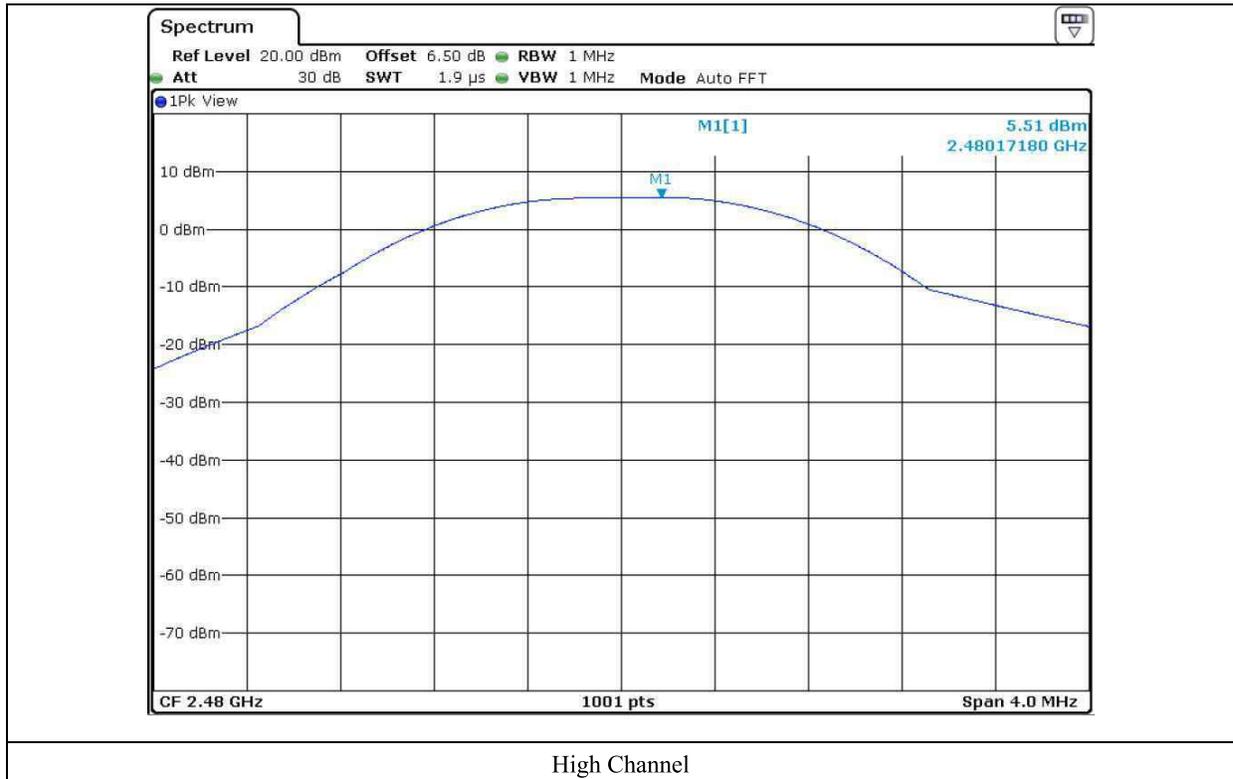

High Channel

**11.5 Test data for 2 Mbps**

- Test Date : September 17, 2018


- Test Result : Pass

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402	5.54	21.00	15.46
MIDDLE	2 441	5.66	21.00	15.34
HIGH	2 480	5.30	21.00	15.70


Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)



**Tested by: Ju Yun Park / Assistant Manager**

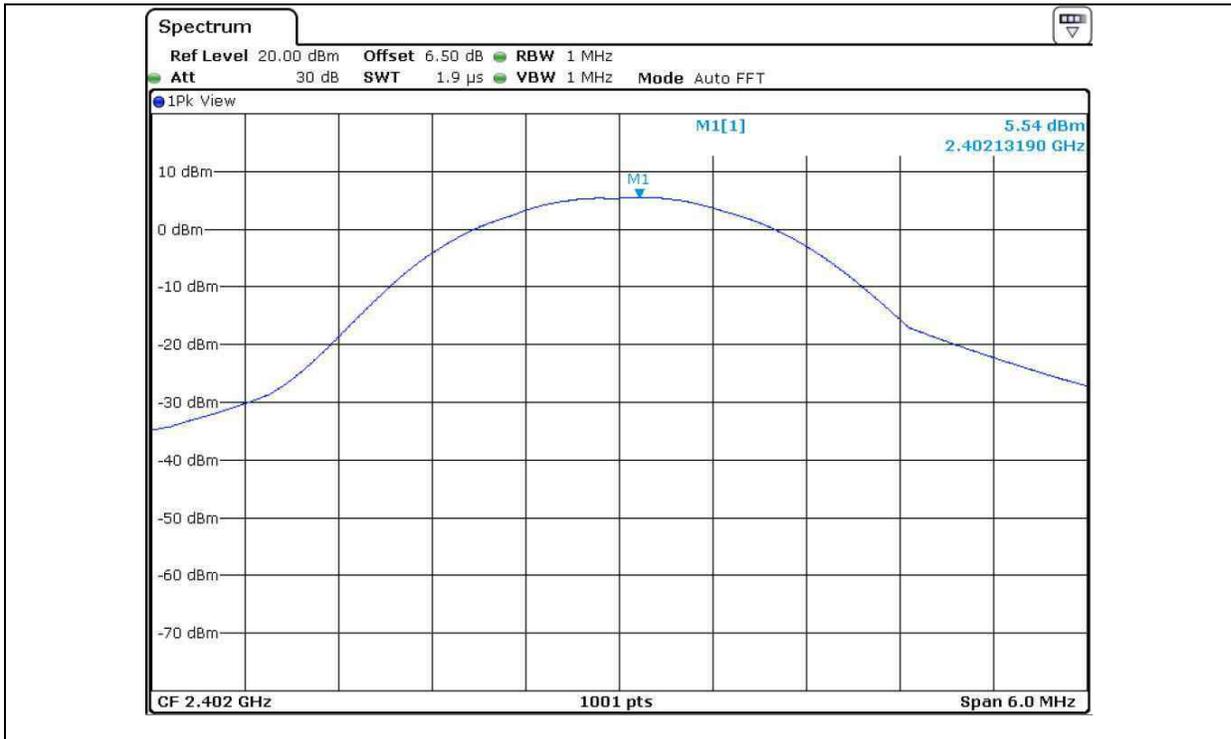

Low Channel

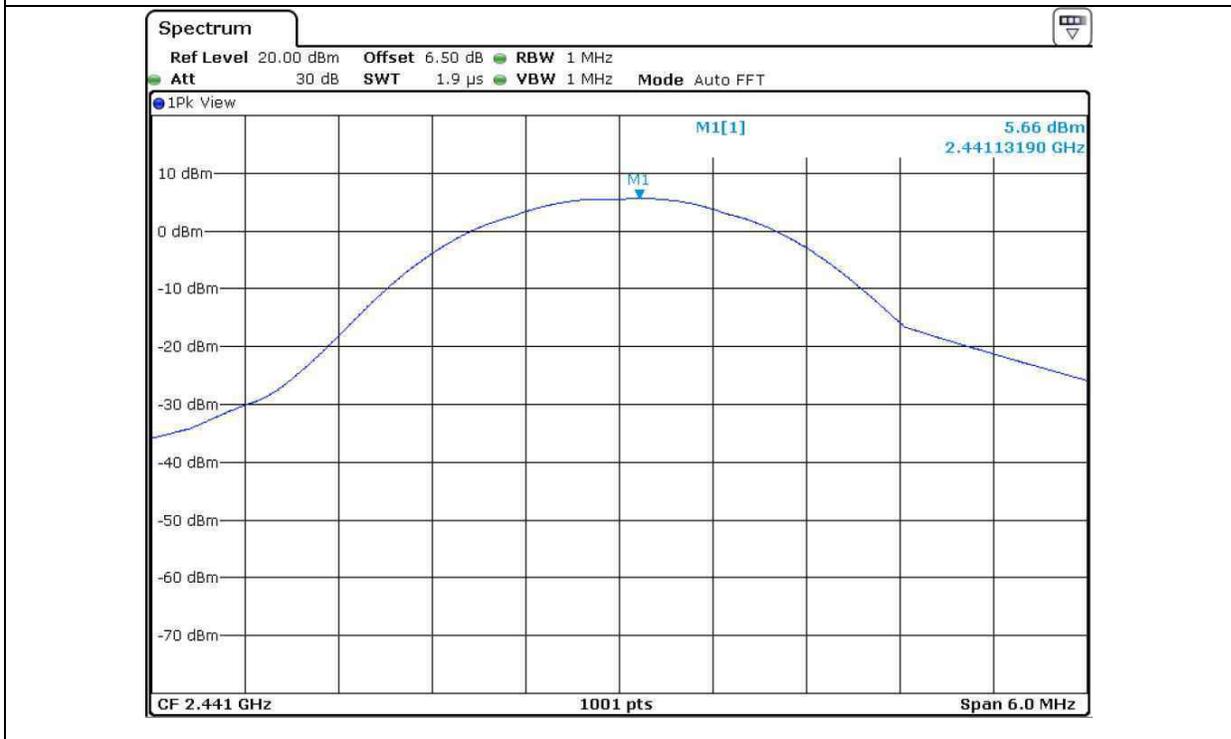

Middle Channel



**11.6 Test data for 3 Mbps**

- Test Date : September 17, 2018


- Test Result : Pass

CHANNEL	FREQUENCY (MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402	5.77	21.00	15.23
MIDDLE	2 441	5.85	21.00	15.15
HIGH	2 480	5.54	21.00	15.46


Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)




Tested by: Ju Yun Park / Assistant Manager

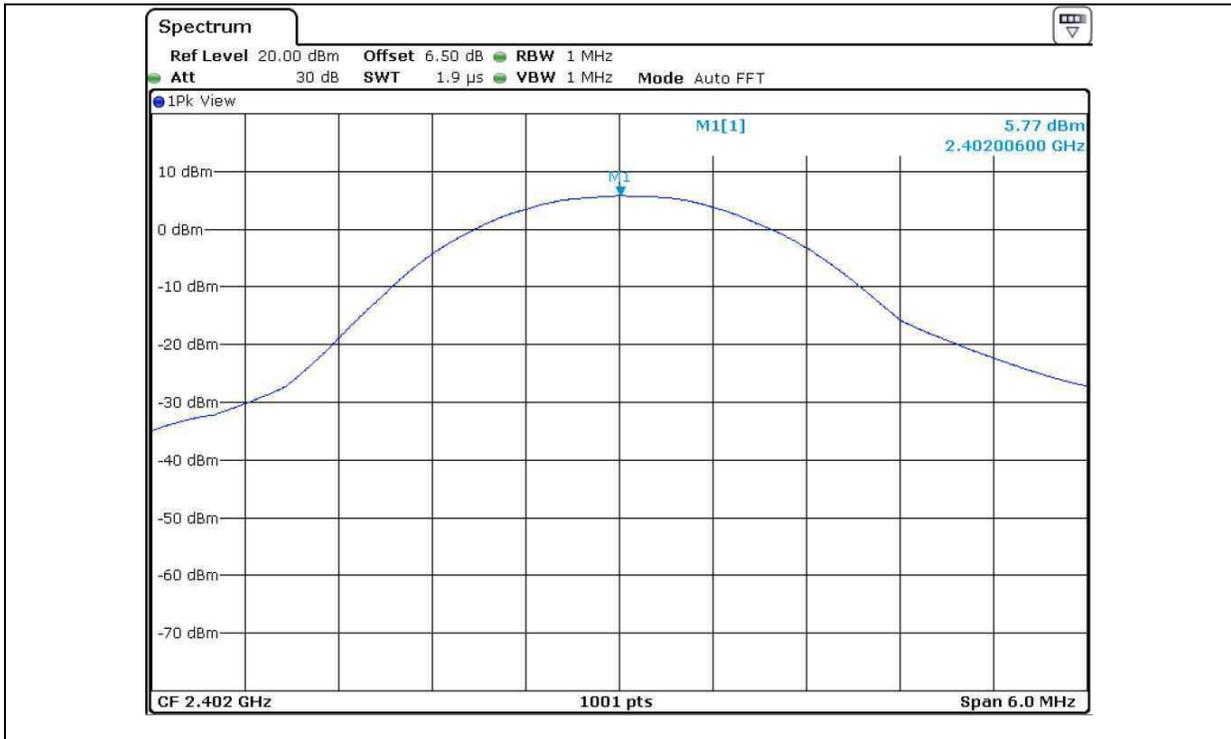

Low Channel

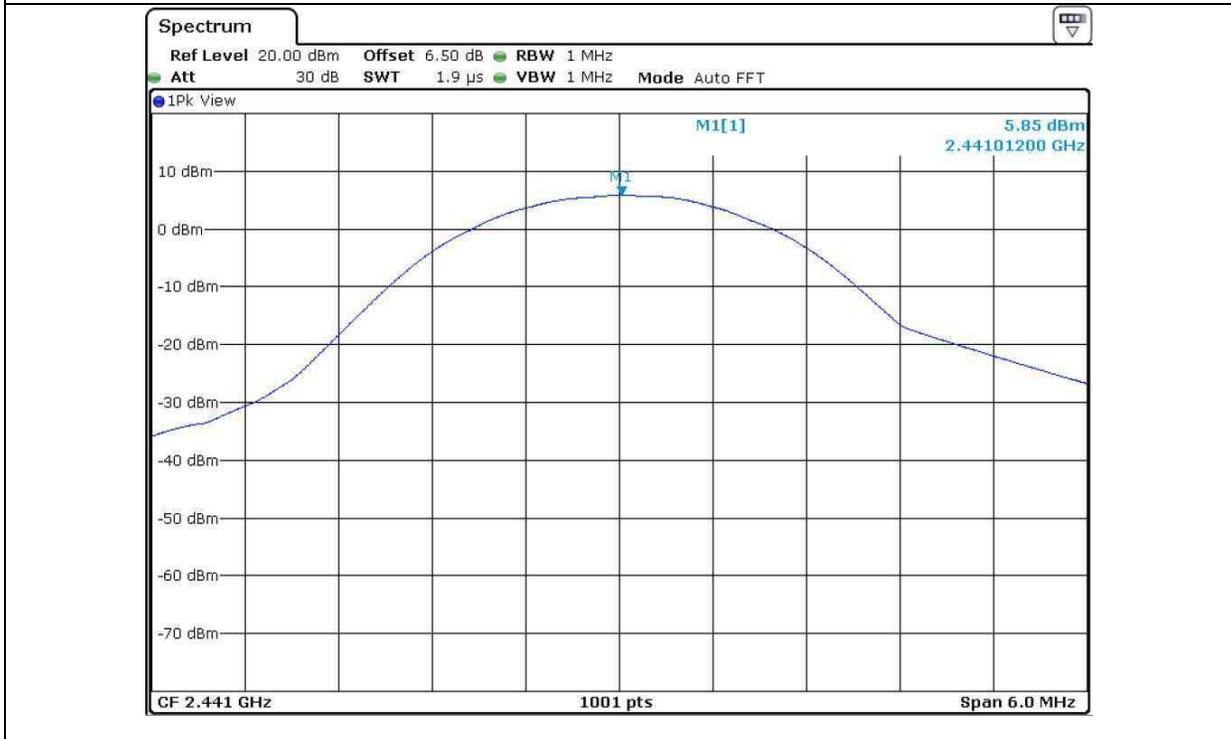

Middle Channel

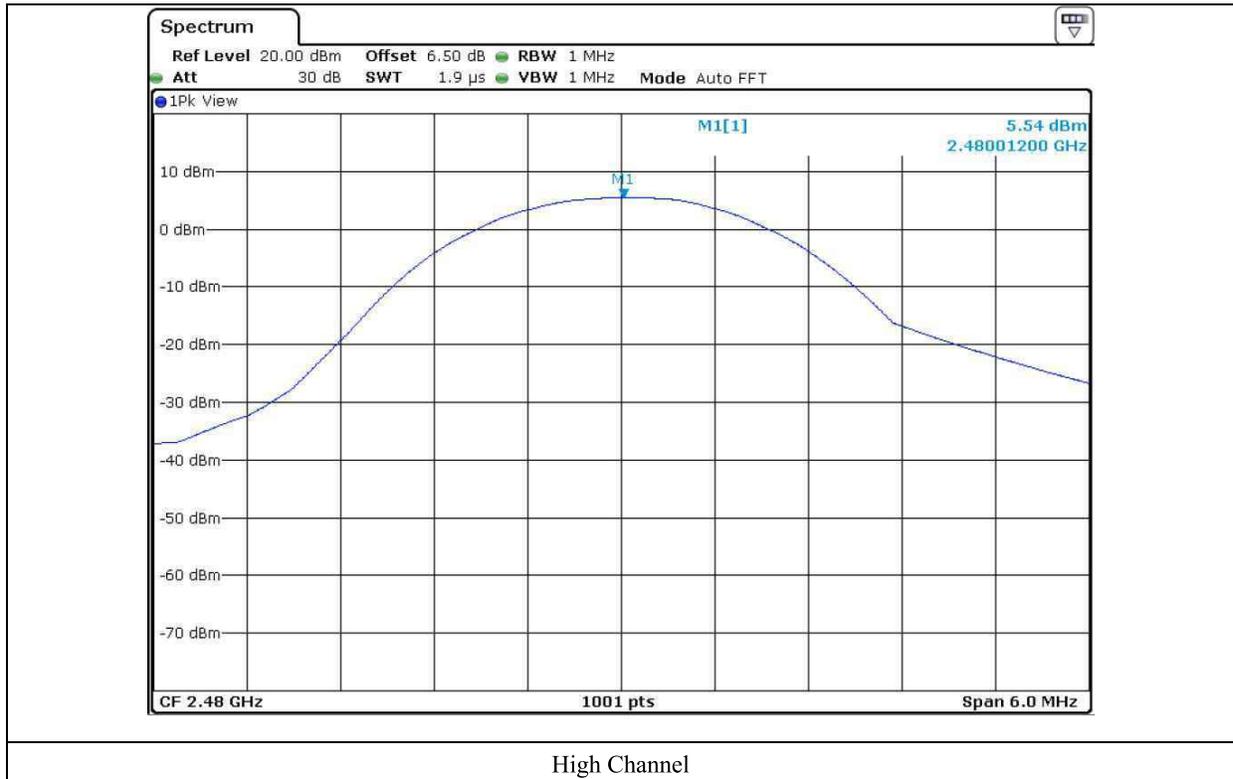


## 12. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND

### 12.1 Operating environment

Temperature : 21 °C  
 Relative humidity : 48 % R.H

### 12.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution and video bandwidth is set to 100 kHz, and peak detection was used.

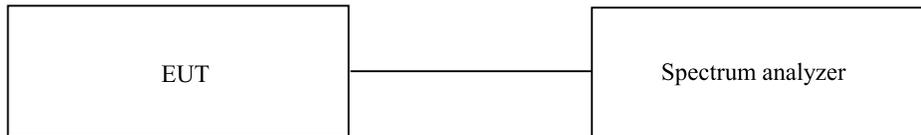

### 12.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3 m, open-field test site. The EUT was placed on a non-conductive turntable approximately 0.8 m above the ground plane.

The frequency spectrum from 30 kHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 ms in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.


### 12.4 Test equipment used


	Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
<input type="checkbox"/>	ESCI	Rohde & Schwarz	EMI Test Receiver	101012	Oct. 27, 2017 (1Y)
<input checked="" type="checkbox"/>	ESR	Rohde & Schwarz	EMI Test Receiver	101470	Oct. 27, 2017 (1Y)
<input type="checkbox"/>	FSP	Rohde & Schwarz	Spectrum Analyzer	100017	Aug. 23, 2018 (1Y)
<input checked="" type="checkbox"/>	310N	Sonoma Instrument	AMPLIFIER	312544	Mar. 28, 2018 (1Y)
<input checked="" type="checkbox"/>	FSV30	Rohde & Schwarz	Signal Analyzer	101200	Aug. 23, 2018 (1Y)
<input type="checkbox"/>	SCU-18	Rohde & Schwarz	Pre-Amplifier	102346	Oct. 24, 2017 (1Y)
<input checked="" type="checkbox"/>	MA-4000XPET	Innco Systems GmbH	Antenna Master	MA4000/509	N/A
<input type="checkbox"/>	HD100	HD GmbH	Position Controller	N/A	N/A
<input checked="" type="checkbox"/>	DT3000-3t	Innco Systems GmbH	Turn Table	N/A	N/A
<input type="checkbox"/>	FMZB 1513	Schwarzbeck	LOOP ANTENNA	1513-235	May. 13, 2018 (2Y)
<input checked="" type="checkbox"/>	VULB9163	Schwarzbeck	TRILOG Broadband Antenna	9163-419	Aug. 14, 2018 (2Y)
<input checked="" type="checkbox"/>	BBHA9120D	Schwarzbeck	Horn Antenna	BBHA9120D295	Aug. 16, 2017 (2Y)
<input checked="" type="checkbox"/>	BBHA9170	Schwarzbeck	Horn Antenna	BBHA91700179	Jul. 28, 2017 (2Y)
<input checked="" type="checkbox"/>	BBV 9718 B	Schwarzbeck	Broadband Preamplifier	009	Mar. 16, 2018(1Y)
<input checked="" type="checkbox"/>	SCU40A	Rohde & Schwarz	Pre-Amplifier	100436	Mar. 15, 2018 (1Y)


All test equipment used is calibrated on a regular basis.

## 12.5 Test data for conducted emission


### 12.5.1 Test data for 1 Mbps

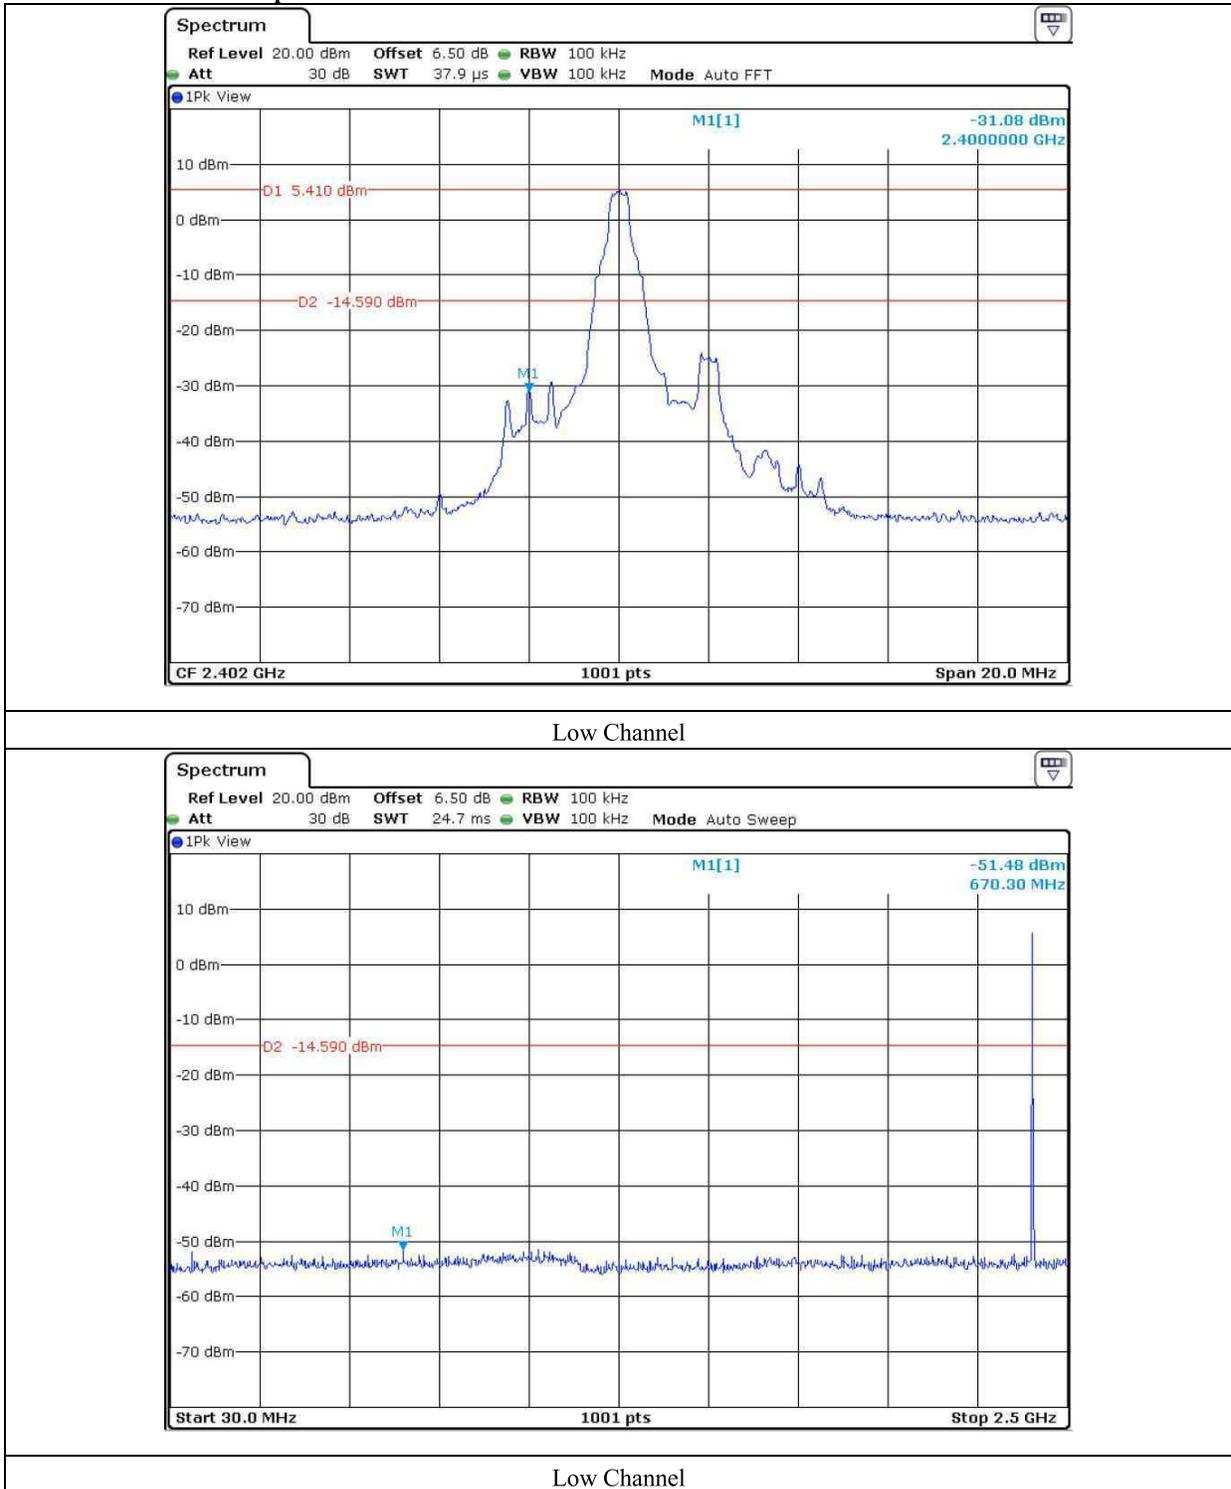

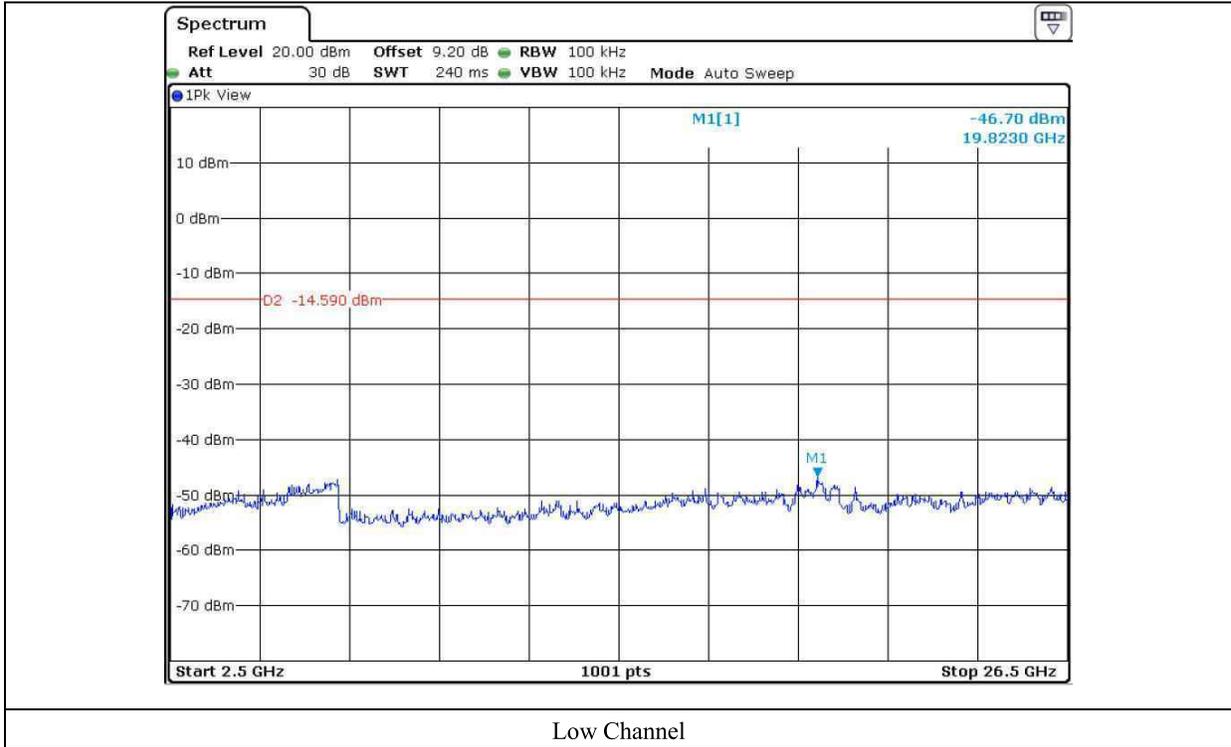


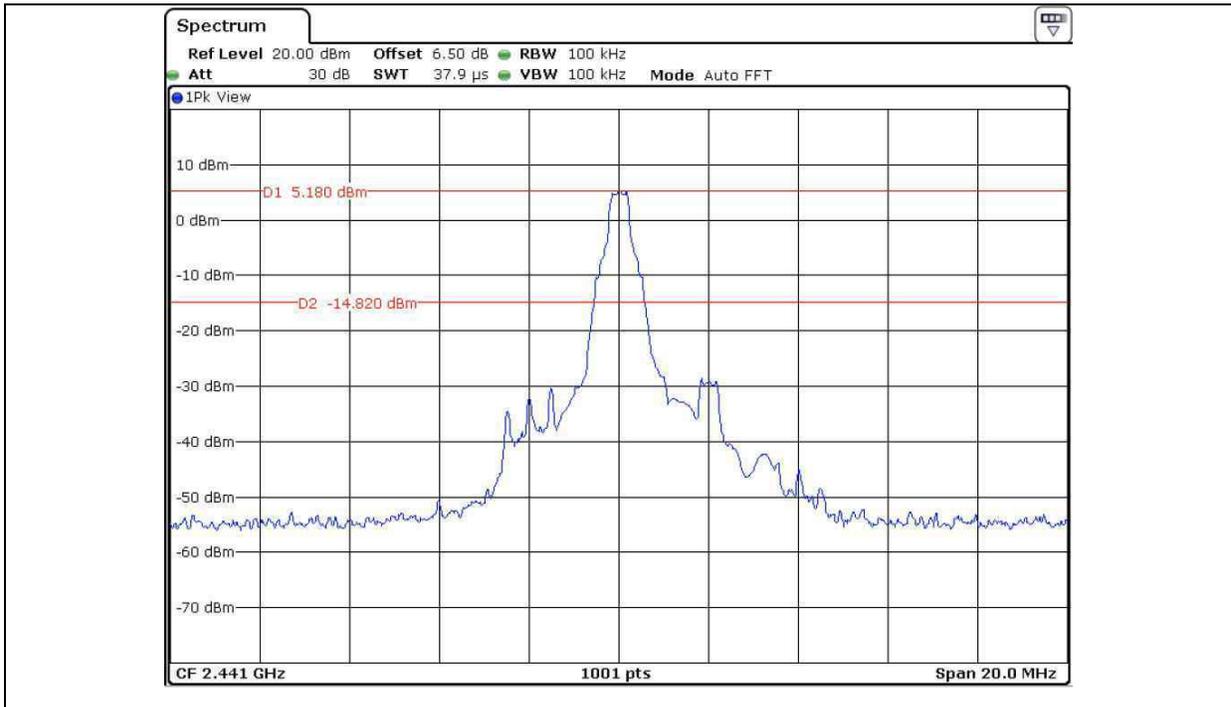


Middle Channel

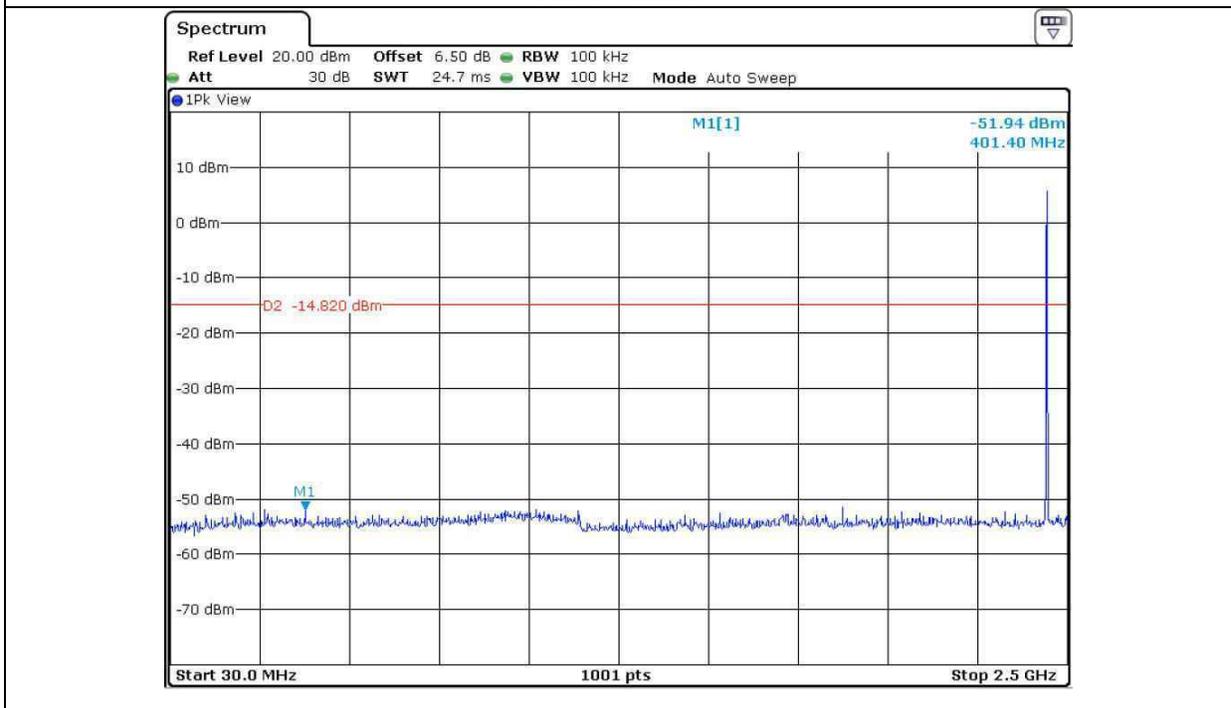


Middle Channel

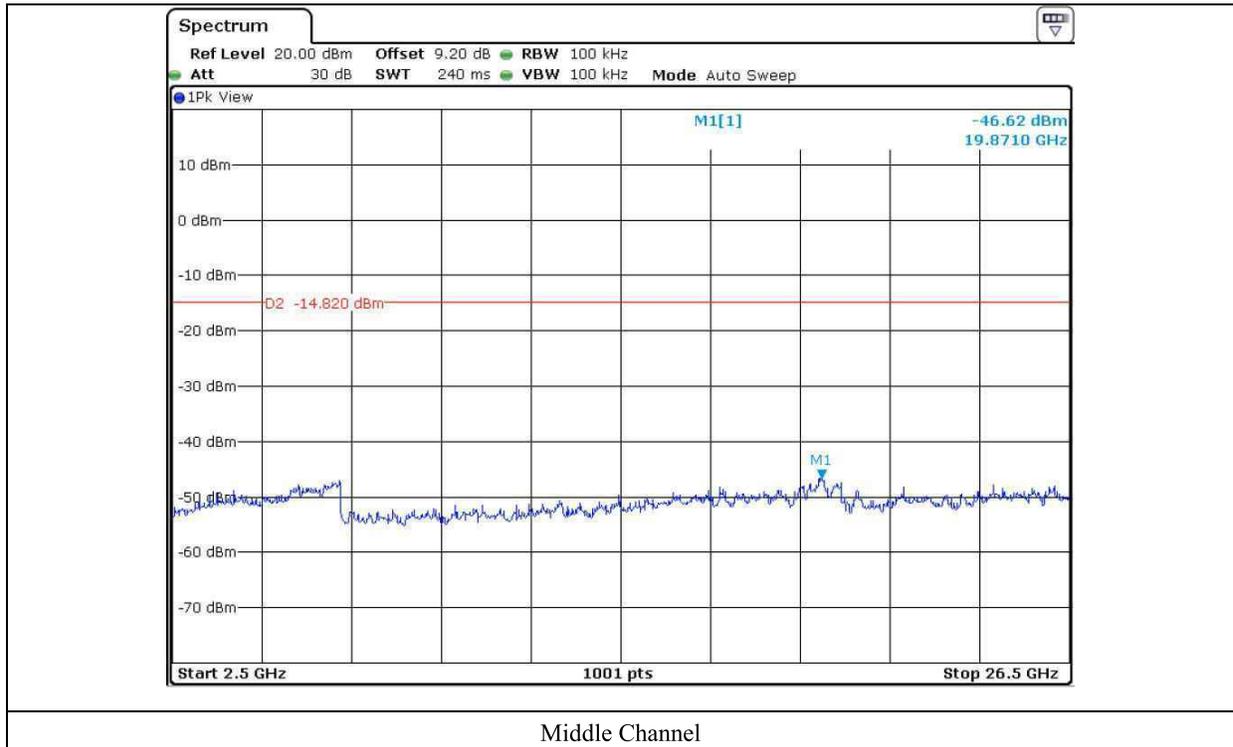


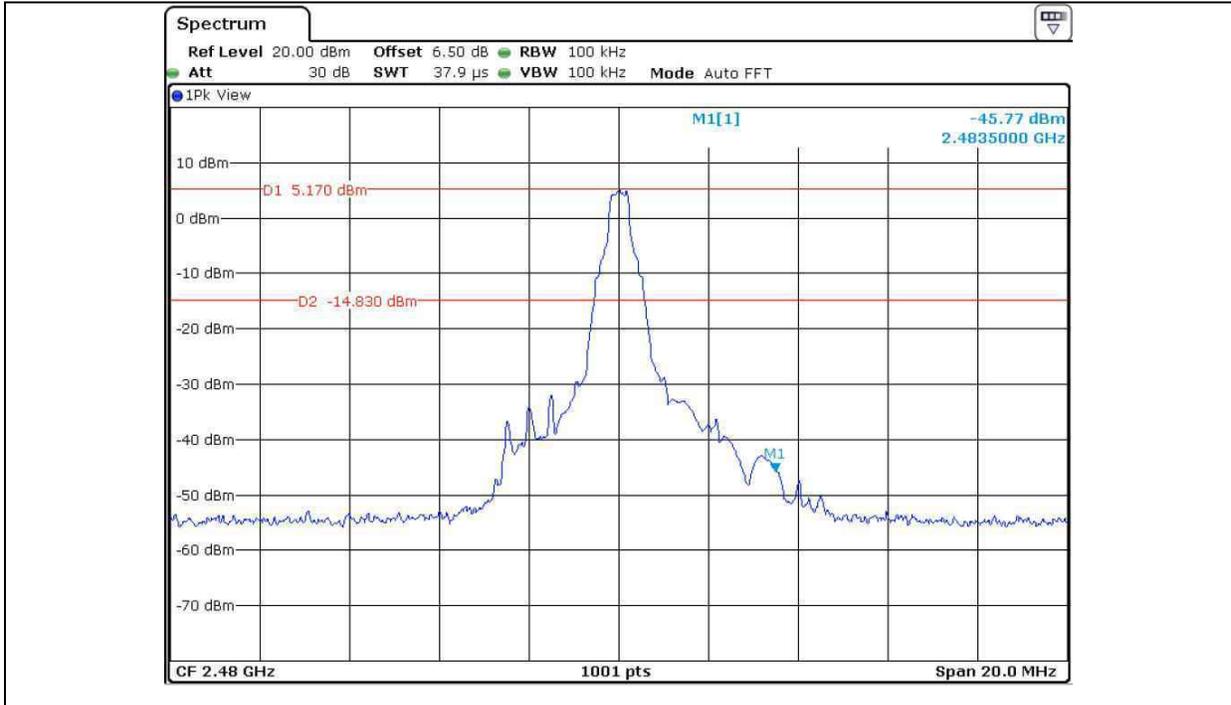


High Channel

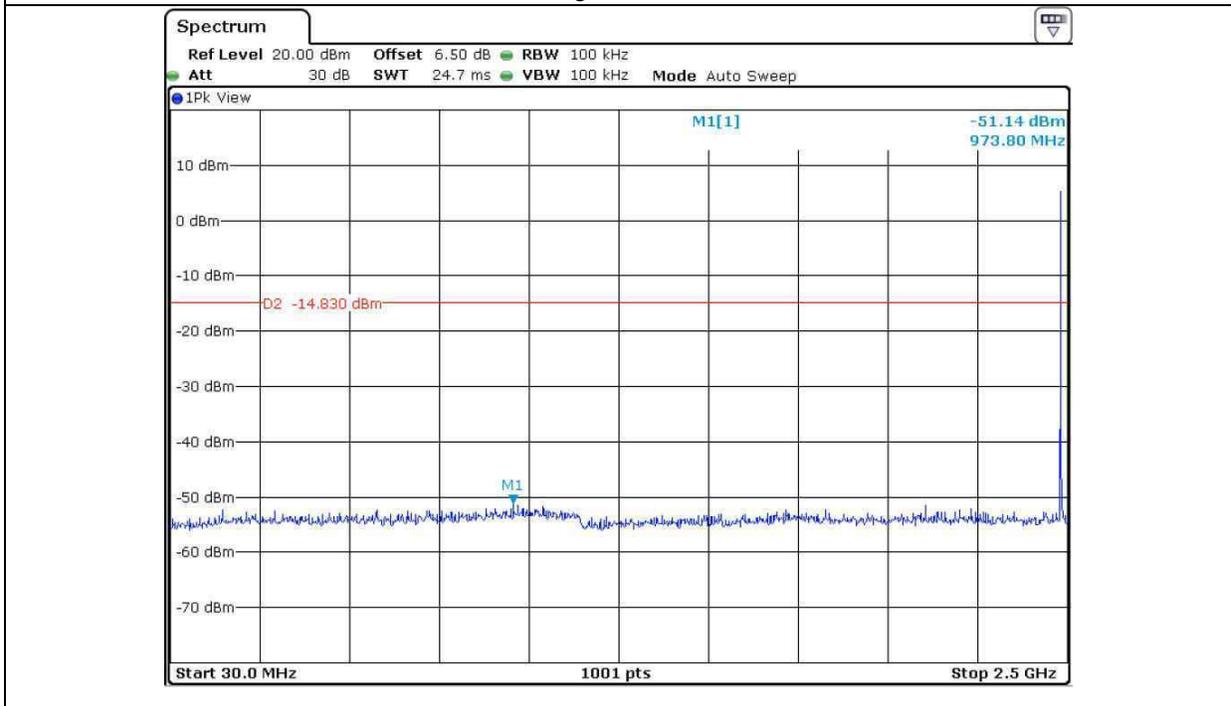


High Channel

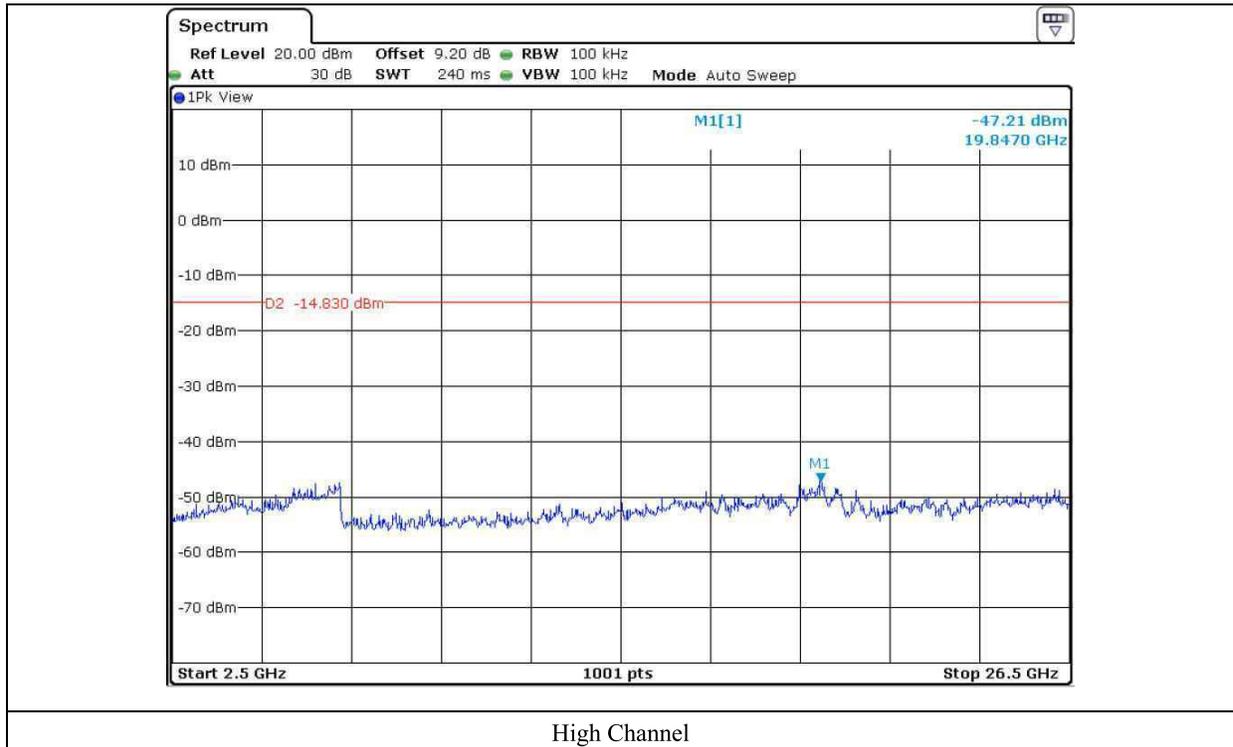


12.5.2 Test data for 2 Mbps

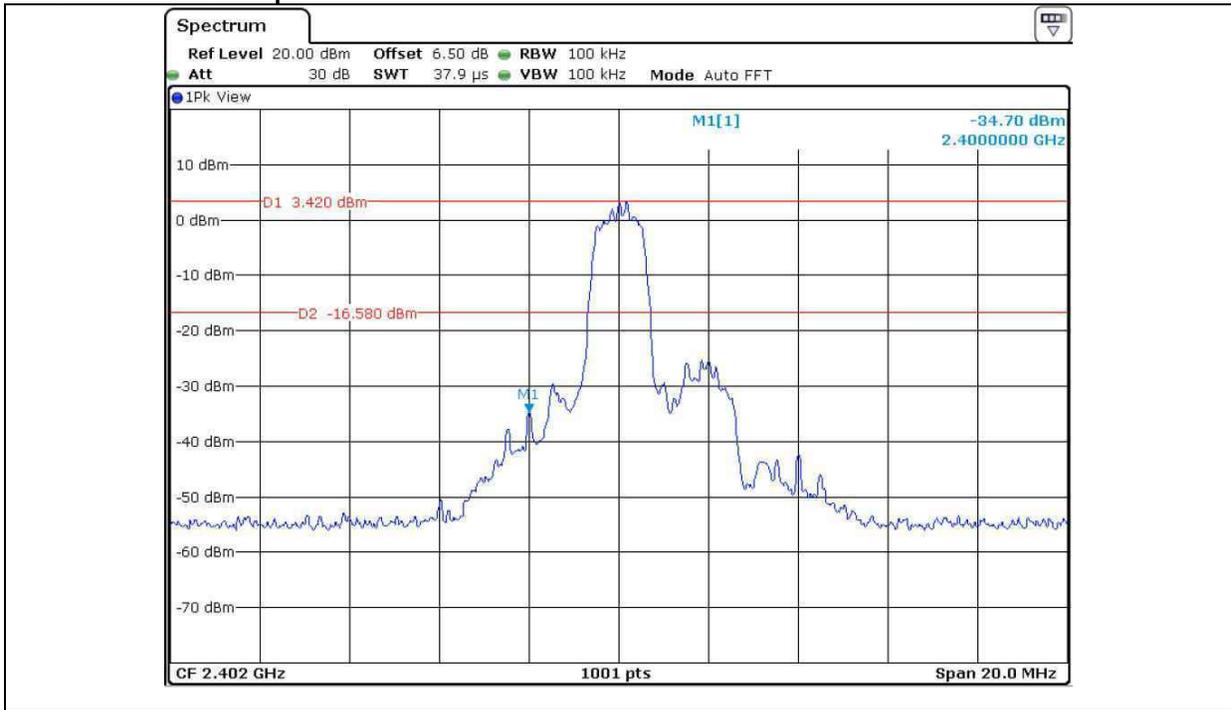


Low Channel

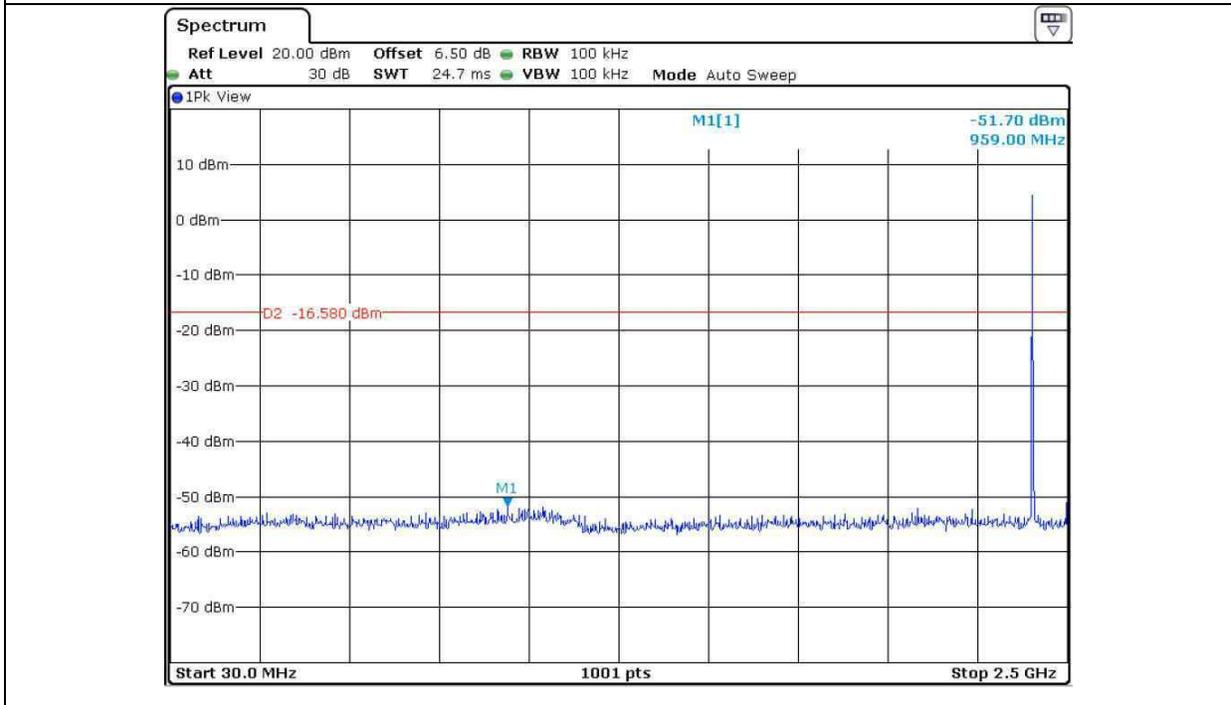


Low Channel

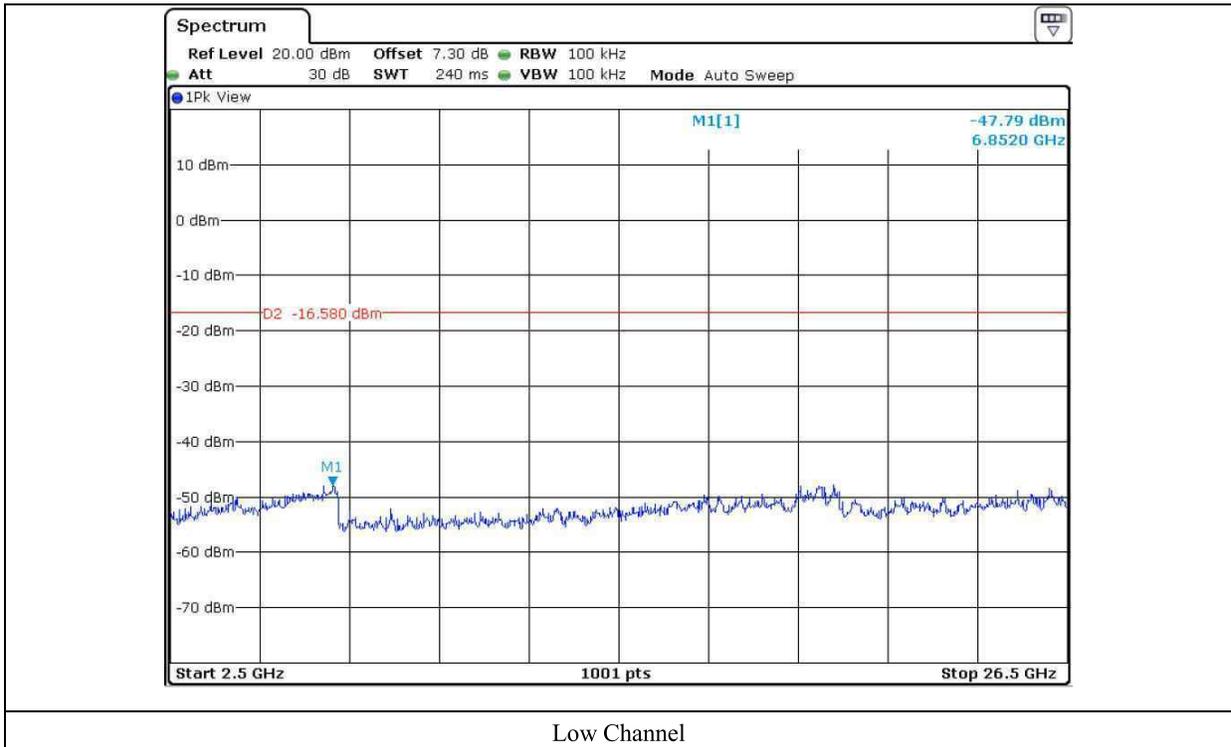


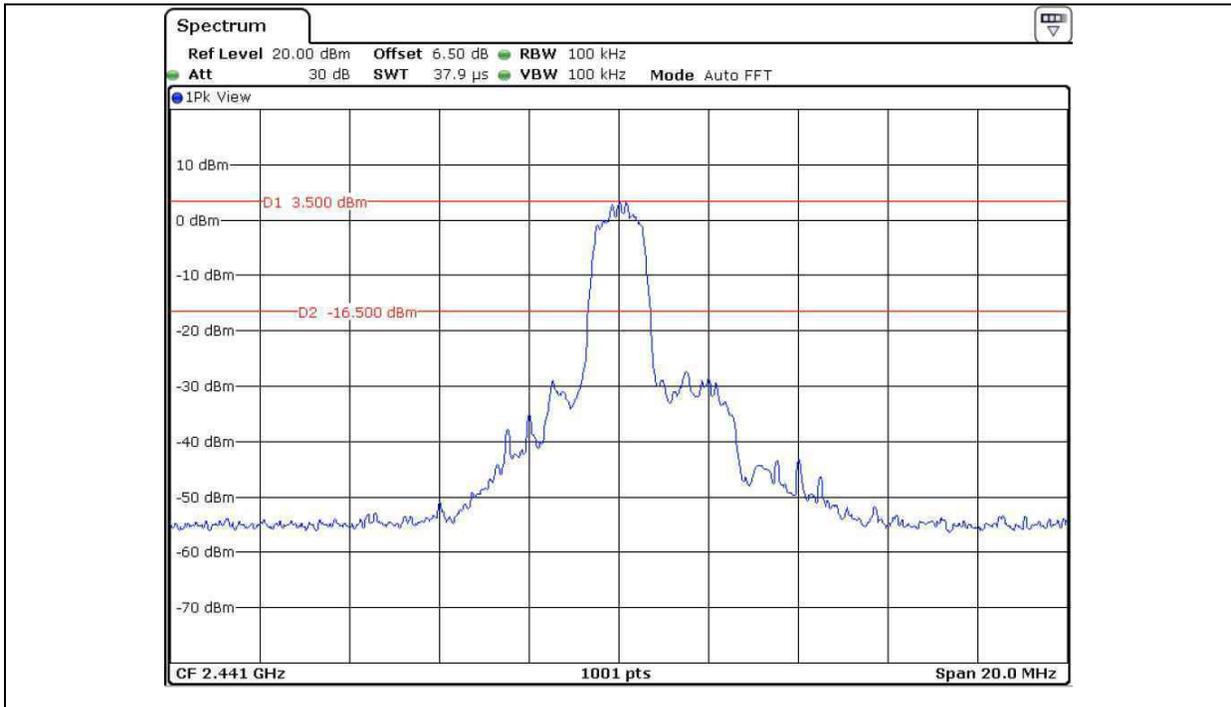


Middle Channel

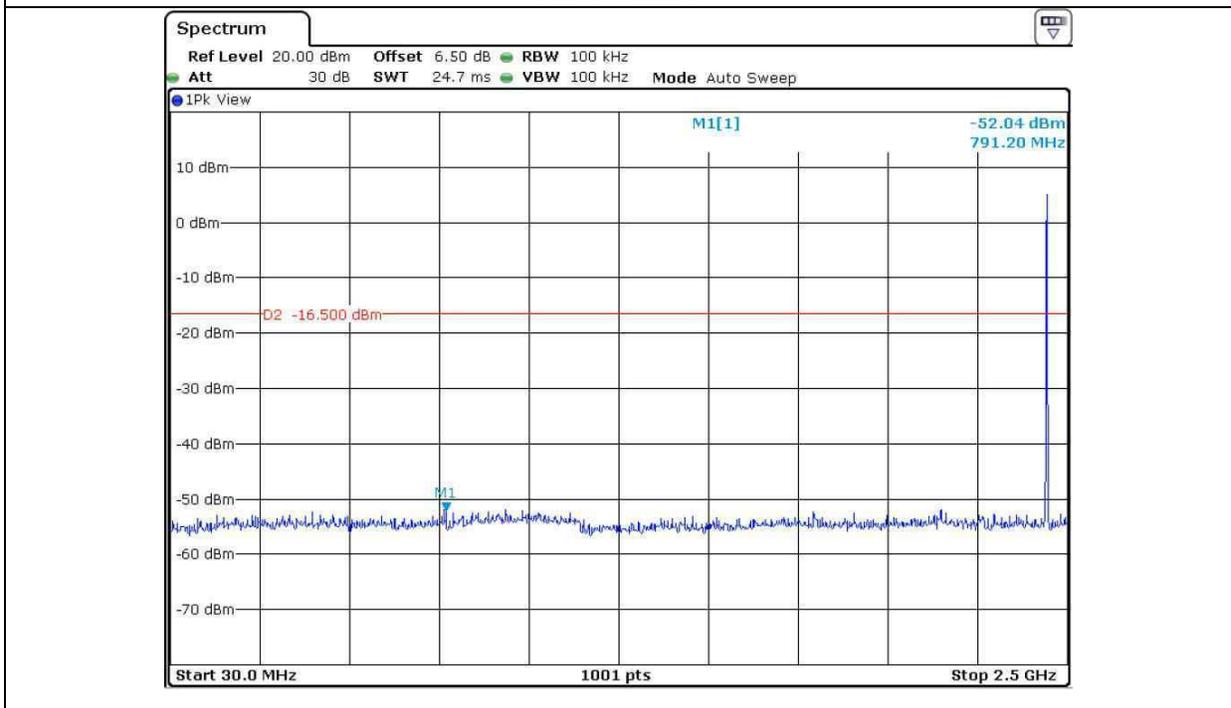


Middle Channel

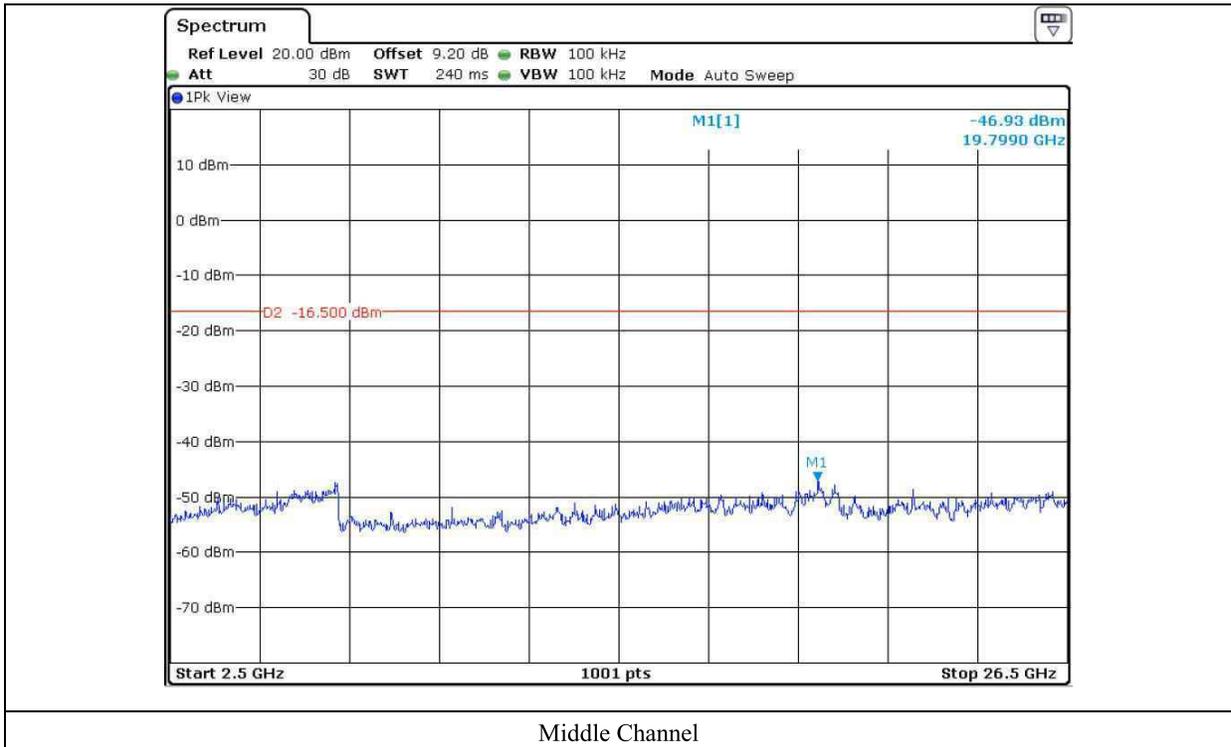


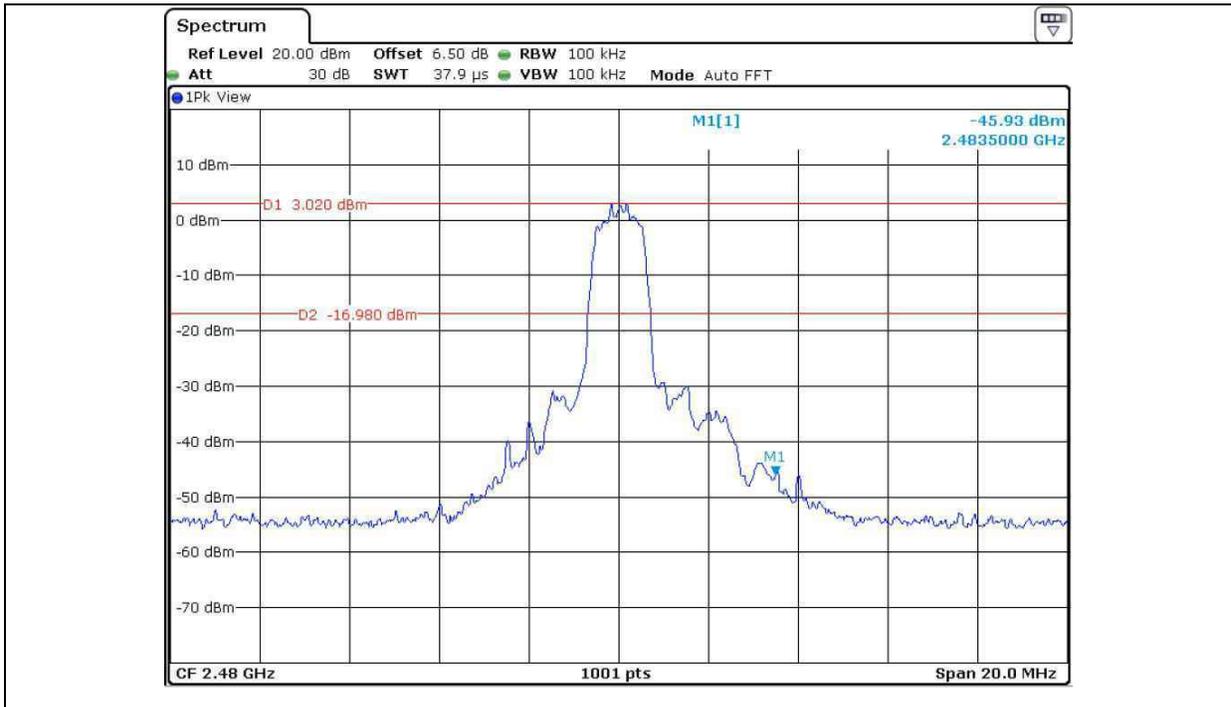


High Channel

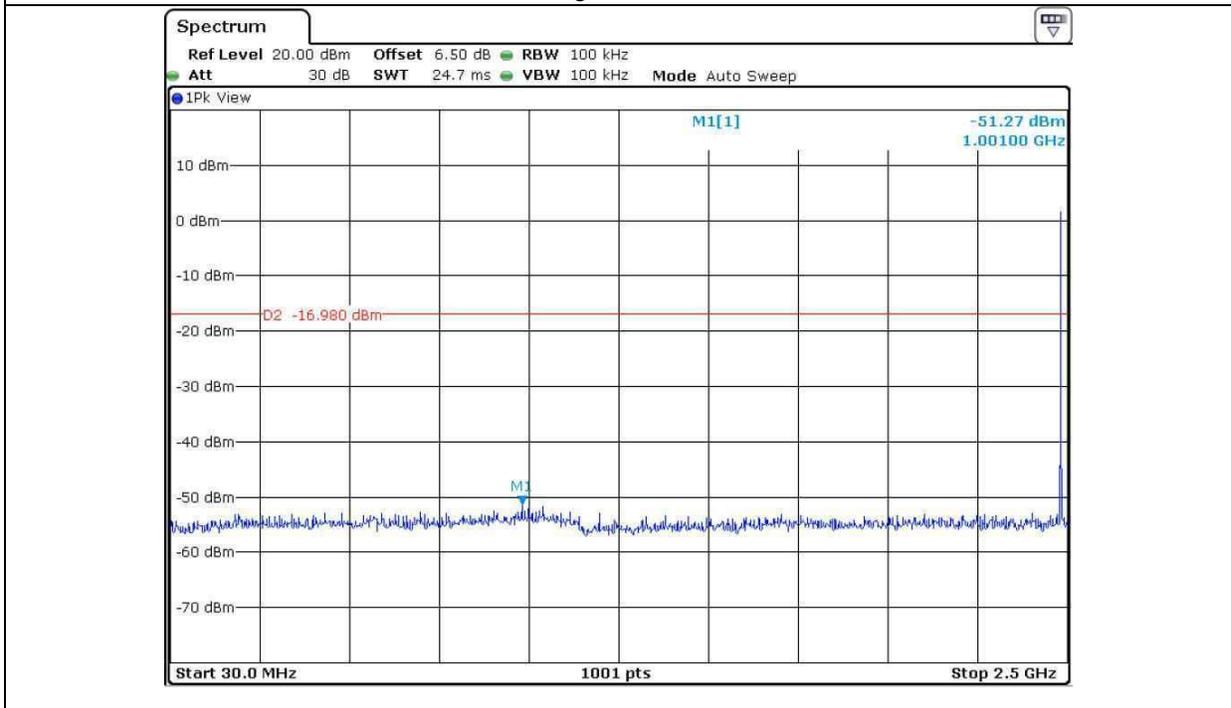


High Channel

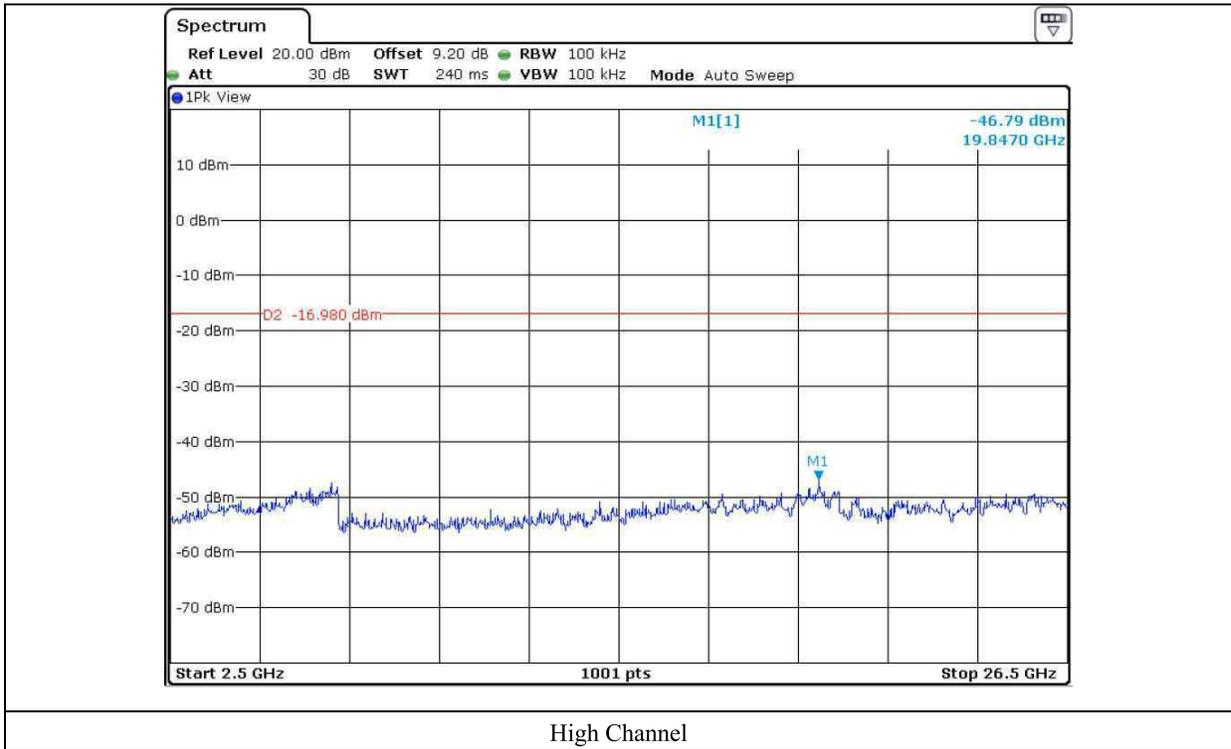


12.5.3 Test data for 3 Mbps

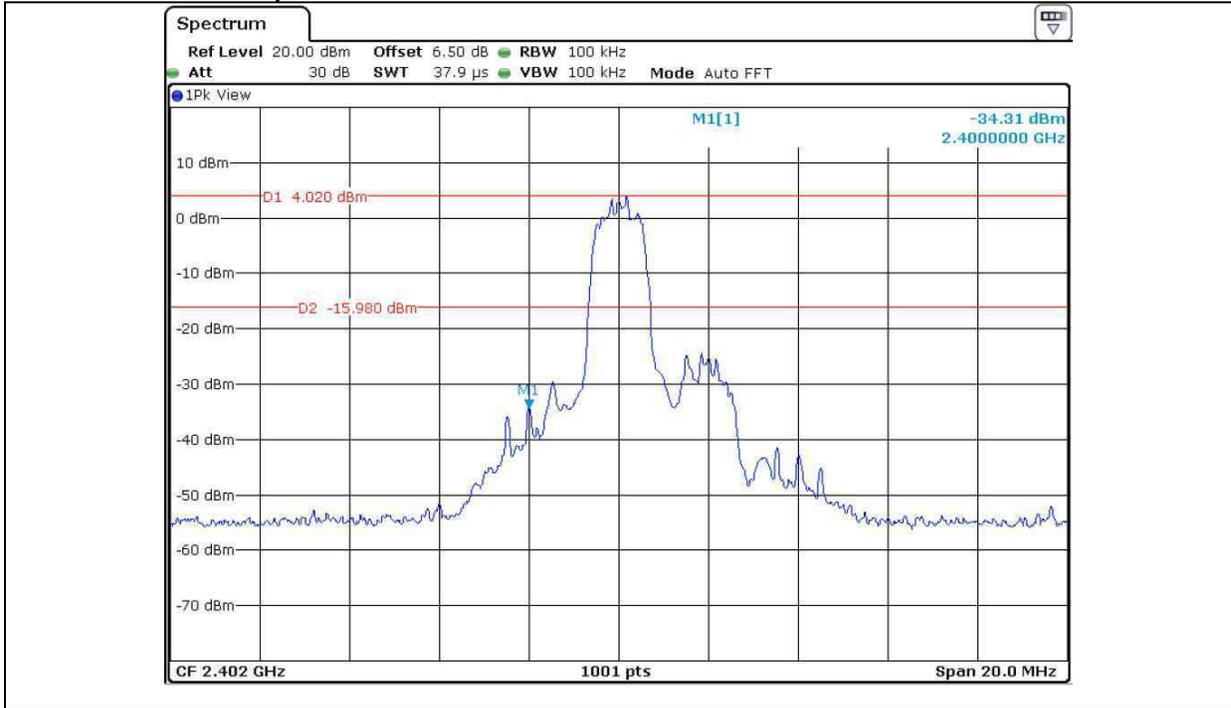


Low Channel

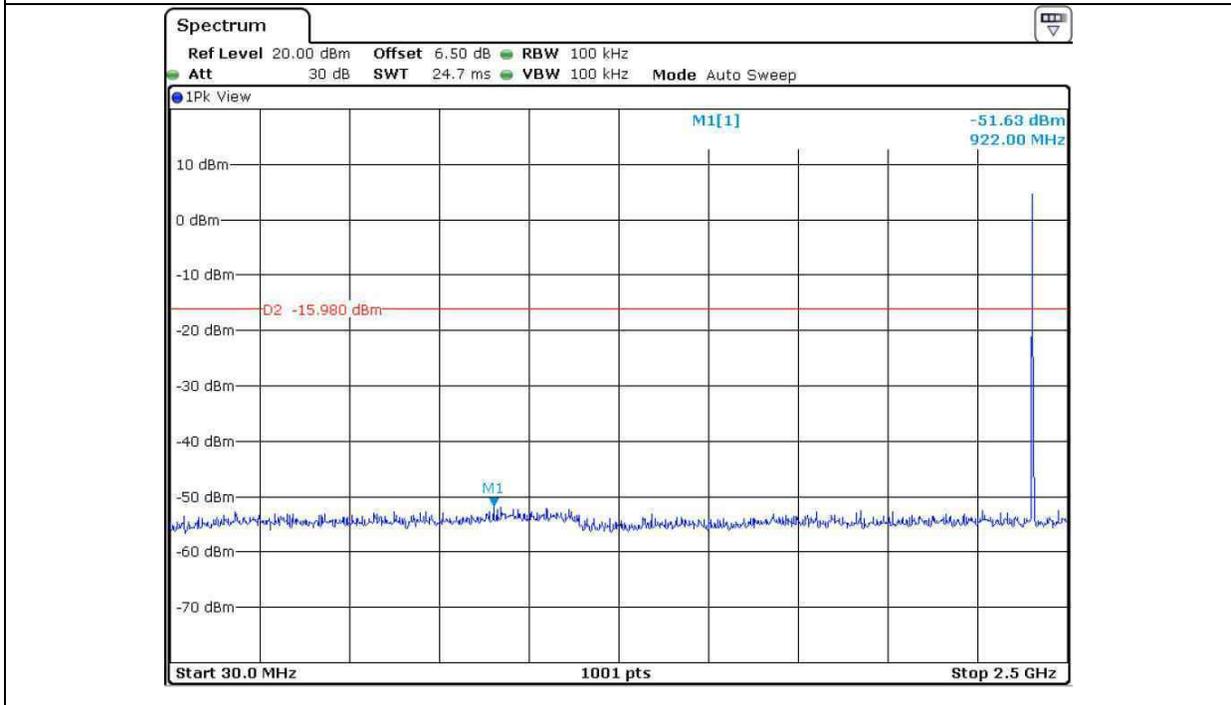


Low Channel

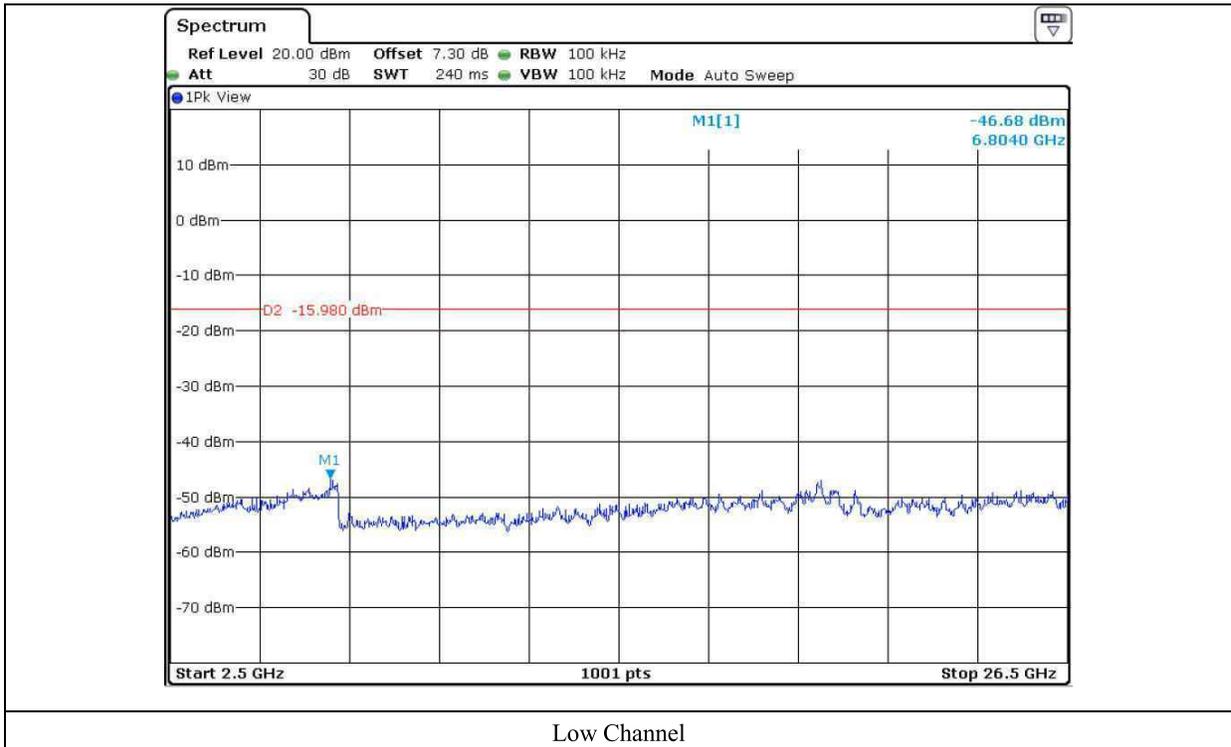


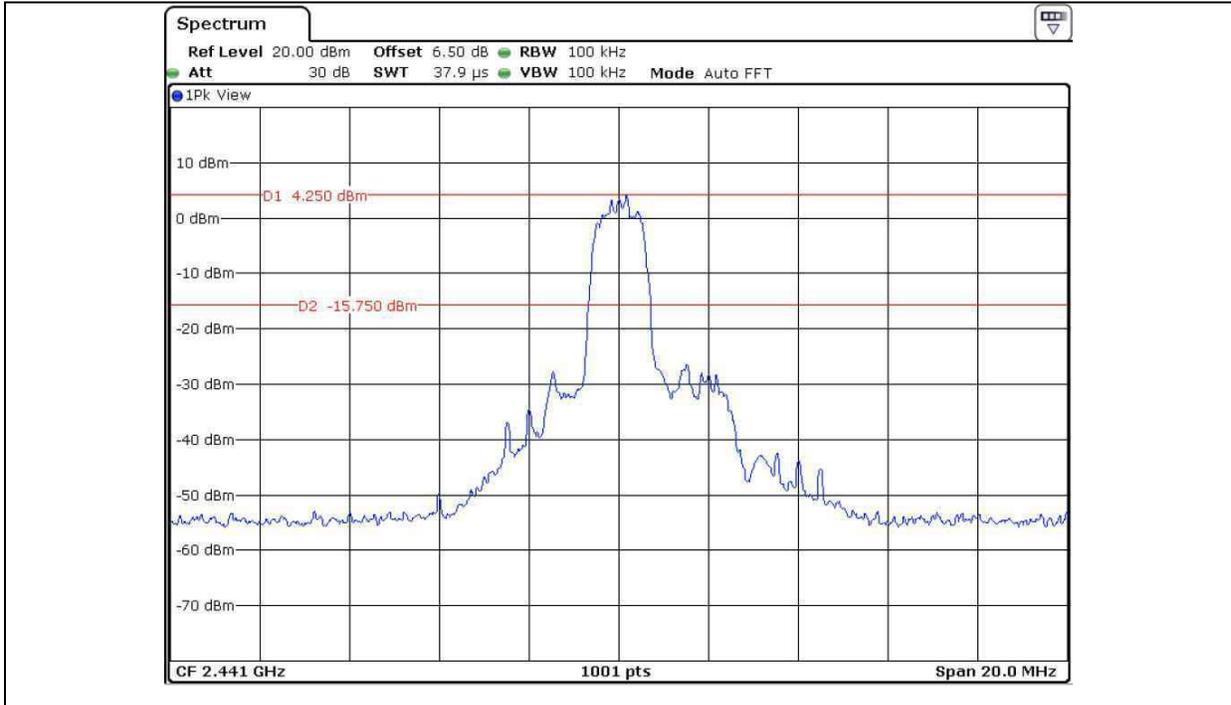


Middle Channel

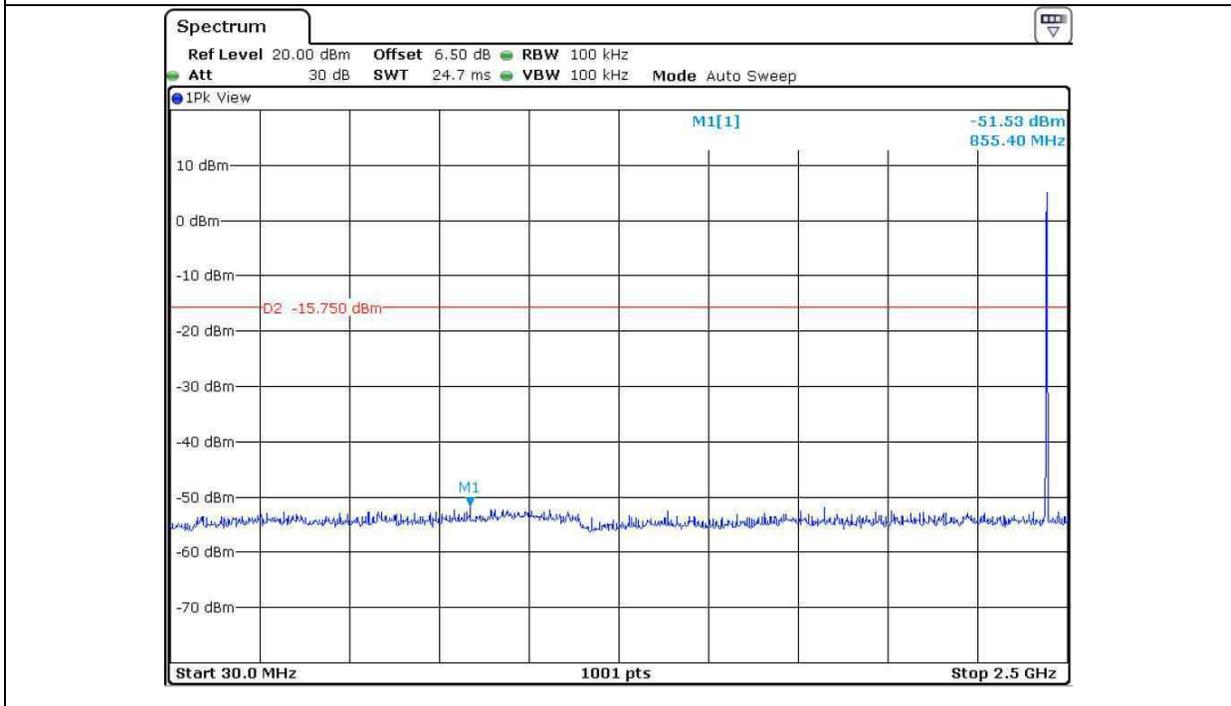


Middle Channel

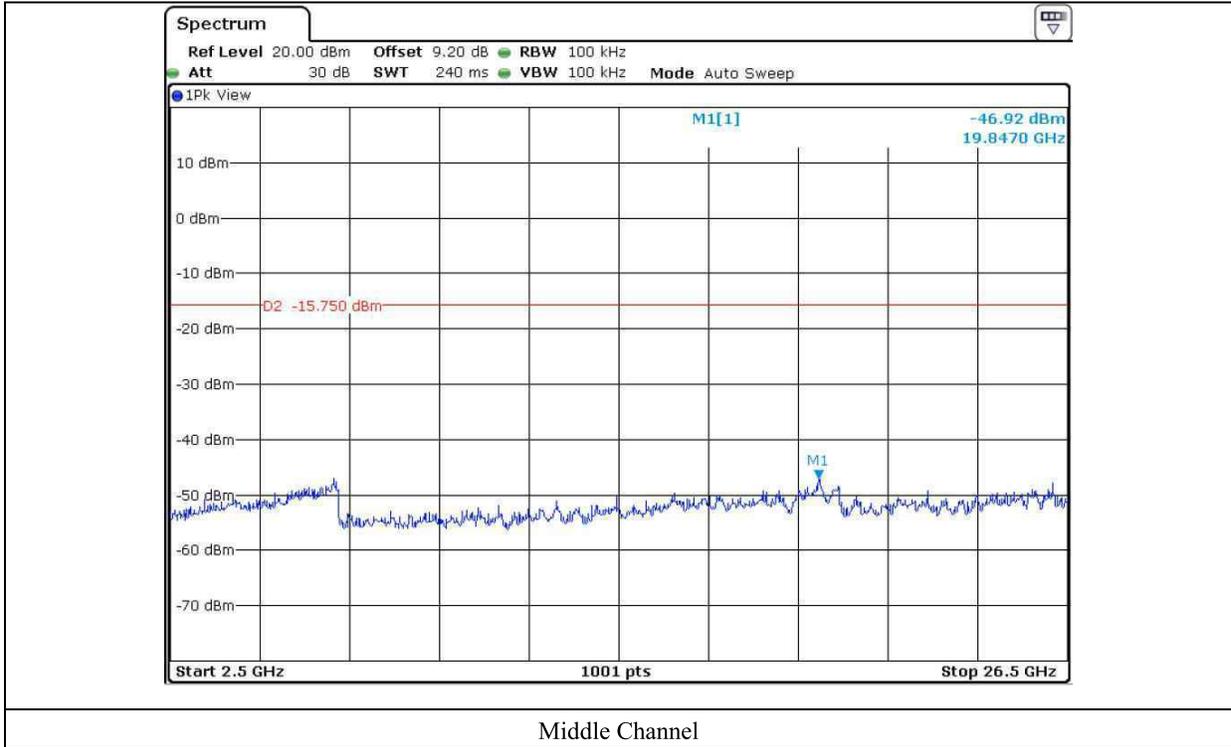


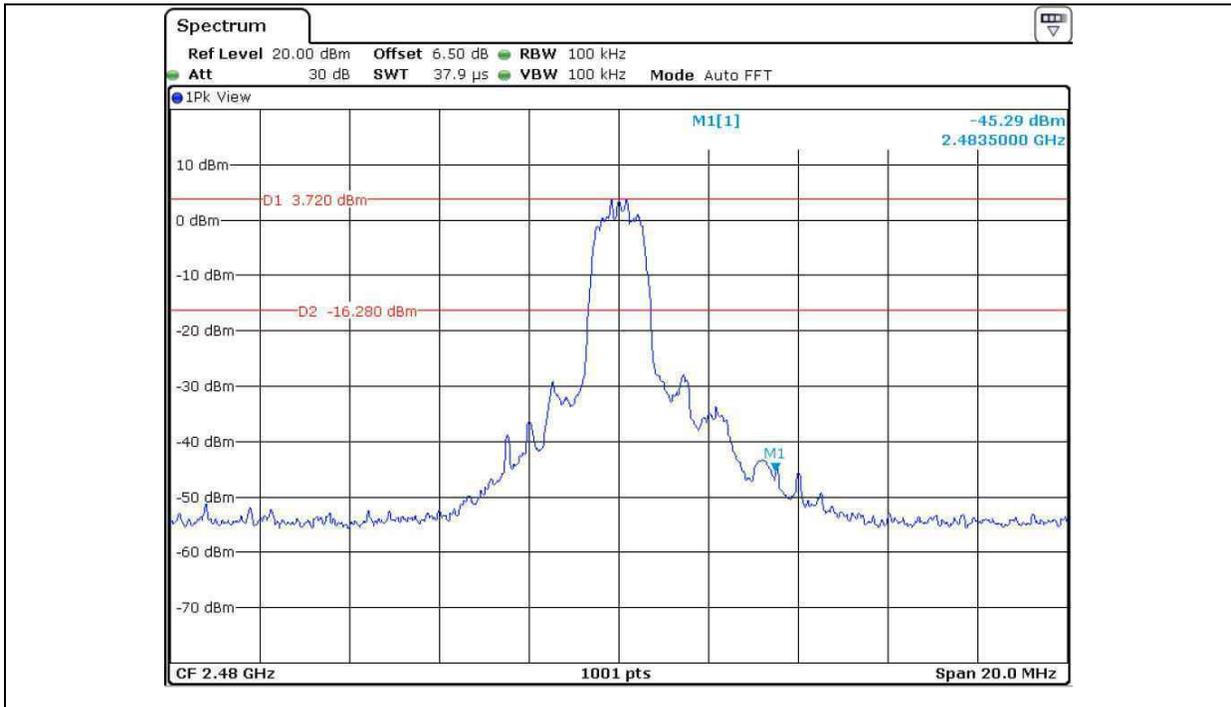

High Channel

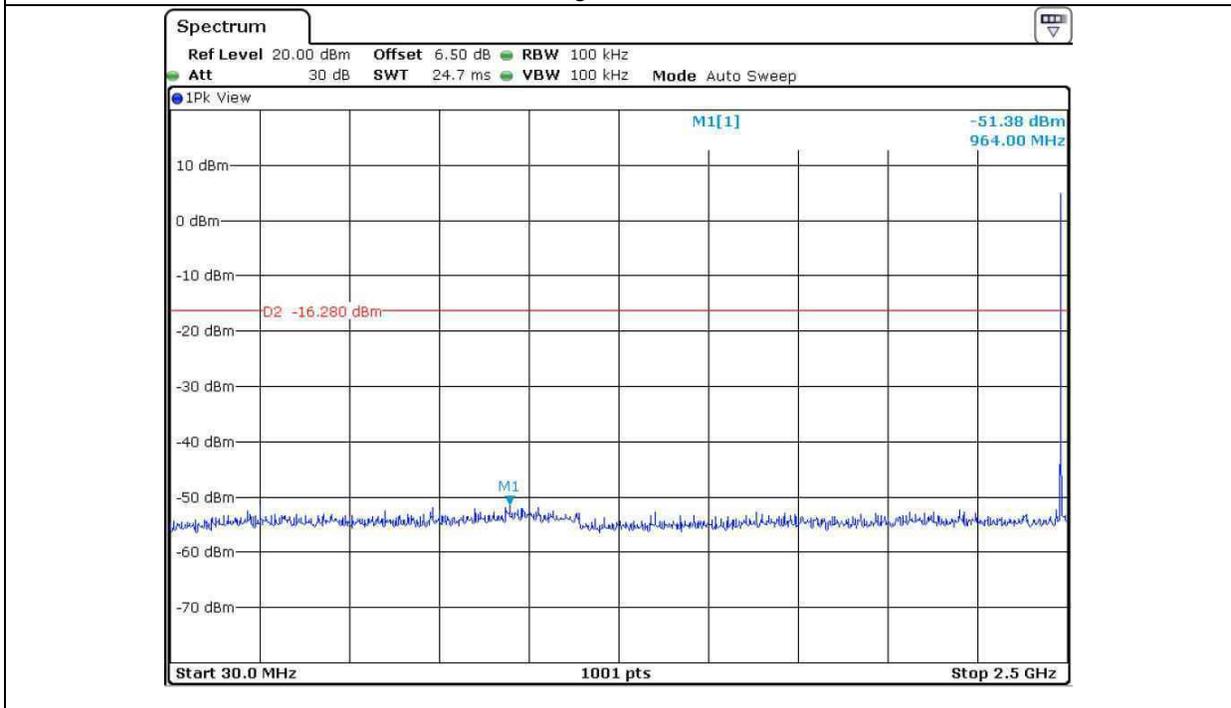

High Channel

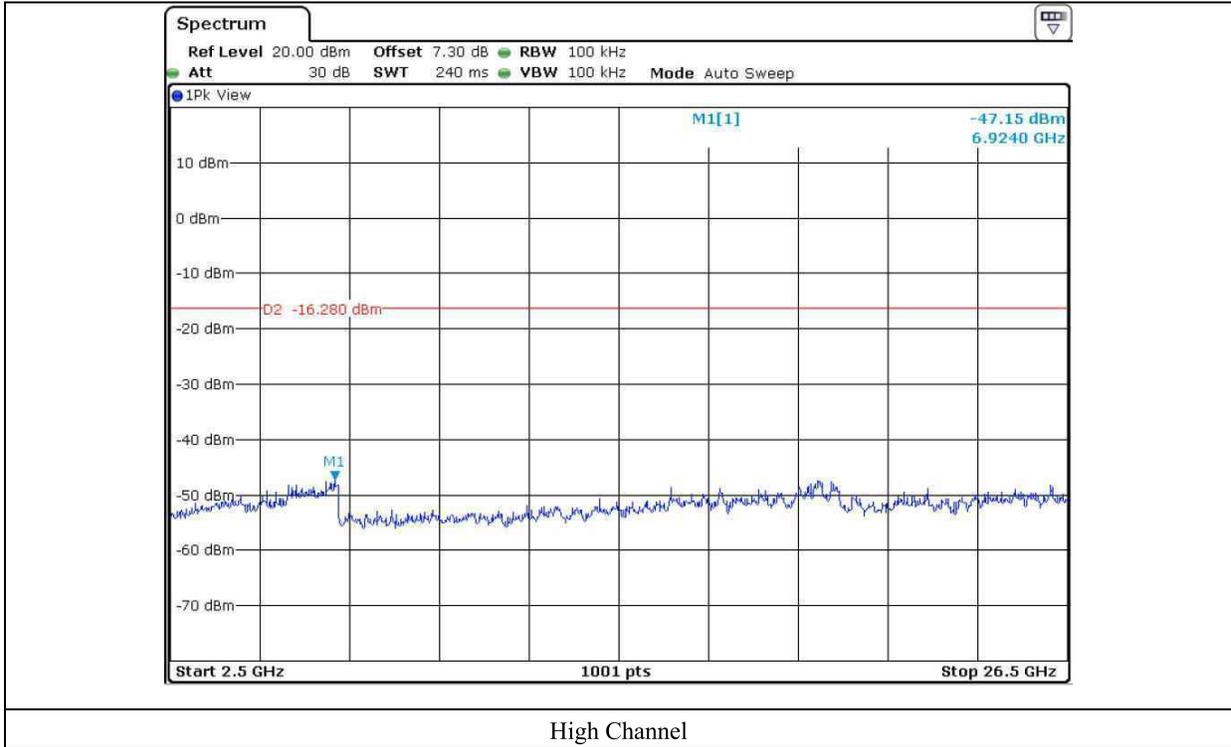

**12.6 Test data for Transmitting Mode radiated emission**

**12.6.1 Radiated Emission which fall in the Restricted Band**


**12.6.1.1 Test data for 1 Mbps**

- Test Date : September 29, 2018
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Detector : Peak Mode(Peak), Average Mode(RMS)
- Measurement distance : 3 m
- Operating Condition : Highest Output Power Transmitting Mode(Low Channel and High Channel)
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
<b>Test Data for Low Channel</b>									
2372.69	38.39	Peak	H	27.80	11.36	34.30	43.25	74.00	30.75
2338.89	28.92	Average	H				33.78	54.00	20.22
2345.92	38.41	Peak	V				43.27	74.00	30.73
2339.77	29.04	Average	V				33.90	54.00	20.10
<b>Test Data for High Channel</b>									
2483.50	42.01	Peak	H	27.80	11.36	34.36	46.81	74.00	27.19
2483.50	33.22	Average	H				38.02	54.00	15.98
2483.50	46.23	Peak	V				51.03	74.00	22.97
2483.50	26.67	Average	V				31.47	54.00	22.53

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical



**Tested by: Ju Yun Park / Assistant Manager**

**12.6.1.2 Test data for 2 Mbps**

- Test Date : September 29, 2018
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Detector : Peak Mode(Peak), Average Mode(RMS)
- Measurement distance : 3 m
- Operating Condition : Highest Output Power Transmitting Mode(Low Channel and High Channel)
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
<b>Test Data for Low Channel</b>									
2337.21	38.99	Peak	H	27.80	11.36	34.30	43.85	74.00	30.15
2336.73	27.50	Average	H				32.36	54.00	21.64
2389.88	38.99	Peak	V				43.85	74.00	30.15
2342.32	28.81	Average	V				33.67	54.00	20.33
<b>Test Data for High Channel</b>									
2483.50	47.23	Peak	H	27.80	11.36	34.36	52.03	74.00	21.97
2483.50	30.87	Average	H				35.67	54.00	18.33
2483.50	50.83	Peak	V				55.63	74.00	18.37
2483.50	34.01	Average	V				38.81	54.00	15.19

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical



**Tested by: Ju Yun Park / Assistant Manager**

**12.6.1.3 Test data for 3 Mbps**

- Test Date : September 29, 2018
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Detector : Peak Mode(Peak), Average Mode(RMS)
- Measurement distance : 3 m
- Operating Condition : Highest Output Power Transmitting Mode(Low Channel and High Channel)
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
<b>Test Data for Low Channel</b>									
2325.14	39.33	Peak	H	27.80	11.36	34.30	44.19	74.00	29.81
2336.65	27.17	Average	H				32.03	54.00	21.97
2339.93	38.94	Peak	V				43.80	74.00	30.20
2336.73	27.12	Average	V				31.98	54.00	22.02
<b>Test Data for High Channel</b>									
2483.50	49.86	Peak	H	27.80	11.36	34.36	54.66	74.00	19.34
2483.50	32.41	Average	H				37.21	54.00	16.79
2483.50	47.96	Peak	V				52.76	74.00	21.24
2483.50	31.18	Average	V				35.98	54.00	18.02

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical



**Tested by: Ju Yun Park / Assistant Manager**

**12.6.2 Spurious & Harmonic Radiated Emission above 1 GHz**

**12.6.2.1 Test data for 1 Mbps**

- Test Date : September 29, 2018
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Detector : Peak Mode(Peak), Average Mode(RMS)
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Operating Condition : Highest Output Power Transmitting Mode
- Result : PASSED

Frequency (GHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
<b>Test Data for Low Channel</b>									
4 804.00	37.82	Peak	H	31.30	16.10	35.23	49.99	74.00	24.01
	28.38	Average	H				40.55	54.00	13.45
	38.42	Peak	V				50.59	74.00	23.41
	28.46	Average	V				40.63	54.00	13.37
<b>Test Data for Middle Channel</b>									
4 882.00	38.33	Peak	H	31.30	16.30	35.26	50.67	74.00	23.33
	28.62	Average	H				40.96	54.00	13.04
	39.63	Peak	V				51.97	74.00	22.03
	27.97	Average	V				40.31	54.00	13.69
<b>Test Data for High Channel</b>									
4 960.00	38.96	Peak	H	31.10	16.50	35.29	51.27	74.00	22.73
	29.39	Average	H				41.70	54.00	12.30
	39.56	Peak	V				51.87	74.00	22.13
	29.16	Average	V				41.47	54.00	12.53

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical, "\*" Frequency fall in restricted band



Tested by: Ju Yun Park / Assistant Manager

**12.6.2.2 Test data for 2 Mbps**

- Test Date : September 29, 2018
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Detector : Peak Mode(Peak), Average Mode(RMS)
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Operating Condition : Highest Output Power Transmitting Mode
- Result : PASSED

Frequency (GHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
<b>Test Data for Low Channel</b>									
4 804.00	38.88	Peak	H	31.30	16.10	35.23	51.05	74.00	22.95
	28.30	Average	H				40.47	54.00	13.53
	37.35	Peak	V				49.52	74.00	24.48
	27.92	Average	V				40.09	54.00	13.91
<b>Test Data for Middle Channel</b>									
4 882.00	39.55	Peak	H	31.30	16.30	35.26	51.89	74.00	22.11
	28.12	Average	H				40.46	54.00	13.54
	38.47	Peak	V				50.81	74.00	23.19
	29.13	Average	V				41.47	54.00	12.53
<b>Test Data for High Channel</b>									
4 960.00	38.62	Peak	H	31.10	16.50	35.29	50.93	74.00	23.07
	28.72	Average	H				41.03	54.00	12.97
	39.02	Peak	V				51.33	74.00	22.67
	29.03	Average	V				41.34	54.00	12.66

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical, "\*" Frequency fall in restricted band



**Tested by: Ju Yun Park / Assistant Manager**

**12.6.2.3 Test data for 3 Mbps**

- Test Date : September 29, 2018
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Detector : Peak Mode(Peak), Average Mode(RMS)
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Operating Condition : Highest Output Power Transmitting Mode
- Result : PASSED

Frequency (GHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
<b>Test Data for Low Channel</b>									
4 804.00	38.54	Peak	H	31.30	16.10	35.23	50.71	74.00	23.29
	28.27	Average	H				40.44	54.00	13.56
	39.01	Peak	V				51.18	74.00	22.82
	28.25	Average	V				40.42	54.00	13.58
<b>Test Data for Middle Channel</b>									
4 882.00	38.13	Peak	H	31.30	16.30	35.26	50.47	74.00	23.53
	28.49	Average	H				40.83	54.00	13.17
	38.85	Peak	V				51.19	74.00	22.81
	28.61	Average	V				40.95	54.00	13.05
<b>Test Data for High Channel</b>									
4 960.00	39.88	Peak	H	31.10	16.50	35.29	52.19	74.00	21.81
	29.16	Average	H				41.47	54.00	12.53
	38.52	Peak	V				50.83	74.00	23.17
	28.98	Average	V				41.29	54.00	12.71

Tabulated test data for Restricted Band

Remark: "H": Horizontal, "V": Vertical, "\*" Frequency fall in restricted band



**Tested by: Ju Yun Park / Assistant Manager**

**12.6.3 Spurious Radiated Emission**

**12.6.3.1 Test Data for 30 MHz ~ 1 000 MHz (Charging mode)**

Humidity Level : 48 % R.H.

Temperature: 21 °C

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247


Result : PASSED

EUT : Bluetooth Headset

Date: September 29, 2018


Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

[Tested Model : BCS-200]

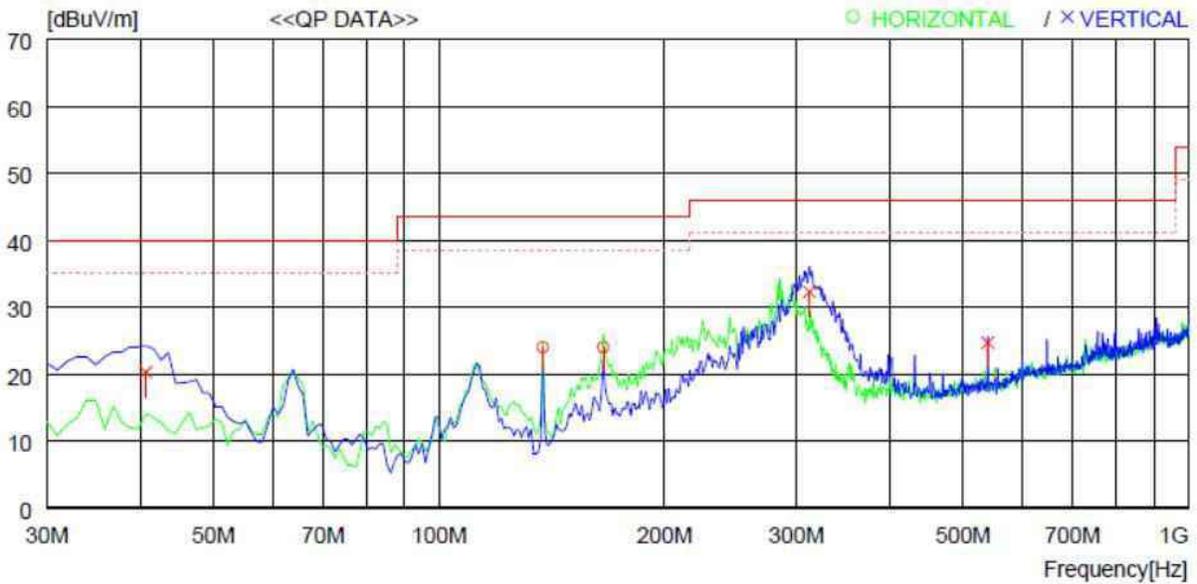

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
---- Horizontal ----										
1	137.670	45.7	8.6	2.7	33.0	24.0	43.5	19.5	200	359
2	165.800	45.2	8.8	3.0	33.0	24.0	43.5	19.5	200	359
---- Vertical ----										
3	40.670	38.1	13.8	1.5	33.1	20.3	40.0	19.7	100	139
4	312.270	47.6	13.6	4.1	33.0	32.3	46.0	13.7	200	174
5	540.220	34.8	17.8	5.4	33.3	24.7	46.0	21.3	100	157

[Tested Model : BCS-100]

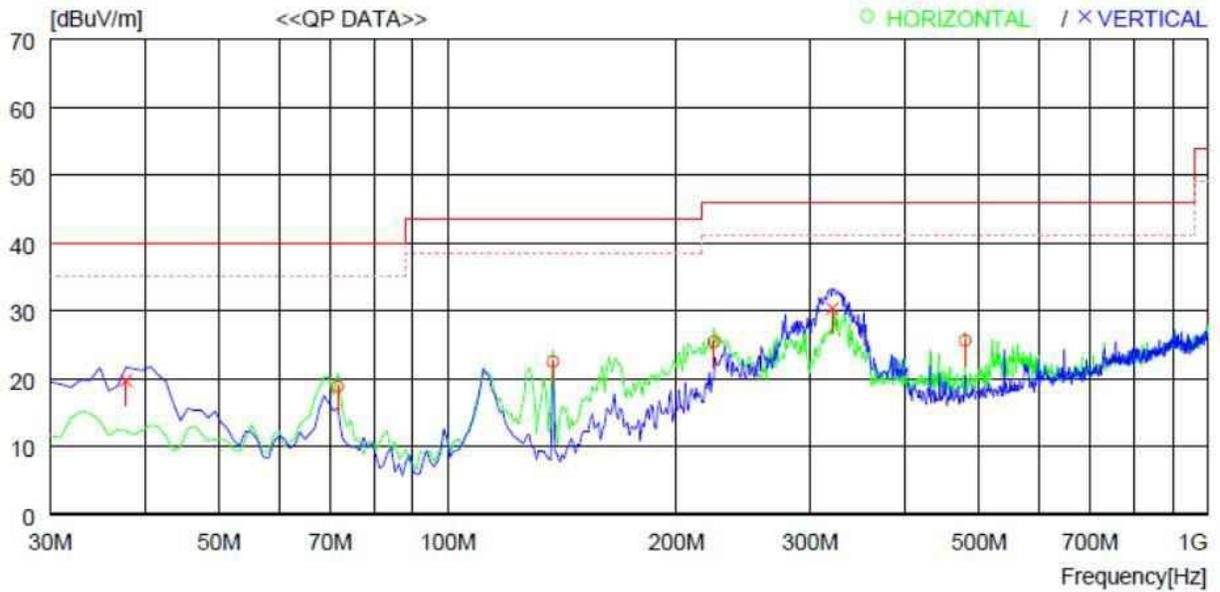

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
---- Horizontal ----										
1	71.710	40.9	9.0	2.0	33.1	18.8	40.0	21.2	300	0
2	137.670	44.2	8.6	2.7	33.0	22.5	43.5	21.0	200	359
3	224.000	43.3	11.6	3.4	32.9	25.4	46.0	20.6	200	359
4	480.081	36.8	16.9	5.1	33.2	25.6	46.0	20.4	100	179
---- Vertical ----										
5	37.760	38.1	13.2	1.5	33.1	19.7	40.0	20.3	200	0
6	321.000	45.3	13.9	4.1	33.0	30.3	46.0	15.7	100	0

Tested by: Ju Yun Park / Assistant Manager

**12.6.3.2 Test Data for 30 MHz ~ 1 000 MHz (Transmitting mode)**

Humidity Level : 48 % R.H.

Temperature: 21 °C

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247


Result : PASSED

EUT : Bluetooth Headset

Date: September 30, 2018


Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

[Tested Model : BCS-200]

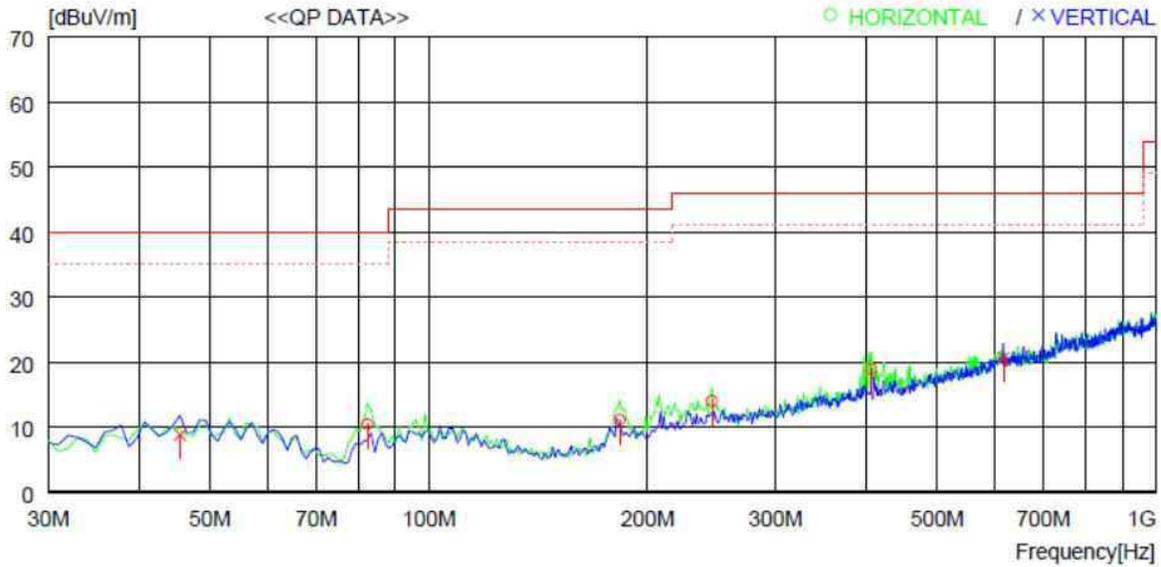

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
---- Horizontal ----										
1	82.380	33.2	8.2	2.0	33.0	10.4	40.0	29.6	300	0
2	183.260	31.1	9.9	3.1	33.0	11.1	43.5	32.4	200	359
3	245.340	30.8	12.4	3.7	32.9	14.0	46.0	32.0	300	0
4	406.360	31.2	16.2	4.6	33.1	18.9	46.0	27.1	100	356
---- Vertical ----										
5	45.520	26.3	14.1	1.5	33.1	8.8	40.0	31.2	300	359
6	616.847	28.6	19.6	5.7	33.3	20.6	46.0	25.4	100	359

[Tested Model : BCS-100]

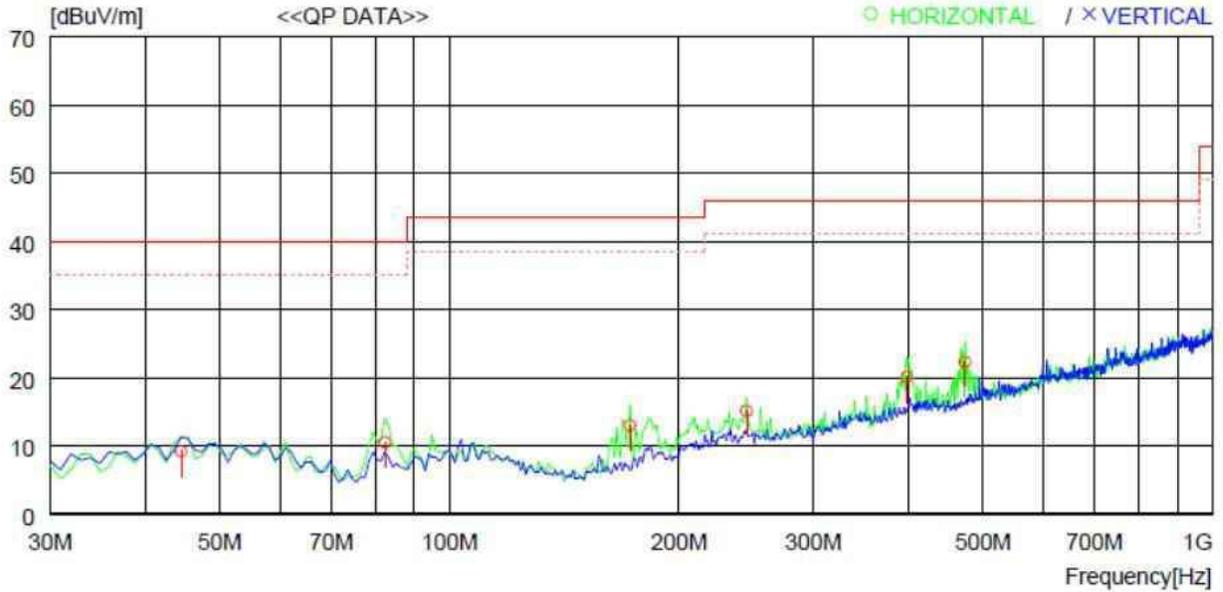

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	44.550	26.7	14.1	1.5	33.1	9.2	40.0	30.8	100	22
2	82.380	33.3	8.2	2.0	33.0	10.5	40.0	29.5	300	78
3	172.590	33.9	9.1	3.0	33.0	13.0	43.5	30.5	100	359
4	245.340	31.9	12.4	3.7	32.9	15.1	46.0	30.9	400	114
5	397.630	32.6	16.0	4.6	33.1	20.1	46.0	25.9	100	0
6	474.261	33.8	16.7	5.0	33.2	22.3	46.0	23.7	100	0

**Tested by: Ju Yun Park / Assistant Manager**

**12.6.3.2 Test Data for Below 30 MHz**

- Test Date : September 29, 2018
- Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- Frequency range : 9 kHz ~ 30 MHz
- Measurement distance : 3 m
- Operating Condition : Highest Output Power Transmitting Mode
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
20dB less than the limit and thus not included.								

**12.6.3.3 Test Data for above 1 GHz**

- Test Date : September 29, 2018
- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Operating Condition : Highest Output Power Transmitting Mode
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Factor (dB/m)	Cable Loss	Amp Gain	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
20dB less than the limit and thus not included.								



**Tested by: Ju Yun Park / Assistant Manager**

### 13. CONDUCTED EMISSION TEST

#### 13.1 Operating environment

Temperature : 21 °C  
 Relative humidity : 48 % R.H.

#### 13.2 Test set-up

The EUT was placed on a wooden table, 0.8 m height above the floor. Power was fed to the EUT through a 50 Ω / 50 μH + 5 Ω Artificial Mains Network (AMN). The ground plane was electrically bonded to the reference ground system and all power lines were filtered from ambient.

#### 13.3 Test equipment used


Model Number	Manufacturer	Description	Serial Number	Last Cal. (Interval)
■ - ESCI	Rohde & Schwarz	EMI Test Receiver	101012 ce 1	Oct. 27, 2017 (1Y)
□ - ESCI	Rohde & Schwarz	EMI Test Receiver	101278 ce 2	Oct. 27, 2017 (1Y)
□ - ESHS10	Rohde & Schwarz	EMI Test Receiver	834467/007	Mar. 29, 2018 (1Y)
■ - NSLK8128	Schwarzbeck	AMN	8128-216 ce1	Mar. 28, 2018 (1Y)
□ - NSLK8126	Schwarzbeck	AMN	8126-404 ce2	Apr. 04, 2018 (1Y)
□ - NSLK8126	Schwarzbeck	AMN	8126-479 ce2	Oct. 24, 2017 (1Y)
□ - NNBM 8124	SCHWARZ BECK	V-LISN	05066	Oct. 24, 2017 (1Y)
□ - NNBM 8124	SCHWARZ BECK	V-LISN	05019	Oct. 25, 2017 (1Y)
■ - 3825/2	EMCO	LISN	9109-1869 ce1	Apr. 11, 2018 (1Y)

All test equipment used is calibrated on a regular basis.


**13.4 Test data for Charging Mode**

- Test Date : September 29, 2018
- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz
- Tested Line : HOT LINE

[Tested Model : BCS-200]

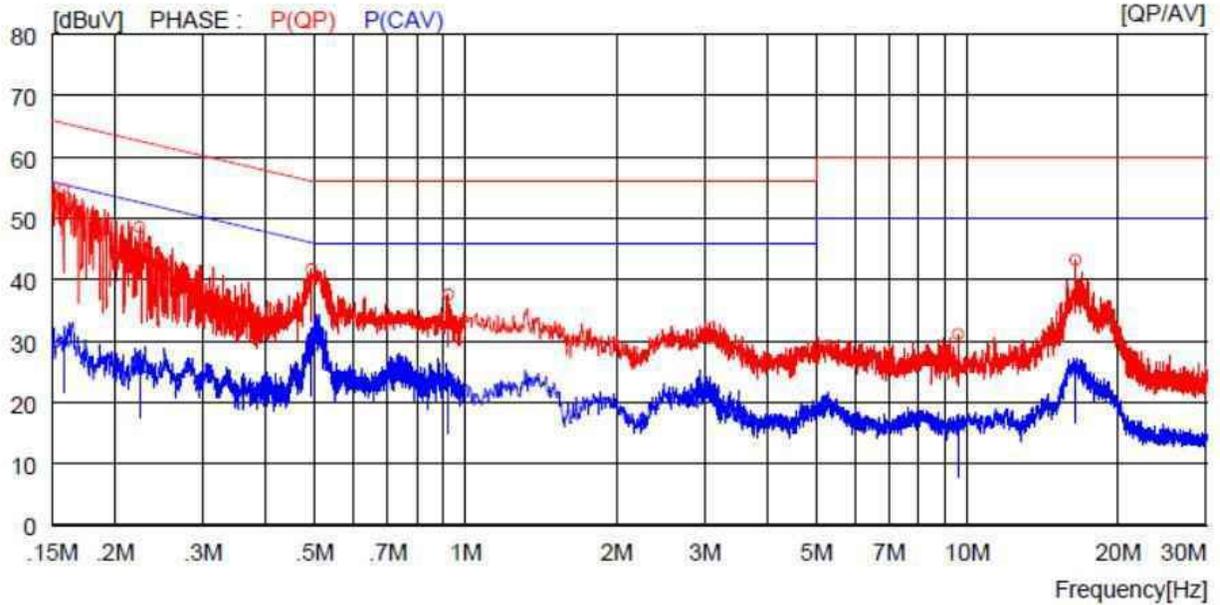


NO	FREQ		READING		C.FACTOR		RESULT		LIMIT		MARGIN	PHASE
	QP	AV	QP	AV	QP	AV	QP	AV	QP	AV		
	[MHz]	[dBuV]	[dBuV]	[dB]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]		
1	0.15800	44.7	---	10.1	54.8	---	65.6	---	10.8	---		P(QP)
2	0.22400	38.5	---	10.1	48.6	---	62.7	---	14.1	---		P(QP)
3	0.49400	31.7	---	10.0	41.7	---	56.1	---	14.4	---		P(QP)
4	0.92500	27.5	---	10.1	37.6	---	56.0	---	18.4	---		P(QP)
5	9.61000	20.9	---	10.2	31.1	---	60.0	---	28.9	---		P(QP)
6	16.45000	33.0	---	10.2	43.2	---	60.0	---	16.8	---		P(QP)
7	0.15800	---	20.1	10.1	---	30.2	---	55.6	---	25.4		P(CAV)
8	0.22400	---	15.8	10.1	---	25.9	---	52.7	---	26.8		P(CAV)
9	0.49400	---	19.4	10.0	---	29.4	---	46.1	---	16.7		P(CAV)
10	0.92500	---	13.5	10.1	---	23.6	---	46.0	---	22.4		P(CAV)
11	9.61000	---	6.2	10.2	---	16.4	---	50.0	---	33.6		P(CAV)
12	16.45000	---	14.9	10.2	---	25.1	---	50.0	---	24.9		P(CAV)

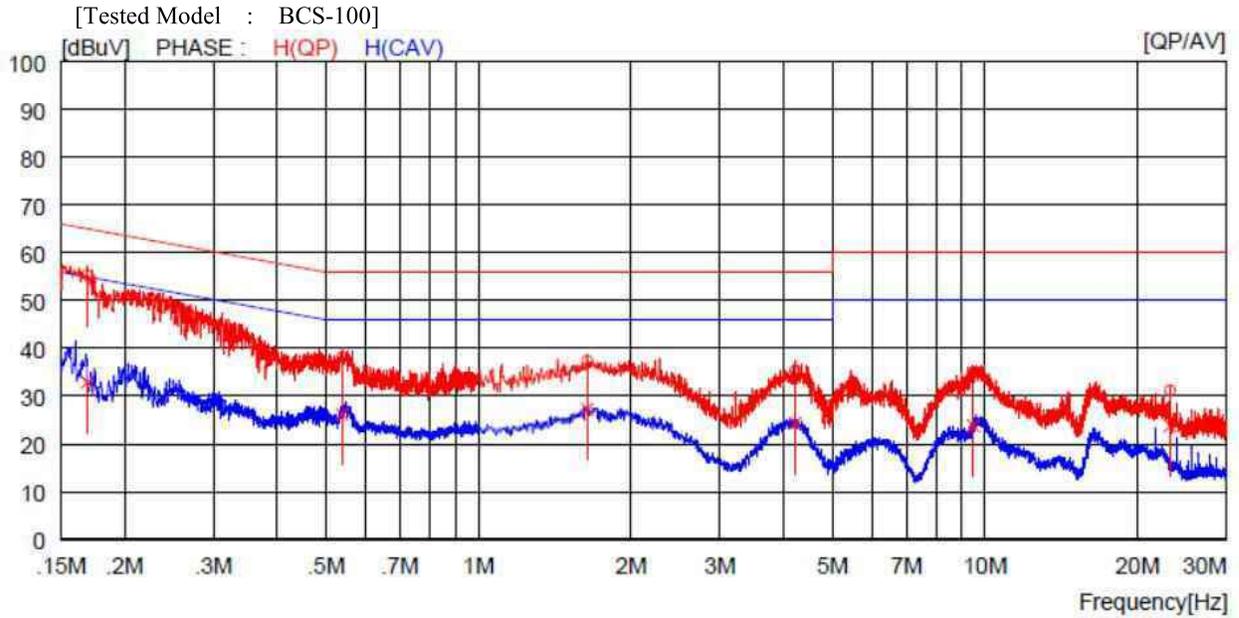

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.16900	45.4	----	9.9	55.3	----	65.0	----	9.7	----	H(QP)
2	0.53900	28.2	----	9.9	38.1	----	56.0	----	17.9	----	H(QP)
3	1.64000	27.5	----	9.9	37.4	----	56.0	----	18.6	----	H(QP)
4	4.22400	25.3	----	10.1	35.4	----	56.0	----	20.6	----	H(QP)
5	9.47500	24.6	----	10.2	34.8	----	60.0	----	25.2	----	H(QP)
6	23.22000	20.5	----	10.7	31.2	----	60.0	----	28.8	----	H(QP)
7	0.16900	----	23.0	9.9	----	32.9	----	55.0	----	22.1	H(CAV)
8	0.53900	----	16.3	9.9	----	26.2	----	46.0	----	19.8	H(CAV)
9	1.64000	----	17.3	9.9	----	27.2	----	46.0	----	18.8	H(CAV)
10	4.22400	----	14.2	10.1	----	24.3	----	46.0	----	21.7	H(CAV)
11	9.47500	----	13.6	10.2	----	23.8	----	50.0	----	26.2	H(CAV)
12	23.22000	----	13.1	10.7	----	23.8	----	50.0	----	26.2	H(CAV)


- Tested Line : NEUTRAL LINE

[Tested Model : BCS-200]

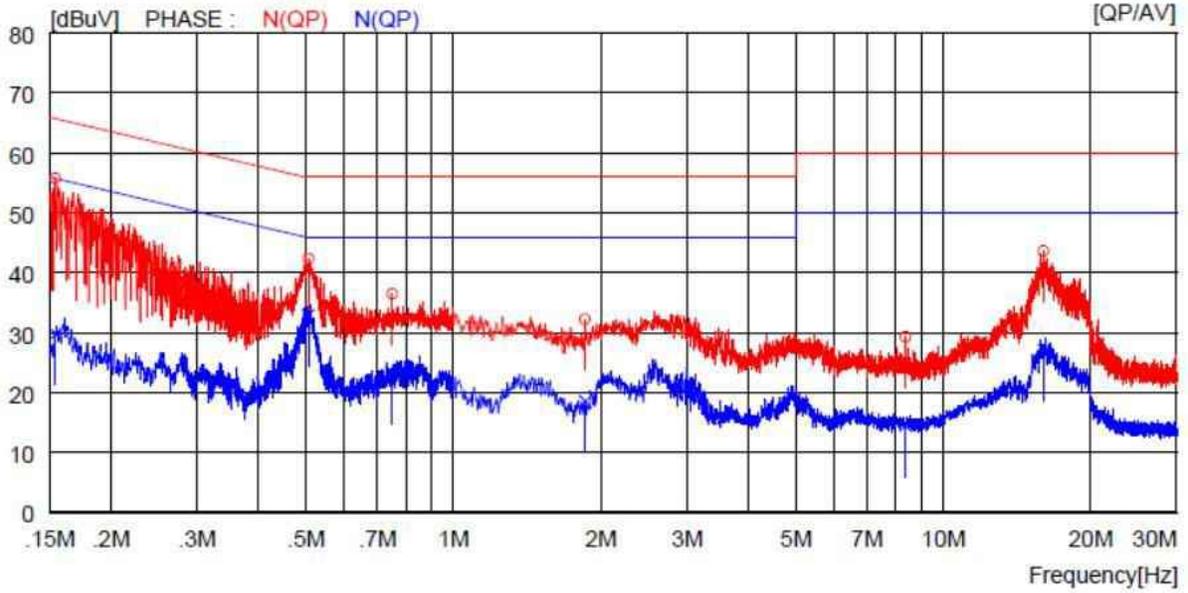

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT	MARGIN	PHASE		
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]					
1	0.15400	45.7	---	10.1	55.8	---	65.8	---	10.0	---	N(QP)
2	0.50600	32.3	---	10.0	42.3	---	56.0	---	13.7	---	N(QP)
3	0.75200	26.5	---	10.0	36.5	---	56.0	---	19.5	---	N(QP)
4	1.86000	22.1	---	10.1	32.2	---	56.0	---	23.8	---	N(QP)
5	8.38000	19.1	---	10.2	29.3	---	60.0	---	30.7	---	N(QP)
6	16.07000	33.4	---	10.2	43.6	---	60.0	---	16.4	---	N(QP)
7	0.15400	---	19.7	10.1	---	29.8	---	55.8	---	26.0	N(CAV)
8	0.50600	---	22.9	10.0	---	32.9	---	46.0	---	13.1	N(CAV)
9	0.75200	---	13.3	10.0	---	23.3	---	46.0	---	22.7	N(CAV)
10	1.86000	---	8.4	10.1	---	18.5	---	46.0	---	27.5	N(CAV)
11	8.38000	---	4.3	10.2	---	14.5	---	50.0	---	35.5	N(CAV)
12	16.07000	---	16.9	10.2	---	27.1	---	50.0	---	22.9	N(CAV)

[Tested Model : BCS-100]

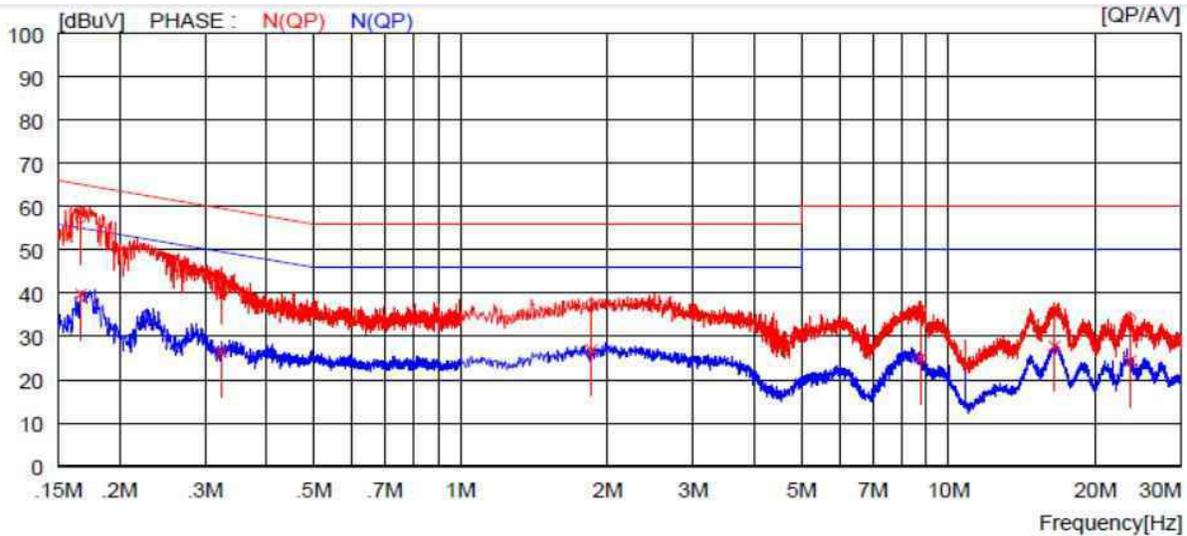

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	0.16700	47.5	----	9.9	57.4	----	65.1	----	7.7	----	N(QP)
2	0.32300	33.8	----	9.8	43.6	----	59.6	----	16.0	----	N(QP)
3	1.85600	27.5	----	9.9	37.4	----	56.0	----	18.6	----	N(QP)
4	8.75500	25.9	----	10.2	36.1	----	60.0	----	23.9	----	N(QP)
5	16.50000	25.2	----	10.5	35.7	----	60.0	----	24.3	----	N(QP)
6	23.58000	23.4	----	10.7	34.1	----	60.0	----	25.9	----	N(QP)
7	0.16700	----	29.9	9.9	----	39.8	----	55.1	----	15.3	N(CAV)
8	0.32300	----	16.6	9.8	----	26.4	----	49.6	----	23.2	N(CAV)
9	1.85600	----	17.0	9.9	----	26.9	----	46.0	----	19.1	N(CAV)
10	8.75500	----	14.8	10.2	----	25.0	----	50.0	----	25.0	N(CAV)
11	16.50000	----	17.3	10.5	----	27.8	----	50.0	----	22.2	N(CAV)
12	23.58000	----	13.6	10.7	----	24.3	----	50.0	----	25.7	N(CAV)

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.

Tested by: Ju Yun Park / Assistant Manager