



# FCC PART 18 TEST REPORT

For

## Continental Conair Limited

35/F, Standard Chartered Tower, Millennium City 1, 388 Kwun Tong Road, Kwun Tong,  
Kowloon, Hong Kong

**FCC ID: U43WIH200**

<b>Report Type:</b> Original Report	<b>Product Type:</b> COMMERCIAL INDUCTION RANGE
<b>Report Number:</b> <u>RSZ180403552-00</u>	
<b>Report Date:</b> <u>2018-07-03</u>	
<b>Reviewed By:</b> <u>Seal Deng</u> Engineer	<i>Seal Deng</i>
<b>Prepared By:</b> Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>	

**Note:** This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA\* or any agency of the Federal Government. \* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “\*\*”.

## TABLE OF CONTENTS

<b>GENERAL INFORMATION.....</b>	<b>3</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
OBJECTIVE .....	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY .....	3
MEASUREMENT UNCERTAINTY:.....	3
TEST FACILITY .....	4
<b>OPERATING CONDITION/TEST CONFIGURATION.....</b>	<b>5</b>
JUSTIFICATION .....	5
EUT EXERCISE SOFTWARE .....	5
SPECIAL ACCESSORIES.....	5
EQUIPMENT MODIFICATIONS .....	5
SUPPORT EQUIPMENT LIST AND DETAILS .....	5
EXTERNAL CABLE LIST AND DETAILS .....	5
BLOCK DIAGRAM OF TEST SETUP .....	6
<b>TEST EQUIPMENT LIST .....</b>	<b>7</b>
<b>SUMMARY OF TEST RESULT .....</b>	<b>8</b>
<b>FCC §18.307 - AC LINE CONDUCTED EMISSIONS.....</b>	<b>9</b>
APPLICABLE STANDARD .....	9
EUT SETUP.....	9
EMI TEST RECEIVER SETUP.....	9
TEST PROCEDURE .....	10
TEST RESULTS SUMMARY .....	10
TEST DATA .....	10
<b>FCC §18.305 – FIELD STRENGTH.....</b>	<b>13</b>
APPLICABLE STANDARD .....	13
EUT SETUP.....	13
EMI TEST RECEIVER SETUP AND SPECTRUM ANALYZER SETUP.....	13
TEST PROCEDURE .....	14
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	14
TEST RESULTS SUMMARY .....	14
TEST DATA AND PLOTS.....	14

**GENERAL INFORMATION**

**Product Description for Equipment under Test (EUT)**

The *Continental Conair Limited*'s product, model number: *WIH200 (FCC ID: U43WIH200)* or the "EUT" in this report is a *COMMERCIAL INDUCTION RANGE*, which was measured approximately: 40.8 cm (L) \* 30.5 cm (W) \* 6.7 cm (H), the rated with input voltage: AC 120V/60Hz. The operating frequency is 27 kHz.

*Notes: This series product models: WIH200##### and WIH200 are electrically identical, the difference among them is only model number due to marketing purpose, model WIH200 was selected for fully testing, the detailed information about their difference can be referred to the declaration letter which was stated and guaranteed by the applicant.*

*\*All measurement and test data in this report was gathered from production sample serial number: 1804004 (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2018-04-03.*

**Objective**

This report is prepared on behalf of *Continental Conair Limited* in accordance with Part 2-Subpart J, and Part 18-Subparts A, B and C of the Federal Communication Commissions rules and regulations.

The objective of the manufacturer is to determine compliance with FCC Part 18 limits.

**Related Submittal(s)/Grant(s)**

No related submittal(s).

**Test Methodology**

All measurements contained in this report were conducted with MP-5, FCC Methods of Measurements of Radio Noise Emissions from ISM Equipment, February 1986. All measurements were performed at Bay Area Compliance Laboratory Corporation. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

**Measurement Uncertainty:**

Item		Expanded Measurement uncertainty	
AC Power Line Conducted Emissions		2.20 dB (k=2, 95% level of confidence)	
Radiated emission	30MHz~200MHz	Horizontal	4.58 dB (k=2, 95% level of confidence)
		Vertical	4.59 dB (k=2, 95% level of confidence)
	200MHz~1 GHz	Horizontal	4.83 dB (k=2, 95% level of confidence)
		Vertical	5.85 dB (k=2, 95% level of confidence)
	1 GHz~6 GHz	Horizontal/Vertical	4.08 dB (k=2, 95% level of confidence)
Above 6 GHz	Horizontal/Vertical	4.59 dB (k=2, 95% level of confidence)	
Occupied Bandwidth		±0.5kHz	
Temperature		±1.0°C	

### **Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

## **OPERATING CONDITION/TEST CONFIGURATION**

---

### **Justification**

The system was configured for testing in a typical fashion (as normally used by a typical user).

### **EUT Exercise Software**

No exercise software was used.

### **Special Accessories**

No special accessory was used.

### **Equipment Modifications**

No modifications were made to the EUT tested.


### **Support Equipment List and Details**

<b>Manufacturer</b>	<b>Description</b>	<b>Model</b>	<b>Serial Number</b>
OUKE	Boiler	N/A	N/A

### **External Cable List and Details**

<b>Cable Description</b>	<b>Length (m)</b>	<b>From/Port</b>	<b>To</b>
Un-shielding Un-detachable AC Cable	1.2	EUT	Mains

**Block Diagram of Test Setup**

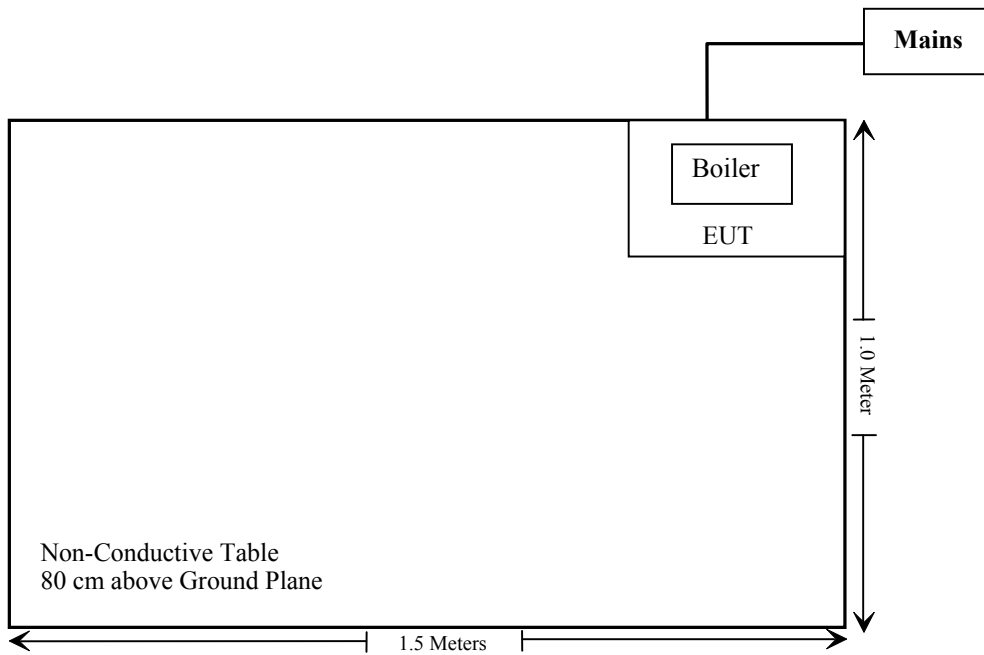

**TEST EQUIPMENT LIST**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>CONDUCTED EMISSIONS</b>					
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2017-08-04	2018-08-04
Rohde & Schwarz	LISN	ENV216	3560.6650.12-101613-Yb	2017-12-21	2018-12-21
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2018-05-19	2019-05-19
Rohde & Schwarz	CE Test software	EMC 32	V8.53.0	NCR	NCR
<b>RADIATED EMISSIONS</b>					
HP	Amplifier	HP8447E	1937A01046	2018-05-21	2018-11-19
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2018-01-11	2019-01-11
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2017-12-22	2020-12-21
TDK	Chamber	Chamber A	2#	2016-12-05	2019-12-05
R&S	Auto test Software	EMC32	V9.10	NCR	NCR
ETS	Passive Loop Antenna	6512	29604	2018-03-07	2021-03-06
Ducommun technologies	RF Cable	UFA210A-1-4724-30050U	MFR64369 223410-001	2018-05-21	2018-11-19
Ducommun technologies	RF Cable	104PEA	218124002	2018-05-21	2018-11-19

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## **SUMMARY OF TEST RESULT**

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Results</b>
§18.307	AC Line Conducted Emissions	Compliance
§18.305	Field Strength	Compliance




## FCC §18.307 - AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC §18.307

### EUT Setup

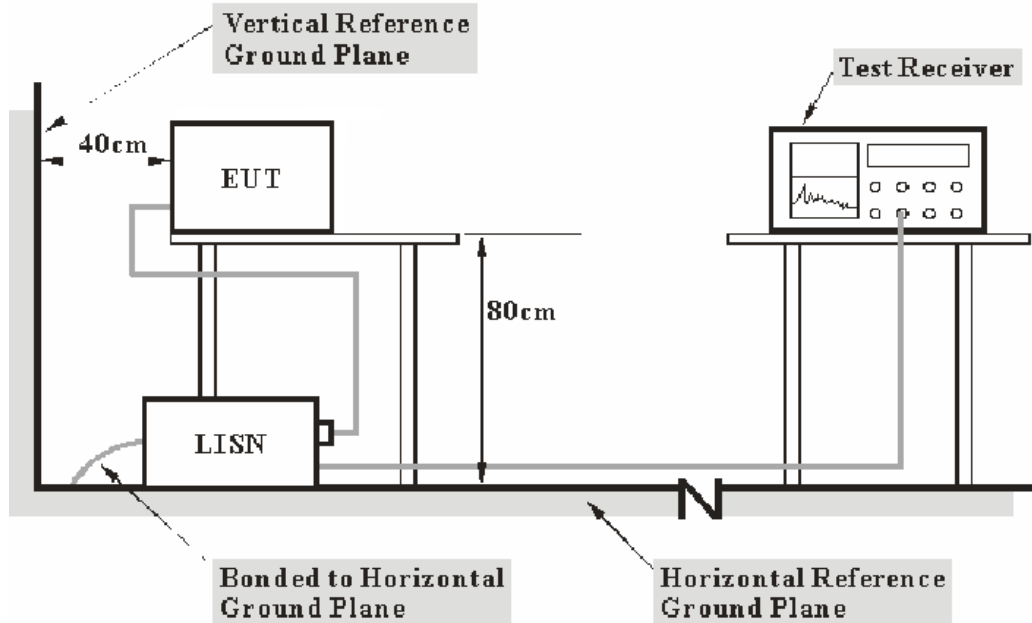

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with MP-5: 1986 measurement procedure. Specification used was with the FCC Part 18.

The socket was connected to a 120 VAC/ 60Hz power source.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 9 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
9 kHz – 150 kHz	200 Hz
150 kHz – 30 MHz	9 kHz

## Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC PART 18,

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(L_m)} \leq L_{lim} + U_{cispr}$$

In BAACL.,  $U_{(L_m)}$  is less than  $U_{cispr}$ , if  $L_m$  is less than  $L_{lim}$ , it implies that the EUT complies with the limit.

## Test Data


### Environmental Conditions

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	50 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Joson Xiao on 2018-07-02.*


*Test Mode: Boil Water*

**AC 120V/60 Hz, Line:**

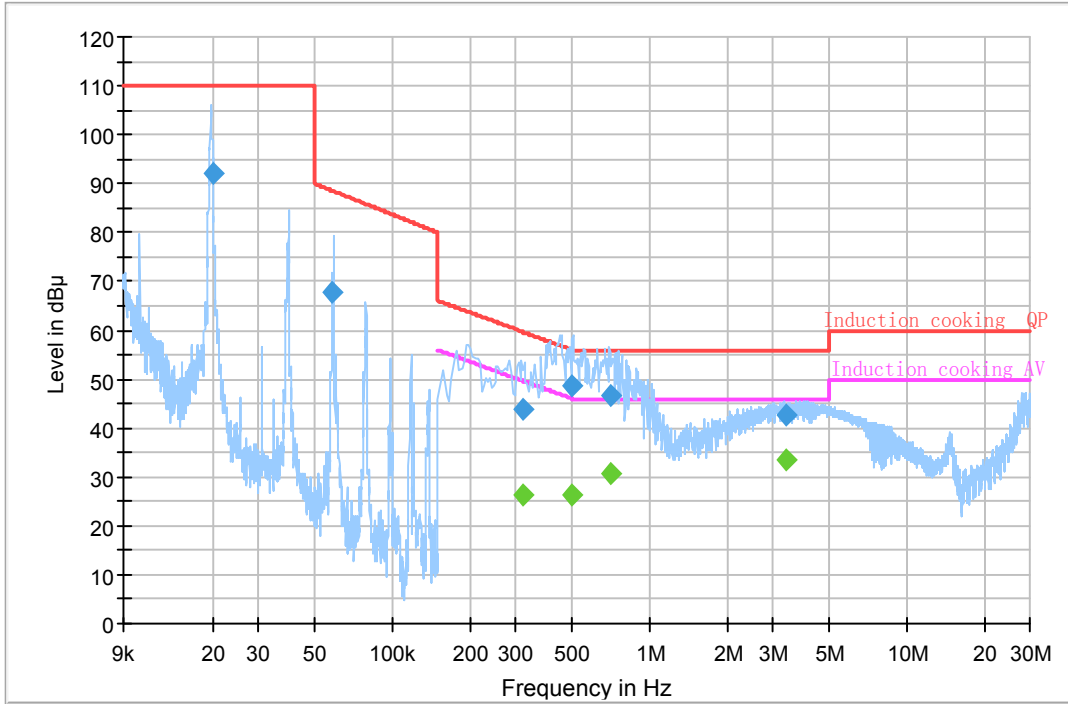

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.019913	92.2	20.1	110.0	17.8	QP
0.058104	67.8	20.1	88.6	20.8	QP
0.322770	43.8	20.1	59.6	15.8	QP
0.498470	48.5	20.1	56.0	7.5	QP
0.708470	46.8	19.9	56.0	9.2	QP
3.364110	42.6	20.0	56.0	13.4	QP
0.322770	26.3	20.1	49.6	23.3	Ave.
0.498470	26.3	20.1	46.0	19.7	Ave.
0.708470	30.7	19.9	46.0	15.3	Ave.
3.364110	33.4	20.0	46.0	12.6	Ave.

**AC 120V/ 60 Hz, Neutral:**

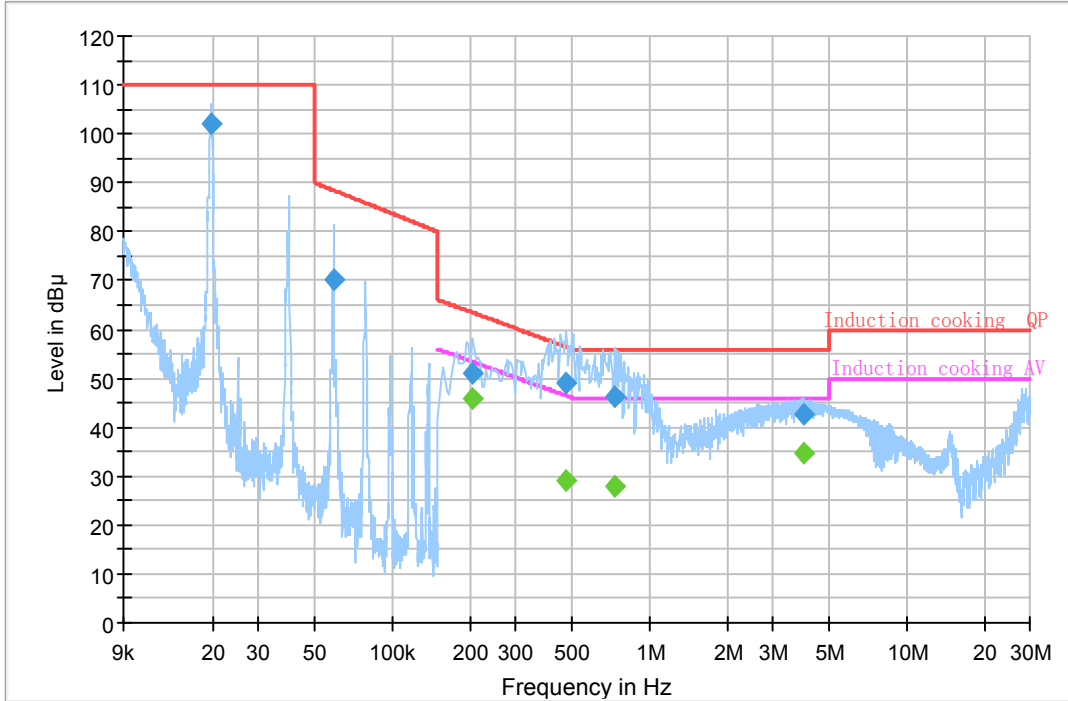

Frequency (MHz)	Corrected Amplitude (dBµV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK/Ave./QP)
0.019736	101.9	20.1	110.0	8.1	QP
0.059225	70.0	20.1	88.5	18.5	QP
0.206000	51.2	20.1	63.4	12.2	QP
0.474000	49.0	20.1	56.4	7.4	QP
0.730000	46.2	19.9	56.0	9.8	QP
3.994000	42.6	20.0	56.0	13.4	QP
0.206000	45.9	20.1	53.4	7.5	Ave.
0.474000	29.2	20.1	46.4	17.2	Ave.
0.730000	27.9	19.9	46.0	18.1	Ave.
3.994000	34.8	20.0	46.0	11.2	Ave.

**Note:**


- 1) Corrected Amplitude = Reading + Correction Factor
- 2) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter
- 3) Margin = Limit - Corrected Amplitude

## FCC §18.305 – FIELD STRENGTH

### Applicable Standard

FCC §18.305(b)

### EUT Setup

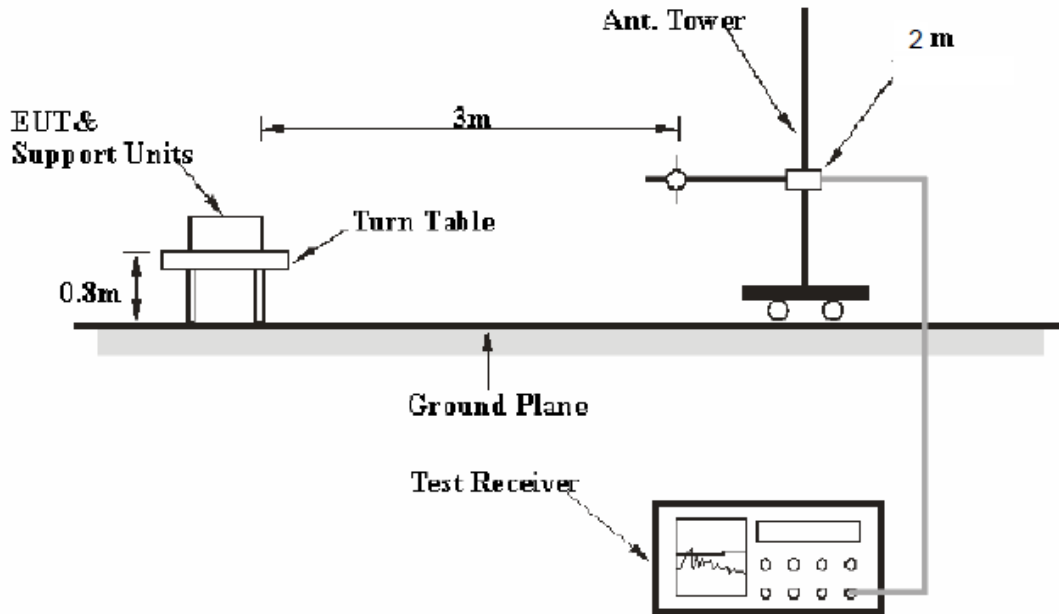

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the FCC MP - 5.

The EUT was connected to 120 VAC/60 Hz power source.

### EMI Test Receiver Setup and Spectrum Analyzer Setup

The system was investigated from 9kHz to 1000 MHz.

During the radiated emission test, the EMI test receiver and Spectrum Analyzer were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
9 kHz – 150 kHz	200 Hz	1 kHz	200 Hz	QP
150 kHz – 30 MHz	9 kHz	30 kHz	9 kHz	QP
30MHz – 1000 MHz	100 kHz	300 kHz	120kHz	QP

## Test Procedure

During the conducted emission test, the EUT was connected to the AC floor outlet.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak detection mode.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 18,

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(L_m)} \leq L_{\text{lim}} + U_{\text{cispr}}$$

In BA CL.,  $U_{(L_m)}$  is less than  $U_{\text{cispr}}$ , if  $L_m$  is less than  $L_{\text{lim}}$ , it implies that the EUT complies with the limit.

## Test Data and Plots

### Environmental Conditions

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	50 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Joson Xiao on 2018-07-02.*

*Test Mode: Boil Water*

**9kHz - 30 MHz:**

Frequency (MHz)	Corrected Amplitude (dBµV/m)	PK/QP/Ave.	Antenna height (m)	Turntable position (degree)	Correction Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
0.79	56.33	QP	1.0	166	51.9	103.52	47.19
1.38	60.68	QP	1.4	73	46.2	103.52	42.84
1.76	67.29	QP	1.0	68	46.2	103.52	36.23
1.91	71.08	QP	2.0	103	46.2	103.52	32.44
2.08	64.32	QP	1.8	223	40.9	103.52	39.20
2.43	56.12	QP	1.6	41	40.9	103.52	47.40

Note: 1) Within measurement uncertainty.

2) The radiation limits (3m distance) =  $20 \cdot \log 1500 + 40 \cdot \log (30/3) = 103.52$  (dBuV/m)

**30 MHz – 1000 MHz:**

Frequency (MHz)	Corrected Amplitude (dBµV/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dBµV/m)	Margin (dB)	PK/QP/Ave.
31.196250	46.46	114.0	V	86.0	-0.5	83.52	37.06	QP
35.663625	36.15	116.0	V	34.0	-3.4	83.52	47.37	QP
132.392625	25.90	210.0	H	209.0	-5.0	83.52	57.62	QP
693.792625	28.77	113.0	H	251.0	6.4	83.52	54.75	QP
799.015000	30.73	256.0	V	59.0	9.0	83.52	52.79	QP
892.194500	31.30	125.0	H	98.0	9.6	83.52	52.22	QP

**\*\*\*\*\* END OF REPORT \*\*\*\*\***