



FCC PART 18 TEST REPORT

For

Continental Conair Limited

35/F, Standard Chartered Tower, Millennium City 1, 388 Kwun Tong Road, Kwun Tong,
Kowloon, Hong Kong

FCC ID: U43WIH400B

Report Type: Class II Permissive Change	Product Type: Commercial Induction Range
Report Number: <u>RSZ190530551-00</u>	
Report Date: <u>2019-06-19</u>	
Reviewed By: <u>Lab Manager</u> 	
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”.

The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	3
MEASUREMENT UNCERTAINTY.....	4
TEST FACILITY	4
OPERATING CONDITION/TEST CONFIGURATION.....	5
JUSTIFICATION	5
EUT EXERCISE SOFTWARE	5
SPECIAL ACCESSORIES.....	5
EQUIPMENT MODIFICATIONS	5
SUPPORT EQUIPMENT LIST AND DETAILS	5
EXTERNAL CABLE LIST AND DETAILS	5
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULT	7
TEST EQUIPMENT LIST	8
CONDUCTED EMISSIONS	9
APPLICABLE STANDARD	9
EUT SETUP.....	9
EMI TEST RECEIVER SETUP.....	9
TEST PROCEDURE	10
TEST RESULTS SUMMARY	10
TEST DATA	10
RADIATED EMISSIONS.....	13
APPLICABLE STANDARD	13
EUT SETUP.....	13
EMI TEST RECEIVER SETUP AND SPECTRUM ANALYZER SETUP.....	13
TEST PROCEDURE	13
CORRECTED AMPLITUDE & MARGIN CALCULATION	14
TEST RESULTS SUMMARY	14
TEST DATA AND PLOTS.....	14

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	Commercial Induction Range
Model	WIH400B
Voltage Range	AC 208V/60Hz, AC 240V/60Hz
Highest operating frequency	28 kHz
Maximum power	2900Watts, 3300Watts
Date of Test	2019/06/14~2019/06/17
Sample serial number	190530551
Received date	2019/05/30
Sample/EUT Status	Good condition

Objective

This report is prepared on behalf of *Continental Conair Limited* in accordance with Part 2-Subpart J, and Part 18-Subparts A, B and C of the Federal Communication Commissions rules and regulations.

The objective of the manufacturer is to determine compliance with FCC Part 18 limits.

This is a CIIPC application of the device, the difference between the original device and the current one described as following:

1.Changed the PCB board, no other change.

Based on the change made to the device, all the test items were performed.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All measurements contained in this report were conducted with MP-5, FCC Methods of Measurements of Radio Noise Emissions from ISM Equipment, February 1986. All measurements were performed at Bay Area Compliance Laboratory Corporation. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		uncertainty
Conducted Emissions		$\pm 1.95\text{dB}$
Radiated Emissions	Below 1GHz	$\pm 4.75\text{dB}$

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

OPERATING CONDITION/TEST CONFIGURATION

Justification

The EUT was operated at maximum (continuous) RF output power.

Note: Two different voltage and power support with device, only test with the high voltage and high power for worst case.

EUT Exercise Software

No exercise software was used.

Special Accessories

No special accessory was used.

Equipment Modifications

No modifications were made to the EUT tested.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
N/A	Socket	N/A	N/A

External Cable List and Details

Cable Description	Length (m)	From/Port	To
Un-shielded Un-detachable AC Cable	1.0	LISN	Socket
Un-shielded Un-detachable AC Cable	1.2	Socket	EUT

Block Diagram of Test Setup

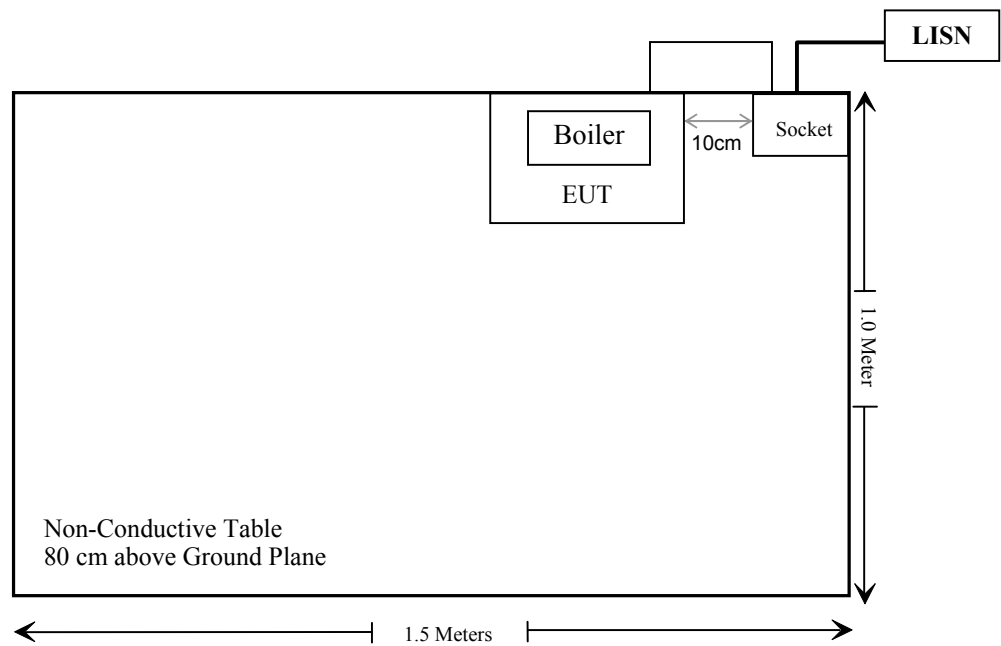

SUMMARY OF TEST RESULT

FCC Rules	Description of Test	Results
§18.307	AC Line Conducted Emissions	Compliance
§18.305	Field Strength	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
CONDUCTED EMISSIONS					
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2018-07-11	2019-07-11
Rohde & Schwarz	LISN	ENV216	3560.6650.12-101613-Yb	2019-01-25	2020-01-25
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2019-03-02	2020-03-02
Rohde & Schwarz	CE Test software	EMC 32	V8.53.0	NCR	NCR
Unknown	Conducted Emission Cable	78652	UF A210B-1-0720-504504	2018-11-12	2019-11-12
RADIATED EMISSIONS					
Sonoma Instrument	Amplifier	310N	186238	2018-11-12	2019-11-12
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2018-07-11	2019-07-11
ETS	Passive Loop Antenna	6512	29604	2018-07-14	2021-07-13
R&S	Auto test Software	EMC32	V9.10	NCR	NCR
Ducommun technologies	RF Cable	UFA210A-1-4724-30050U	MFR64369 223410-001	2018-11-12	2019-11-12
Ducommun technologies	RF Cable	104PEA	218124002	2018-11-12	2019-11-12


* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

CONDUCTED EMISSIONS

Applicable Standard

FCC §18.307

EUT Setup

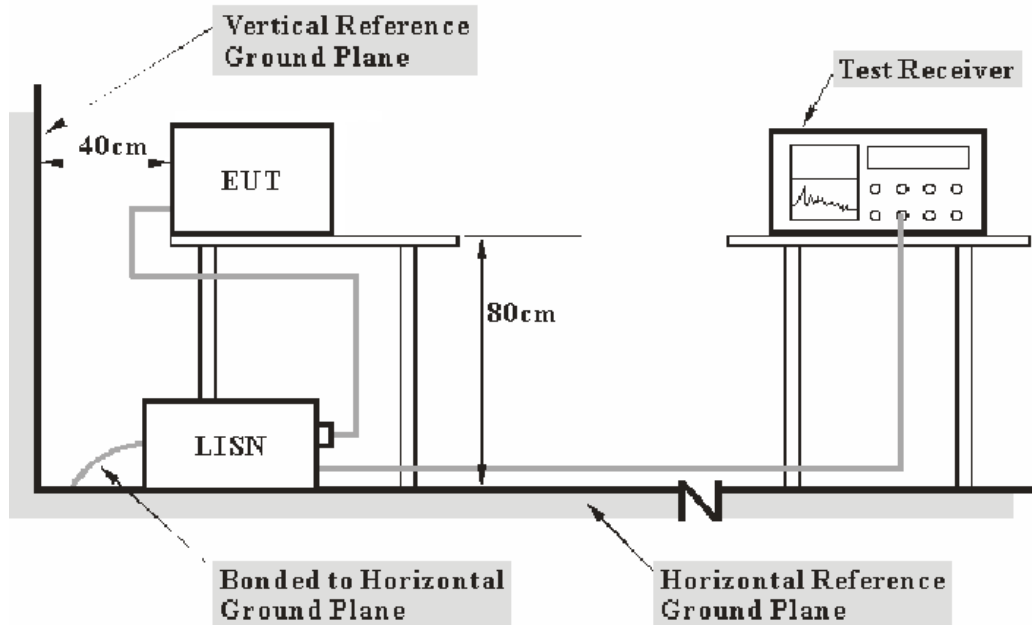

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 30 cm from other units and other metal planes support units.

The setup of EUT is according with MP-5: 1986 measurement procedure. Specification used was with the FCC Part 18.

The socket was connected to a 240 VAC/ 60Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 9 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
9 kHz – 150 kHz	200 Hz
150 kHz – 30 MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC PART 18,

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cispr}$$

In BACL., $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.


Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101.0 kPa

The testing was performed by Haiguo Li on 2019-06-17.

EUT operation mode: Max power

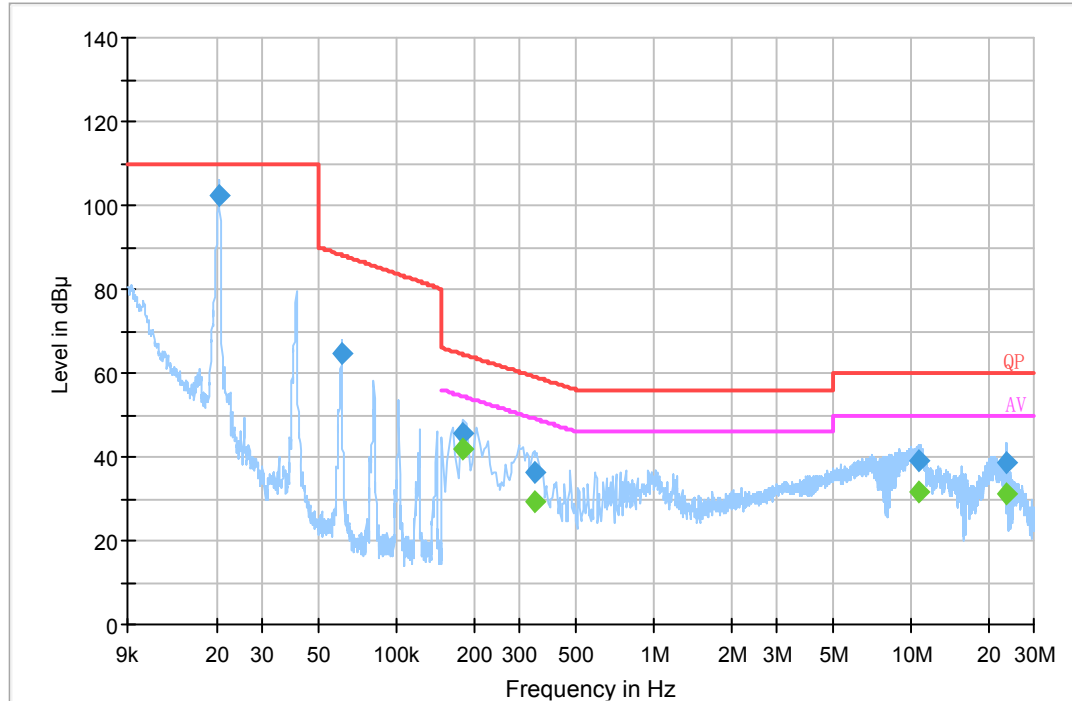AC 240V/60Hz, Line

Frequency (MHz)	Corrected Amplitude (dBμV)	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Remark (PK/QP/Ave.)
0.020377	102.4	20.4	110.0	7.6	QP
0.061271	64.7	19.9	88.1	23.4	QP
0.182000	45.7	19.9	64.4	18.7	QP
0.342000	36.1	19.9	59.2	23.1	QP
10.714000	39.2	20.0	60.0	20.8	QP
23.614000	38.4	20.3	60.0	21.6	QP
0.182000	41.6	19.9	54.4	12.8	Ave.
0.342000	29.3	19.9	49.2	19.9	Ave.
10.714000	31.7	20.0	50.0	18.3	Ave.
23.614000	31.1	20.3	50.0	18.9	Ave.

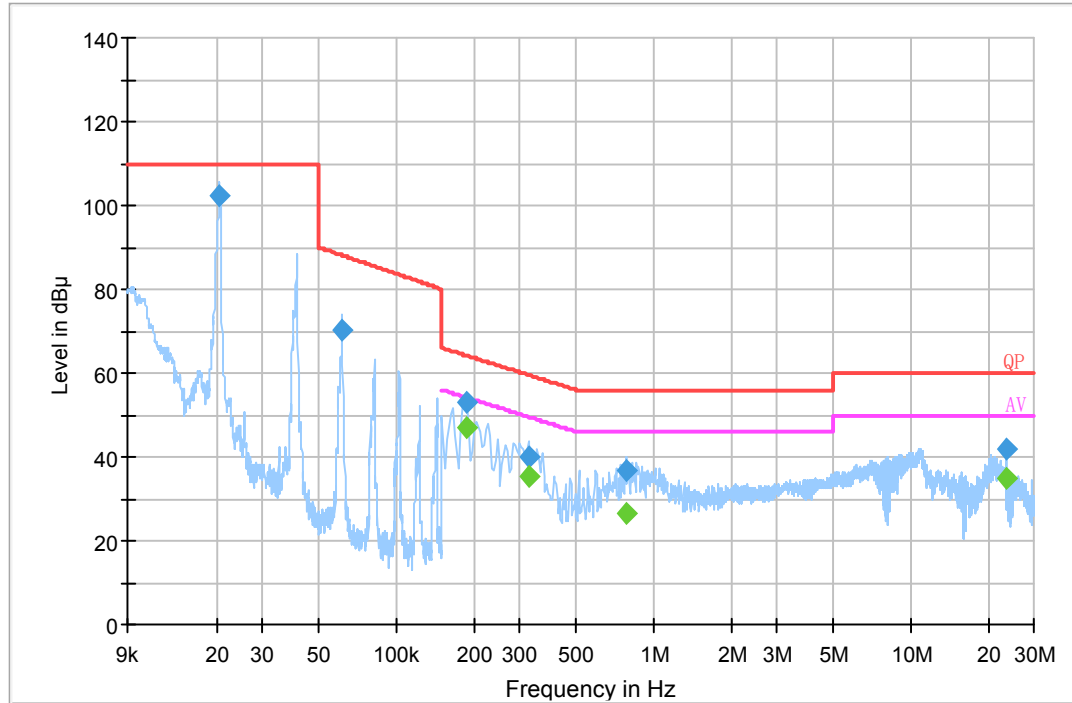AC 240V/60Hz, Neutral

Frequency (MHz)	Corrected Amplitude (dBμV)	Corrected Factor (dB)	Limit (dBμV)	Margin (dB)	Remark (PK/QP/Ave.)
0.020459	102.4	20.6	110.0	7.6	QP
0.061394	70.2	19.8	88.1	17.9	QP
0.186000	53.0	19.8	64.2	11.2	QP
0.326000	39.9	19.8	59.6	19.7	QP
0.782000	37.0	19.8	56.0	19	QP
23.590000	42.1	20.3	60.0	17.9	QP
0.186000	47.1	19.8	54.2	7.1	Ave.
0.326000	35.3	19.8	49.6	14.3	Ave.
0.782000	26.6	19.8	46.0	19.4	Ave.
23.590000	34.9	20.3	50.0	15.1	Ave.

Note:

- 1) Corrected Amplitude = Reading + Correction Factor
- 2) Correction Factor = LISN VDF + Cable Loss + Transient Limiter Attenuation
- 3) Margin = Limit – Corrected Amplitude


RADIATED EMISSIONS

Applicable Standard

FCC §18.305 and FCC §18.309

EUT Setup

Below 1GHz:

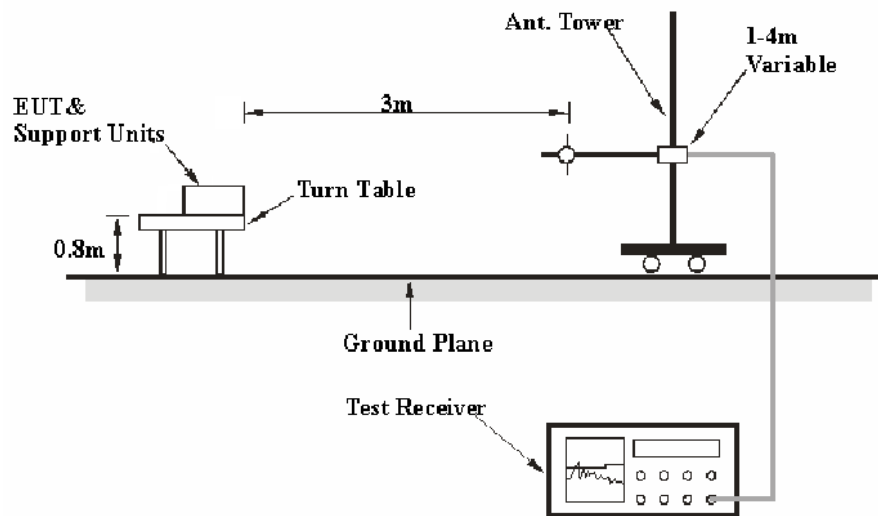

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the FCC MP - 5. The specification used was the FCC part 18 limits.

The socket was connected to 240 VAC/60 Hz power source.

EMI Test Receiver Setup and Spectrum Analyzer Setup

The system was investigated from 9 kHz to 30MHz.

During the radiated emission test, the EMI test receiver and Spectrum Analyzer were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
9 kHz – 150 kHz	200 Hz	1 kHz	200 Hz	QP
150 kHz – 30 MHz	9 kHz	30 kHz	9 kHz	QP

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions to ensure that the EUT complied with all installation combinations.

The EUT was in the normal (naïve) operating mode during the final qualification test to represent the worst results.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 18,

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(Lm)} \leq L_{\text{lim}} + U_{\text{cispr}}$$

In BACL., $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data and Plots

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Baston Chen on 2019-06-14.

EUT operation mode: Max power

9 KHz – 30 MHz:

Frequency (MHz)	Corrected Amplitude (dBμV/m)	PK/QP/Ave.	Turntable Position (degree)	Antenna Height (m)	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
2.34	36.28	QP	112	2	40.9	103.52	67.24
4.21	35.47	QP	89	2	36.4	103.52	68.05
6.44	40.16	QP	45	2	34.3	103.52	63.36
7.91	41.29	QP	278	2	34.3	103.52	62.23
12.87	38.71	QP	158	2	32.3	103.52	64.81
16.14	35.11	QP	16	2	32.2	103.52	68.41

Note:

- 1) Corrected Amplitude = Meter Reading + Correction Factor
- 2) Correction Factor = Antenna Factor + Cable Loss - Amplifier Gain
- 3) Margin = Limit – Corrected Amplitude
- 4) The data below 20dB to the limit was not recorded.

******* END OF REPORT *******