





# Test Report

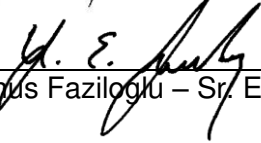

Curtis-Straus LLC, a wholly owned subsidiary of BV CPS

Report No	EQ1125-3
Client	ASSA ABLOY Inc.
Address	110 Sargent Drive New Haven, CT, 06511
Phone	203-499-6836
Items tested	Aperio V3 iN100
FCC ID	U4A-SCYMCA1
IC	6982A-SCYMCA1
FRN	0016550824
Equipment Type	Digital Transmission System
Equipment Code	DTS
Emission Designator	2M77D1D
FCC/IC Rule Parts	47 CFR 15.247, RSS-247 Issue 1
Test Dates	5/16/16 through 5/26/16
Results	As detailed within this report
Prepared by	 Jason Haley – Test Engineer
Authorized by	 Yunus Faziloglu – Sr. EMC Engineer
Issue Date	7/11/2016
Conditions of Issue	This Test Report is issued subject to the conditions stated in the 'Conditions of Testing' section on page 29 of this report.

Curtis-Straus LLC is accredited by the American Association for Laboratory Accreditation for the specific scope of accreditation under Certificate Number 1627-01. This report may contain data which is not covered by the A2LA accreditation.



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS  
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



**Contents**

Contents .....2  
Summary .....3  
Test Methodology .....4  
Product Tested - Configuration Documentation .....5  
    *Statement of Conformity* .....6  
Modifications Required for Compliance .....6  
Test Results .....7  
    *Bandwidth* .....7  
    *Peak Power* .....9  
    *Band Edge Measurements* .....13  
    *Radiated Spurious Emissions* .....15  
    *Power Spectral Density* .....20  
    *AC Line Conducted Emissions* .....24  
    *Occupied Bandwidth* .....25  
Measurement Uncertainty .....27  
Test Equipment Used .....28  
Conditions Of Testing .....29

Form Final Report REV 12-07-15



**Summary**

This test report supports a “Limited Modular Approval” certification application of a transmitter operating pursuant to 47 CFR 15.247 and RSS-247. The product is the Aperio V3 iN100. It operates in the 2405MHz to 2475MHz frequency range.

We found that the product met the above requirements without modifications. Steve Morse from ASSA ABLOY Inc. was present during testing. The test sample was received in good condition.

Release Control Record

Issue No.	Reason for change	Date Issued
1	Original Release	July 11, 2016



## Test Methodology

All testing was performed according to the following rules/procedures/documents;  
CFR 47 Part 15.247, RSS-247 Issue 1, RSS-Gen Issue 4, FCC KDB 558074 D01 DTS  
Measurement Guidance v03r05 and ANSI C63.10-2013.

Radiated Emissions were maximized by rotating the device around three orthogonal axes as well as varying the test antenna's height and polarity. The device antenna cannot be maximized separately.

The EUT operating voltage is 9VDC from battery. Fresh batteries were used during testing. The environmental conditions during each test are detailed in the results tables for each section. The following bandwidths were used during radiated spurious and line conducted emissions.

Frequency	RBW	VBW
0.15-30MHz	9kHz	30kHz
30-1000MHz	120kHz	1MHz
1-25GHz	1MHz	3MHz

**Product Tested - Configuration Documentation**

EUT Configuration										
<b>Work Order:</b>	Q1125									
<b>Company:</b>	ASSA ABLOY Inc.									
<b>Company Address:</b>	110 Sargent Drive New Haven, CT, 06511									
<b>Contact:</b>	Steve Morse									
<b>EUT:</b>	<b>MN</b>	<b>PN</b>	<b>SN</b>							
	IN100	IN100	1							
<b>EUT Description:</b>	Aperio V3									
<b>EUT Max Frequency:</b>	2475 MHz									
<b>EUT Min Frequency:</b>	0.032 MHz									
<b>Support Equipment</b>	<b>MN</b>					<b>SN</b>				
Laptop computer	dell									
Sargent 12V Supply	3521					Sample 1				
Sargent 24V Supply	3520					Sample 1				
AC/DC Brick	SYS1308-2424-W2					SW-241PR				
<b>Port Label</b>	<b>Port Type</b>	<b># ports</b>	<b># populated</b>	<b>cable type</b>	<b>shielded</b>	<b>ferrites</b>	<b>length (m)</b>	<b>in/out</b>	<b>under test</b>	<b>comment</b>
DC Power input	Power DC	1	1	Power DC	No	No	10	in	yes	*not used for emissions. emissions done with battery power
USB setup port	USB	1	1	USB	Yes	No	1	in	yes	*used to setup the radio power and channels
<b>Software Operating Mode Description:</b>										
For emissions testing, the EUT will be operated by the client. Commands are given to the EUT over USB, setting up the radio parameters. Then the laptop and usb are disconnected and the EUT continues operating in that mode until battery power is removed.										
<b>Performance Criteria:</b>										
Client operated										



## Statement of Conformity

The Asperio V3 iN100 has been found to conform to the following parts of 47 CFR and RSS 247 as detailed below:

RSS-GEN	RSP-100	RSS 247	Part 15	Comments
6.3			15.15(b)	There are no controls accessible to the user that varies the output power to operate in violation of the regulatory requirements.
	3.1		15.19	The label is shown in the label exhibit.
	4		15.21	Information to the user is shown in the instruction manual exhibit.
			15.27	No special accessories are required for compliance.
3, 6.1			15.31	The EUT was tested in accordance with the measurement standards in this section.
6.13			15.33	Frequency range was investigated according to this section, unless noted in specific rule section under which the equipment operates.
8.1			15.35	The EUT emissions were measured using the measurement detector and bandwidth specified in this section, unless noted in specific rule section under which the equipment operates.
8.3			15.203	The antenna for this device is hardwired to the PCB.
8.10			15.205 15.209	The fundamental is not in a Restricted band and the spurious and harmonic emissions in the Restricted bands comply with the general emission limits of 15.209 or RSS-Gen as applicable
8.8			15.207	EUT meets the AC Line conducted emissions requirements of this section.
			15.247	The unit complies with the requirements of 15.247
		RSS 247		The unit complies with the requirements of RSS-247
6.6				Occupied Bandwidth measurements were made.

## Modifications Required for Compliance

None.

## Test Results

### Bandwidth

#### LIMIT


The minimum 6 dB bandwidth shall be at least 500 kHz. [15.247(a) (2)]

#### MEASUREMENTS / RESULTS

6dB Bandwidth Radiated Emissions Table				
Date: 16-May-16		Company: AssaAbloy		Work Order: Q1125
Engineer: Jason Haley		EUT Desc: Aperio V3 iN100		EUT Operating Voltage/Frequency: Battery
Temp: 22°C		Humidity: 29%		Pressure: 1003mBar
Frequency Range: 2405-2475MHz			Measurement Distance: 3m	
Notes: RBW=100kHz, VBW=300kHz, Span=5MHz, Sweep=AUTO, Attn=AUTO, Detector=Peak				EUT Max Freq: 2475MHz
Measured IAW 558074 D01 DTS Meas Guidance v03r05, April 8, 2016, Section 8.2 Option 2				
Antenna Polarization (H/V)	Frequency (MHz)	DTS Bandwidth (kHz)	Limit (kHz min)	Test Result (pass/fail)
H, low ch	2405.0	1607.0	500.0	Pass
H, mid ch	2440.0	1606.0	500.0	Pass
H, high ch	2475.0	1600.0	500.0	Pass
<b>Table Result:</b>		Pass		
Test Site: CH1	Cable 1: Asset #2051	Cable 2: Asset #1785	Cable 3: ---	
Analyzer: MXE	Preamp: Asset #1517	Antenna: Orange Horn	Preselector: ---	
Copyright Curtis-Straus LLC 2000				


Measured 6dB bandwidth = 1607kHz

#### PLOT

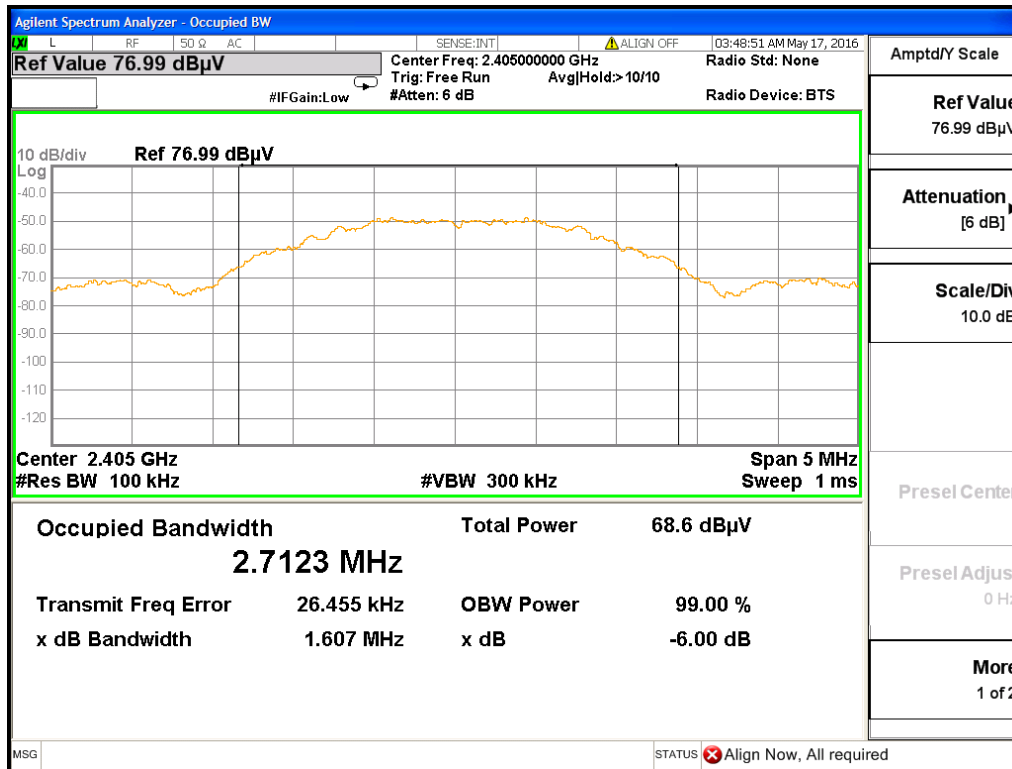


DTS Bandwidth, Low Channel



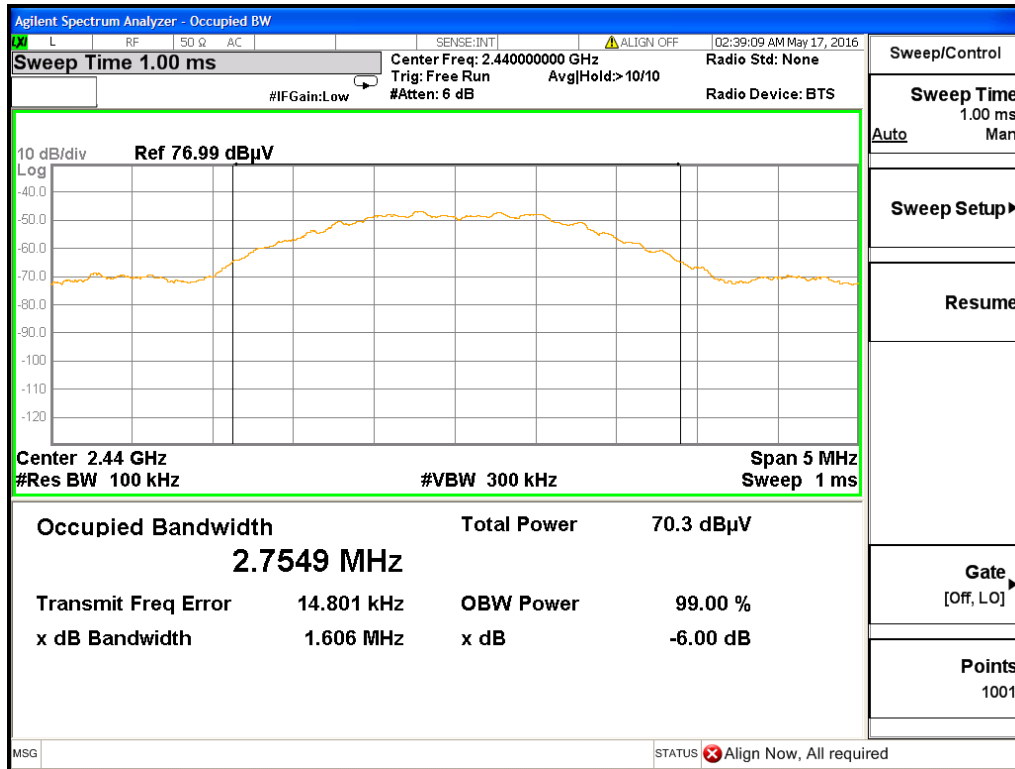

DTS Bandwidth, Middle Channel

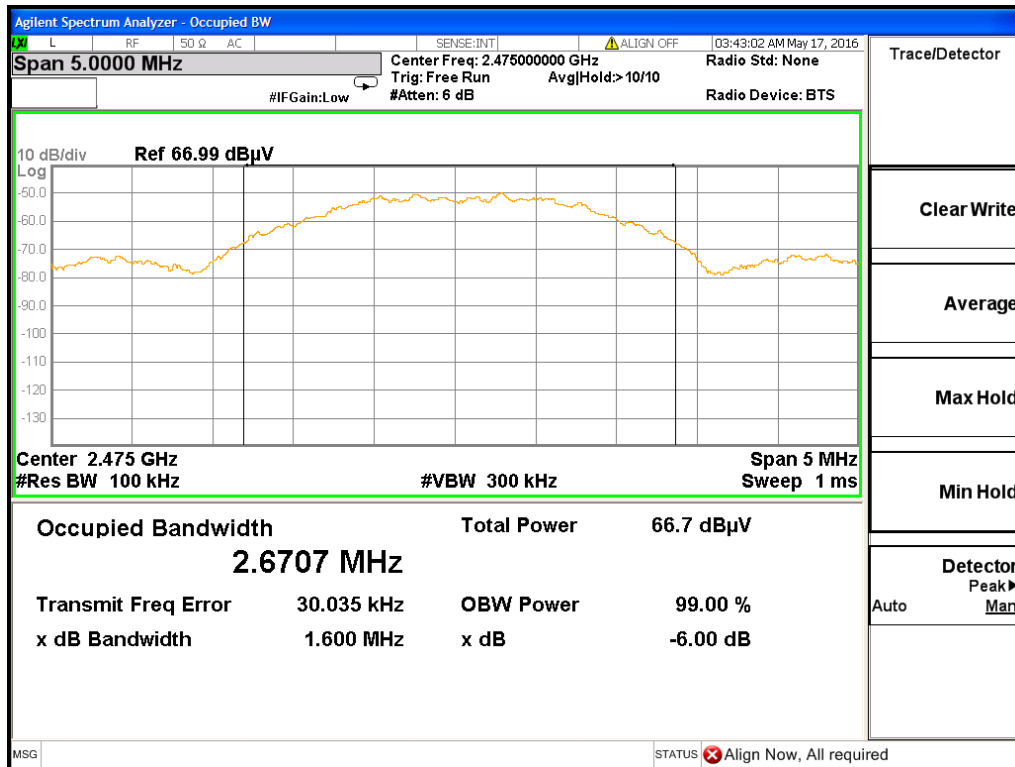

DTS Bandwidth, High Channel





# Peak Power LIMIT


Radiated Output Power  
1W (EIRP) = 30dBm = 125.2dBμV/m @ 3m  
[15.247(b) (3)]

## MEASUREMENTS / RESULTS


Peak Output Power Radiated Emissions Table												
Date: 16-May-16			Company: AssaAbloy				Work Order: Q1125					
Engineer: Jason Haley			EUT Desc: Aperio V3 iN100				EUT Operating Voltage/Frequency: Battery					
Temp: 22°C			Humidity: 29%				Pressure: 1003mBar					
Frequency Range: 2405-2475MHz						Measurement Distance: 3 m						
Notes: RBW=3MHz, VBW=50MHz, Span=10MHz, Sweep=AUTO, Attn=AUTO, Detector=Peak						EUT Max Freq: 2475 MHz						
Measured IAW 558074 D01 DTS Meas Guidance v03r05, April 8, 2016, Section 9.1.1												
Antenna Polarization (H/V)	Frequency (MHz)	Peak Reading (dBμV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dBμV/m)	Adjusted ERP Reading (dBm)	Antenna Gain (dBi)	Final Conducted Reading (dBm)	FCC 15.247		
										Limit (dBm)	Margin (dB)	Result (Pass/Fail)
H, low ch	2405.0	62.5	0.0	28.0	3.6	94.1	-1.1	4.5	-5.6	30.0	-35.6	Pass
V, low ch	2405.0	53.0	0.0	28.0	3.6	84.6	-10.6	4.5	-15.1	30.0	-45.1	Pass
H, mid ch	2440.0	64.2	0.0	28.2	3.6	96.0	0.8	4.5	-3.7	30.0	-33.7	Pass
V, mid ch	2440.0	64.2	0.0	28.2	3.6	96.0	0.8	4.5	-3.7	30.0	-33.7	Pass
H, high ch	2475.0	60.6	0.0	28.3	3.6	92.5	-2.7	4.5	-7.2	30.0	-37.2	Pass
V, high ch	2475.0	62.5	0.0	28.3	3.6	94.4	-0.8	4.5	-5.3	30.0	-35.3	Pass
<b>Table Result:</b> Pass by -33.7 dB										<b>Worst Freq:</b> 2440.0 MHz		
Test Site: CH1			Cable 1: Asset #2051				Cable 2: Asset #1785			Cable 3: ---		
Analyzer: MXE			Preamp: none				Antenna: Orange Horn			Preselector: ---		
CSsoft Radiated Emissions Calculator v 1.017.162						Copyright Curtis-Straus LLC 2000						
Adjusted Reading = Reading - Preamp Factor + Antenna Factor + Cable Factor												



PLOTS

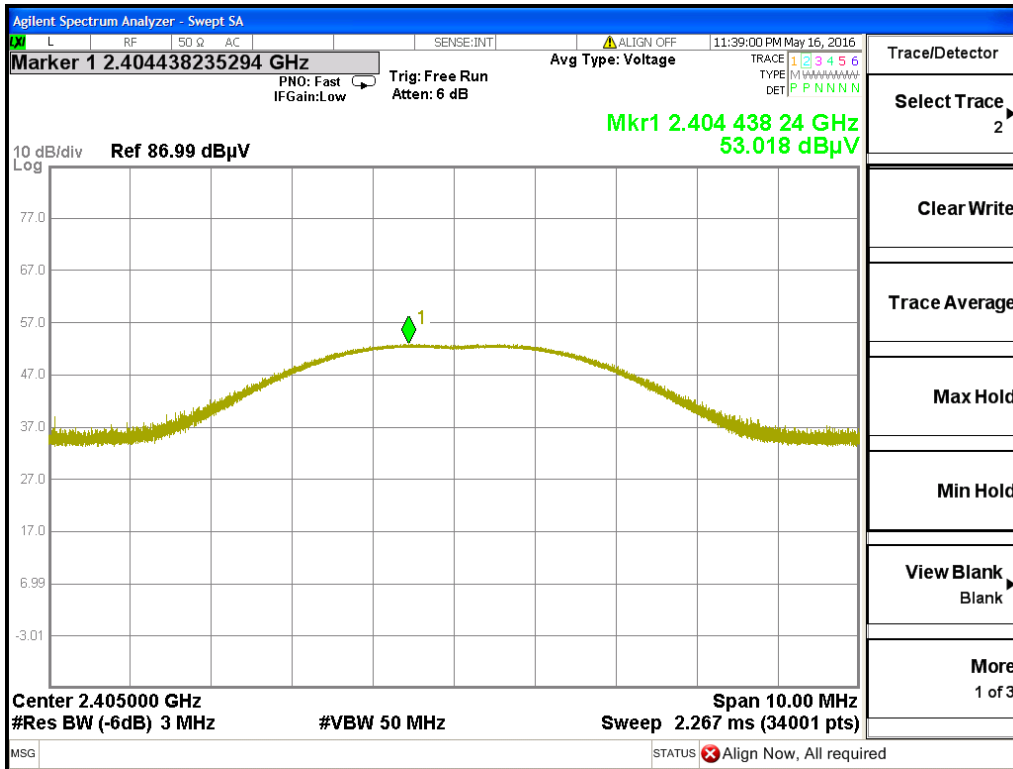


Peak Output Power, Low Channel, Vertical Polarity

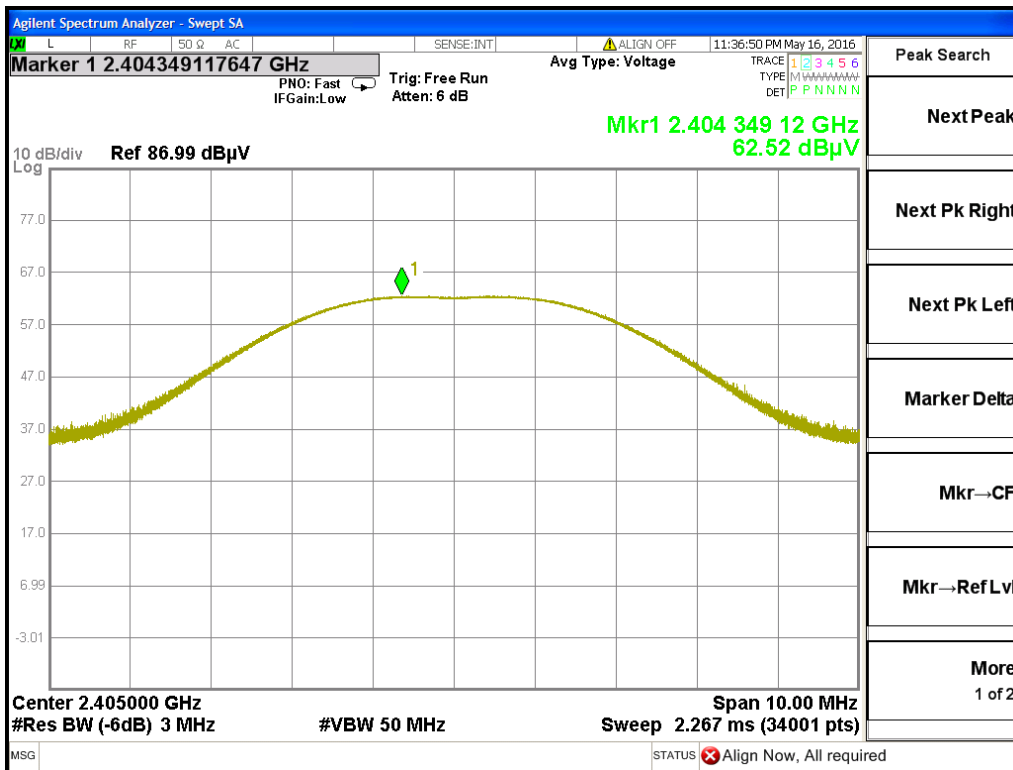


Peak Output Power, Low Channel, Horizontal Polarity



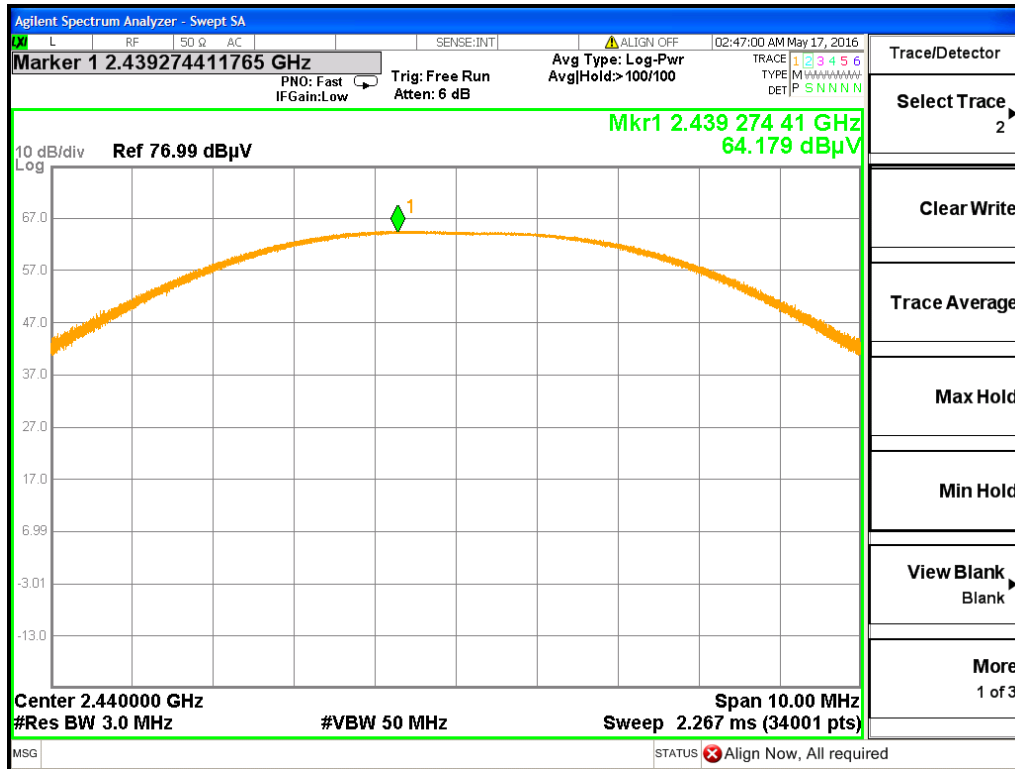


Peak Output Power, Middle Channel, Vertical Polarity

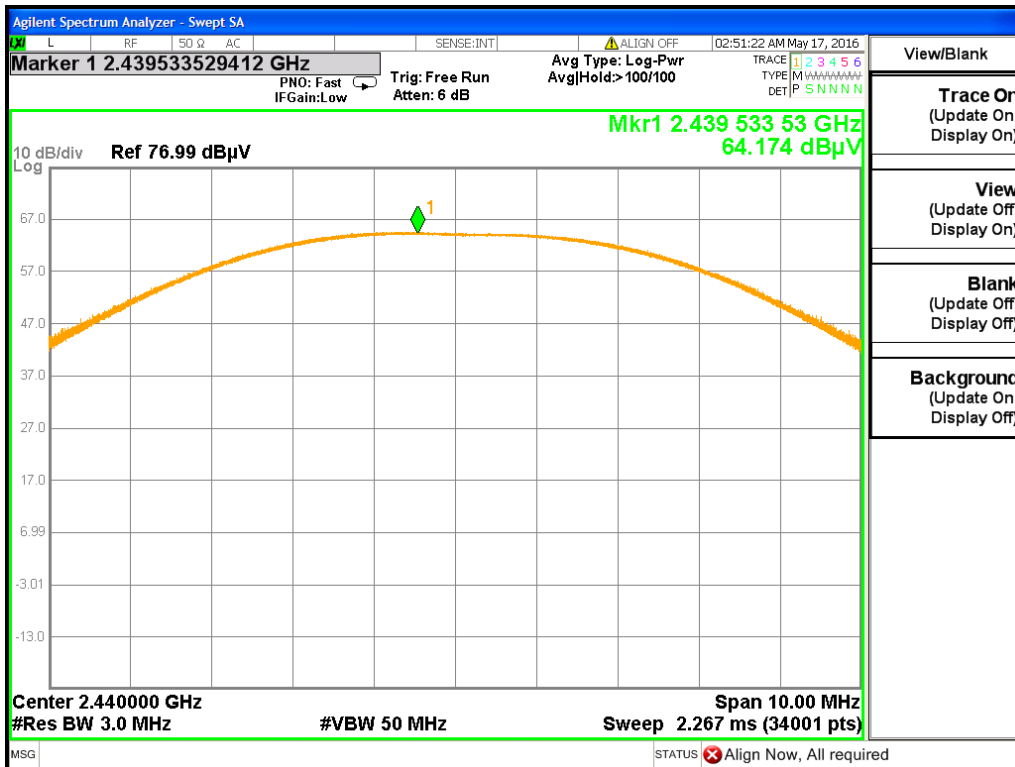


Peak Output Power, Middle Channel, Horizontal Polarity



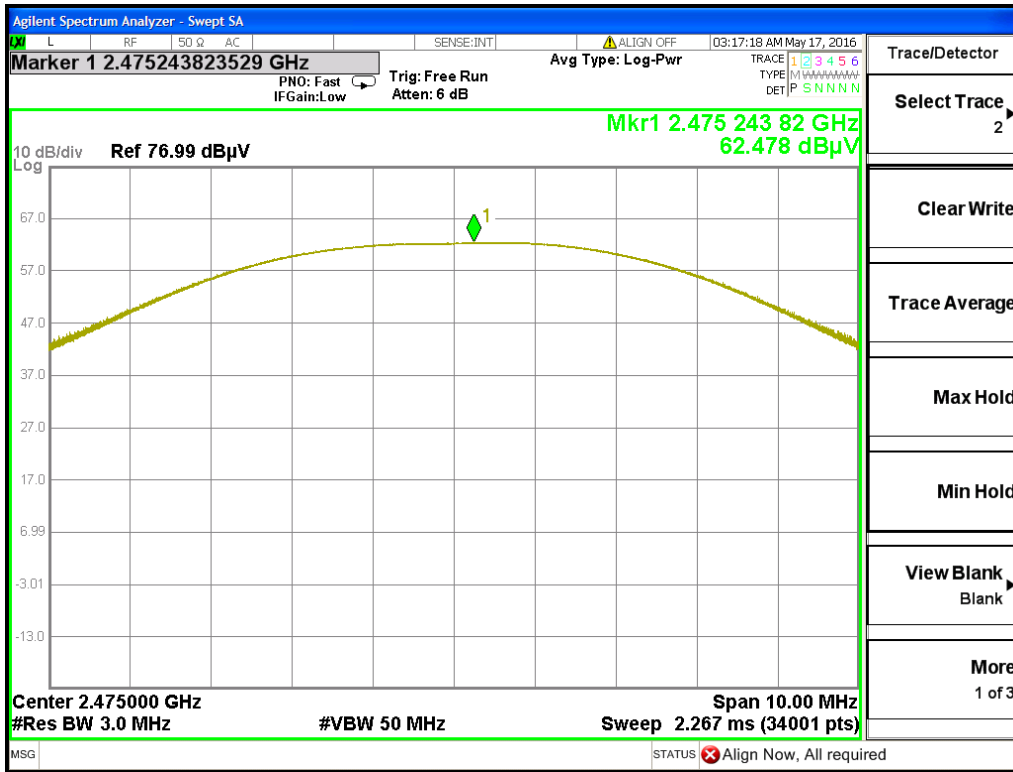

Peak Output Power, High Channel, Vertical Polarity

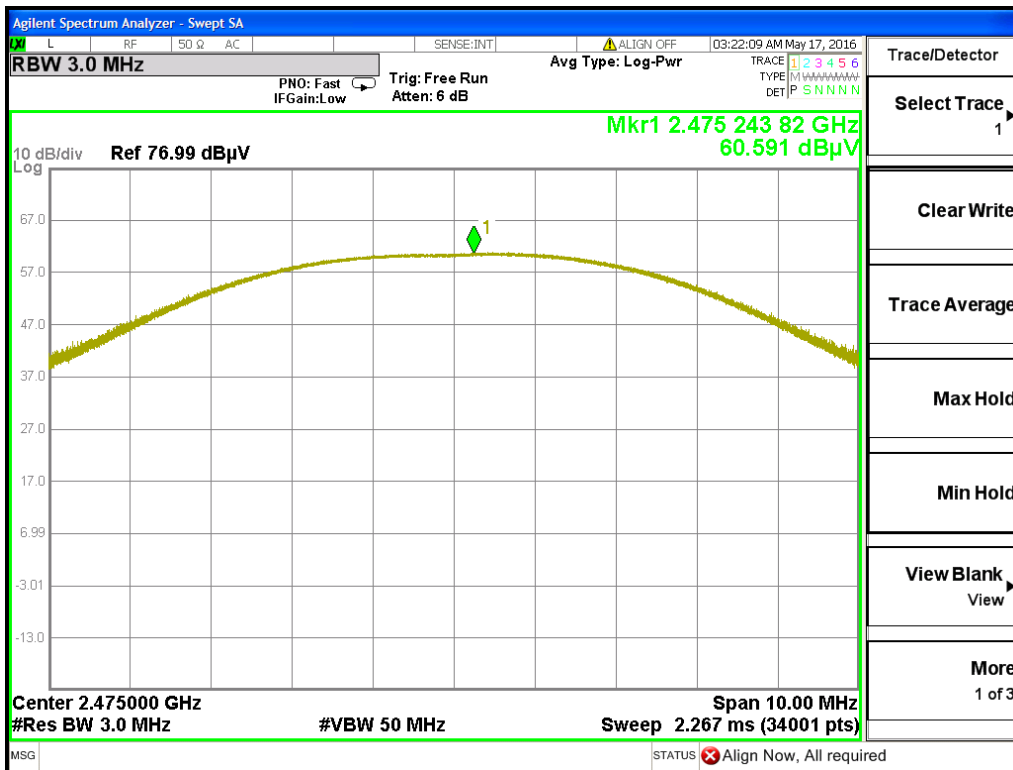

Peak Output Power, High Channel, Horizontal Polarity



# Band Edge Measurements


## LIMITS

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).  
[15.247(d)]

## MEASUREMENTS / RESULTS


Band Edge Radiated Emissions Table														
Date: 16-May-16			Company: AssaAbloy			Work Order: Q1125								
Engineer: Jason Haley			EUT Desc: Apero V3 iN100			EUT Operating Voltage/Frequency: Battery								
Temp: 22°C			Humidity: 29%			Pressure: 1003mBar			Measurement Distance: 3 m					
Frequency Range: 2385-2485MHz														
Peak Readings: RBW=1MHz, VBW=50MHz, Span=10MHz, Sweep=AUTO, Attn=AUTO, Detector=Peak														
Notes: Average Readings: RBW=1MHz, VBW=30Hz, Span=100MHz, Sweep=AUTO, Attn=AUTO, Detector=Video Averaging														
EUT Max Freq: 2475MHz														
Antenna Polarization (H/V)	Frequency (MHz)	Peak Reading (dBµV)	Average Reading (dBµV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Peak Reading (dBµV/m)	Adjusted Avg Reading (dBµV/m)	FCC Class B High Frequency - Peak			FCC Class B High Frequency - Average		
									Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)	Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)
V, band edge	2390.0	36.7	20.3	0.0	28.0	3.5	68.2	51.8	74.0	-5.8	Pass	54.0	-2.2	Pass
V, band edge	2400.0	40.6	20.5	0.0	28.0	3.6	72.2	52.1	74.0	-1.8	Pass	54.0	-1.9	Pass
V, band edge	2483.5	36.7	20.4	0.0	28.4	3.6	68.7	52.4	74.0	-5.3	Pass	54.0	-1.6	Pass
H, band edge	2390.0	36.5	20.3	0.0	28.0	3.5	68.0	51.8	74.0	-6.0	Pass	54.0	-2.2	Pass
H, band edge	2400.0	40.1	20.5	0.0	28.0	3.6	71.7	52.1	74.0	-2.3	Pass	54.0	-1.9	Pass
H, band edge	2483.5	36.6	20.4	0.0	28.4	3.6	68.6	52.4	74.0	-5.4	Pass	54.0	-1.6	Pass
<b>Table Result:</b> Pass by -1.6 dB <b>Worst Freq:</b> 2483.5 MHz														
Test Site: CH1			Cable 1: Asset #2051			Cable 2: Asset #1785			Cable 3: ---					
Analyzer: MXE			Preamp: none			Antenna: Orange Horn			Preselector: ---					
CSsoft Radiated Emissions Calculator v 1.017.162 Adjusted Reading = Reading - Preamp Factor + Antenna Factor + Cable Factor														
Copyright Curtis-Straus LLC 2000														

## PLOTS

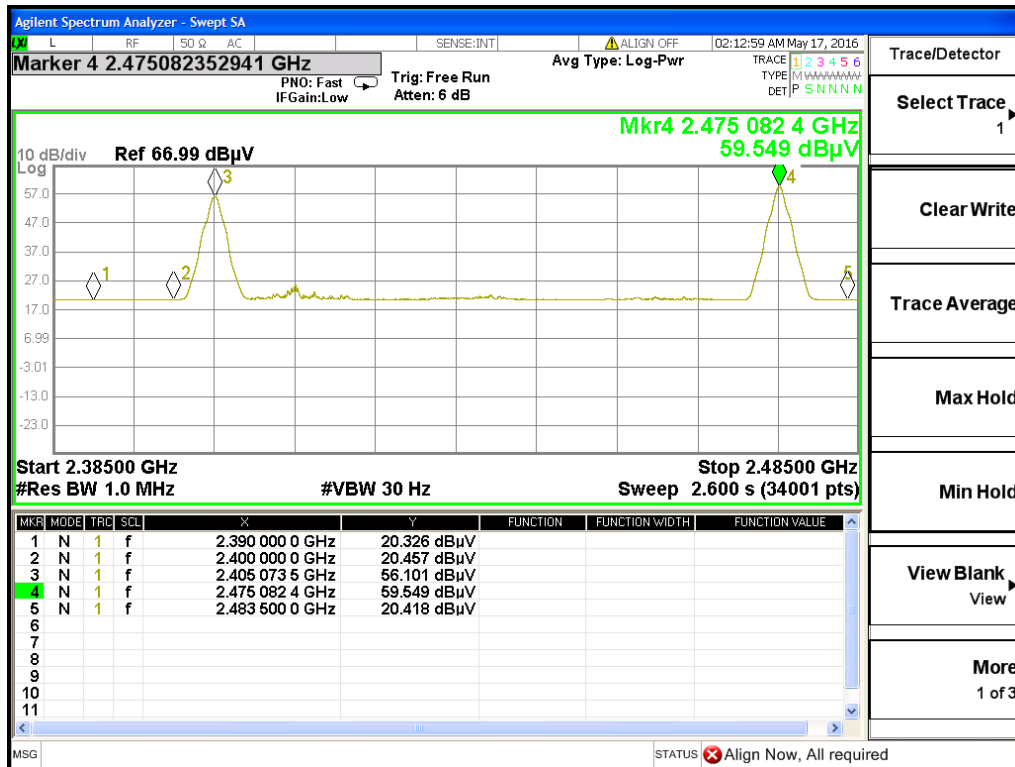

Band Edges, Horizontal Polarity, Average Detector



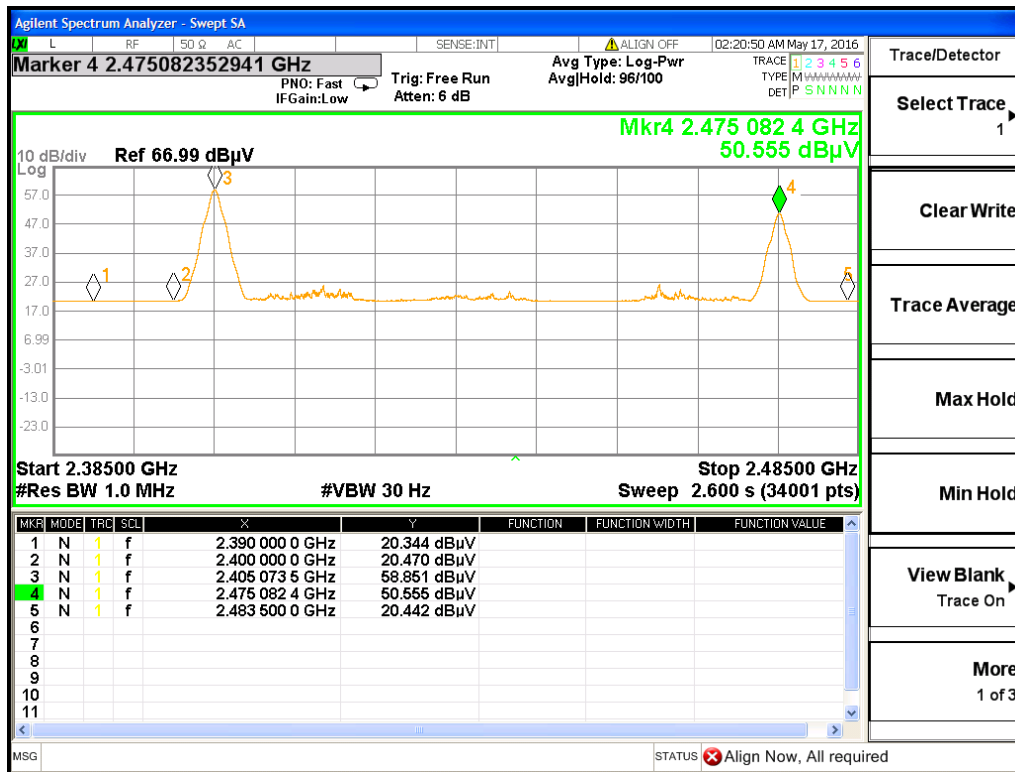

Band Edges, Vertical Polarity, Average Detector



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS  
 One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828



# Radiated Spurious Emissions

## LIMITS

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).  
[15.247(d)]

## MEASUREMENTS / RESULTS

Radiated Emissions Table												
Date: 16-May-16			Company: AssaAbloy				Work Order: Q1125					
Engineer: Chris Bramley			EUT Desc: Aperio V3 iN100 - 2.4GHz Radio				EUT Operating Voltage/Frequency: 9Vdc					
Temp: 23.5°C			Humidity: 25%				Pressure: 997mBar					
Frequency Range: 30-1000MHz						Measurement Distance: 3 m						
Notes: EUT is Tx on Low Channel - 2405MHz						EUT Max Freq: 2480MHz						
Antenna Polarization (H/V)	Frequency (MHz)	Reading (dBµV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dBµV/m)	FCC Class B					
							Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)			
v	46.5	30.7	25.4	9.7	0.5	15.5	40.0	-24.5	Pass			
v	117.5	27.9	25.4	13.8	0.9	17.2	43.5	-26.3	Pass			
v	155.4	34.1	25.9	12.4	1.0	21.6	43.5	-21.9	Pass			
v	161.7	38.4	25.9	12.2	1.0	25.7	43.5	-17.8	Pass			
v	164.8	37.8	25.9	12.0	1.0	24.9	43.5	-18.6	Pass			
h	297.2	28.6	25.5	13.3	1.2	17.6	46.0	-28.4	Pass			
v	439.7	23.8	25.7	16.7	1.5	16.3	46.0	-29.7	Pass			
<b>Table Result:</b> Pass						by -17.8 dB		<b>Worst Freq:</b> 161.7 MHz				
Test Site: EMI Chamber 1			Cable 1: Asset #2051				Cable 2: Asset #1785					
Analyzer: Asset #1327			Preamp: Red-White				Antenna: Red-Brown					
CSsoft Radiated Emissions Calculator v 1.017.162						Copyright Curtis-Straus LLC 2000						
Adjusted Reading = Reading - Preamp Factor + Antenna Factor + Cable Factor												

Radiated Emissions Table												
Date: 16-May-16			Company: AssaAbloy				Work Order: Q1125					
Engineer: Chris Bramley			EUT Desc: Aperio V3 iN100 - 2.4GHz Radio				EUT Operating Voltage/Frequency: 9Vdc					
Temp: 23.5°C			Humidity: 25%				Pressure: 997mBar					
Frequency Range: 30-1000MHz						Measurement Distance: 3 m						
Notes: EUT is Tx on Mid Channel - 2440MHz						EUT Max Freq: 2480MHz						
Antenna Polarization (H/V)	Frequency (MHz)	Reading (dBµV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dBµV/m)	FCC Class B					
							Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)			
v	46.6	29.6	25.4	9.7	0.5	14.4	40.0	-25.6	Pass			
v	117.3	27.6	25.4	13.7	0.9	16.8	43.5	-26.7	Pass			
v	158.3	34.5	25.9	12.3	1.0	21.9	43.5	-21.6	Pass			
v	161.4	40.3	25.9	12.2	1.0	27.6	43.5	-15.9	Pass			
v	164.5	35.5	25.9	12.0	1.0	22.6	43.5	-20.9	Pass			
h	296.6	28.3	25.5	13.3	1.1	17.2	46.0	-28.8	Pass			
v	439.5	23.9	25.7	16.7	1.5	16.4	46.0	-29.6	Pass			
<b>Table Result:</b> Pass						by -15.9 dB		<b>Worst Freq:</b> 161.4 MHz				
Test Site: EMI Chamber 1			Cable 1: Asset #2051				Cable 2: Asset #1785					
Analyzer: Asset #1327			Preamp: Red-White				Antenna: Red-Brown					
CSsoft Radiated Emissions Calculator v 1.017.162						Copyright Curtis-Straus LLC 2000						
Adjusted Reading = Reading - Preamp Factor + Antenna Factor + Cable Factor												



**Radiated Emissions Table**

<b>Date:</b> 16-May-16		<b>Company:</b> AssaAbloy				<b>Work Order:</b> Q1125			
<b>Engineer:</b> Chris Bramley		<b>EUT Desc:</b> Aperio V3 iN100 - 2.4GHz Radio				<b>EUT Operating Voltage/Frequency:</b> 9Vdc			
<b>Temp:</b> 23.5°C		<b>Humidity:</b> 25%		<b>Pressure:</b> 997mBar					
<b>Frequency Range:</b> 30-1000MHz						<b>Measurement Distance:</b> 3 m			
<b>Notes:</b> EUT is Tx on High Channel - 2475MHz						<b>EUT Max Freq:</b> 2480MHz			
Antenna Polarization (H/V)	Frequency (MHz)	Reading (dBµV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dBµV/m)	FCC Class B		
							Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)
v	46.5	30.9	25.4	9.7	0.5	15.7	40.0	-24.3	Pass
v	117.9	28.5	25.4	13.8	0.9	17.8	43.5	-25.7	Pass
v	155.7	34.1	25.9	12.4	1.0	21.6	43.5	-21.9	Pass
v	158.9	36.2	25.9	12.3	1.0	23.6	43.5	-19.9	Pass
v	162.0	40.2	25.9	12.2	1.0	27.5	43.5	-16.0	Pass
h	297.6	29.8	25.5	13.4	1.2	18.9	46.0	-27.1	Pass
v	440.0	23.7	25.7	16.7	1.5	16.2	46.0	-29.8	Pass
<b>Table Result:</b> Pass						by -16.0 dB		<b>Worst Freq:</b> 162.0 MHz	
<b>Test Site:</b> EMI Chamber 1		<b>Cable 1:</b> Asset #2051			<b>Cable 2:</b> Asset #1785				
<b>Analyzer:</b> Asset #1327		<b>Preamp:</b> Red-White			<b>Antenna:</b> Red-Brown				
CSsoft Radiated Emissions Calculator v 1.017.162						Copyright Curtis-Straus LLC 2000			
Adjusted Reading = Reading - Preamp Factor + Antenna Factor + Cable Factor									

Rev. 5/13/2016

<b>Spectrum Analyzers / Receivers /Preselectors</b>	<b>Range</b>	<b>MN</b>	<b>Mfr</b>	<b>SN</b>	<b>Asset</b>	<b>Cat</b>	<b>Calibration Due</b>	<b>Calibrated on</b>
SA EMI Chamber (1327)	9kHz-13.2 GHz	E4405B	Agilent	MY45103416	1327	I	7/10/2016	7/10/2015
<b>Radiated Emissions Sites</b>	<b>FCC Code</b>	<b>IC Code</b>	<b>VCCI Code</b>	<b>Range</b>	<b>Cat</b>	<b>Calibration Due</b>	<b>Calibrated on</b>	
EMI Chamber 1	719150	2762A-6	A-0015	30-1000MHz	II	3/21/2017	3/21/2015	
<b>Preamps / Couplers Attenuators / Filters</b>	<b>Range</b>	<b>MN</b>	<b>Mfr</b>	<b>SN</b>	<b>Asset</b>	<b>Cat</b>	<b>Calibration Due</b>	<b>Calibrated on</b>
Red-White	0.009-2000MHz	ZFL-1000-LN	CS	N/A	1258	II	12/27/2016	12/27/2015
<b>Antennas</b>	<b>Range</b>	<b>MN</b>	<b>Mfr</b>	<b>SN</b>	<b>Asset</b>	<b>Cat</b>	<b>Calibration Due</b>	<b>Calibrated on</b>
Red-Brown Bilog	30-2000MHz	JB1	Sunol	A0032406	1218	I	12/4/2016	12/4/2014
<b>Meteorological Meters</b>		<b>MN</b>	<b>Mfr</b>	<b>SN</b>	<b>Asset</b>	<b>Cat</b>	<b>Calibration Due</b>	<b>Calibrated on</b>
TH A#2080		HTC-1	HDE	2080	2080	II	4/5/2017	4/5/2016
Barometric A#2160		5396-0321	Monarch Instruments	4000060	2160	I	3/7/2017	3/7/2016
<b>Cables</b>	<b>Range</b>		<b>Mfr</b>			<b>Cat</b>	<b>Calibration Due</b>	<b>Calibrated on</b>
Asset #1785	9kHz - 18GHz		Florida RF			II	1/5/2017	1/5/2016
Asset #2051	9kHz - 18GHz		Florida RF			II	3/2/2017	3/2/2016

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.

**Radiated Emissions Table**

<b>Date:</b> 16-May-16		<b>Company:</b> AssaAbloy				<b>Work Order:</b> Q1125								
<b>Engineer:</b> Chris Bramley		<b>EUT Desc:</b> Aperio V3 iN100 - 2.4GHz Radio				<b>EUT Operating Voltage/Frequency:</b> 9Vdc								
<b>Temp:</b> 23.5°C		<b>Humidity:</b> 25%		<b>Pressure:</b> 997mBar										
<b>Frequency Range:</b> 1-6GHz						<b>Measurement Distance:</b> 3 m								
<b>Notes:</b>						<b>EUT Max Freq:</b> 2480MHz								
Antenna Polarization (H/V)	Frequency (MHz)	Peak Reading (dBµV)	Average Reading (dBµV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Peak Reading (dBµV/m)	Adjusted Avg Reading (dBµV/m)	FCC Class B High Frequency - Peak			FCC Class B High Frequency - Average		
									Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)	Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)
Low Channel - 2405MHz														
v	4810.0	32.87	21.3	17.9	32.8	4.9	52.7	41.1	74.0	-21.3	Pass	54.0	-12.9	Pass
h	4810.0	33.88	23.5	17.9	32.8	4.9	53.7	43.3	74.0	-20.3	Pass	54.0	-10.7	Pass
Mid Channel - 2440MHz														
v	4880.0	35.78	24.8	17.9	32.8	4.9	55.6	44.6	74.0	-18.4	Pass	54.0	-9.4	Pass
h	4880.0	36.74	27.4	17.9	32.8	4.9	56.5	47.2	74.0	-17.5	Pass	54.0	-6.8	Pass
High Channel - 2475MHz														
v	4950.0	36.89	27.2	17.9	32.9	5.0	56.9	47.2	74.0	-17.1	Pass	54.0	-6.8	Pass
h	4950.0	37.06	27.3	17.9	32.9	5.0	57.1	47.3	74.0	-16.9	Pass	54.0	-6.7	Pass
<b>Table Result:</b> Pass						by -6.7 dB		<b>Worst Freq:</b> 4950.0 MHz						
<b>Test Site:</b> EMI Chamber 1		<b>Cable 1:</b> Asset #2051			<b>Cable 2:</b> Asset #1785									
<b>Analyzer:</b> Asset #1327		<b>Preamp:</b> Asset #1517			<b>Antenna:</b> Orange Horn									
CSsoft Radiated Emissions Calculator v 1.017.162						Copyright Curtis-Straus LLC 2000								
Adjusted Reading = Reading - Preamp Factor + Antenna Factor + Cable Factor														





Rev. 5/13/2016

<b>Spectrum Analyzers / Receivers / Preselectors</b> SA EMI Chamber (1327)	<b>Range</b> 9kHz-13.2 GHz	<b>MN</b> E4405B	<b>Mfr</b> Agilent	<b>SN</b> MY45103416	<b>Asset</b> 1327	<b>Cat</b> I	<b>Calibration Due</b> 7/10/2016	<b>Calibrated on</b> 7/10/2015
<b>Radiated Emissions Sites</b> EMI Chamber 1	<b>FCC Code</b> 719150	<b>IC Code</b> 2762A-6	<b>VCCI Code</b> A-0015	<b>Range</b> 30-1000MHz		<b>Cat</b> II	<b>Calibration Due</b> 3/21/2017	<b>Calibrated on</b> 3/21/2015
<b>Preamps / Couplers Attenuators / Filters</b> 1517 HF Preamp	<b>Range</b> 1-20GHz	<b>MN</b> CS	<b>Mfr</b> CS	<b>SN</b> N/A	<b>Asset</b> 1517	<b>Cat</b> II	<b>Calibration Due</b> 8/6/2016	<b>Calibrated on</b> 8/6/2015
<b>Antennas</b> Orange Horn	<b>Range</b> 1-18GHz	<b>MN</b> 3115	<b>Mfr</b> EMCO	<b>SN</b> 0004-6123	<b>Asset</b> 390	<b>Cat</b> I	<b>Calibration Due</b> 10/13/2016	<b>Calibrated on</b> 10/13/2014
<b>Meteorological Meters</b> TH A#2080 Barometric A#2160		<b>MN</b> HTC-1 5396-0321	<b>Mfr</b> HDE Monarch Instruments	<b>SN</b> 4000060	<b>Asset</b> 2080 2160	<b>Cat</b> II I	<b>Calibration Due</b> 4/5/2017 3/7/2017	<b>Calibrated on</b> 4/5/2016 3/7/2016
<b>Cables</b> Asset #1785 Asset #2051	<b>Range</b> 9kHz - 18GHz 9kHz - 18GHz		<b>Mfr</b> Florida RF Florida RF			<b>Cat</b> II II	<b>Calibration Due</b> 1/5/2017 3/2/2017	<b>Calibrated on</b> 1/5/2016 3/2/2016

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.

<b>Radiated Emissions Table</b>														
<b>Date:</b> 16-May-16			<b>Company:</b> AssaAbloy						<b>Work Order:</b> Q1125					
<b>Engineer:</b> Chris Bramley			<b>EUT Desc:</b> Aperio V3 iN100 - 2.4GHz Radio						<b>EUT Operating Voltage/Frequency:</b> 9Vdc					
<b>Temp:</b> 23.5°C			<b>Humidity:</b> 25%						<b>Pressure:</b> 997mBar					
<b>Frequency Range:</b> 6-18GHz									<b>Measurement Distance:</b> 1 m					
<b>Notes:</b>									<b>EUT Max Freq:</b> 2480MHz					
Antenna Polarization (H/V)	Frequency (MHz)	Peak Reading (dBµV)	Average Reading (dBµV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Peak Reading (dBµV/m)	Adjusted Avg Reading (dBµV/m)	FCC Class B High Frequency - Peak			FCC Class B High Frequency - Average		
									Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)	Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)
<b>Mid Channel - 2440MHz</b>														
v	7320.0	41.35	33.5	17.0	37.6	6.6	68.6	60.7	83.5	-14.9	Pass	63.5	-2.8	Pass
h	7320.0	40.82	32.1	17.0	37.6	6.6	68.0	59.3	83.5	-15.5	Pass	63.5	-4.2	Pass
v	9760.0	35.39	24.3	17.1	38.1	7.7	64.1	53.0	83.5	-19.4	Pass	63.5	-10.5	Pass
h	9760.0	34.28	23.1	17.1	38.1	7.7	63.0	51.8	83.5	-20.5	Pass	63.5	-11.7	Pass
<b>High Channel - 2475MHz</b>														
v	7425.0	39.15	30.7	17.2	37.5	6.6	66.1	57.6	83.5	-17.4	Pass	63.5	-5.9	Pass
h	7425.0	39.68	30.9	17.2	37.5	6.6	66.6	57.8	83.5	-16.9	Pass	63.5	-5.7	Pass
v	9900.0	31.56	18.9	17.4	38.4	6.8	59.4	46.7	83.5	-24.1	Pass	63.5	-16.8	Pass
h	9900.0	31.13	18.8	17.4	38.4	6.8	58.9	46.6	83.5	-24.6	Pass	63.5	-16.9	Pass
<b>Table Result:</b> Pass by -2.8 dB <b>Worst Freq:</b> 7320.0 MHz														
<b>Test Site:</b> EMI Chamber 1			<b>Cable 1:</b> Asset #2051						<b>Cable 2:</b> Asset #1785					
<b>Analyzer:</b> Brown			<b>Preamp:</b> Asset #1517						<b>Antenna:</b> Orange Horn					
CSsoft Radiated Emissions Calculator v 1.017.162 <span style="float: right;">Copyright Curtis-Straus LLC 2000</span>														
Adjusted Reading = Reading - Preamp Factor + Antenna Factor + Cable Factor														

Rev. 5/13/2016

<b>Spectrum Analyzers / Receivers / Preselectors</b> Brown	<b>Range</b> 9kHz-26.5GHz	<b>MN</b> E4407B	<b>Mfr</b> Agilent	<b>SN</b> SG44210511	<b>Asset</b> 1510	<b>Cat</b> I	<b>Calibration Due</b> 1/21/2017	<b>Calibrated on</b> 1/21/2016
<b>Radiated Emissions Sites</b> EMI Chamber 1	<b>FCC Code</b> 719150	<b>IC Code</b> 2762A-6	<b>VCCI Code</b> A-0015	<b>Range</b> 30-1000MHz		<b>Cat</b> II	<b>Calibration Due</b> 3/21/2017	<b>Calibrated on</b> 3/21/2015
<b>Preamps / Couplers Attenuators / Filters</b> 1517 HF Preamp	<b>Range</b> 1-20GHz	<b>MN</b> CS	<b>Mfr</b> CS	<b>SN</b> N/A	<b>Asset</b> 1517	<b>Cat</b> II	<b>Calibration Due</b> 8/6/2016	<b>Calibrated on</b> 8/6/2015
<b>Antennas</b> Orange Horn	<b>Range</b> 1-18GHz	<b>MN</b> 3115	<b>Mfr</b> EMCO	<b>SN</b> 0004-6123	<b>Asset</b> 390	<b>Cat</b> I	<b>Calibration Due</b> 10/13/2016	<b>Calibrated on</b> 10/13/2014
<b>Meteorological Meters</b> TH A#2080 Barometric A#2160		<b>MN</b> HTC-1 5396-0321	<b>Mfr</b> HDE Monarch Instruments	<b>SN</b> 4000060	<b>Asset</b> 2080 2160	<b>Cat</b> II I	<b>Calibration Due</b> 4/5/2017 3/7/2017	<b>Calibrated on</b> 4/5/2016 3/7/2016
<b>Cables</b> Asset #1785 Asset #2051	<b>Range</b> 9kHz - 18GHz 9kHz - 18GHz		<b>Mfr</b> Florida RF Florida RF			<b>Cat</b> II II	<b>Calibration Due</b> 1/5/2017 3/2/2017	<b>Calibrated on</b> 1/5/2016 3/2/2016

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



Radiated Emissions Table														
Date: 16-May-16			Company: AssaAbløy				Work Order: Q1125							
Engineer: Jason Haley			EUT Desc: Aperio V3 iN100				EUT Operating Voltage/Frequency: Battery							
Temp: 22°C			Humidity: 29%				Pressure: 1003mBar							
Frequency Range: 6-18GHz						Measurement Distance: 1 m								
Notes: Used HPF1311 for these measurements. 2.9GHz 3dB cutoff						EUT Max Freq: 2480 MHz								
Antenna Polarization (H/V)	Frequency (MHz)	Peak Reading (dBµV)	Average Reading (dBµV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Peak Reading (dBµV/m)	Adjusted Avg Reading (dBµV/m)	FCC Class B High Frequency - Peak			FCC Class B High Frequency - Average		
									Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)	Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)
H, low ch	7215.0	43.7	34.9	16.6	37.1	6.4	70.6	61.8	83.5	-12.9	Pass	63.5	-1.7	Pass
H, low ch	9620.0	33.6	23.9	16.9	37.9	7.3	61.9	52.2	83.5	-21.6	Pass	63.5	-11.3	Pass
H, low ch	12025.0	35.7	26.4	16.7	39.3	8.2	66.5	57.2	83.5	-17.0	Pass	63.5	-6.3	Pass
H, low ch, n.f.	14430.0	34.6	23.5	16.7	41.5	9.1	68.5	57.4	83.5	-15.0	Pass	63.5	-6.1	Pass
H, low ch, n.f.	16835.0	36.7	25.9	16.1	42.3	9.5	72.4	61.6	83.5	-11.1	Pass	63.5	-1.9	Pass
V, low ch	7215.0	42.3	35.1	16.6	37.1	6.4	69.2	62.0	83.5	-14.3	Pass	63.5	-1.5	Pass
V, low ch	9620.0	31.0	23.2	16.9	37.9	7.3	59.3	51.5	83.5	-24.2	Pass	63.5	-12.0	Pass
V, low ch, n.f.	12025.0	33.5	23.1	16.7	39.3	8.2	64.3	53.9	83.5	-19.2	Pass	63.5	-9.6	Pass
V, low ch, n.f.	14430.0	34.5	23.5	16.7	41.5	9.1	68.4	57.4	83.5	-15.1	Pass	63.5	-6.1	Pass
V, low ch, n.f.	16835.0	36.0	26.1	16.1	42.3	9.5	71.7	61.8	83.5	-11.8	Pass	63.5	-1.7	Pass
<b>Table Result:</b> Pass by -1.5 dB <span style="float: right;"><b>Worst Freq:</b> 7215.0 MHz</span>														
Test Site: CH1			Cable 1: Asset #2051				Cable 2: Asset #1785			Cable 3: ---				
Analyzer: MXE			Preamp: Asset #1517				Antenna: Orange Horn			Preselector: ---				
CSsoft Radiated Emissions Calculator v 1.017.162						Copyright Curtis-Straus LLC 2000								
Adjusted Reading = Reading - Preamp Factor + Antenna Factor + Cable Factor														

Rev. 5/13/2016

Spectrum Analyzers / Receivers / Preselectors	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
MXE EMI Receiver	20Hz-26.5GHz	N9038A	Agilent	MY51210181	2093	I	7/21/2016	7/21/2015
Radiated Emissions Sites	FCC Code	IC Code	VCCI Code	Range	Cat	Calibration Due	Calibrated on	
EMI Chamber 1	719150	2762A-6	A-0015	1-18GHz	I	5/23/2017	5/23/2015	
Preamps/Couplers Attenuators / Filters	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
1517 HF Preamp	1-20GHz	CS	CS	N/A	1517	II	8/6/2016	8/6/2015
High Pass Filter	0.03-14.5 GHz	11SH10-3000/T9000-0/0	K&L	1	1311	II	1/7/2017	1/7/2016
Antennas	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Orange Horn	1-18GHz	3115	EMCO	0004-6123	390	I	10/13/2016	10/13/2014
Meteorological Meters	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
Weather Clock (Pressure Only)		BA928	Oregon Scientific	C3166-1	831	I	4/28/2017	4/28/2016
TH A#2080		HTC-1	HDE		2080	II	4/5/2017	4/5/2016
Cables	Range	Mfr	Cat	Calibration Due	Calibrated on			
Asset #1785	9kHz - 18GHz	Florida RF	II	1/5/2017	1/5/2016			
Asset #2051	9kHz - 18GHz	Florida RF	II	3/2/2017	3/2/2016			

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.

Radiated Emissions Table														
Date: 17-May-16			Company: AssaAbløy				Work Order: Q1125							
Engineer: Jason Haley			EUT Desc: Aperio V3 iN100				EUT Operating Voltage/Frequency: Battery							
Temp: 22°C			Humidity: 27%				Pressure: 1013mBar							
Frequency Range: 18-26.5GHz						Measurement Distance: 0.1 m								
Notes: Peak Readings Low, middle and high channels						EUT Max Freq: 2475MHz								
Antenna Polarization (H/V)	Frequency (MHz)	Peak Reading (dBµV)	Average Reading (dBµV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Peak Reading (dBµV/m)	Adjusted Avg Reading (dBµV/m)	FCC Class B High Frequency - Peak			FCC Class B High Frequency - Average		
									Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)	Limit (dBµV/m)	Margin (dB)	Result (Pass/Fail)
Maximized	19240.0	50.8	50.8	40.9	40.3	6.0	56.2	56.2	103.5	-47.3	Pass	83.5	-27.3	Pass
Maximized	21645.0	54.12	54.1	42.3	40.4	6.5	58.7	58.7	103.5	-44.8	Pass	83.5	-24.8	Pass
Maximized	24050.0	40.78	40.8	40.8	40.4	6.9	47.3	47.3	103.5	-56.2	Pass	83.5	-36.2	Pass
Maximized	19520.0	53.5	53.5	41.4	40.3	6.0	58.4	58.4	103.5	-45.1	Pass	83.5	-25.1	Pass
Maximized	21960.0	49.8	49.8	42.0	40.5	6.7	55.0	55.0	103.5	-48.5	Pass	83.5	-28.5	Pass
Maximized	24400.0	49.36	49.4	40.9	40.2	7.2	55.9	55.9	103.5	-47.6	Pass	83.5	-27.6	Pass
Maximized	19800.0	41.45	41.5	41.4	40.3	5.9	46.3	46.3	103.5	-57.2	Pass	83.5	-37.2	Pass
Maximized	22275.0	45.01	45.0	41.7	40.5	6.6	50.4	50.4	103.5	-53.1	Pass	83.5	-33.1	Pass
Maximized	24135.0	49.4	49.4	40.9	40.3	6.9	55.7	55.7	103.5	-47.8	Pass	83.5	-27.8	Pass
<b>Table Result:</b> Pass by -24.8 dB <span style="float: right;"><b>Worst Freq:</b> 21645.0 MHz</span>														
Test Site: CH1			Cable 1: EMIR-HIGH-07				Cable 2: ---			Cable 3: ---				
Analyzer: MXE			Preamp: 18-26.5GHz				Antenna: 18-26.5GHz Horn			Preselector: ---				
CSsoft Radiated Emissions Calculator v 1.017.162						Copyright Curtis-Straus LLC 2000								
Adjusted Reading = Reading - Preamp Factor + Antenna Factor + Cable Factor														



Rev. 5/13/2016

<b>Spectrum Analyzers / Receivers / Preselectors</b>		<b>Range</b>	<b>MN</b>	<b>Mfr</b>	<b>SN</b>	<b>Asset</b>	<b>Cat</b>	<b>Calibration Due</b>	<b>Calibrated on</b>
MXE EMI Receiver		20Hz-26.5GHz	N9038A	Agilent	MY51210181	2093	I	7/21/2016	7/21/2015
<b>Radiated Emissions Sites</b>		<b>FCC Code</b>	<b>IC Code</b>	<b>VCCI Code</b>	<b>Range</b>		<b>Cat</b>	<b>Calibration Due</b>	<b>Calibrated on</b>
EMI Chamber 1		719150	2762A-6	A-0015	1-18GHz		I	5/23/2017	5/23/2015
<b>Preamps/Couplers Attenuators / Filters</b>		<b>Range</b>	<b>MN</b>	<b>Mfr</b>	<b>SN</b>	<b>Asset</b>	<b>Cat</b>	<b>Calibration Due</b>	<b>Calibrated on</b>
HF (Yellow)		18-26.5GHz	AFS4-18002650-60-8P-4	CS	467559	1266	II	3/8/2017	3/8/2016
<b>Antennas</b>		<b>Range</b>	<b>MN</b>	<b>Mfr</b>	<b>SN</b>	<b>Asset</b>	<b>Cat</b>	<b>Calibration Due</b>	<b>Calibrated on</b>
HF (White) Horn		18-26.5GHz	801-WLM	Waveline	758	758	III	Verify before Use	date of test 5/29/2014
<b>Meteorological Meters</b>			<b>MN</b>	<b>Mfr</b>	<b>SN</b>	<b>Asset</b>	<b>Cat</b>	<b>Calibration Due</b>	<b>Calibrated on</b>
Weather Clock (Pressure Only)			BA928	Oregon Scientific	C3166-1	831	I	4/28/2017	4/28/2016
TH A#2080			HTC-1	HDE		2080	II	4/5/2017	4/5/2016
<b>Cables</b>		<b>Range</b>		<b>Mfr</b>			<b>Cat</b>	<b>Calibration Due</b>	<b>Calibrated on</b>
REM-High-07		1 - 26.5GHz	TRU-21B0707-120	TRU			II	8/7/2016	8/7/2015
									1/5/2016
									3/2/2016

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



# Power Spectral Density


## LIMIT

...the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.  
[15.247(e)]

## MEASUREMENTS / RESULTS


Power Spectral Density Radiated Emissions Table												
Date: 16-May-16			Company: AssaAbloy				Work Order: Q1125					
Engineer: Jason Haley			EUT Desc: Aperio V3 iN100				EUT Operating Voltage/Frequency: Battery					
Temp: 22°C			Humidity: 29%				Pressure: 1003mBar					
Frequency Range: 2405-2475MHz						Measurement Distance: 3 m						
Notes: RBW=100kHz, VBW=300kHz, Span=3MHz, Sweep=AUTO, Attn=AUTO, Detector=Peak										EUT Max Freq: 2475 MHz		
Measured IAW 558074 D01 DTS Meas Guidance v03r05, April 8, 2016, Section 10.2 (peak PSD)												
Antenna Polarization (H/V)	Frequency (MHz)	Peak Reading (dBμV)	Preamp Factor (dB)	Antenna Factor (dB/m)	Cable Factor (dB)	Adjusted Reading (dBμV/m)	Adjusted Reading (dBm)	Antenna Gain (dBi)	Final Conducted Reading (dBm)	FCC 15.247		
										Limit (dBm)	Margin (dB)	Result (Pass/Fail)
H, low ch	2405.0	58.6	0.0	28.0	3.6	90.2	-5.0	4.5	-9.5	8.0	-17.5	Pass
V, low ch	2405.0	48.6	0.0	28.0	3.6	80.2	-15.1	4.5	-19.6	8.0	-27.6	Pass
H, mid ch	2440.0	60.2	0.0	28.2	3.6	92.0	-3.2	4.5	-7.7	8.0	-15.7	Pass
V, mid ch	2440.0	60.9	0.0	28.2	3.6	92.7	-2.5	4.5	-7.0	8.0	-15.0	Pass
H, high ch	2475.0	54.0	0.0	28.3	3.6	85.9	-9.3	4.5	-13.8	8.0	-21.8	Pass
V, high ch	2475.0	56.8	0.0	28.3	3.6	88.7	-6.5	4.5	-11.0	8.0	-19.0	Pass
<b>Table Result:</b> Pass by -15.0 dB										<b>Worst Freq:</b> 2440.0 MHz		
Test Site: CH1			Cable 1: Asset #2051				Cable 2: Asset #1785			Cable 3: ---		
Analyzer: MXE			Preamp: none				Antenna: Orange Horn			Preselector: ---		
CSsoft Radiated Emissions Calculator v 1.017.162												
Adjusted Reading = Reading - Preamp Factor + Antenna Factor + Cable Factor												

## PLOTS

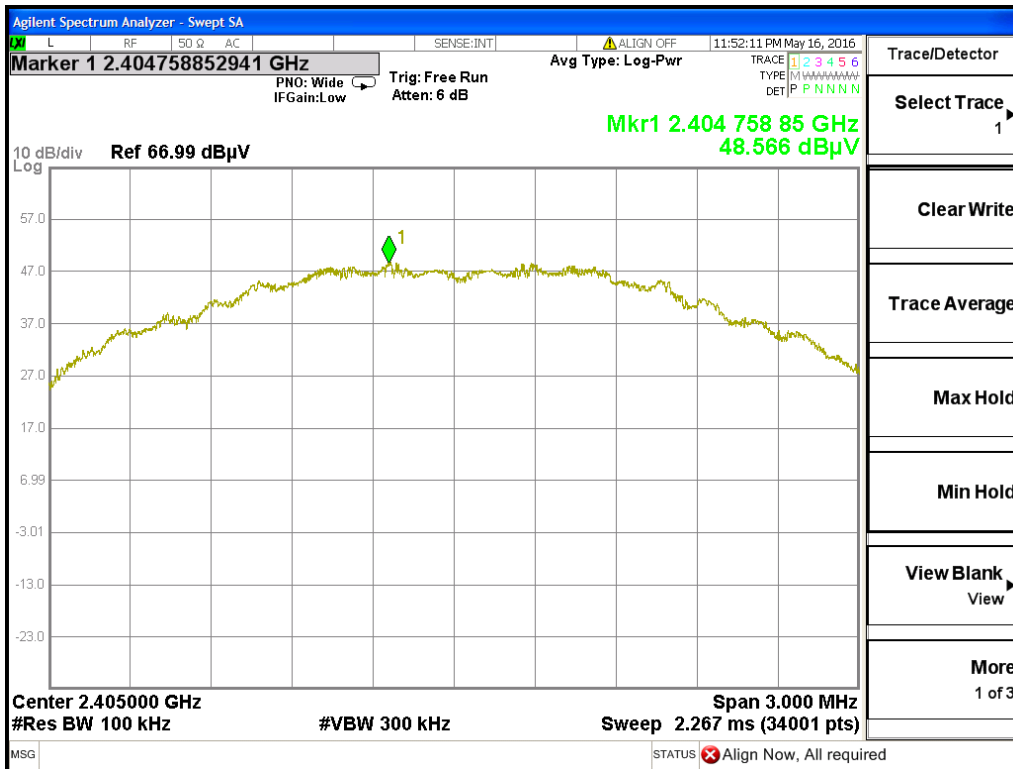


Power Spectral Density, Low Channel, Vertical Polarity



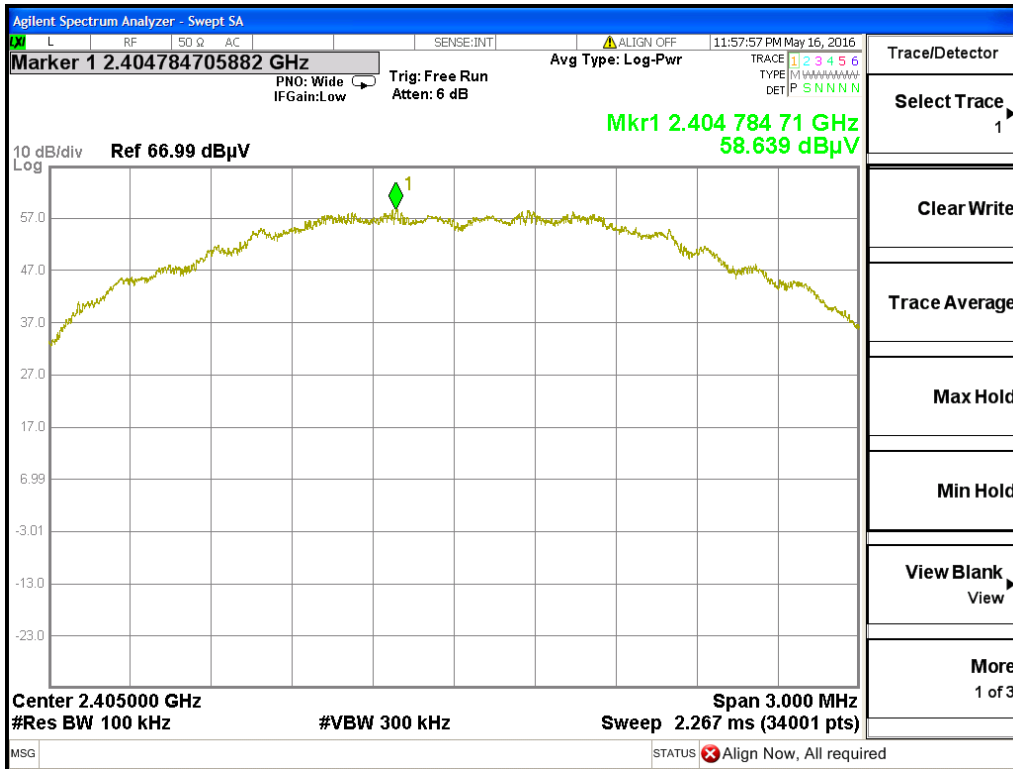


Power Spectral Density, Low Channel, Horizontal Polarity

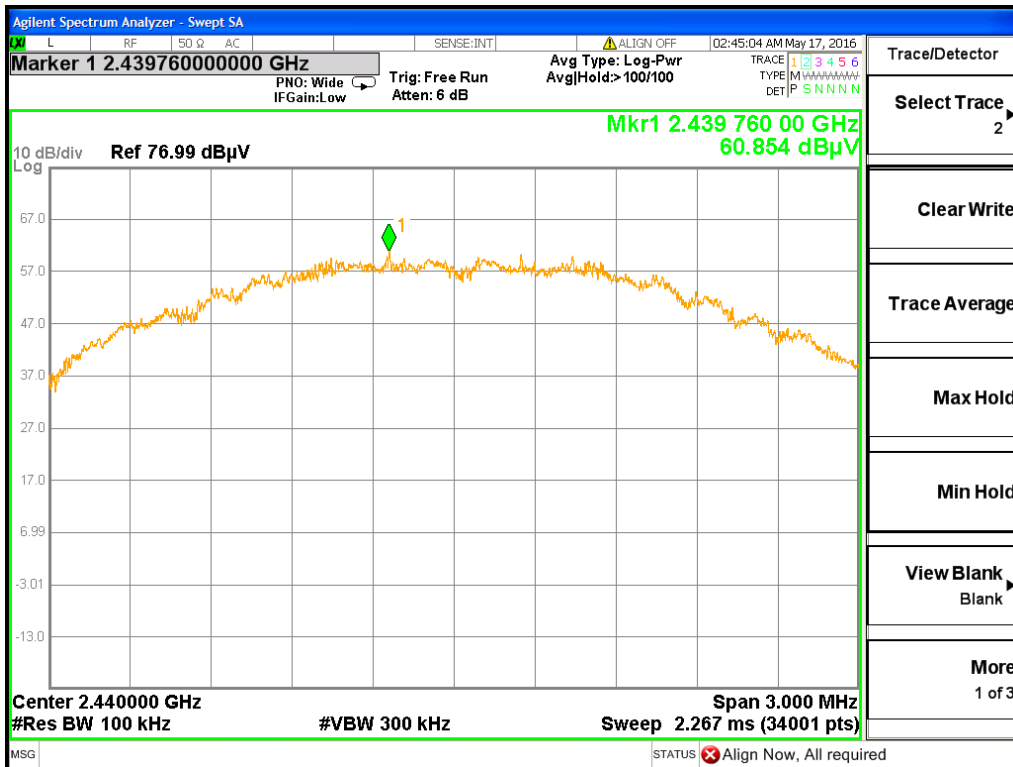


Power Spectral Density, Middle Channel, Vertical Polarity



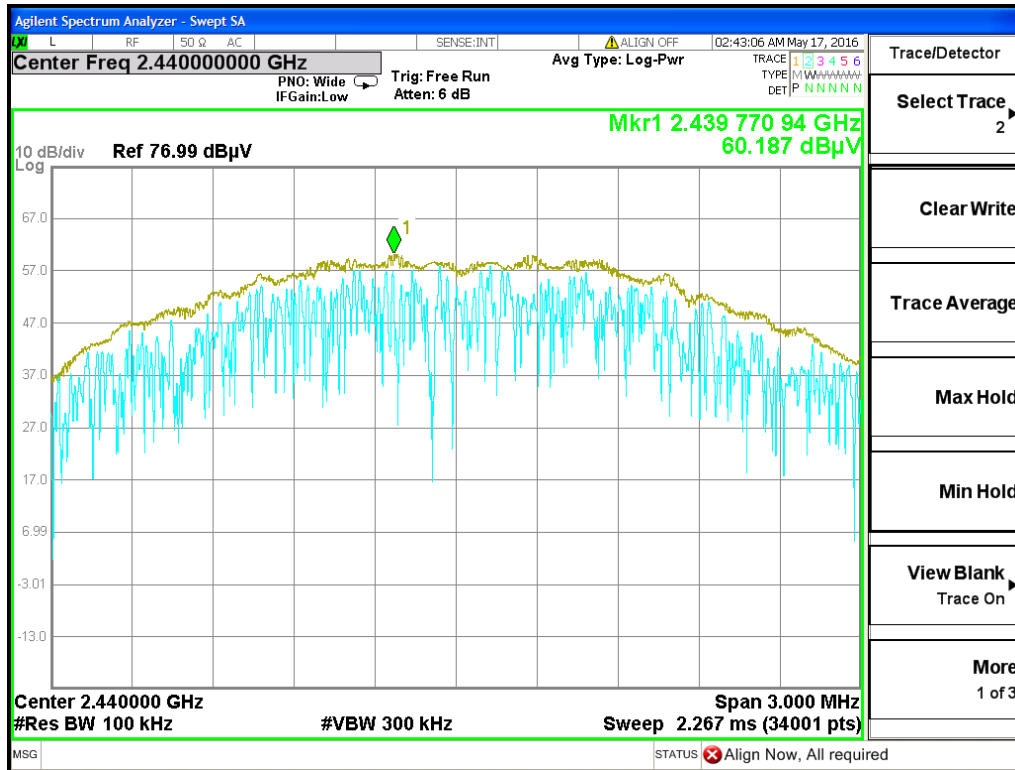


Power Spectral Density, Middle Channel, Horizontal Polarity

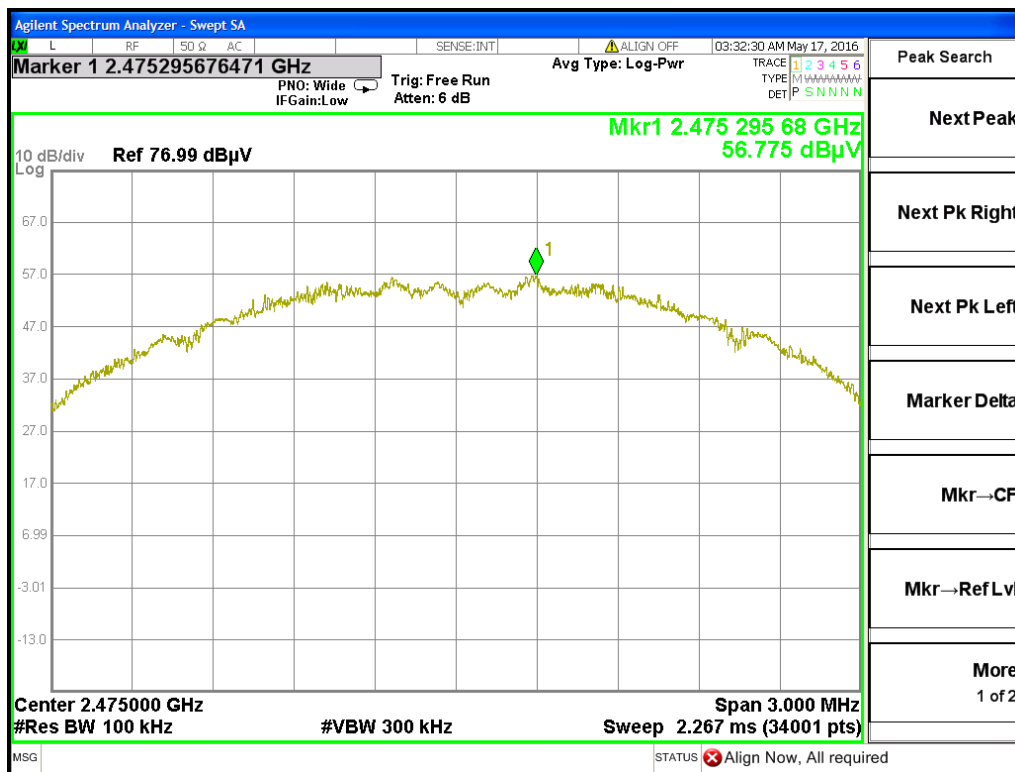

Power Spectral Density, High Channel, Vertical Polarity



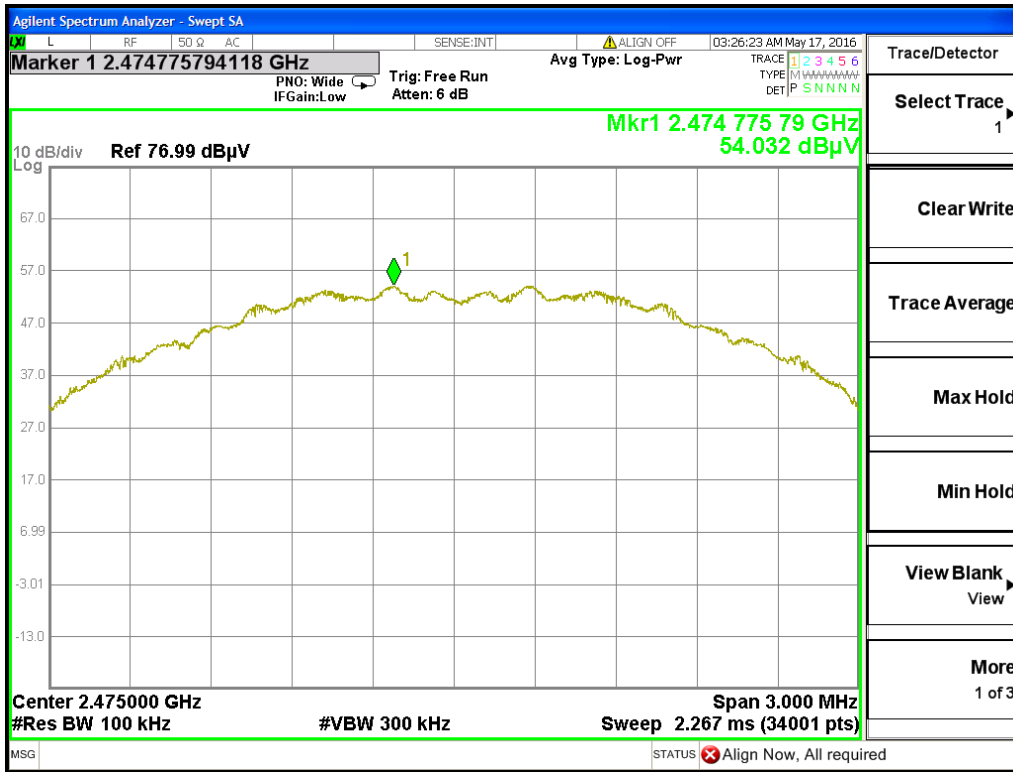

Power Spectral Density, High Channel, Horizontal Polarity

# AC Line Conducted Emissions LIMITS

Frequency of emission (MHz)	Quasi-peak limit (dBµV)	Average limit (dBµV)
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

[47 CFR 15.207(a)]

## MEASUREMENTS / RESULTS

AC Side of a DC Supply Conducted Emissions														
Date: 17-May-16				Company: AssaAbløy				Work Order: Q1125						
Engineer: Chris Bramley				EUT Desc: Apero V3 iN100 - 2.4GHz Radio				Humidity: 32%						
Temp: 22.5 °C				Notes: Sargent 12V DC Supply, EUT Tx on Mid Channel - 2440MHz				Pressure: 1001 mBar						
Frequency Range: 0.15-30MHz EUT Input Voltage/Frequency: 120V/60Hz														
Frequency (MHz)	Quasi-Peak Readings		Average Readings		LISN Factors		Cable Factor (dB)	ATTN Factor (dB)	FCC/CISPR Class B			FCC/CISPR Class B		
	QP1 (dBµV)	QP2 (dBµV)	AVG1 (dBµV)	AVG2 (dBµV)	L1 (dB)	L2 (dB)			QP Limit (dBµV)	Margin (dB)	Result (Pass/Fail)	AVG Limit (dBµV)	Margin (dB)	Result (Pass/Fail)
0.150	23.7	24.5	21.4	19.2	-0.1	-0.2	-0.1	-20.8	66.0	-20.4	Pass	56.0	-13.6	Pass
0.600	6.6	5.9	2.2	3.1	-0.1	-0.1	-0.1	-20.8	56.0	-28.5	Pass	46.0	-22.0	Pass
0.937	3.3	6.2	2.3	3.8	-0.1	-0.1	-0.1	-20.8	56.0	-28.8	Pass	46.0	-21.2	Pass
1.700	3.7	3.2	1.3	2.6	-0.1	-0.1	-0.1	-20.8	56.0	-31.4	Pass	46.0	-22.4	Pass
5.920	4.3	9.9	2.7	4.1	-0.1	-0.1	-0.2	-20.8	60.0	-29.0	Pass	50.0	-24.8	Pass
14.000	7.1	6.3	6.6	5.1	-0.1	-0.1	-0.2	-20.9	60.0	-31.7	Pass	50.0	-22.3	Pass
<b>Result: Pass</b>				<b>Worst Margin: -13.6 dB</b>				<b>Frequency: 0.150 MHz</b>						
Measurement Device: LISN ASSET 1730(Line 1) LISN ASSET 1731(Line 2)				Cable: CEMI-01				Spectrum Analyzer: SA EMI Chamber (1327)						
				Attenuator: 20dB Attenuator-07				Site: CEMI5						
C-S CEMI Calculator Version 3.0.14 Adjusted Reading = Raw Reading + LISN Insertion Loss + Cable Loss + Attenuation														
Equipment Factor Sheet rev: 5/11/2016														

Rev. 5/13/2016

Spectrum Analyzers / Receivers / Preselectors	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on		
SA EMI Chamber (1327)	9kHz-13.2 GHz	E4405B	Agilent	MY45103416	1327	I	7/10/2016	7/10/2015		
LISNs/Measurement Probes	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on		
LISN Asset 1730	150kHz-30MHz	LI-150A	Com-Power	201090	1730	I	3/10/2017	3/10/2016		
LISN Asset 1731	150kHz-30MHz	LI-150A	Com-Power	201091	1731	I	3/10/2017	3/10/2016		
Conducted Test Sites (Mains / Telco)	FCC Code	VCCI Code	Cat	Calibration Due	Calibrated on					
CEMI 5	719150	A-0015	III	NA	N/A					
Meteorological Meters	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on			
TH A#2082	HTC-1	HDE	2082	2082	II	4/5/2017	4/5/2016			
Barometric A#2160	5396-0321	Monarch Instruments	4000060	2160	I	3/7/2017	3/7/2016			
Cables	Range	Mfr	Cat	Calibration Due	Calibrated on					
CEMI-01	9kHz - 2GHz	C-S	II	9/11/2016	9/11/2015					
Attenuators	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on		
20dB Attenuator-07	9kHz-2GHz	BW-N20W+	MCL	N/A	II	4/10/2017	4/10/2016			

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS  
One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828





## Occupied Bandwidth


### REQUIREMENT

When an occupied bandwidth is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured. [RSS-GEN 4.6.1]


### MEASUREMENTS / RESULTS

Occupied Bandwidth (Radiated) Table			
Date: 16-May-16	Company: AssaAbloy	Work Order: Q1125	
Engineer: Jason Haley	EUT Desc: Aperio V3 iN100	EUT Operating Voltage/Frequency: Battery	
Temp: 22°C	Humidity: 29%	Pressure: 1003mBar	
Frequency Range: 2405-2475MHz		Measurement Distance: 3m	
Notes: RBW=47kHz, VBW=150kHz, Span=5MHz, Sweep=AUTO, Attn=AUTO, Detector=Peak Measured IAW ANSI C63.10 - 2013, Section 6.9.3		EUT Max Freq: 2475 MHz	
Antenna Polarization (H/V)	Frequency (MHz)	Measured Occupied Bandwidth (kHz)	
H, low ch	2405.0	2691.0	
H, mid ch	2440.0	2765.0	
V, high ch	2475.0	2649.0	
Test Site: CH1	Cable 1: Asset #2051	Cable 2: Asset #1785	Cable 3: ---
Analyzer: MXE	Preamp: Asset #1517	Antenna: Orange Horn	Preselector: ---
Copyright Curtis-Straus LLC 2000			


### PLOTS

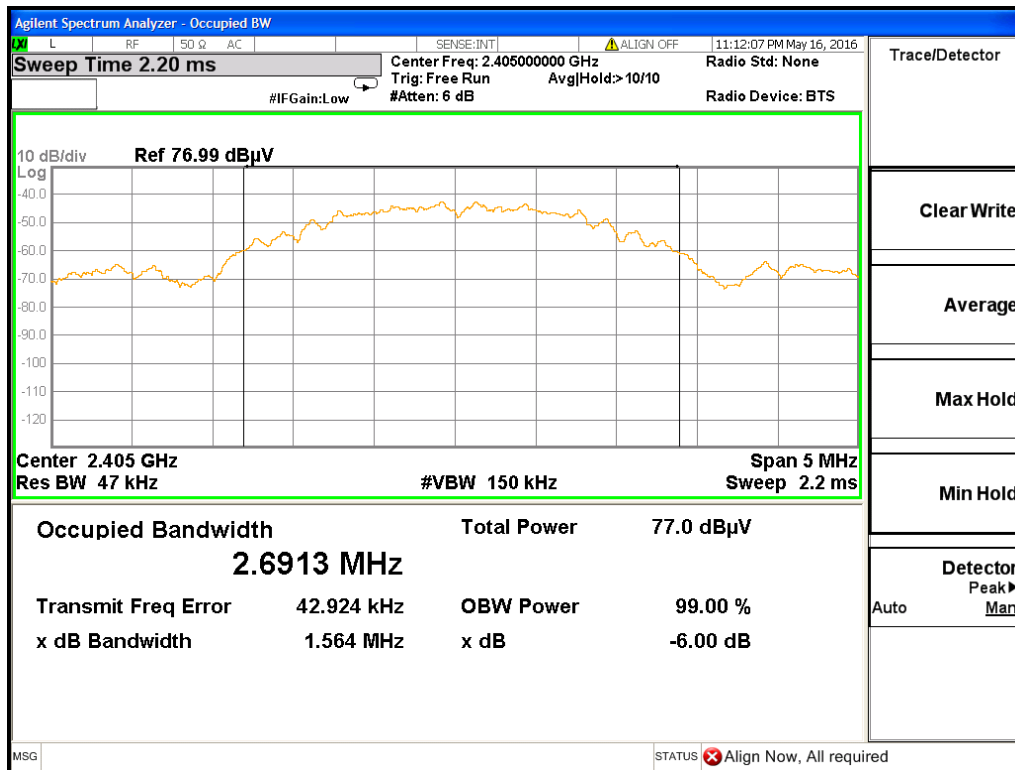

Occupied Bandwidth, Low Channel

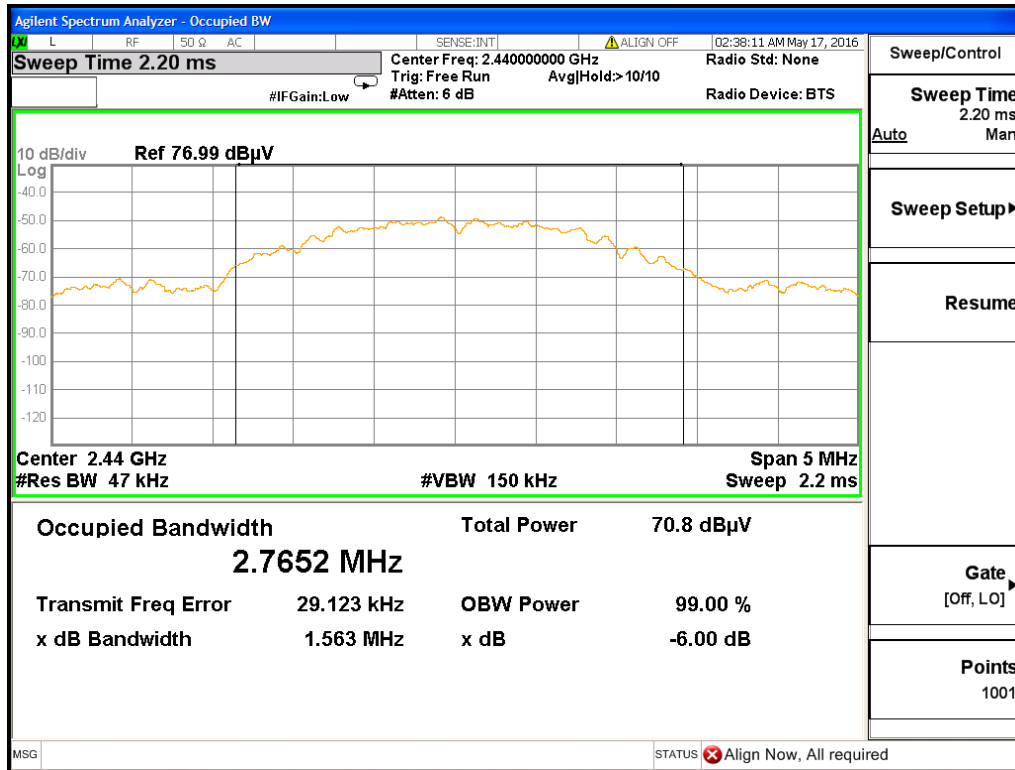

Occupied Bandwidth, Middle Channel

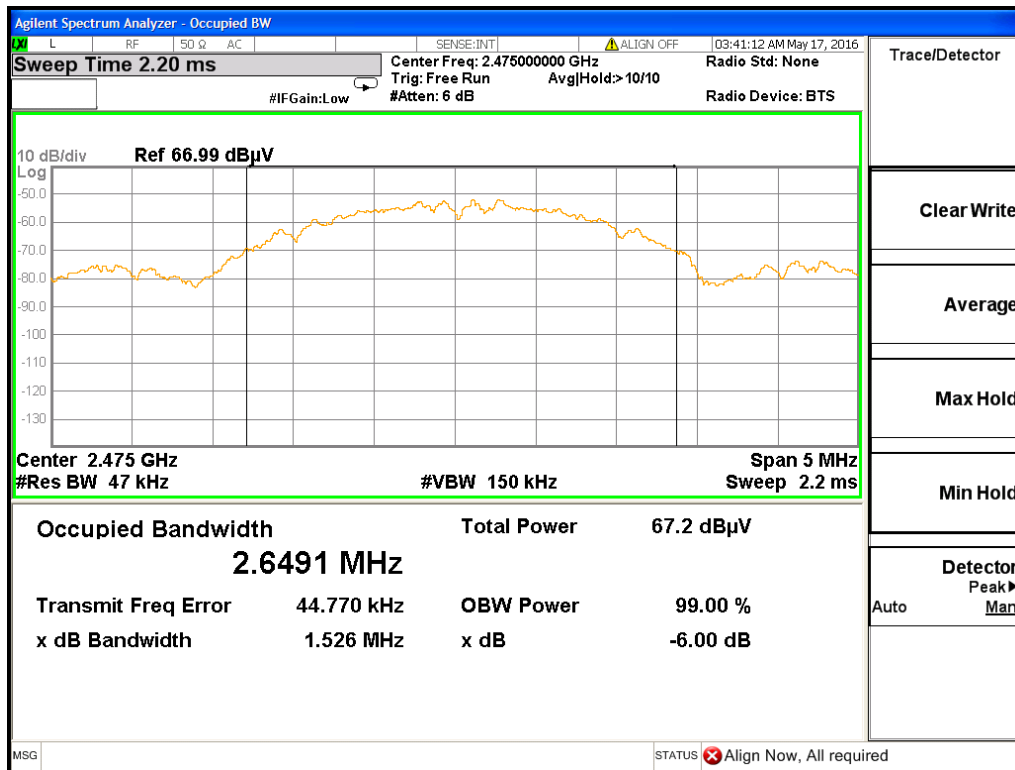

Occupied Bandwidth, High Channel



### Measurement Uncertainty

The listed uncertainties are the worst case uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results.

Measurement	Expanded Uncertainty k=2	Maximum allowable uncertainty
Radiated Emissions (30-1000MHz)		
NIST	5.6dB	N/A
CISPR	4.6dB	5.2dB (Ucisprr)
Radiated Emissions (1-26.5GHz)	4.6dB	N/A
Radiated Emissions (above 26.5GHz)	4.9dB	N/A
Magnetic Radiated Emissions	5.6dB	N/A
Conducted Emissions		
NIST	3.9dB	N/A
CISPR	3.6dB	3.6dB (Ucisprr)
Telco Conducted Emissions (Current)	2.9dB	N/A
Telco Conducted Emissions (Voltage)	4.4dB	N/A
Electrostatic Discharge	11.5%	N/A
Radiated RF Immunity (Uniform Field)	1.6dB	N/A
Electrical Fast Transients	23.1%	N/A
Surge	23.1%	N/A
Conducted RF Immunity	3dB	N/A
Magnetic Immunity	12.8%	N/A
Dips and Interrupts	2.3V	N/A
Harmonics	3.5%	N/A
Flicker	3.5%	N/A
Radio frequency (@ 2.4GHz)	$3.23 \times 10^{-8}$	$1 \times 10^{-7}$
RF power, conducted	0.40dB	0.75dB
Maximum frequency deviation:		
• Within 300Hz and 6kHz of audio frequency / Within 6kHz and 25kHz of audio frequency	3.4% 0.3dB	5% 3dB
Adjacent channel power	1.9dB	3dB
Conducted spurious emission of transmitter, valid up to 12.75GHz	2.39dB	3dB
Conducted emission of receivers	1.3dB	3dB
Radiated emission of transmitter, valid up to 26.5GHz	3.9dB	6dB
Radiated emission of transmitter, valid up to 80GHz	3.3dB	6dB
Radiated emission of receiver, valid up to 26.5GHz	3.9dB	6dB
Radiated emission of receiver, valid up to 80GHz	3.3dB	6dB
Humidity	2.37%	5%
Temperature	0.7°C	1.0°C
Time	4.1%	10%
RF Power Density, Conducted	0.4dB	3dB
DC and low frequency voltages	1.3%	3%
Voltage (AC, <10kHz)	1.3%	2%
Voltage (DC)	0.62%	1%
The above reflects a 95% confidence level		



### Test Equipment Used

The following test equipment was used for Occupied Bandwidth, DTS Bandwidth, Peak Output Power, Power Spectral Density and Band Edge Measurements.

Rev. 5/13/2016

Equipment Description	Range	MN	Mfr	SN	Asset	Cat	Calibration Due	Calibrated on
<b>Spectrum Analyzers / Receivers / Preselectors</b> MXE EMI Receiver	20Hz-26.5GHz	N9038A	Agilent	MY51210181	2093	I	7/21/2016	7/21/2015
<b>Radiated Emissions Sites</b> EMI Chamber 1	FCC Code 719150	IC Code 2762A-6	VCCI Code A-0015	Range 1-18GHz		I	5/23/2017	5/23/2015
<b>Preamps/Couplers Attenuators / Filters</b> 1517 HF Preamp High Pass Filter	Range 1-20GHz 0.03-14.5 GHz	MN CS 11SH10-3000/T9000-0/0	Mfr CS K&L	SN N/A 1	Asset 1517 1311	Cat II II	Calibration Due 8/6/2016 1/7/2017	Calibrated on 8/6/2015 1/7/2016
<b>Antennas</b> Orange Horn	Range 1-18GHz	MN 3115	Mfr EMCO	SN 0004-6123	Asset 390	Cat I	Calibration Due 10/13/2016	Calibrated on 10/13/2014
<b>Meteorological Meters</b> Weather Clock (Pressure Only) TH A#2080		MN BA928 HTC-1	Mfr Oregon Scientific HDE	SN C3166-1	Asset 831 2080	Cat I II	Calibration Due 4/28/2017 4/5/2017	Calibrated on 4/28/2016 4/5/2016
<b>Cables</b> Asset #1785 Asset #2051	Range 9kHz - 18GHz 9kHz - 18GHz		Mfr Florida RF Florida RF			Cat II II	Calibration Due 1/5/2017 3/2/2017	Calibrated on 1/5/2016 3/2/2016

All equipment is calibrated using standards traceable to NIST or other nationally recognized calibration standard.



## Conditions Of Testing

[Bureau Veritas Consumer Products Services, Inc., a Massachusetts corporation], and/or its affiliates (collectively, the "Company") will conduct, at the request of the Submitter ("Client"), the tests specified on the submitted Test Request Form or equivalent in accordance with, and subject to, the following terms and conditions (collectively, "Conditions"):

1. All orders for tests are subject to acceptance by the Company, and no order will constitute a binding commitment of the Company unless and until such order is accepted by it, as evidenced by the issuance of a written report ("Test Report") by the Company. The Test Report is issued solely by the Company, is intended for the exclusive use of Client and shall not be published, used for advertising purposes, copied or replicated for distribution to any other person or entity or otherwise publicly disclosed without the prior written consent of the Company. By submitting a request for services to the Company, Client consents to the disclosure to accreditation bodies of those records of Client relevant to the accreditation body's assessment of the Company's competence and compliance with relevant accreditation criteria. The Company shall not be liable for any loss or damage whatsoever resulting from the failure of the Company to provide its services within any time period for completion estimated by the Company. If Client anticipates using the Test Report in any legal proceeding, arbitration, dispute resolution forum or other proceeding, it shall so notify the Company prior to submitting the Test Report in such proceeding. The Company has no obligation to provide a fact or expert witness at such proceeding unless the Company agrees in advance to do so for a separate and additional fee.
2. The Test Report will set forth the findings of the Company solely with respect to the test samples identified therein. Unless specifically and expressly indicated in the Test Report, the results set forth in such Test Report are not intended to be indicative or representative of the quality or characteristics of the lot from which a test sample is taken, and Client shall not rely upon the Test Report as being so indicative or representative of the lot or of the tested product in general. The Test Report will reflect the findings of the Company at the time of testing only, and the Company shall have no obligation to update the Test Report after its issuance. The Test Report will set forth the results of the tests performed by the Company based upon the written information provided to the Company. The Test Report will be based solely on the samples and written information submitted to the Company by Client, and the Company shall not be obligated to conduct any independent investigation or inquiry with respect thereto.
3. The Company may, in its sole discretion, destroy samples which have been furnished to the Company for testing and which have not been destroyed in the course of testing. The Company may delegate the performance of all or a portion of the services contemplated hereunder to an affiliate, agent or subcontractor of the Company, and Client consents to such delegation.
4. These Conditions and the Test Report represent the entire understanding of the parties hereto with respect to the subject matter hereof and of the Test Report, and no modification, variance or extrapolation with respect thereto shall be permitted without the prior written consent of the Company.
5. The names, service marks, trademarks and copyrights of the Company and its affiliates, including the names "**BUREAU VERITAS**," "**BUREAU VERITAS CONSUMER PRODUCTS SERVICES**," "**BVCPS**," "**MTL**," "**ACTS**," "**MTL-ACTS**" and "**CURTIS-STRAUS**" (collectively, the "Marks") are and shall remain the sole property of the Company or its affiliates and shall not be used by Client except solely to the extent that Client obtains the prior written approval of the Company and then only in the manner prescribed by the Company. Client shall not contest the validity of the Marks or take any action that might impair the value or goodwill associated with the Marks or the image or reputation of the Company or its affiliates.
6. Payment in full shall be due 30 days after the date of invoice. Interest shall be due on overdue amounts from the due date until paid at an interest rate of 1.5% per month or, if less, the maximum rate permitted by law. The Company reserves the right, at any time and from time to time, to revoke any credit extended to Client. Client shall reimburse the Company for any costs it incurs in collecting past due amounts, including court costs and fees and expenses of attorneys and collection agencies. The Test Report may not be used or relied upon by Client if and for so long as Client fails to pay when due any invoice issued by the Company or any affiliate of it to Client or any affiliate or subsidiary of Client together with interest and penalties, if any, accrued thereon.
7. The Company disclaims any and all responsibility or liability arising out of or in connection with e-mail transmissions of such information.
8. Client understands and agrees that the Company is neither an insurer nor a guarantor, that the Company does not take the place of Client or any designer, manufacturer, agent, buyer, distributor or transportation or shipping company, and that the Company disclaims all liability in such capacities. Client further understands that if it seeks assurance against loss or damage, it should obtain appropriate insurance.
9. Client agrees that the Company, by providing the services, does not take the place of Client nor any third party, nor does the Company release them from any of their obligations, nor does the Company otherwise assume, abridge, abrogate or undertake to discharge any duty of any third party to Client or any duty of Client or any third party to any other third party, and Client will not release any third party from its obligations and duties with respect to the tested goods.
10. Client shall, on a timely basis, (a) provide adequate instructions to the Company in order to enable the Company to perform properly its services, (b) provide, or cause Client's suppliers and contractors to provide, the Company with all documents necessary to enable the Company to perform its services, (c) furnish the Company with all relevant information regarding Client's intended use and purposes of the tested goods, (d) advise the Company of essential dates and deadlines relevant to the tested goods and (e) fully exercise all rights and remedies available to Client against third parties in respect of the tested goods.
11. The Company shall undertake due care and ordinary skill in the performance of its services to Client, and the Company shall accept responsibility only were such skill has not been exercised and, even in such event, only to the extent of the limitation of liability set forth herein.
12. If Client desires to assert a claim arising from or relating to (i) the performance, purported performance or non-performance of any services by the Company or (ii) the sale, resale, manufacture, distribution or use of any tested goods, it must submit that claim to the Company in a writing that sets forth with particularity the basis for such claim within 60 days from discovery of the potential claim and not more than six months after the date of issuance of the Test Report to Client. Client waives any and all such claims including, without limitation, claims that the Test Report is inaccurate, incomplete or misleading or that additional or different testing is required, unless and then only to the extent that Client submits a written claim to the Company within both such time periods.
13. CLIENT SHALL, EXCEPT TO THE EXTENT OF COMPANY'S LIABILITY TO CLIENT HEREUNDER (WHICH IN NO EVENT SHALL EXCEED THE LIMITATION OF LIABILITY HEREIN), HOLD HARMLESS AND INDEMNIFY THE COMPANY, ITS AFFILIATES AND THEIR RESPECTIVE DIRECTORS, OFFICERS, EMPLOYEES, AGENTS AND SUBCONTRACTORS AGAINST ALL ACTUAL OR ALLEGED THIRD PARTY CLAIMS FOR LOSS, DAMAGE OR EXPENSE OF WHATSOEVER NATURE AND HOWSOEVER ARISING FROM OR RELATING TO (i) THE PERFORMANCE, PURPORTED PERFORMANCE OR NON-PERFORMANCE OF ANY SERVICES BY THE COMPANY OR (ii) THE SALE, RESALE, MANUFACTURE, DISTRIBUTION OR USE OF ANY TESTED GOODS.
14. EXCEPT AS MAY OTHERWISE BE EXPRESSLY AGREED TO IN WRITING BY THE COMPANY AND NOTWITHSTANDING ANY PROVISION TO THE CONTRARY CONTAINED HEREIN OR IN ANY TEST REPORT, NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR USE, IS MADE.



**Curtis-Straus LLC, a wholly owned subsidiary of BV CPS**

**One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828**



15. (A) IN NO EVENT WHATSOEVER SHALL THE COMPANY BE LIABLE FOR ANY CONSEQUENTIAL, SPECIAL, INCIDENTAL, EXEMPLARY OR PUNITIVE DAMAGES IN CONNECTION WITH, RELATING TO OR ARISING OUT OF THE TEST REPORT OR THE SERVICES PROVIDED BY THE COMPANY HEREUNDER, INCLUDING WITHOUT LIMITATION LOSS OF OR DAMAGE TO PROPERTY; LOSS OF INCOME, PROFIT OR USE; OR ANY CLAIMS OR DEMANDS MADE AGAINST CLIENT OR ANY OTHER PERSON BY ANY THIRD PARTY IN CONNECTION WITH, RELATING TO OR ARISING OUT OF THE SERVICES PROVIDED BY THE COMPANY HEREUNDER.

(B) NOTWITHSTANDING ANY PROVISION TO THE CONTRARY CONTAINED HEREIN, AND IN RECOGNITION OF THE RELATIVE RISKS AND BENEFITS TO CLIENT AND THE COMPANY ASSOCIATED WITH THE TESTING SERVICES CONTEMPLATED HEREBY, THE RISKS HAVE BEEN ALLOCATED SUCH THAT UNDER NO CIRCUMSTANCES WHATSOEVER SHALL THE LIABILITY OF THE COMPANY TO CLIENT OR ANY THIRD PARTY IN RESPECT OF ANY CLAIM FOR LOSS, DAMAGE OR EXPENSE, OF WHATSOEVER NATURE OR MAGNITUDE, AND HOWSOEVER ARISING, EXCEED AN AMOUNT EQUAL TO FIVE (5) TIMES THE AMOUNT OF THE FEES PAID TO THE COMPANY FOR THE SPECIFIC SERVICES WHICH GAVE RISE TO SUCH CLAIM OR U.S.\$10,000, WHICHEVER IS THE LESSER AMOUNT.

16. The Company shall not be liable for any loss or damage resulting from any delay or failure in performance of its obligations hereunder resulting directly or indirectly from any event of force majeure or any event outside the control of the Company. If any such event occurs, the Company may immediately cancel or suspend its performance hereunder without incurring any liability whatsoever to Client.

17. Company's services, including these Conditions, shall be governed by, and construed in accordance with, the local laws of the country where the Company performs the tests or, in the case of tests performed in the United States of America, the laws of Massachusetts without regard to conflicts of laws principles. If any aspect(s) of these Conditions is found to be illegal or unenforceable, the validity, legality and enforceability of all remaining aspects of these Conditions shall not in any way be affected or impaired thereby. Any proceeding related to the subject matter hereof shall be brought, if at all, in the courts of the country where the Company performs the tests or, in the case of tests performed in the United States of America, in the courts of Massachusetts. Client waives the right to interpose any counterclaim or setoffs of any nature in any litigation arising hereunder.

The complete list of the Approved Subcontractors Curtis-Straus may use to delegate the performance of work can be provided upon request.  
Rev.160009121(2)\_#684340 v14CS



Curtis-Straus LLC, a wholly owned subsidiary of BV CPS

One Distribution Center Circle, #1 • Littleton, MA • TEL (978) 486-8880 • FAX (978) 486-8828

