



313 West 12800 South, Suite 311

Draper, UT 84020

(801) 260-4040

Test Report

Certification

| | |
|------------------------------|---|
| FCC ID | U4A-WF1MRUS |
| Equipment Under Test | MD-05 |
| Test Report Serial No | V059452_01 |
| Dates of Test | Radiated: May 6, 2021, June 7 – 14, 2021 Conducted: May 18, 2021 |
| Report Issue Date | August 3, 2021 |

| Test Specifications: | Applicant: |
|-----------------------------|--|
| FCC Part 15, Subpart E | Assa Abloy 110 Sargent Drive New Haven, CT 06511 U.S.A. |



Certification of Engineering Report

This report has been prepared by VPI Laboratories, Inc. to document compliance of the device described below with the requirements of Federal Communications Commission (FCC) Part 15, Subpart E. This report may be reproduced in full. Partial reproduction of this report may only be made with the written consent of the laboratory. The results in this report apply only to the sample tested.

| | |
|---------------------|-------------|
| Applicant | Assa Abloy |
| Manufacturer | Assa Abloy |
| Brand Name | Yale |
| Model Number | MD-05 |
| FCC ID | U4A-WF1MRUS |

On this 3rd day of August 2021, I, individually and for VPI Laboratories, Inc., certify that the statements made in this engineering report are true, complete, and correct to the best of my knowledge, and are made in good faith.

Although NVLAP has accredited the VPI Laboratories, Inc. EMC testing facilities, this report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

VPI Laboratories, Inc.



Radiated Emissions Testing by: Norman P. Hansen



Direct Connect Measurements by: Benjamin N. Antczak



Reviewed by: Jason Stewart

| Revision History | | |
|-------------------------|-------------------------|----------------|
| Revision | Description | Date |
| 01 | Original Report Release | August 3, 2021 |

Table of Contents

| | | |
|-----|---|----|
| 1 | Client Information..... | 5 |
| 1.1 | Applicant..... | 5 |
| 1.2 | Manufacturer..... | 5 |
| 2 | Equipment Under Test (EUT)..... | 6 |
| 2.1 | Identification of EUT..... | 6 |
| 2.2 | Description of EUT..... | 6 |
| 2.3 | EUT and Support Equipment..... | 7 |
| 2.4 | Interface Ports on EUT..... | 7 |
| 2.5 | Modification Incorporated/Special Accessories on EUT..... | 7 |
| 2.6 | Deviation from Test Standard..... | 7 |
| 2.7 | Scope of This Report..... | 7 |
| 3 | Test Specification, Methods and Procedures..... | 8 |
| 3.1 | Test Specification..... | 8 |
| 3.2 | Methods & Procedures..... | 8 |
| 3.3 | Test Procedure..... | 13 |
| 4 | Operation of EUT During Testing..... | 14 |
| 4.1 | Operating Environment..... | 14 |
| 4.2 | Operating Modes..... | 14 |
| 4.3 | EUT Exercise Software..... | 14 |
| 5 | Summary of Test Results..... | 15 |
| 5.1 | FCC Part 15, Subpart E..... | 15 |
| 5.2 | Result..... | 15 |
| 6 | Measurements, Examinations and Derived Results..... | 16 |
| 6.1 | General Comments..... | 16 |
| 6.2 | Test Result..... | 16 |
| 7 | Procedures and Test Equipment..... | 29 |
| 7.1 | Conducted Emissions at Mains Ports..... | 29 |
| 7.2 | Direct Connection at the Antenna Port Test..... | 30 |
| 7.3 | Radiated Emissions..... | 31 |
| 7.4 | Equipment Calibration..... | 34 |
| 7.5 | Measurement Uncertainty..... | 34 |
| 8 | Photographs..... | 35 |

1 Client Information

1.1 Applicant

| | |
|---------------------|--|
| Company Name | Assa Abloy 110 Sargent Drive New Haven, CT 06511 U.S.A. |
| Contact Name | James W. Forte |
| Title | Senior Product Compliance Engineer |

1.2 Manufacturer

| | |
|---------------------|--|
| Company Name | Assa Abloy 110 Sargent Drive New Haven, CT 06511 U.S.A. |
| Contact Name | James W. Forte |
| Title | Senior Product Compliance Engineer |

2 Equipment Under Test (EUT)

2.1 Identification of EUT

| | |
|------------------------|---------------------------|
| Brand Name | Yale |
| Model Number | MD-05 |
| Serial Number | None |
| Dimensions (cm) | 6.03. 01.5 x 9.2 x 2.2 |

2.2 Description of EUT

The MD-05 is a module containing a BLE/WiFi transceiver that is used in Yale door locks. The MD-05 is powered by the batteries in the lock. For testing purposes, the MD-05 was powered by a Phihong PSA05A-050QL6 power supply. The MD-05 uses a Murata Type 1LV BLE/WiFi transceiver module with an inverted F trace antenna.

. Channel assignments, frequencies and maximum power settings are shown in the table below.

| Channel | Frequency (MHz) | Maximum Power Setting |
|---------|-----------------|-----------------------|
| 149 | 5745 | 25 |
| 153 | 5765 | 25 |
| 157 | 5785 | 25 |
| 161 | 5805 | 25 |
| 165 | 5825 | 25 |

2.2.1 Modes of Operation

EUT is intended to operate indoors as a client device. The EUT is not fixed and therefore incapable of fixed point-to-point architecture.

2.2.2 DFS Capabilities

This report covers the circuitry of the device operating in the UNII-3 band (5.725 GHz – 5.85 GHz). Operation in the UNII-3 band is not subject to DFS requirements.

2.3 EUT and Support Equipment

The EUT and support equipment used during the test are listed below.

| Brand Name Model Number Serial Number | Description | Name of Interface Ports / Interface Cables |
|---|-----------------------------------|---|
| BN: Yale MN: MD-05 (Note 1) SN: None | Transceiver module for door locks | See Section 2.4 |

Notes: (1) EUT

2.4 Interface Ports on EUT

| Name of Ports | No. of Ports Fitted to EUT | Cable Description/Length |
|----------------|----------------------------|--|
| Lock Interface | 1 | The EUT connects directly to the door lock via an 8 pin header connector |

2.5 Modification Incorporated/Special Accessories on EUT

There were no modifications or special accessories required to comply with the specification.

2.6 Deviation from Test Standard

There were no deviations from the test specification.

2.7 Scope of This Report

This report covers the circuitry of the devices subject to FCC Part 15, Subpart E. with operation in the 5725 MHz to 5850 MHz frequency band. The circuitry of the device subject to FCC 15 Subpart B, FCC 15 Subpart C, and other requirements of FCC Part 15 Subpart E and was found to be compliant but are covered in separate reports.

3 Test Specification, Methods and Procedures

3.1 Test Specification

| | |
|------------------------|--|
| Title | FCC PART 15, Subpart E (47 CFR 15) 15.203, 15.207, 15.209, and 15.407 |
| Purpose of Test | The tests were performed to demonstrate initial compliance |
| UNII References | KDB 789033 Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02 |

3.2 Methods & Procedures

3.2.1 §15.203 Antenna Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered in compliance with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

3.2.2 §15.207 Conducted Limits

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

| Frequency range (MHz) | Limit (dBμV) | |
|-----------------------|--------------|-----------|
| | Quasi-peak | Average |
| 0.15 to 0.50* | 66 to 56* | 56 to 46* |
| 0.50 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

*Decreases with the logarithm of the frequency.

Table 1: Limits for conducted emissions at mains ports of Class B ITE.

3.2.3 §15.407 Operation within the UNII Bands

Emission bandwidth is determined by measuring the width of the signal between points that are 26 dB down relative to the maximum level of the carrier center frequency.

Maximum conducted output power is the total transmit power delivered to all antennas, averaged across all symbols when operating at maximum power control level. If multiple modulation methods are possible, then the highest total transmit power in any mode is considered the maximum conducted output power.

Power spectral density is the total energy output per unit bandwidth from a transmitter operating at maximum power level divided by the total duration of transmission.

Measurements for UNII operation are taken over intervals of continuous transmissions. Measurements are taken using a minimum of resolution bandwidth of 1 MHz. If lower resolution bandwidths are used, measurement energies must be integrated to show the total power over 1 MHz. Emission limits are taken at the highest and lowest channels available to the manufacturer.

Although not covered in this test report, frequency stability must be ensured by manufacturer under all conditions of normal operation.

3.2.3.1 Power Limits in the Band 5150 – 5250 MHz (“UNII-1”)

Access points operating either indoors or outdoors, maximum conducted output power over the frequency band 5.15 – 5.25 GHz (“UNII-1”) shall not exceed 1 W (30 dBm) as long as the maximum antenna gain does not exceed 6 dBi. In addition, maximum power spectral density shall not exceed 17 dBm in any 1 MHz band. If maximum antenna gain exceeds 6 dBi, then the maximum conducted output power and maximum power spectral density shall be reduced by the amount (in dB) that the directional gain of the antenna exceeds 6 dBi.

Outdoor access points additionally may not exceed 125 mW (21 dBm) maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon.

Only fixed point-to-point access points may employ antennas with directional gain of up to 23 dBi without reducing conducted output power. However, for every 1 dB gain over 23 dBi, maximum conducted output power and maximum power spectral density must be reduced by 1 dB. The 23 dBi exception is only applicable to fixed, point-to-point access points, and is not acceptable for point to multi-point, omnidirectional, or multi-point to point architectures.

Client devices shall not exceed conducted output power of 250 mW (24 dBm) as long as the maximum antenna gain does not exceed 6 dBi. In addition, maximum power spectral density shall not exceed 11 dBm for any 1 MHz band. If maximum antenna gain exceeds 6 dBi, then the maximum conducted output power and maximum power spectral density shall be reduced by the amount (in dB) that the directional gain of the antenna exceeds 6dBi.

Emissions outside the band 5.15 – 5.35 GHz shall not exceed an e.i.r.p. of -27 dBm/MHz.

3.2.3.2 Power Limits in the Bands 5250 – 5350 MHz and 5470 – 5725 MHz (“UNII-2”)

Maximum conducted output power over the frequency bands 5.25-5.35 GHz and 5.47-5.725 GHz (“UNII-2A” and “UNII-2C,” collectively, “UNII-2”) shall not exceed the lesser of: 250 mW (24 dBm); or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz (MHz). Maximum power spectral density shall additionally not exceed 11 dBm in any 1 MHz band. If maximum antenna gain exceeds 6 dBi, then the maximum conducted output power and maximum power spectral density shall be reduced by the amount (in dB) that the directional gain of the antenna exceeds 6 dBi.

For transmitters operating in the UNII-2A band, emissions outside the band 5.15 – 5.35 GHz shall not exceed an e.i.r.p. of -27 dBm/MHz. For those transmitters operating in the UNII-2C band, emissions outside the UNII-2C band shall not exceed an e.i.r.p. of -27 dBm/MHz.

Transmitters operating in the UNII-2 bands for which e.i.r.p. exceeds 500 mW (27 dBm) must employ a transmit power control (TPC) mechanism, giving the device the capability of operating at least 6 dB below the mean EIRP of 30 dBm.

3.2.3.3 Power Limits in the Band 5725 – 5850 MHz (“UNII-3”)

Maximum conducted output power over the frequency bands 5.725 – 5.85 GHz (“UNII-3”) shall not exceed 1 W (30 dBm). Maximum power spectral density shall not exceed 30 dBm in any 500 kHz band. If maximum antenna gain exceeds 6 dBi, then the maximum conducted output power and maximum power spectral density shall be reduced by the amount (in dB) that the directional gain of the antenna exceeds 6 dBi. Fixed point-to-point operations may utilize antennas exceeding 6 dBi without reducing the transmitter conducted power; this exception is only applicable to fixed, point-to-point transmitters, and is not acceptable for point to multi-point, omni-directional, or multi-point to point architectures.

For transmitters operating in the UNII-3 band, emissions 75 MHz above or below the band-edge shall not exceed an e.i.r.p. of -27 dBm/MHz. For those emissions within 75 MHz and 25 MHz of the band-edge the limit increases linearly to 10 dBm/MHz. For those emissions within 25 MHz and 5 MHz of the band-edge the limit increases linearly to 15.6 dBm/MHz. For those emissions within 5 MHz of the band-edge the limit increases linearly to the band-edge to 27 dBm/MHz.

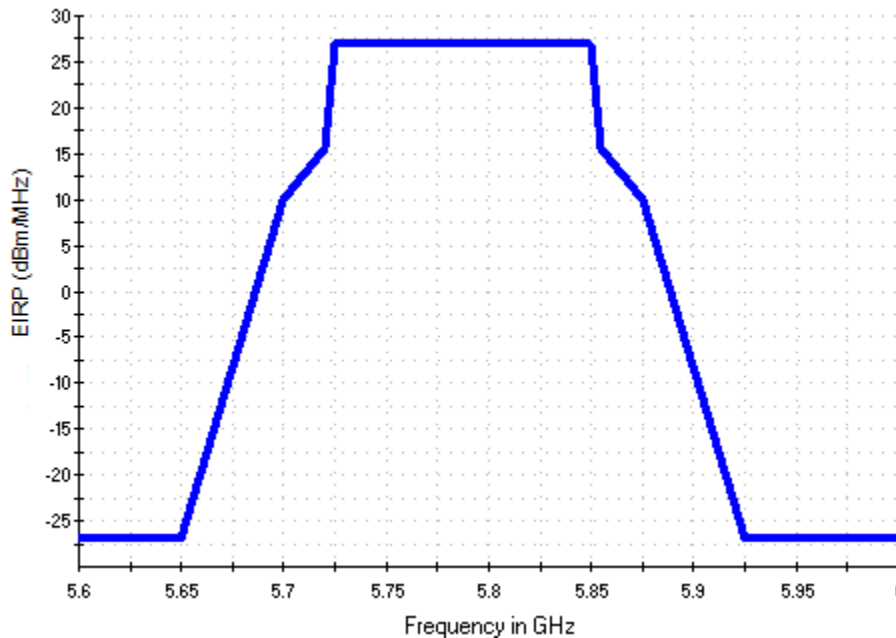


Figure 1. Emission limit for transmitters operating in the UNII-3 (5.725 – 5.850 GHz) band

Transmitters operating in the UNII-3 band shall also have a 6 dB bandwidth of at least 500 kHz.

3.2.3.4 Radar Detection Function of Dynamic Frequency Selection

UNII devices that operate with any part of their 26 dB emission bandwidth in the UNII-2 bands must employ a DFS radar detection mechanism to avoid co-channel operation with radar systems. Upon detection of radar signals, the channel must be flagged as containing a radar system and must not be utilized for at least 30 minutes (“Non-occupancy Period”).

All DFS devices must fulfil the Channel Move Time requirement, forcing all transmissions to cease operating on a channel within 10 seconds of detecting a radar signal. Transmissions may continue with normal traffic for a maximum of 200 ms after the detection of radar, but only control and management signals may exist after 200 ms to assist in the vacating of the occupied channel. Control and management signals are not allowed after 10 seconds.

Only DFS devices operating as a master device must fulfil the Channel Availability Check time requirement. Master devices must check if there are radar signals already operating on a channel before initiating transmission (or changing channels). If no radar signals are detected above the DFS detection threshold within 60 seconds, the channel may be utilized. Initial channel selection may be either randomly selected or manually selected.

The DFS detection threshold is -64 dBm for devices with a maximum e.i.r.p. between 200 mW and 1 W. Devices for which e.i.r.p. is less than 200 mW and for which maximum power spectral density is less than 10 dBm per 1 MHz band shall have a DFS threshold of -62 dBm.

Radar signals must be detected at 100 percent of the device's emission bandwidth. DFS detection threshold is the received power averaged over 1 μ s and referenced to a 0 dBi antenna.

Some standards such as IEEE 801.11.ax allow wideband transmissions that are “notched” or “punctured” upon radar detection (e.g., 160 MHz wideband transmissions wherein a 20 MHz portion of the bandwidth is not utilized). For such transmission schemes, the remaining emissions of the notched signal shall not bleed into the notch (i.e., 26 dB or 99% bandwidth is outside the notch). Channel closing and moving times must be met when notches are utilized.

3.2.4 UNII Band Channel Aggregation

EUTs which utilize “straddle” channels (Channel 50 at 160 MHz BW, Channel 138 at 80 MHz BW, Channel 142 at 40 MHz BW, or Channel 144 at 20 MHz BW) are subject to the requirements of the bands they straddle. For example, Channel 42 + 138 (80 MHz + 80 MHz) are distributed over (and straddle) the UNII-1 and UNII-2 bands.

Straddle channel 50 is considered operating in both UNII-1 and UNII-2A; straddle channels 138, 142, and 144 are considered operating in both UNII-2C and UNII-3.

3.2.4.1 Conducted Output Power in the Case of Channel Aggregation

For such transmissions, conducted output power is calculated as the summed power of segments located within the band, where the band edge replaces the -26 dB point of the straddling signal. In the example shown in Figure 1, power requirements must be met for both UNII-2 and UNII-3. While it is acceptable to sum the power of the entire transmission in a band (e.g., top-line $P_{U-NII-2C}$ and $P_{U-NII-3}$), individual measurements over the 26 dB bandwidth of each carrier frequency (or to the band edge) may also be summed ($P_A + P_B$ for UNII-2 band requirements and $P_{U-NII-3}$ for UNII-3 band requirements).

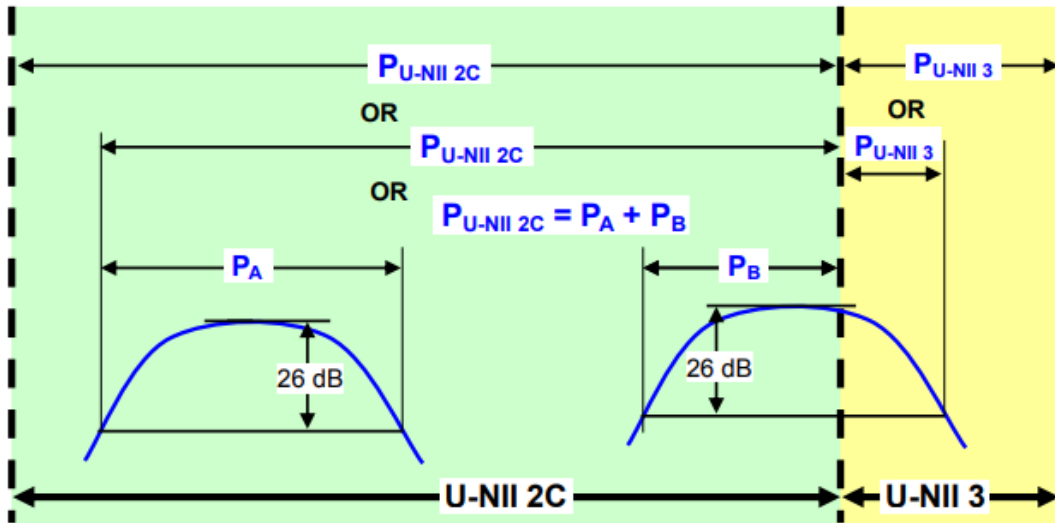


Figure 2. Conducted output power measurement examples (KDB 789033 D02 v02r01, p 21)

3.2.4.2 Emissions Bandwidths in the Case of Channel Aggregation

Emissions bandwidth is defined based upon overlap of the 26 dB bandwidths of each channel individually. For those transmissions where the 26 dB bandwidths overlap, the emission bandwidth (EWB) is the difference between the outer -26 dB points.

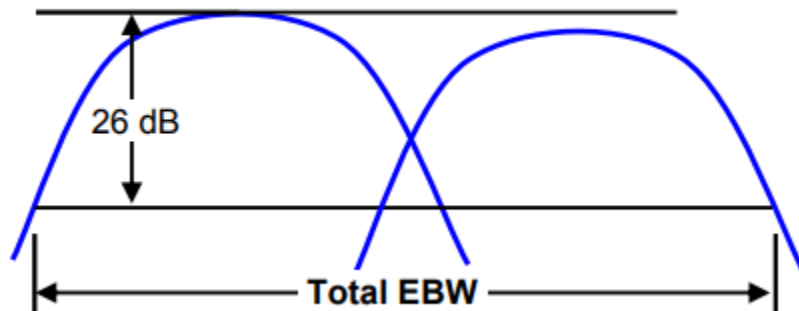


Figure 3. Overlapping emissions bandwidths (KDB 789033 D02 v02r01, p 18)

For those transmissions where the 26 dB bandwidths do not overlap, the emission bandwidth is the sum of the individual 26 dB bandwidths, and each segment is measured independently.

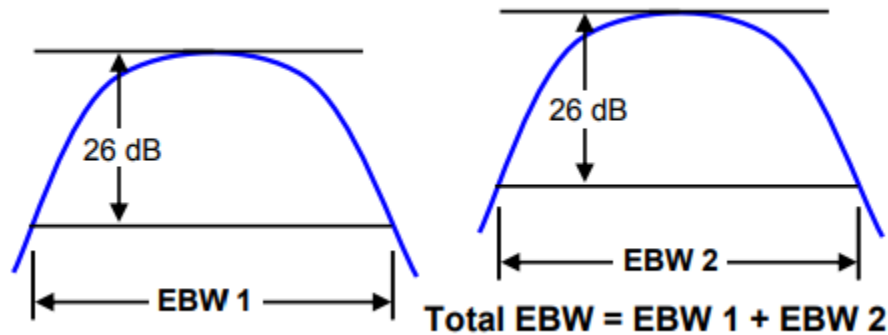


Figure 4. Non-overlapping emissions bandwidths (KDB 789033 D02 v02r01, p 18)

Finally, for those transmissions which cross into other UNII bands, the band boundary serves as one edge for that band, while the other edge is measured from the peak of the contiguous segment.

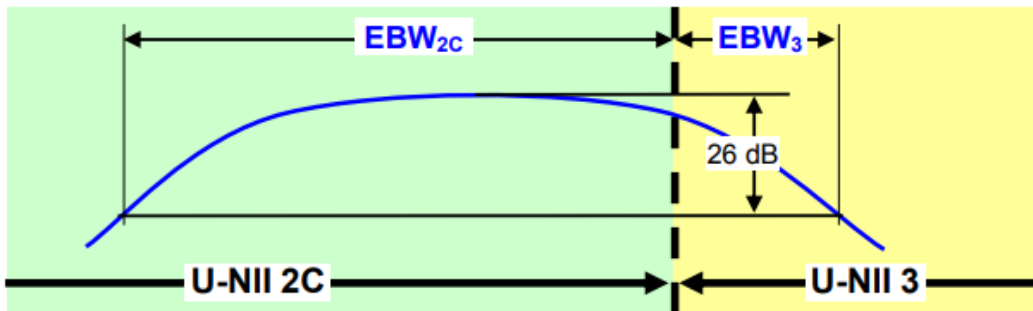


Figure 5. Non-overlapping emissions bandwidths (KDB 789033 D02 v02r01, p 19)

3.2.4.3 Additional Requirements for UNII Devices

UNII devices are subject to requirements imposed by the National Environmental Policy Act. Manufacturers are responsible for applying RF radiation exposure requirements specified in 47 CFR 1.1307(b), 2.1091, and 2.1093 as appropriate (47 CFR 15.407(f)). Such requirements include (but are not limited to) routine environmental evaluation for RF exposure prior to equipment authorization or use (47 CFR 1.1307(b)(2)(i)) and additional evaluation of RF radiation exposure for mobile and portable devices (47 CFR 2.1091 and 2.1093, respectively).

3.3 Test Procedure

VPI Laboratories, Inc. is accredited by National Voluntary Laboratory Accreditation Program (NVLAP); NVLAP Lab Code: 100272-0, which is effective until September 30, 2021. VPI Laboratories, Inc. carries FCC Accreditation Designation Number US5263. VPI Laboratories main office is located at 313 W 12800 S, Suite 311, Draper, UT 84020. The testing was performed according to the procedures in ANSI C63.10-2013, KDB 789033, and 47 CFR Part 15. Radiated testing was performed at the VPI Laboratories, Inc. Wanship Upper Open Area Test Site, located at 29145 Old Lincoln Highway, Wanship, UT. This location is listed on NVLAP scope under the lines for C63.4 and C63.10. Conducted testing was performed at VPI Laboratories main office.

4 Operation of EUT During Testing

4.1 Operating Environment

| | |
|---------------------|---|
| Power Supply | 120 VAC/60 Hz to power supply, 5 VDC to EUT |
|---------------------|---|

4.2 Operating Modes

The transmitter was tested on 3 orthogonal axes while in a constant transmit mode at the upper, middle, and lower channels. The voltage EUT was varied as required by §15.31(e) with no change seen in the transmitter characteristics.

4.3 EUT Exercise Software

CA Engineering firmware was used to exercise and control the transmitter for testing.

5 Summary of Test Results

5.1 FCC Part 15, Subpart E

5.1.1 Summary of Tests

| Section | Environmental Phenomena | Frequency Range (MHz) | Result |
|---|--|-----------------------|----------|
| 15.205 (15.407(b)(9)) | Spurious Emissions in Restricted Bands | 0.009 - 40000 | Complied |
| 15.207 (15.407(b)(8)) | Conducted Disturbance at Mains Ports | 0.15 to 30 | Complied |
| 15.209 (15.407(b)(6)) | General Field Strength Limits | 0.009 - 40000 | Complied |
| 15.403 | Emissions Bandwidth | 5725 - 5850 | Complied |
| 15.407(e) | Minimum 6 dB Emission Bandwidth | 5725 - 5850 | Complied |
| 15.407(a)(3) | Maximum Conducted Output Power | 5725 - 5850 | Complied |
| 15.407(a)(1)(i) | EIRP above 30 Degrees | 5150 - 5250 | Note 2 |
| 15.407(a)(3) | Maximum Power Spectral Density | 5725 - 5850 | Complied |
| 15.407(b)(4) | Unwanted Emissions | 0.009 - 40000 | Complied |
| Note 1: UNII-1 capable EUT does not operate outdoors and therefore requirement is not applicable. | | | |

5.2 Result

In the configuration tested, the EUT complied with the requirements of the specification.

6 Measurements, Examinations and Derived Results

6.1 General Comments

This section contains the test results only. Details of the test methods used and a list of the test equipment used during the measurements can be found in Section 7 of this report.

6.2 Test Result

6.2.1 §15.203 Antenna Requirements

The EUT uses a trace on the PCB for an antenna. Maximum gain of the antenna is 2.5 dBi. The antenna is not user replaceable.

Result

In the configurations tested the EUT complied with the requirements of the specification.

6.2.2 §15.207 Conducted Emissions at AC Mains Ports

| Frequency (MHz) | AC Mains Lead | Detector | Measured Level (dB μ V) | Limit (dB μ V) | Margin (dB) |
|-----------------|---------------|---------------------|-----------------------------|--------------------|-------------|
| 0.47 | Hot Lead | Quasi-Peak (Note 2) | 44.7 | 56.5 | -11.8 |
| 0.47 | Hot Lead | Average (Note 2) | 41.4 | 46.5 | -5.1 |
| 0.80 | Hot Lead | Peak (Note 1) | 34.3 | 46.0 | -11.7 |
| 0.95 | Hot Lead | Peak (Note 1) | 34.2 | 46.0 | -11.8 |
| 1.84 | Hot Lead | Peak (Note 1) | 34.7 | 46.0 | -11.3 |
| 2.34 | Hot Lead | Peak (Note 1) | 34.9 | 46.0 | -11.1 |
| 4.50 | Hot Lead | Peak (Note 1) | 33.9 | 46.0 | -12.1 |
| 0.47 | Neutral Lead | Quasi-Peak (Note 2) | 46.2 | 56.5 | -10.3 |
| 0.47 | Neutral Lead | Average (Note 2) | 43.6 | 46.5 | -2.9 |
| 0.80 | Neutral Lead | Peak (Note 1) | 33.9 | 46.0 | -12.1 |
| 1.29 | Neutral Lead | Peak (Note 1) | 34.6 | 46.0 | -11.4 |
| 1.84 | Neutral Lead | Peak (Note 1) | 34.5 | 46.0 | -11.5 |
| 2.45 | Neutral Lead | Peak (Note 1) | 35.0 | 46.0 | -11.0 |
| 4.57 | Neutral Lead | Peak (Note 1) | 34.5 | 46.0 | -11.5 |

Note 1: The reference detector used for the measurements was Quasi-Peak or Peak and the data was compared to the average limit; therefore, the EUT was deemed to meet both the average and quasi-peak limits.

Note 2: The reference detector used for the measurements was quasi-peak and average and the data was compared to the respective limits.

Result

The EUT complied with the specification limit by a margin of 2.9 dB.

6.2.3 Duty Cycle, Transmission Duration, and Maximum Power Control


Where EUT was incapable of 100% duty cycle at maximum power control, correction factors are required. Duty cycle (DC) and transmission duration (“T”) was tested for these modes of operation. and the Correction Factor (“CF”) is determined by the equation $CF = 10 \times \log \frac{1}{DC}$, wherein DC is a decimal value between 0 and 1.

| .Mode / Datarate | Duty Cycle | Correction Factor |
|-------------------------|-------------------|--------------------------|
| N-Mode / DR: 4 | 61.83 | +2.18 |


6.2.4 26 dB Emission Bandwidth

| Frequency (MHz) | Emissions 26 dB bandwidth (MHz) |
|-----------------|---------------------------------|
| 5745 | 40.0 |
| 5785 | 40.0 |
| 5825 | 40.0 |

Table 2: 26 dB Emission Bandwidth

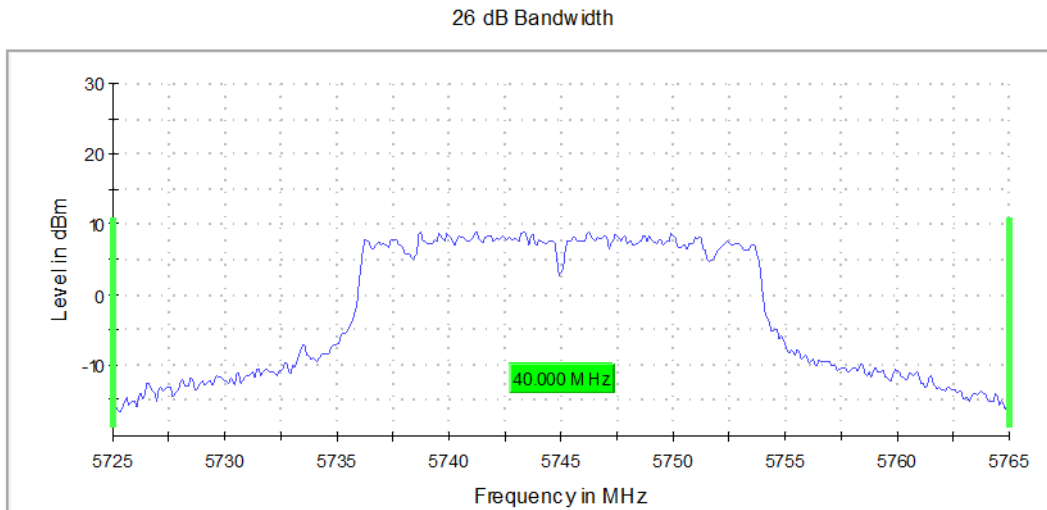


Graph 1: 26 dB Emissions Bandwidth Transmitting at 5745 MHz

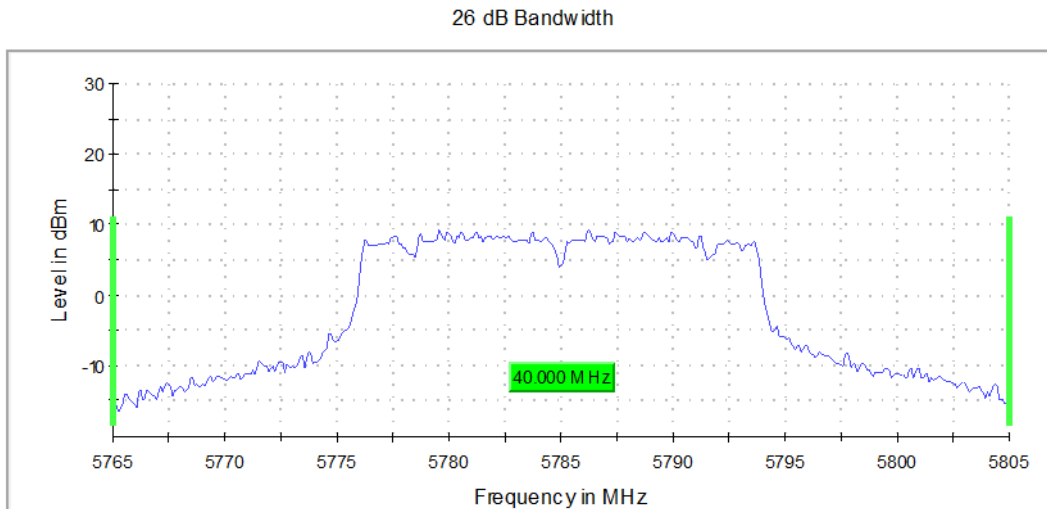

Graph 2: 26 dB Emissions Bandwidth Transmitting at 5785 MHz

26 dB Bandwidth

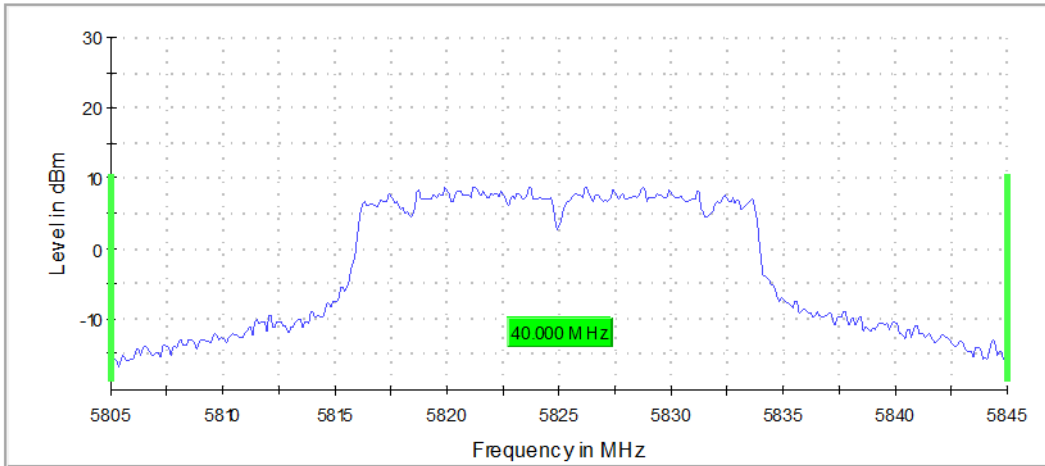


Graph 3: 26 dB Emissions Bandwidth Transmitting at 5825 MHz


6.2.5 6 dB Emission Bandwidth

| Frequency (MHz) | Emissions 6 dB bandwidth (MHz) |
|-----------------|--------------------------------|
| 5745 | 17.8 |
| 5785 | 17.8 |
| 5825 | 17.8 |

Table 3: 6 dB Emission Bandwidth

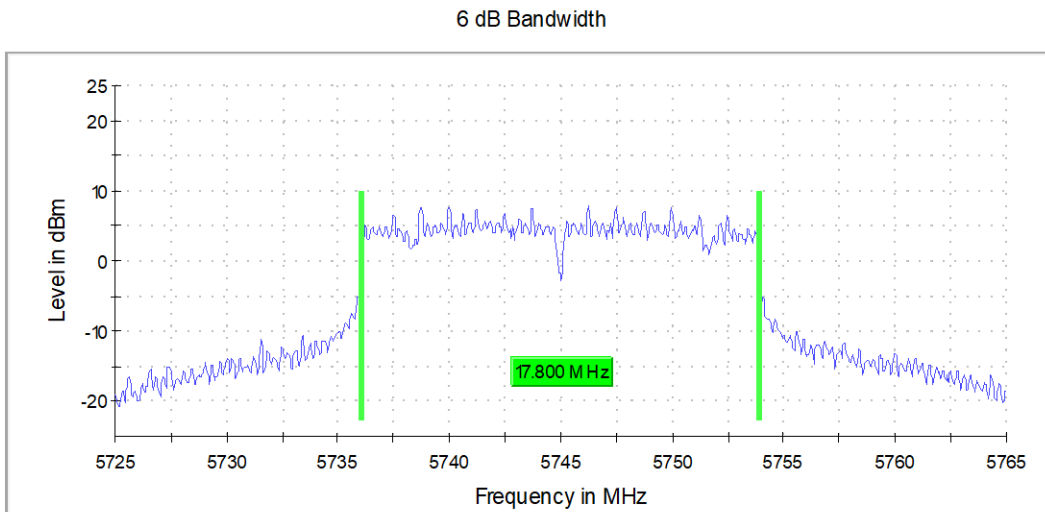


Graph 4: 6 dB Emissions Bandwidth Transmitting at 5745 MHz

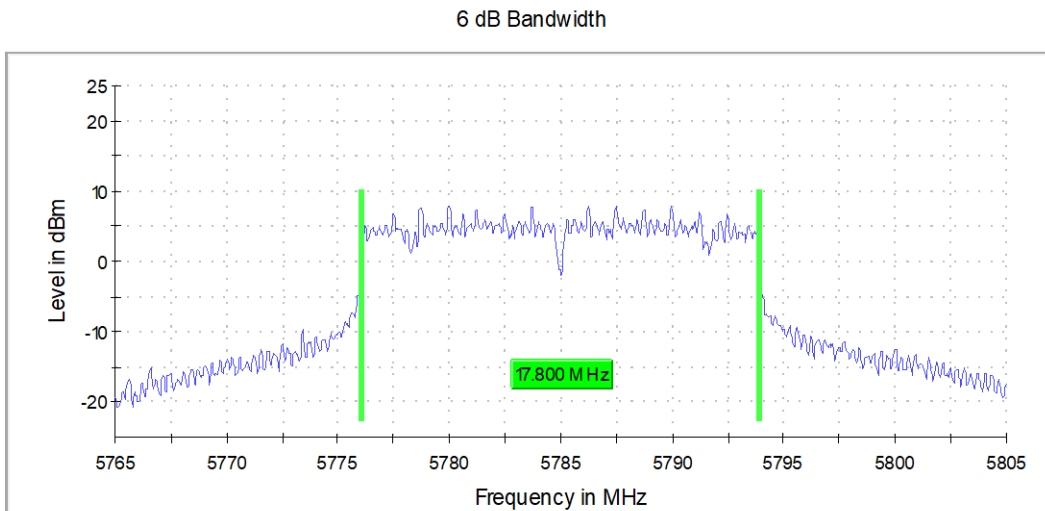

Graph 5: 6 dB Emissions Bandwidth Transmitting at 5785 MHz

6 dB Bandwidth

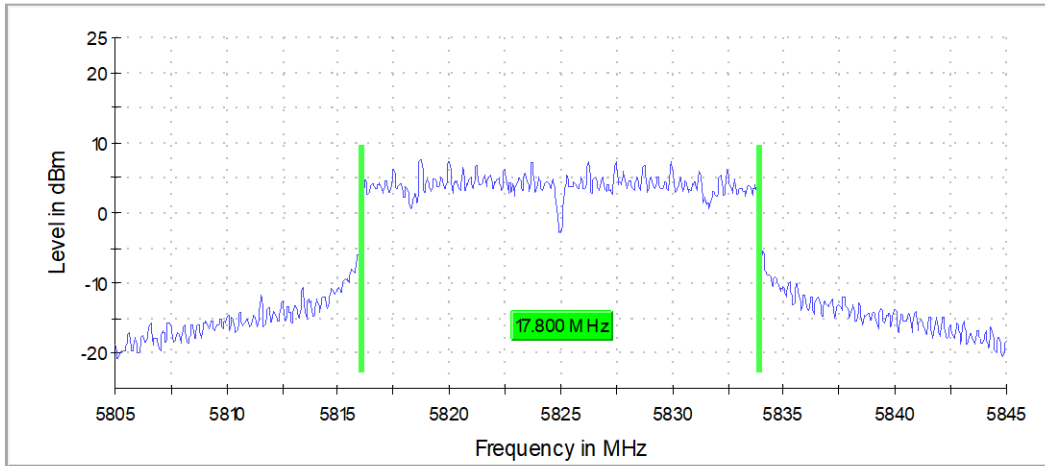

Graph 6: 6 dB Emissions Bandwidth Transmitting at 5825 MHz

6.2.6 §15.407(a) Power Limits: Maximum Conducted Output Power

| Frequency (MHz) | Output Power (dBm) | Limit (dBm) | Margin (dB) |
|----------------------------|-------------------------------|------------------------|------------------------|
| 5745 | 19.5 | 30.0 | -10.5 |
| 5785 | 19.7 | 30.0 | -10.3 |
| 5825 | 19.5 | 30.0 | -10.5 |

Table 4: Maximum Conducted Output Power (Method PM-G)**Result:**

In the configurations tested the EUT complied with a margin of 10.3 dB.

6.2.7 §15.407(a) Power Limits: Maximum Power Spectral Density

The following tables show the power spectral density per 500 kHz.

| Frequency (MHz) | 500 kHz PSD (dBm/500kHz) | Limit (dBm/500kHz) | Margin (dB) |
|----------------------------|-------------------------------------|-------------------------------|------------------------|
| 5745 | 4.5 | 30.0 | -25.5 |
| 5785 | 4.7 | 30.0 | -25.3 |
| 5825 | 4.1 | 30.0 | -25.9 |

Table 5: Maximum Power Spectral Density

Result:

In the configurations tested, EUT complied with the requirements with a margin of 25.3 dB.

6.2.8 §15.247(b) Undesirable Emissions – Restricted Bands

The frequency range from the lowest frequency generated or used in the device to the tenth harmonic of the highest fundamental emission was investigated to measure any radiated emissions in the restricted bands. The following tables show measurements of any emission that fell into the restricted bands of §15.205. The tables show the worst-case emission measured from the EUT. For frequencies above 18.0 GHz, a measurement distance of 1 meter was used. The noise floor was a minimum of 6 dB below the limit. The emissions in the restricted bands must meet the limits specified in §15.209. The spurious emissions were tested at the highest power setting used by any channel in the band (setting of 20). The band edges at the restricted bands were measured using the power settings that will be used in manufacturing. Tabular data and plots are shown below.

| Frequency (MHz) | Detector | Antenna Polarity | Receiver Reading (dBµV) | Correction Factor (dB) | Field Strength (dBµV/m) | Limit (dBµV/m) | Margin (dB) |
|-----------------|----------|------------------|-------------------------|------------------------|-------------------------|----------------|-------------|
| 11490.0 | Peak | Vertical | 5.1 | 47.3 | 52.4 | 74.0 | -21.6 |
| 11490.0 | Average | Vertical | -5.1 | 47.3 | 42.2 | 54.0 | -11.8 |
| 11490.0 | Peak | Horizontal | 5.8 | 47.3 | 53.1 | 74.0 | -20.9 |
| 11490.0 | Average | Horizontal | -4.8 | 47.3 | 42.5 | 54.0 | -11.5 |
| 22980.0 | Peak | Vertical | -13.3 | 53.3 | 40.0 | 74.0 | -34.0 |
| 22980.0 | Average | Vertical | -22.4 | 53.3 | 30.9 | 54.0 | -23.1 |
| 22980.0 | Peak | Horizontal | -13.2 | 53.3 | 40.1 | 74.0 | -33.9 |
| 22980.0 | Average | Horizontal | -22.1 | 53.3 | 31.2 | 54.0 | -22.8 |

Table 6: Transmitting at the Lowest Frequency (Channel 149)

| Frequency (MHz) | Detector | Antenna Polarity | Receiver Reading (dBµV) | Correction Factor (dB) | Field Strength (dBµV/m) | Limit (dBµV/m) | Margin (dB) |
|-----------------|----------|------------------|-------------------------|------------------------|-------------------------|----------------|-------------|
| 11570.0 | Peak | Vertical | 5.9 | 47.4 | 53.3 | 74.0 | -20.7 |
| 11570.0 | Average | Vertical | -4.8 | 47.4 | 42.6 | 54.0 | -11.4 |
| 11570.0 | Peak | Horizontal | 6.8 | 47.4 | 54.2 | 74.0 | -19.8 |
| 11570.0 | Average | Horizontal | -4.1 | 47.4 | 43.3 | 54.0 | -10.7 |

Table 7: Transmitting at the Middle Frequency (Channel 157)


| Frequency (MHz) | Detector | Antenna Polarity | Receiver Reading (dBµV) | Correction Factor (dB) | Field Strength (dBµV/m) | Limit (dBµV/m) | Margin (dB) |
|-----------------|----------|------------------|-------------------------|------------------------|-------------------------|----------------|-------------|
| 11650.0 | Peak | Vertical | 5.5 | 47.5 | 53.0 | 74.0 | -21.0 |
| 11650.0 | Average | Vertical | -5.2 | 47.5 | 42.3 | 54.0 | -11.7 |
| 11650.0 | Peak | Horizontal | 6.4 | 47.5 | 53.9 | 74.0 | -20.1 |
| 11650.0 | Average | Horizontal | -3.9 | 47.5 | 43.6 | 54.0 | -10.4 |

Table 8: Transmitting at the Highest Frequency (Channel 165)


Result

The EUT complied with the specification limit as all emissions met the limits of 15.209.

6.2.9 §15.407(b) Undesirable Emissions – Out-of-Band and Spurious Domains
Out-Of-Band Domain Measurements

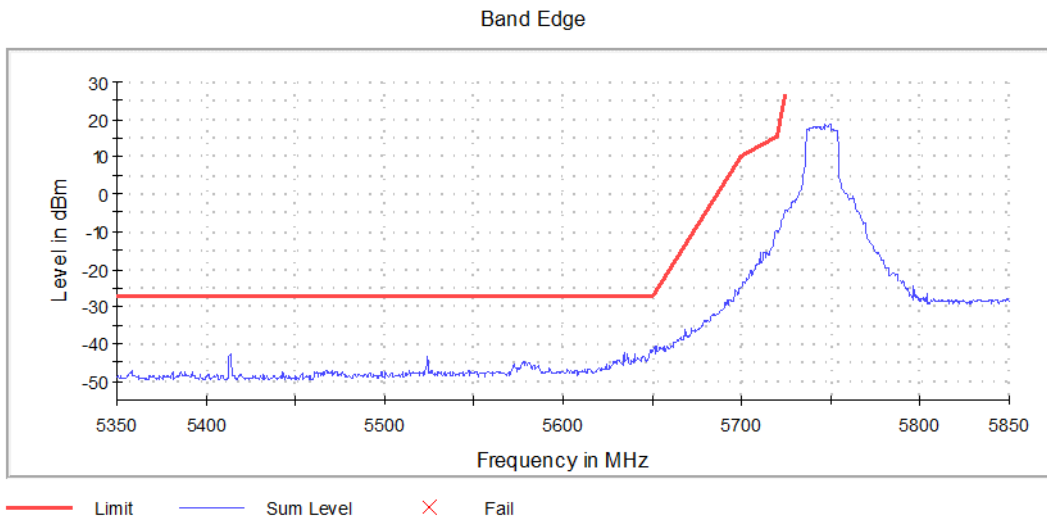


Graph 7: Lower Band Edge Channel 149 Transmitting (5745 MHz)

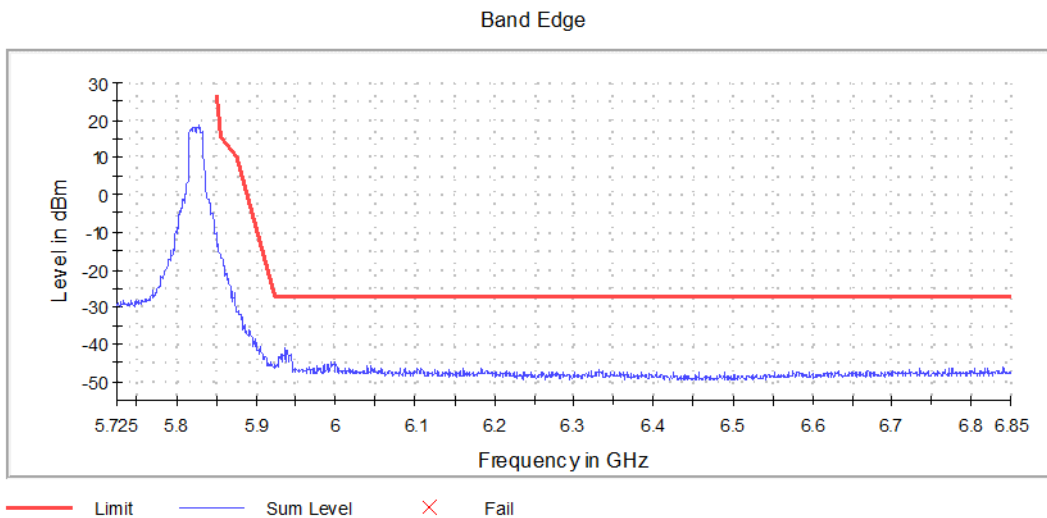


Graph 8: Upper Band Edge Channel 165 Transmitting (5825 MHz)


Spurious Domain Measurements

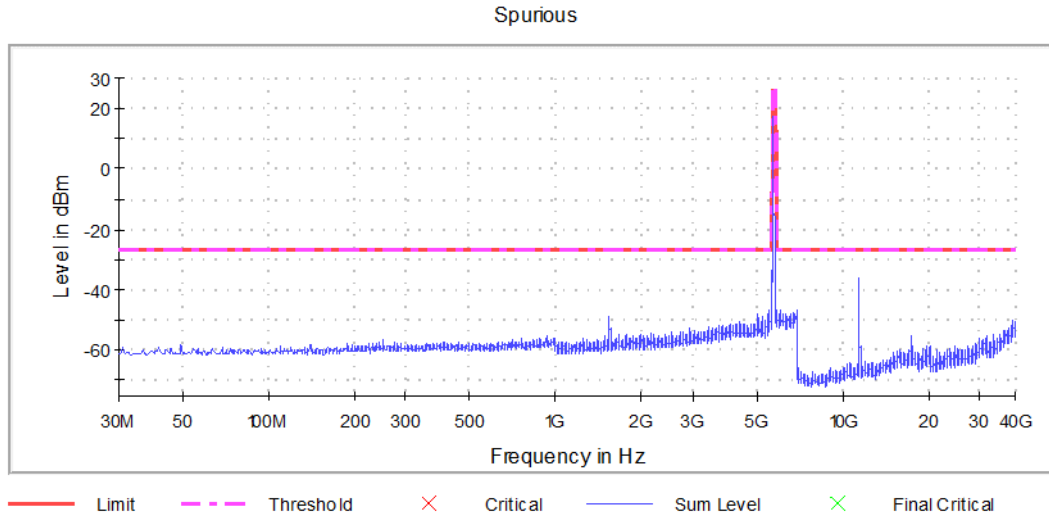

Graph 9: Spurious Emissions Channel 149 Transmitting (5745 MHz)

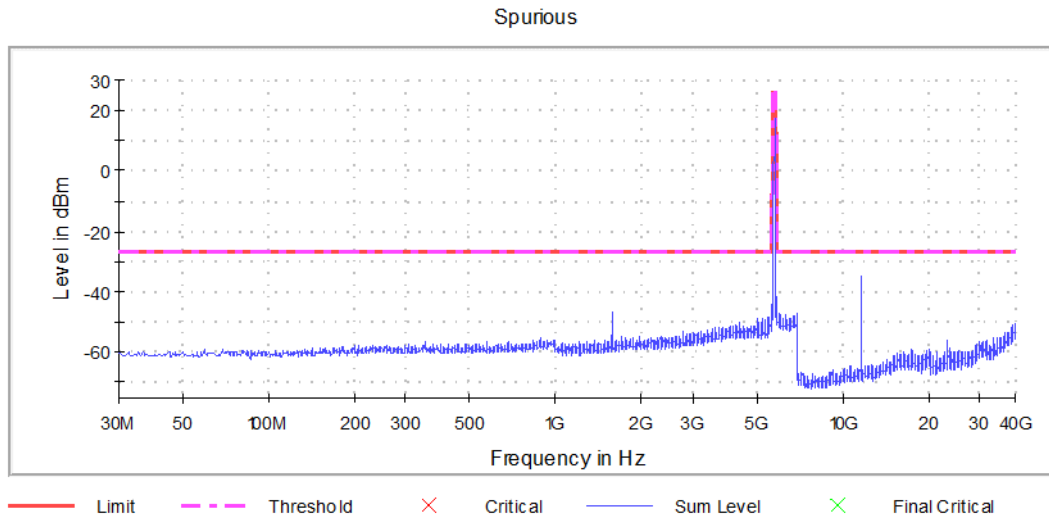

Graph 10: Spurious Emissions Channel 157 Transmitting (5785 MHz)

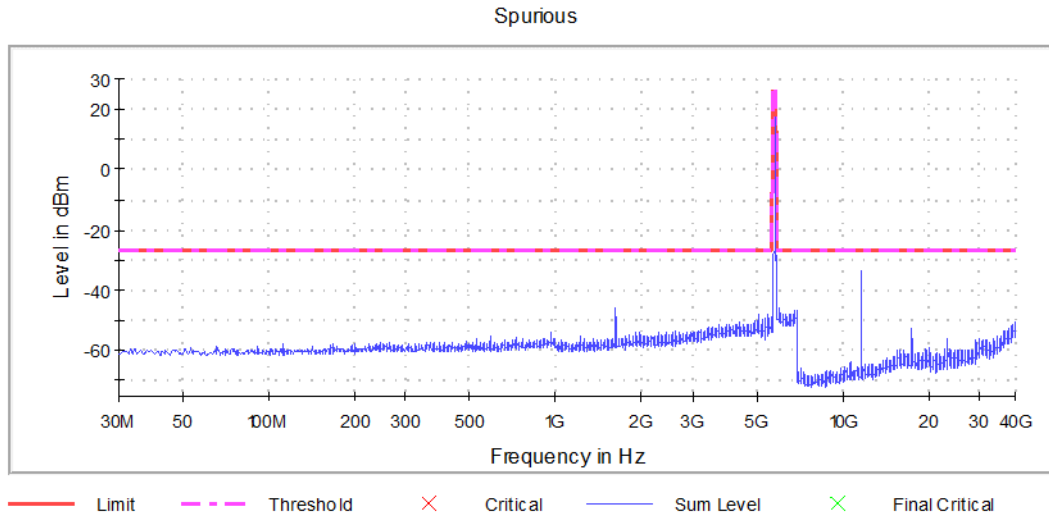

Graph 11: Spurious Emissions Channel 165 Transmitting (5825 MHz)

Result

The EUT complied with all undesirable emission requirements of 15.407(b).

7 Procedures and Test Equipment

7.1 Conducted Emissions at Mains Ports

The conducted emissions at mains and telecommunications ports from the EUT were measured using a spectrum analyzer with a quasi-peak adapter for peak, quasi-peak and average readings. The quasi-peak adapter uses a bandwidth of 9 kHz, with the spectrum analyzer's resolution bandwidth set at 100 kHz, for readings in the 150 kHz to 30 MHz frequency ranges.

The conducted emissions at mains ports measurements are performed in a screen room using a (50 Ω/50 μH) Line Impedance Stabilization Network (LISN).

Where mains flexible power cords are longer than 1 m, the excess cable is folded back and forth as far as possible so as to form a bundle not exceeding 0.4 m in length.

Where the EUT is a collection of devices with each device having its own power cord, the point of connection for the LISN is determined from the following rules:

- Each power cord, which is terminated in a mains supply plug, shall be tested separately.
- Power cords, which are not specified by the manufacturer to be connected via a host unit, shall be tested separately.
- Power cords which are specified by the manufacturer to be connected via a host unit or other power supplying equipment shall be connected to that host unit and the power cords of that host unit connected to the LISN and tested.
- Where a special connection is specified, the necessary hardware to effect the connection is supplied by the manufacturer for the testing purpose.
- When testing equipment with multiple mains cords, those cords not under test are connected to an artificial mains network (AMN) different than the AMN used for the mains cord under test.

For testing, desktop EUT are placed on a non-conducting table at least 0.8 meters from the metallic floor and placed 40 cm from the vertical coupling plane (copper plating in the wall behind EUT table). Floor standing equipment is placed directly on the earth grounded floor.

| Type of Equipment | Manufacturer | Model Number | Asset Number | Date of Last Calibration | Due Date of Calibration |
|--------------------------------------|-----------------|--------------|--------------|--------------------------|-------------------------|
| Spectrum Analyzer | Hewlett Packard | 8566B | V048078 | 05/03/2021 | 05/03/2022 |
| Quasi-Peak Detector | Hewlett Packard | 85650A | V039474 | 05/04/2021 | 05/04/2023 |
| LISN | Teseq | NNB 51 | V045406 | 08/20/2020 | 08/20/2021 |
| Conductance Cable Wanship Upper Site | VPI Labs | Cable J | V034832 | 01/12/2021 | 01/12/2022 |
| Filter | VPI Labs | 47038 | V047038 | 01/12/2021 | 01/12/2022 |
| Test Software (AC) | VPI Labs | Revision 01 | V035674 | N/A | N/A |

Table 2: List of equipment used for conducted emissions testing at mains ports.

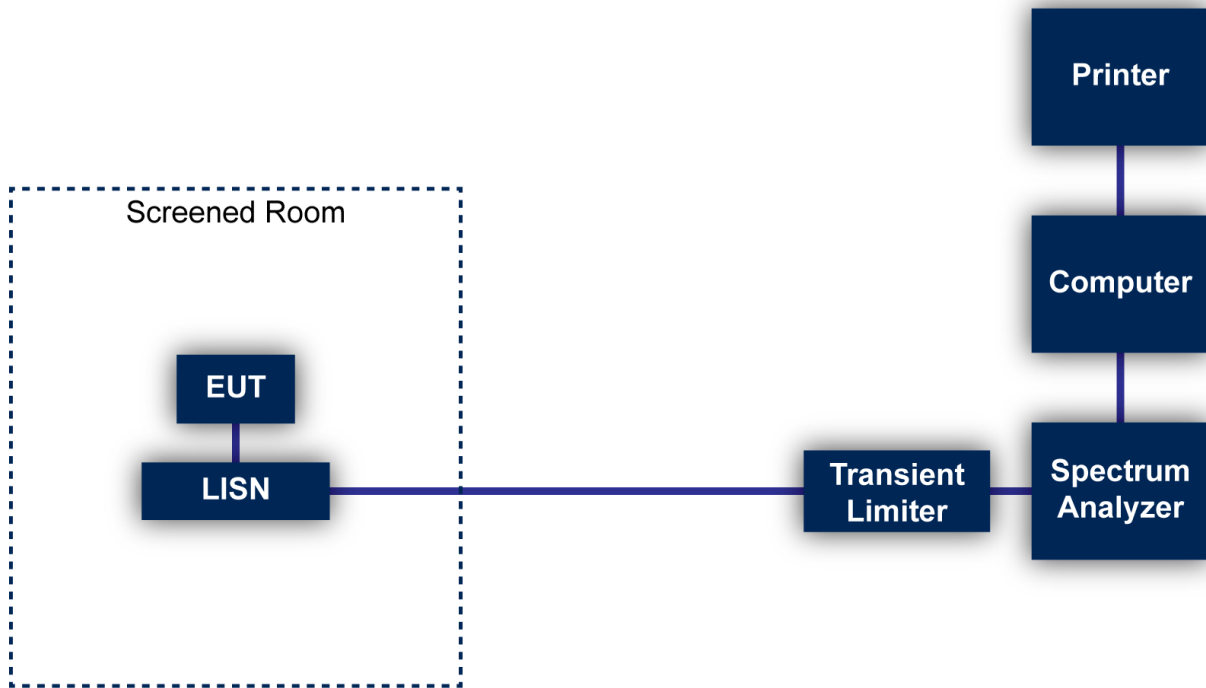


Figure 1: Mains Conducted Emissions Test

7.2 Direct Connection at the Antenna Port Test

| Type of Equipment | Manufacturer | Model Number | Asset Number | Date of Last Calibration | Due Date of Calibration |
|-------------------------|-----------------|--------------|--------------|--------------------------|-------------------------|
| Spectrum Analyzer | Rohde & Schwarz | FSU40 | V044352 | 03/13/2020 | 03/13/2022 |
| Signal Generator | Rohde & Schwarz | SMB100A | V044485 | 03/16/2020 | 03/16/2022 |
| Vector Signal Generator | Rohde & Schwarz | SMBV100A | V044217 | 04/01/2019 | 04/01/2022 |
| 40GHz Switch Extension | Rohde & Schwarz | OSP-150 | V044486 | 03/24/2020 | 03/24/2022 |
| 40GHz Switch Base Unite | Rohde & Schwarz | OSP-120 | V044487 | 04/30/2020 | 04/30/2022 |

Table 3: List of equipment used for conducted emissions testing at antenna ports.

7.2.1 Test Configuration Block Diagram

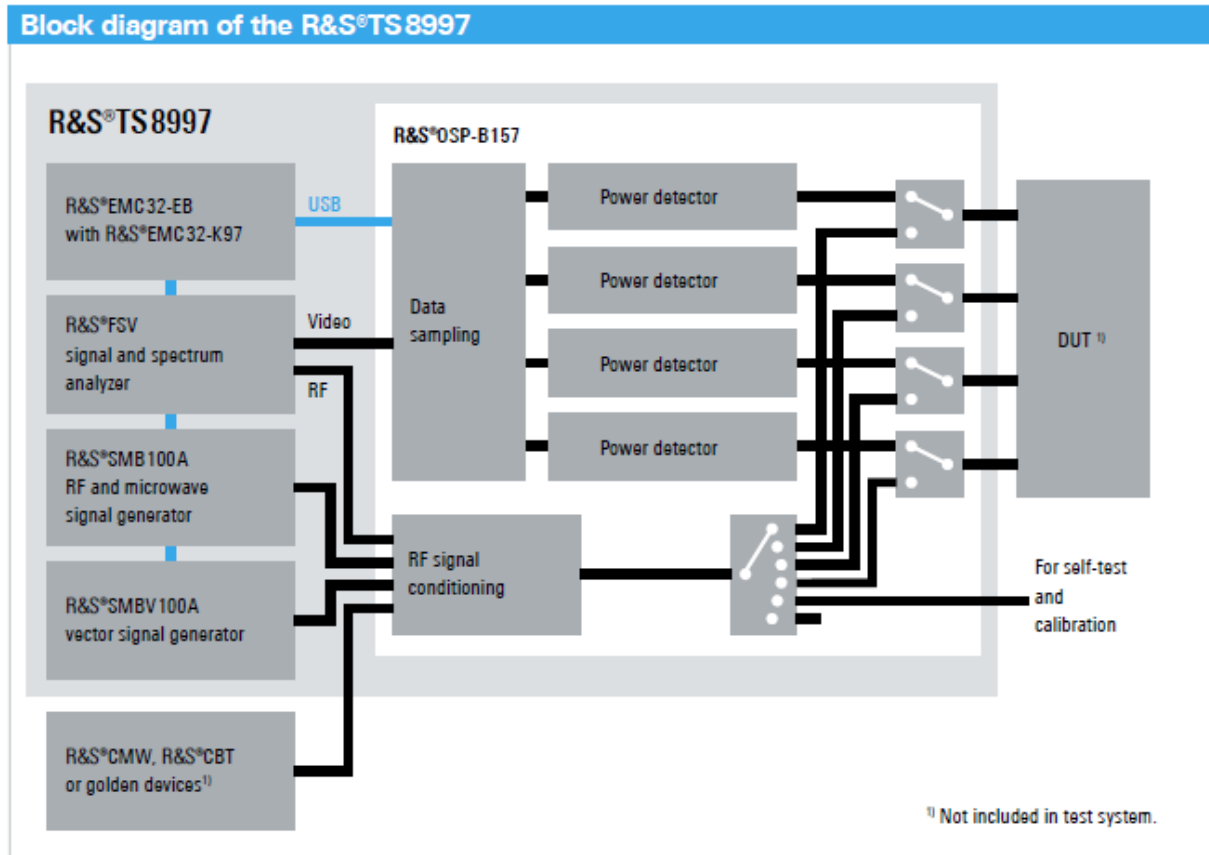


Figure 2: Direct Connection at the Antenna Port Test

7.3 Radiated Emissions

The radiated emissions from the EUT were measured using a spectrum analyzer with a quasi-peak adapter for peak and quasi-peak readings.

A preamplifier with a fixed gain of 51 dB was used to increase the sensitivity of the measuring instrumentation. The quasi-peak adapter uses a bandwidth of 120 kHz, with the spectrum analyzer's resolution bandwidth set at 1 MHz, for readings in the 30 to 1000 MHz frequency ranges. For frequencies below 30 MHz, a 9 kHz resolution Bandwidth was used.

A loop antenna was used to measure frequencies below 30 MHz. A biconilog antenna was used to measure the frequency range of 30 to 1000 MHz, at a distance of 3 meters from the EUT. The readings obtained by these antennas are correlated to the levels obtained with a tuned dipole antenna by adding antenna factors. A double-ridged guide antenna was used to measure the emissions at frequencies above 1000 MHz at a 3 meter or 1 meter distance from the EUT.

The configuration of the EUT was varied to find the maximum radiated emission. The EUT was connected to the peripherals listed in Section 2.3 via the interconnecting cables listed in Section 2.4. A technician manually manipulated these interconnecting cables to obtain worst-case radiated emissions. The EUT was rotated 360 degrees, and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission. Where there were multiple interface ports all of the same type, cables are either placed on all of the ports or cables added to these ports until the emissions do not increase by more than 2 dB.

Desktop EUT are measured on a non-conducting table 0.8 meters above the ground plane. For frequencies above 1000 MHz, the EUT is placed on a table 1.5 meters above the ground plane. The table is placed on a turntable, which is level with the ground plane. For equipment normally placed on floors, the equipment shall be placed directly on the turntable.

For radiated emissions testing that is performed at distances closer than the specified distance; an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.

| Type of Equipment | Manufacturer | Model Number | Asset Number | Date of Last Calibration | Due Date of Calibration |
|---|-----------------|-------------------------|--------------|--------------------------|-------------------------|
| Spectrum Analyzer/Receiver | Rohde & Schwarz | ESU40 | V033119 | 08/05/2020 | 08/05/2021 |
| Spectrum Analyzer | Hewlett Packard | 8566B | V048078 | 05/03/2021 | 05/03/2022 |
| Quasi-Peak Detector | Hewlett Packard | 85650A | V039474 | 05/04/2021 | 05/04/2023 |
| Loop Antenna | EMCO | 6502 | V034216 | 02/03/2021 | 02/03/2023 |
| Biconilog Antenna | EMCO | 3142E-PA | V035736 | 06/24/2020 | 06/24/2022 |
| Double Ridged Guide Antenna | EMCO | 3115 | V033469 | 01/25/2021 | 01/25/2023 |
| Standard Gain Horn | ETS-Lindgren | 3160-09 | V034223 | ICO | ICO |
| Standard Gain Horn | ETS-Lindgren | 3160-10 | V034224 | ICO | ICO |
| High Frequency Amplifier | Miteq | AFS4-001018000-35-10P-4 | V033997 | 01/12/2021 | 01/12/2022 |
| High Frequency Amplifier | L3-Narda-Miteq | AMF-6F-18004000-37-8P | V042464 | 01/12/2021 | 01/12/2022 |
| 5.8 GHz High Pass Filter | Micro-Tronics | HPM50105 | V034198 | 01/12/2021 | 01/12/2022 |
| 6' High Frequency Cable | Microcoax | UFB197C-0-0720-000000 | V033638 | 01/12/2021 | 01/12/2022 |
| 20' High Frequency Cable | Microcoax | UFB197C-1-3120-000000 | V033979 | 01/12/2021 | 01/12/2022 |
| 3 Meter Radiated Emissions Cable Wanship Upper Site | Microcoax | UFB205A-0-4700-000000 | V033639 | 01/12/2021 | 01/12/2022 |
| Test Software (FCC) | VPI Labs | Revision 01 | V035673 | N/A | N/A |

Table 4: List of equipment used for radiated emissions testing.

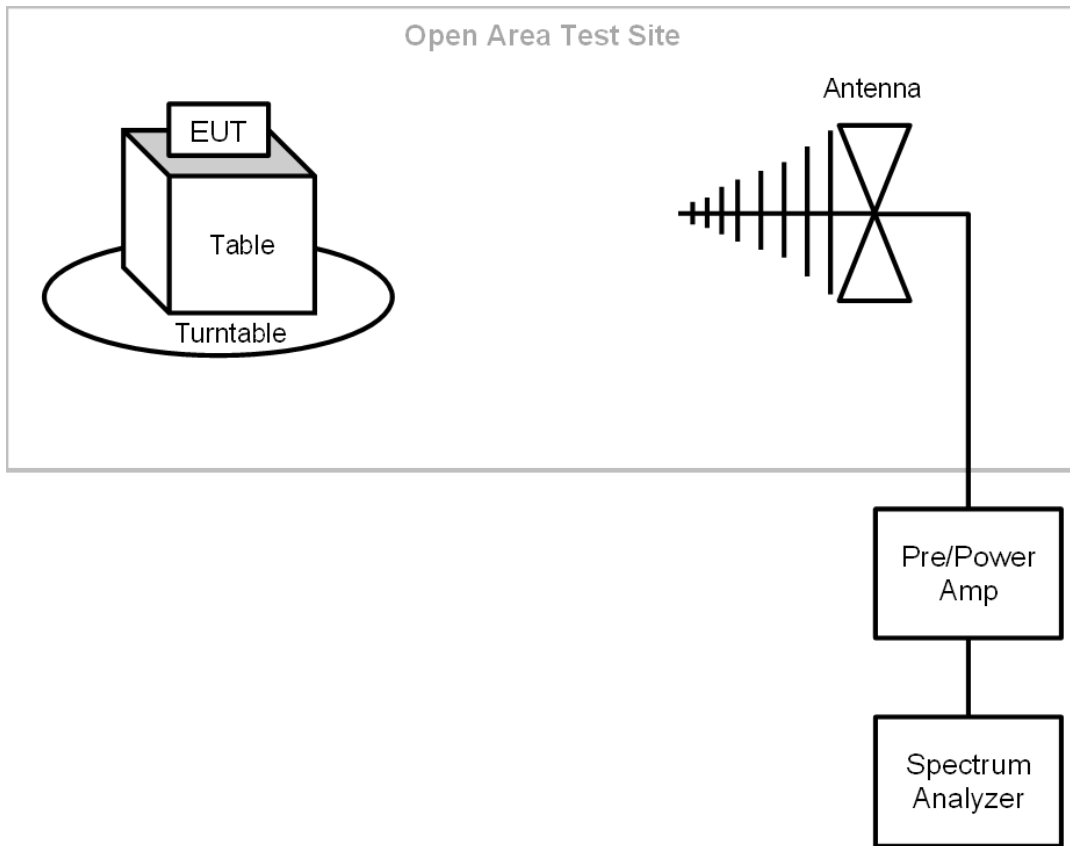


Figure 3: Radiated Emissions Below 1GHz Test

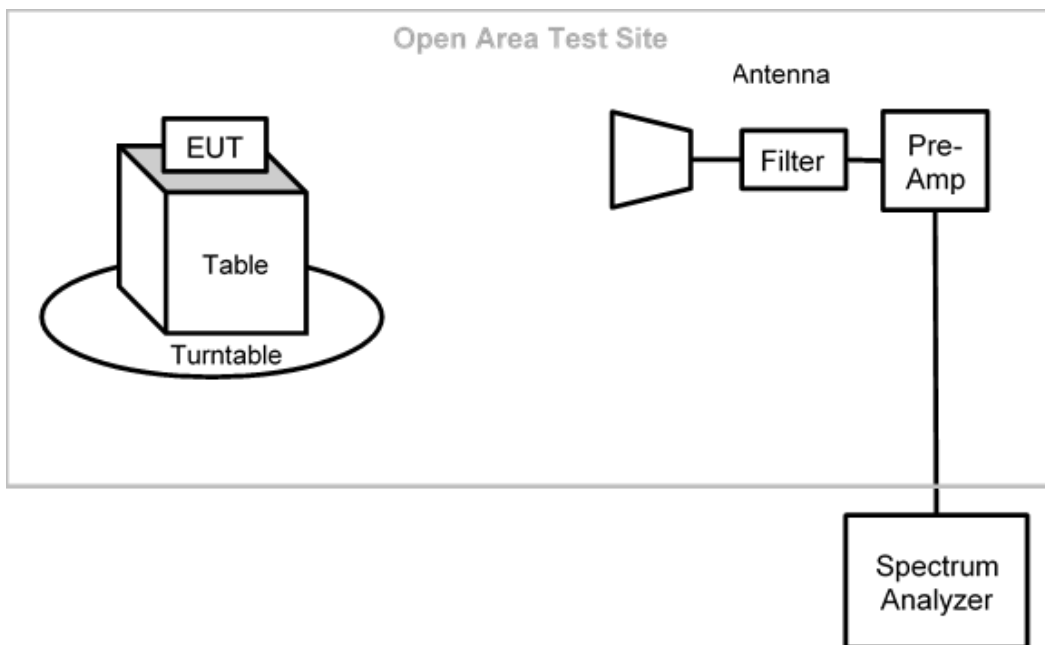


Figure 4: Radiated Emissions Above 1GHz Test


7.4 Equipment Calibration

All applicable equipment is calibrated using either an independent calibration laboratory or VPI Laboratories, Inc. personnel at intervals defined in ANSI C63.4:2014 following outlined calibration procedures. All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Supporting documentation relative to tractability is on file and is available for examination upon request.

7.5 Measurement Uncertainty

| Test | Uncertainty (\pm dB) | Confidence (%) |
|---------------------------------------|-------------------------|----------------|
| Conducted Emissions | 2.8 | 95 |
| Radiated Emission (9 kHz to 30 MHz) | 3.3 | 95 |
| Radiated Emissions (30 MHz to 1 GHz) | 3.4 | 95 |
| Radiated Emissions (1 GHz to 18 GHz) | 5.0 | 95 |
| Radiated Emissions (18 GHz to 40 GHz) | 4.1 | 95 |


8 Photographs

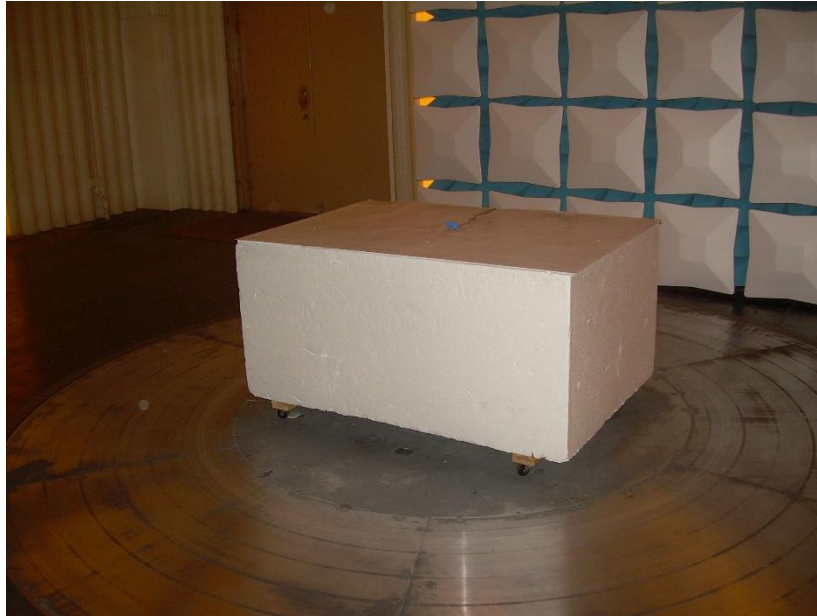

Photograph 1: Front View Radiated Emissions Worst Case Configuration – 30 MHz to 1000 MHz



Photograph 2: Back View Radiated Emissions Worst Case Configuration– 30 MHz to 1000 MHz

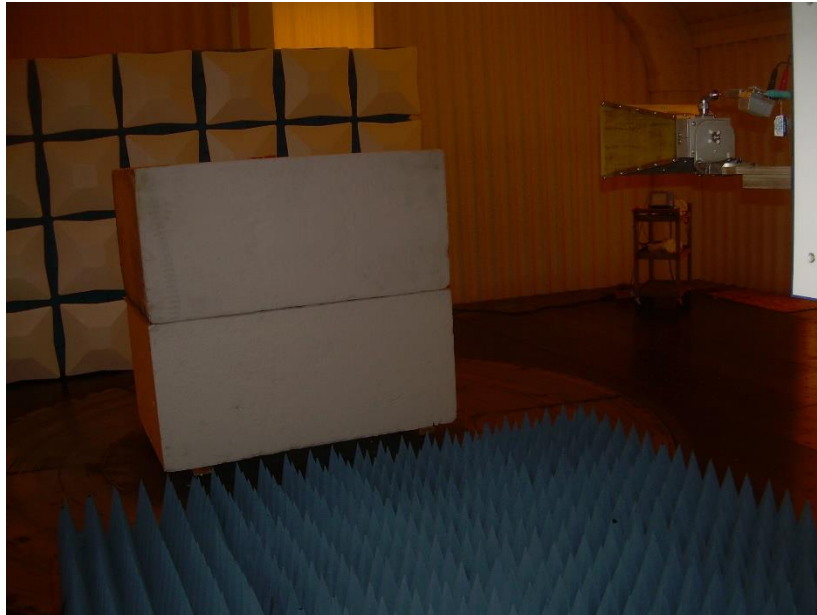

Photograph 3: Front View Radiated Emissions Worst Case Configuration – Above 1000 MHz



Photograph 4: Flat Orientation



Photograph 5: On Edge Orientation



Photograph 6: Vertical Orientation




Photograph 7: Front View Conducted Emissions Worst Case Configuration



Photograph 8: Back View Conducted Emissions Worst Case Configuration



Photograph 9: Top View of the EUT

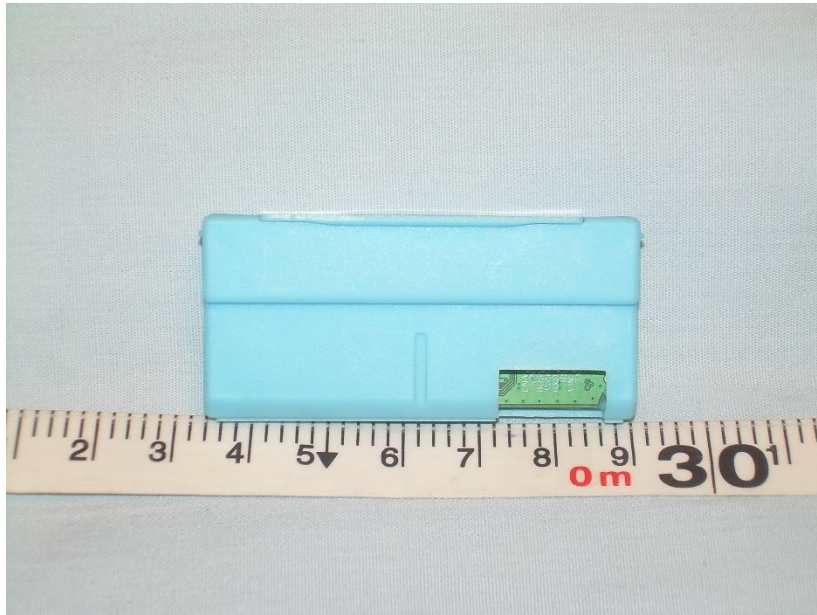


Photograph 10: Bottom View of the EUT




Photograph 11: Front View of the EUT



Photograph 12: Back View of the EUT

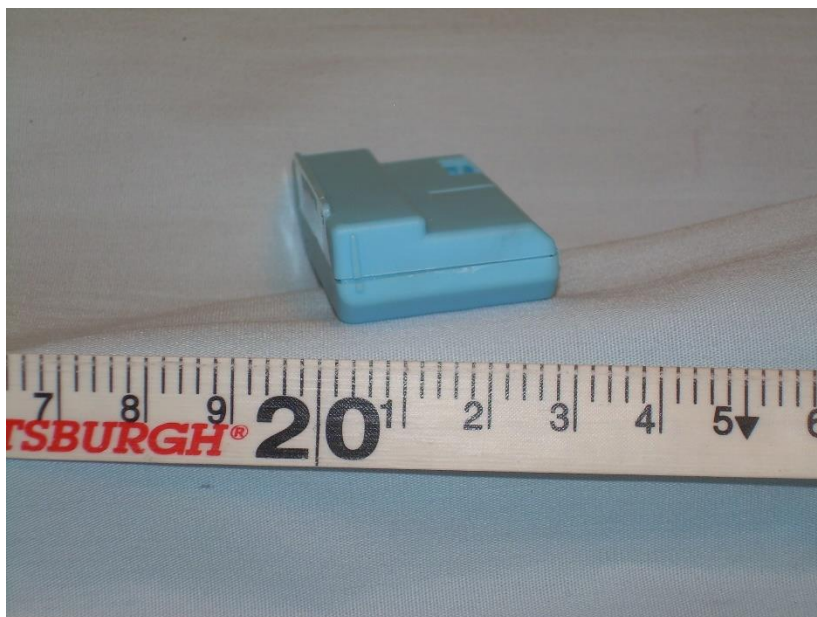


Photograph 13: Side View of the EUT

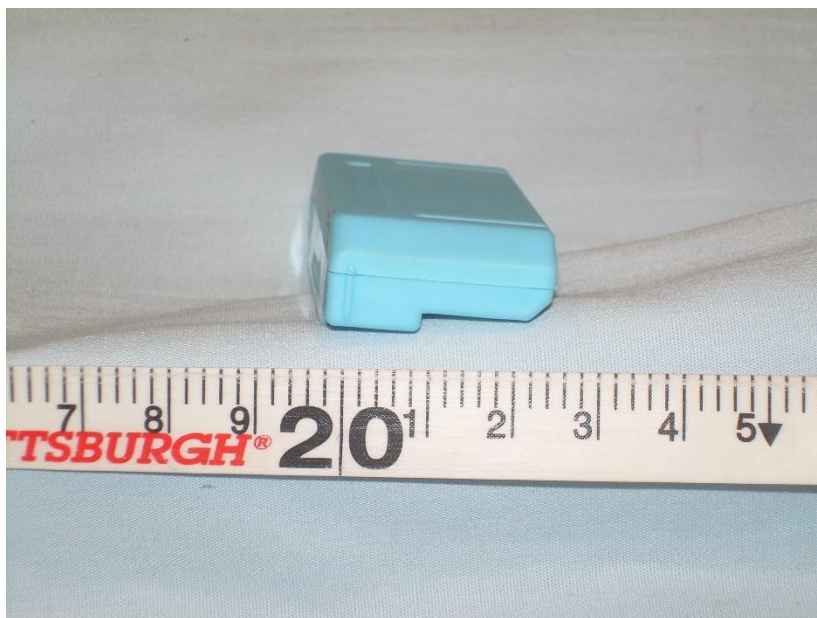


Photograph 14: Side View of the EUT



Photograph 15: PCB in Housing

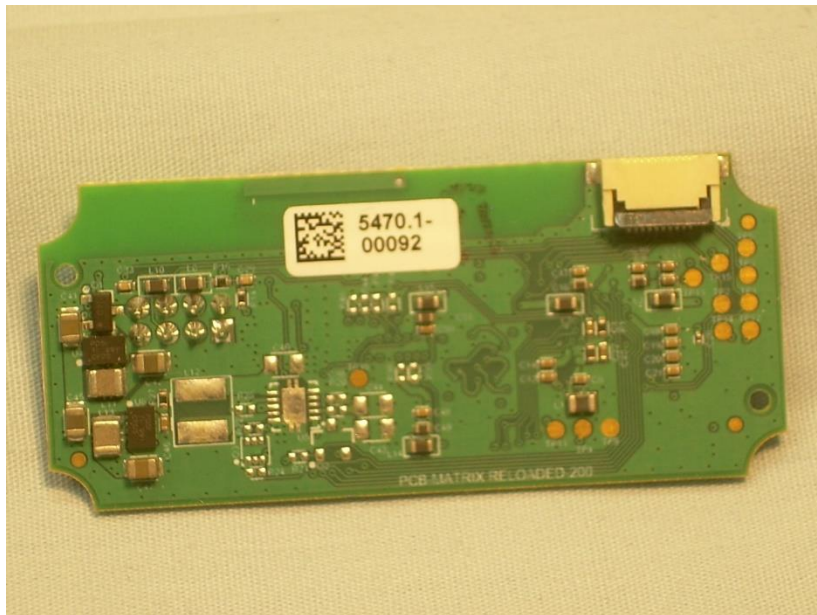

Photograph 16: Top Side of the PCB

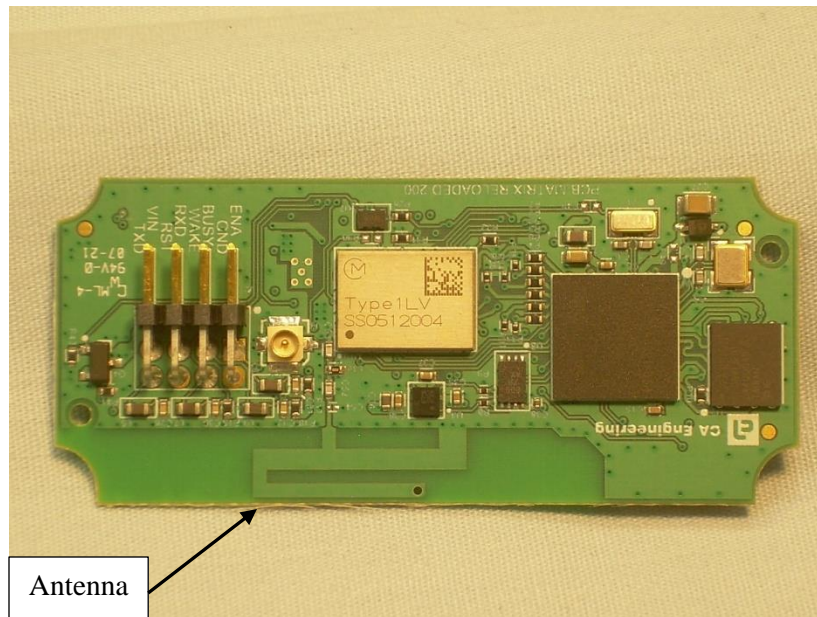

Photograph 17: Bottom View of the PCB

--- End of Report ---