

Certification Test Report

FCC ID: U4A-YRHCPZB0
IC: 6982A-YRHCPZB0

FCC Rule Part: 15.247
IC Radio Standards Specification: RSS-210

ACS Report Number: 12-0001.W04.1A

Manufacturer: Assa Abloy Inc.
Models: YRDZB, YRD210-ZB, YRD220-ZB
YRT210-ZB, YRT220-ZB

Test Begin Date: January 16, 2012
Test End Date: January 18, 2012
Report Issue Date: February 14, 2012



FOR THE SCOPE OF ACCREDITATION UNDER LAB Code 200612-0

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Reviewed by:

A handwritten signature in black ink, appearing to read 'Kirby Munroe', is written over a horizontal line.

Kirby Munroe
Director, Wireless Certifications
ACS, Inc.

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of ACS, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

This report contains 15 pages

TABLE OF CONTENTS

1	GENERAL	3
1.1	PURPOSE.....	3
1.2	GENERAL.....	3
1.3	TEST METHODOLOGY AND CONSIDERATIONS	4
2	TEST FACILITIES	5
2.1	LOCATION	5
2.2	LABORATORY ACCREDITATIONS/RECOGNITIONS/CERTIFICATIONS	5
2.3	RADIATED EMISSIONS TEST SITE DESCRIPTION	6
2.3.1	<i>Semi-Anechoic Chamber Test Site</i>	6
2.3.2	<i>Open Area Tests Site (OATS)</i>	7
3	APPLICABLE STANDARD REFERENCES	8
4	LIST OF TEST EQUIPMENT	9
5	SUPPORT EQUIPMENT	10
6	EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM	10
7	SUMMARY OF TESTS	11
7.1	ANTENNA REQUIREMENT – FCC: SECTION 15.203	11
7.2	POWER LINE CONDUCTED EMISSIONS – FCC: SECTION 15.207 IC: RSS-GEN 7.2.4.....	11
7.2.1	<i>Measurement Procedure</i>	11
7.3	BAND-EDGE COMPLIANCE AND SPURIOUS EMISSIONS-FCC 15.247(D) IC:RSS-210 2.2, A8.5.....	12
7.3.1	<i>Band-Edge Compliance</i>	12
7.3.1.1	Measurement Procedure	12
7.3.1.2	Measurement Results	12
7.3.2	<i>Radiated Spurious Emissions (Restricted Bands)</i>	13
7.3.2.1	Measurement Procedure	13
7.3.2.2	Duty Cycle Correction	13
7.3.2.3	Measurement Results	13
7.3.2.4	Sample Calculation:	15
8	CONCLUSION	15

1 GENERAL

1.1 Purpose

The purpose of this report is to demonstrate compliance with Part 15 Subpart C of the FCC's Code of Federal Regulations and Industry Canada's Radio Standards Specification RSS-210 for a Class II Permissive Change.

The purpose of this Class II Permissive Change is to add a new antenna design and to add four electrically identical model variants.

1.2 General

The 2.4 GHz door locks can be used to remotely control different radio linked devices in the home that the door locks are associated with. The locks utilize an EM351 2.4GHz Zigbee radio with operation on standard channels. The locks are low powered and power is sourced from 4 AA batteries located inside the lock housings.

The original certified model is the YRDZB Push Button Deadbolt lock. This model is identical to model YRD210-ZB Push Button Deadbolt lock identified below. The change in model number is strictly to address product identification. No changes from the originally certified device were made, with the exception of the antenna.

Four additional models are also being included in equipment authorization. Model descriptions are as follows:

Model Number YRDZB	Push Button Deadbolt (Original certified model)
Model Number YRD210-ZB	Push Button Deadbolt (Equivalent to original YRDZB)
Model Number YRD220-ZB	Touch Screen Deadbolt
Model Number YRT210-ZB	Push Button Lever lock
Model Number YRT220-ZB	Touch Screen Lever lock

All five models are electrically identical with respect to the RF circuitry and differ only in user interface (pushbutton / touchscreen interface) and mechanical functionality (deadbolt / lever operation). All variations are represented in this report.

Technical Information:

Band of Operation: 2405 – 2480 MHz
Number of Channels: 16
Modulation Format: O-QPSK
Antenna Type/Gain: Fixed PCB-F / (0) Gain
Operating Voltage: 6VDC (4-AA Batteries)

Manufacturer Information:

Assa Abloy Inc.
110 Sargent Dr.
New Haven, CT 06511

Test Sample Serial Number(s): YRD210-ZB – U5N15100097; YRD220-ZB – U6N15100080; YRT210-ZB – N/A; YRT220-AB - 1

Test Sample Condition: The test samples were provided in good working order with no visible defects.

1.3 Test Methodology and Considerations

All model variants were evaluated for radiated emissions to address the new antenna design and additional variations in user interface and mechanical functionality. The EUTs were tested in an orientation of typical installation.

2 TEST FACILITIES

2.1 Location

The radiated and conducted emissions test sites are located at the following address:

Advanced Compliance Solutions
5015 B.U. Bowman Drive
Buford, GA 30518
Phone: (770) 831-8048
Fax: (770) 831-8598

2.2 Laboratory Accreditations/Recognitions/Certifications

ACS is accredited to ISO/IEC 17025 by the National Institute of Standards and Technology under their National Voluntary Laboratory Accreditation Program (NVLAP), Lab Code 200612-0. Unless otherwise specified, all tests methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

The Semi-Anechoic Chamber Test Site, Open Area Test Site (OATS) and Conducted Emissions Site have been fully described, submitted to, and accepted by the FCC, Industry Canada and the Japanese Voluntary Control Council for Interference by information technology equipment.

FCC Registration Number: 511277
Industry Canada Lab Code: IC 4175A-1
VCCI Member Number: 1831

- VCCI OATS Registration Number R-1526
- VCCI Conducted Emissions Site Registration Number: C-1608

2.3 Radiated Emissions Test Site Description

2.3.1 Semi-Anechoic Chamber Test Site

The Semi-Anechoic Chamber Test Site consists of a 20' x 30' x 18' shielded enclosure. The chamber is lined with Toyo Ferrite Grid Absorber, model number FFG-1000. The ferrite tile grid is 101 x 101 x 19mm thick and weighs approximately 550 grams. These tiles are mounted on steel panels and installed directly on the inner walls of the chamber.

The turntable is 150cm in diameter and is located 160cm from the back wall of the chamber. The chamber is grounded via 1 - 8' copper ground rod, installed at the center of the back wall, it is bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is all steel, flush mounted table installed in an all steel frame. The table is remotely operated from inside the control room located 25' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Behind the turntable is a 3' x 6' x 4' deep shielded pit used for support equipment if necessary. The pit is equipped with 1 - 4" PVC chases from the turntable to the pit that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit.

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3-1 below:

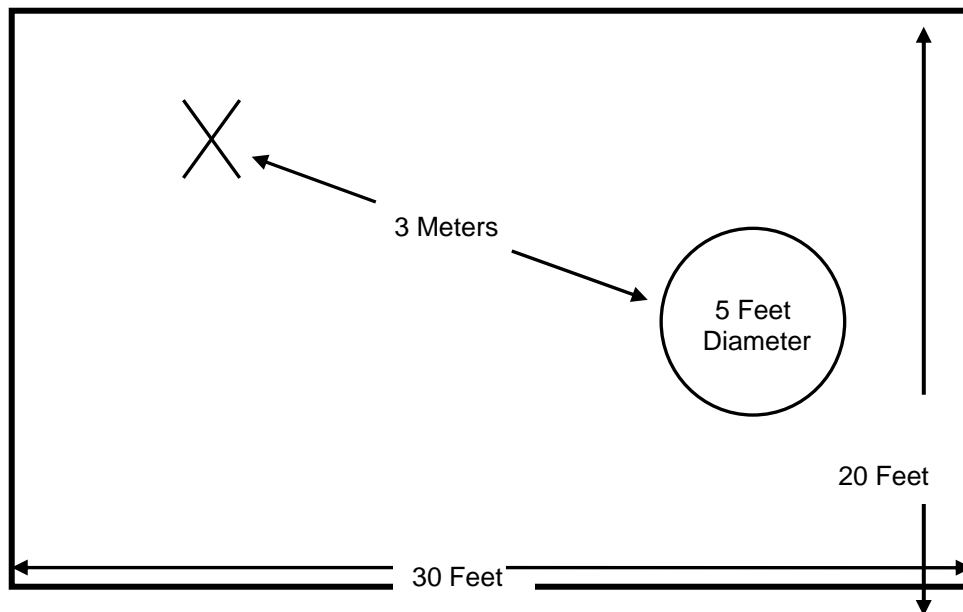


Figure 2.3-1: Semi-Anechoic Chamber Test Site

2.3.2 Open Area Tests Site (OATS)

The open area test site consists of a 40' x 66' concrete pad covered with a perforated electro-plated galvanized sheet metal. The perforations in the sheet metal are 1/8" holes that are staggered every 3/16". The individual sheets are placed to overlap each other by 1/4" and are riveted together to provide a continuous seam. Rivets are spaced every 3" in a 3 x 20 meter perimeter around the antenna mast and EUT area. Rivets in the remaining area are spaced as necessary to properly secure the ground plane and maintain the electrical continuity.

The entire ground plane extends 12' beyond the turntable edge and 16' beyond the antenna mast when set to a 10 meter measurement distance. The ground plane is grounded via 4 - 8' copper ground rods, each installed at a corner of the ground plane and bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is an all aluminum 10' flush mounted table installed in an all aluminum frame. The table is remotely operated from inside the control room located 40' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Adjacent to the turntable is a 7' x 7' square and 4' deep concrete pit used for support equipment if necessary. The pit is equipped with 5 - 4" PVC chases from the pit to the control room that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit. The pit is covered with 2 sheets of 1/4" diamond style re-enforced steel sheets. The sheets are painted to match the perforated steel ground plane; however the underside edges have been masked off to maintain the electrical continuity of the ground plane. All reflecting objects are located outside of the ellipse defined in ANSI C63.4.

A diagram of the Open Area Test Site is shown in Figure 2.3-2 below:

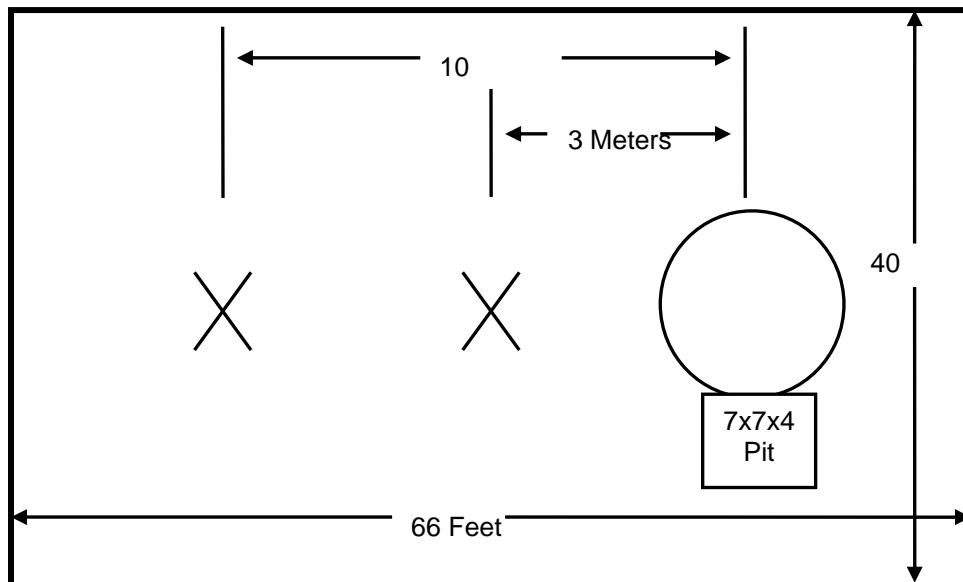


Figure 2.3-2: Open Area Test Site

3 APPLICABLE STANDARD REFERENCES

The following standards were used:

- ❖ ANSI C63.4-2003: Method of Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the 9KHz to 40GHz
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2011
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2011
- ❖ FCC KDB Publication No. 558074 - Guidance on Measurements for Digital Transmission Systems (47 CFR 15.247), March 2005
- ❖ Industry Canada Radio Standards Specification: RSS-210 - Low-power License-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment, Issue 8, Dec 2010
- ❖ Industry Canada Radio Standards Specification: RSS-GEN – General Requirements and Information for the Certification of Radiocommunication Equipment, Issue 3, Dec 2010.

4 LIST OF TEST EQUIPMENT

The calibration interval of test equipment is annually or the manufacturer's recommendations. Where the calibration interval deviates from the annual cycle based on the instrument manufacturer's recommendations, it shall be stated below.

Table 4-1: Test Equipment


AssetID	Manufacturer	Model #	Equipment Type	Serial #	Last Calibration Date	Calibration Due Date
1	Rohde & Schwarz	ESMI - Display	Spectrum Analyzers	833771/007	9/23/2010	9/23/2012
2	Rohde & Schwarz	ESMI-Receiver	Spectrum Analyzers	839587/003	9/23/2010	9/23/2012
30	Spectrum Technologies	DRH-0118	Antennas	970102	4/27/2011	4/27/2013
40	EMCO	3104	Antennas	3211	2/11/2011	2/11/2013
73	Agilent	8447D	Amplifiers	2727A05624	3/21/2011	3/21/2012
167	ACS	Chamber EMI Cable Set	Cable Set	167	1/26/2011	1/26/2012
283	Rohde & Schwarz	FSP40	Spectrum Analyzers	1000033	8/26/2011	8/26/2012
291	Florida RF Cables	SMRE-200W-12.0-SMRE	Cables	None	12/2/2011	12/2/2012
292	Florida RF Cables	SMR-290AW-480.0-SMR	Cables	None	4/11/2011	4/11/2012
334	Rohde&Schwarz	3160-10	Antennas	45576	11/4/2010	NCR
335	Suhner	SF-102A	Cables	882/2A	8/29/2011	8/29/2012
338	Hewlett Packard	8449B	Amplifiers	3008A01111	3/24/2011	3/24/2012
339	Aeroflex/Weinschel	AS-18	Attenuators	7142	6/10/2011	6/10/2012
340	Aeroflex/Weinschel	AS-20	Attenuators	7136	8/29/2011	8/29/2012
345	Suhner Sucoflex	102A	Cables	1077/2A	8/29/2011	8/29/2012
412	Electro Metrics	LPA-25	Antennas	1241	7/28/2010	7/28/2012
422	Florida RF	SMS-200AW-72.0-SMR	Cables	805	12/2/2011	12/2/2012
432	Microwave Circuits	H3G020G4	Filters	264066	7/11/2011	7/11/2012

5 SUPPORT EQUIPMENT

Table 5-1: Support Equipment

Item	Equipment Type	Manufacturer	Model Number	Serial Number
The EUT is stand alone battery operated therefore no support equipment was utilized.				

6 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM



7 SUMMARY OF TESTS

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

7.1 Antenna Requirement – FCC: Section 15.203

The EUT utilizes a Fixed PCB-F antenna which cannot be removed without permanently damaging the device thus satisfying Part 15.203. The gain on the antenna is 0dBi.

7.2 Power Line Conducted Emissions – FCC: Section 15.207 IC: RSS-Gen 7.2.4

7.2.1 Measurement Procedure

The EUT is battery operated therefore AC power line conducted emissions testing is not applicable.

7.3 Band-Edge Compliance and Spurious Emissions-FCC 15.247(d) IC:RSS-210 2.2, A8.5

7.3.1 Band-Edge Compliance

7.3.1.1 Measurement Procedure

The EUT was investigated at the low and high channels of operation to determine band-edge compliance. Band-edge compliance for the lower and upper band-edges was determined based on the absolute radiated emissions measurements.

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies below 1000MHz, quasi-peak measurements were made using a resolution bandwidth RBW of 120 kHz and a video bandwidth VBW of 300 kHz. For frequencies above 1000MHz, peak and average measurements were made with RBW and VBW of 1 MHz and 3 MHz respectively. The average emissions were further corrected by applying the duty cycle correction of the EUT for comparison to the average limit. See section 7.3.2.2 for determination of duty cycle.

7.3.1.2 Measurement Results

Band-edge compliance is displayed in Tables 7.3.1.2-1 - 7.3.1.2-4.

Table 7.3.1.2-1: Band-edge Radiated Emissions – YRT220-ZB

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
2390	50.42	38.77	H	-5.52	44.90	21.88	74.0	54.0	29.1	32.1
2390	47.22	35.62	V	-5.52	41.70	18.73	74.0	54.0	32.3	35.3
2483.5	72.01	63.82	H	-5.12	66.89	47.32	74.0	54.0	7.1	6.7
2483.5	64.74	56.46	V	-5.12	59.62	39.96	74.0	54.0	14.4	14.0

Table 7.3.1.2-2: Band-edge Radiated Emissions – YRT210-ZB

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
2390	49.15	37.67	H	-5.52	43.63	20.78	74.0	54.0	30.4	33.2
2390	48.36	36.46	V	-5.52	42.84	19.57	74.0	54.0	31.2	34.4
2483.5	72.18	64.08	H	-5.12	67.06	47.58	74.0	54.0	6.9	6.4
2483.5	64.54	56.23	V	-5.12	59.42	39.73	74.0	54.0	14.6	14.3

Table 7.3.1.2-3: Band-edge Radiated Emissions – YRD220-ZB

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
2390	51.28	39.68	H	-5.52	45.76	22.79	74.0	54.0	28.2	31.2
2390	48.07	36.18	V	-5.52	42.55	19.29	74.0	54.0	31.5	34.7
2483.5	70.63	62.43	H	-5.12	65.51	45.93	74.0	54.0	8.5	8.1
2483.5	64.56	56.31	V	-5.12	59.44	39.81	74.0	54.0	14.6	14.2

Table 7.3.1.2-4: Band-edge Radiated Emissions – YRD210-ZB / YRDZB

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
2390	51.21	40.16	H	-5.52	45.69	23.27	74.0	54.0	28.3	30.7
2390	48.15	36.18	V	-5.52	42.63	19.29	74.0	54.0	31.4	34.7
2483.5	70.53	62.33	H	-5.12	65.41	45.83	74.0	54.0	8.6	8.2
2483.5	63.30	54.92	V	-5.12	58.18	38.42	74.0	54.0	15.8	15.6

7.3.2 Radiated Spurious Emissions (Restricted Bands)

7.3.2.1 Measurement Procedure

Radiated emissions tests were made over the frequency range of 30MHz to 25 GHz, 10 times the highest fundamental frequency.

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies below 1000MHz, quasi-peak measurements were made using a resolution bandwidth RBW of 120 kHz and a video bandwidth VBW of 300 kHz. For frequencies above 1000MHz, peak and average measurements were made with RBW and VBW of 1 MHz and 3 MHz respectively. The average emissions were further corrected by applying the duty cycle correction of the EUT for comparison to the average limit.

Each emission found to be in a restricted band was compared to the applicable radiated emission limits.

7.3.2.2 Duty Cycle Correction

For average radiated measurements, using a 27% duty cycle, the measured level was reduced by a factor -11.37dB. The duty cycle correction factor is determined using the formula: $20\log(27/100) = -11.37\text{dB}$.

A detailed analysis of the duty cycle timing is provided in the Theory of Operation accompanying this report.

7.3.2.3 Measurement Results

Radiated spurious emissions found in the band of 30MHz to 25GHz are reported in tables 7.3.2.3-1 – 7.3.2.3-4 below.

Table 7.3.2.3-1: Radiated Spurious Emissions Tabulated Data – YRT220-ZB

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
Low Channel										
4810	54.23	45.93	H	2.00	56.23	36.56	74.0	54.0	17.8	17.4
4810	48.57	37.65	V	2.00	50.57	28.28	74.0	54.0	23.4	25.7
Middle Channel										
4880	48.16	38.01	H	2.16	50.32	28.80	74.0	54.0	23.7	25.2
7320	50.24	40.59	H	7.74	57.98	36.96	74.0	54.0	16.0	17.0
7320	46.15	35.57	V	7.74	53.89	31.94	74.0	54.0	20.1	22.1
High Channel										
4960	49.10	39.17	H	2.35	51.45	30.15	74.0	54.0	22.5	23.9
7440	50.37	40.72	H	7.70	58.07	37.05	74.0	54.0	15.9	16.9
7440	47.13	35.82	V	7.70	54.83	32.15	74.0	54.0	19.2	21.8

Table 7.3.2.3-2: Radiated Spurious Emissions Tabulated Data – YRT210-ZB

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
Low Channel										
4810	50.10	39.04	H	2.00	52.10	29.67	74.0	54.0	21.9	24.3
Middle Channel										
4880	48.11	38.26	H	2.16	50.27	29.05	74.0	54.0	23.7	25.0
7320	50.14	40.36	H	7.74	57.88	36.73	74.0	54.0	16.1	17.3
7320	47.14	36.20	V	7.74	54.88	32.57	74.0	54.0	19.1	21.4
High Channel										
4960	49.36	39.47	H	2.35	51.71	30.45	74.0	54.0	22.3	23.6
7440	51.02	40.92	H	7.70	58.72	37.25	74.0	54.0	15.3	16.7

Table 7.3.2.3-3: Radiated Spurious Emissions Tabulated Data – YRD220-ZB

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
Low Channel										
4810	50.04	40.42	H	2.00	52.04	31.05	74.0	54.0	22.0	23.0
Middle Channel										
4880	49.05	39.91	H	2.16	51.21	30.70	74.0	54.0	22.8	23.3
4880	47.54	36.51	V	2.16	49.70	27.30	74.0	54.0	24.3	26.7
7320	53.47	45.06	H	7.74	61.21	41.43	74.0	54.0	12.8	12.6
7320	48.12	37.42	V	7.74	55.86	33.79	74.0	54.0	18.1	20.2
High Channel										
4960	52.31	42.75	H	2.35	54.66	33.73	74.0	54.0	19.3	20.3
4960	49.01	38.46	V	2.35	51.36	29.44	74.0	54.0	22.6	24.6
7440	52.57	43.46	H	7.70	60.27	39.79	74.0	54.0	13.7	14.2
7440	48.38	38.18	V	7.70	56.08	34.51	74.0	54.0	17.9	19.5

Table 7.3.2.3-4: Radiated Spurious Emissions Tabulated Data – YRD210-ZB / YRDZB

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
Low Channel										
4810	49.18	39.48	H	2.00	51.18	30.11	74.0	54.0	22.8	23.9
4810	46.19	35.08	V	2.00	48.19	25.71	74.0	54.0	25.8	28.3
Middle Channel										
4880	50.07	40.21	H	2.16	52.23	31.00	74.0	54.0	21.8	23.0
4880	49.11	38.41	V	2.16	51.27	29.20	74.0	54.0	22.7	24.8
7320	53.62	44.93	H	7.74	61.36	41.30	74.0	54.0	12.6	12.7
7320	48.65	37.47	V	7.74	56.39	33.84	74.0	54.0	17.6	20.2
High Channel										
4960	52.26	42.90	H	2.35	54.61	33.88	74.0	54.0	19.4	20.1
4960	50.11	39.96	V	2.35	52.46	30.94	74.0	54.0	21.5	23.1
7440	53.04	44.33	H	7.70	60.74	40.66	74.0	54.0	13.3	13.3
7440	49.13	38.66	V	7.70	56.83	34.99	74.0	54.0	17.2	19.0

7.3.2.4 Sample Calculation:

$$R_C = R_U + CF_T$$

Where:

CF_T	=	Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only)
R_U	=	Uncorrected Reading
R_C	=	Corrected Level
AF	=	Antenna Factor
CA	=	Cable Attenuation
AG	=	Amplifier Gain
DC	=	Duty Cycle Correction Factor

Example Calculation: Peak

Corrected Level: $54.23 + 2.00 = 56.23\text{dBuV/m}$

Margin: $74\text{dBuV/m} - 56.23\text{dBuV/m} = 17.8\text{dB}$

Example Calculation: Average

Corrected Level: $45.93 + 2.00 - 11.37 = 36.56\text{dBuV}$

Margin: $54\text{dBuV} - 36.56\text{dBuV} = 17.4\text{dB}$

8 CONCLUSION

In the opinion of ACS, Inc. models YRDZB, YRD210-ZB, YRD220-ZB, YRT210-ZB, YRT220-ZB, manufactured by Assa Abloy Inc. meet the requirements of FCC Part 15 subpart C and Industry Canada's Radio Standards Specification RSS-210.

END REPORT