



Excellence in Compliance Testing

Certification Test Report

FCC ID: U4A-YRHCPZB0LM

IC: 6982A-YRHCPZB0LM

FCC Rule Part: 15.247

IC Radio Standards Specification: RSS-210

ACS Report Number: 14-0012.W06.1B

Manufacturer: Assa Abloy Inc.

Model: YRMZB1

Test Begin Date: January 23, 2014

Test End Date: March 17, 2014

Report Issue Date: April 9, 2014



FOR THE SCOPE OF ACCREDITATION UNDER LAB Code 200612-0

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Reviewed by:

Kirby Munroe

Director, Wireless Certifications

ACS, Inc.

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of ACS, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

This report contains 20 pages

TABLE OF CONTENTS

1	GENERAL	3
1.1	PURPOSE.....	3
1.2	PRODUCT DESCRIPTION.....	3
1.3	TEST METHODOLOGY AND CONSIDERATIONS.....	3
2	TEST FACILITIES.....	4
2.1	LOCATION	4
2.2	LABORATORY ACCREDITATIONS/RECOGNITIONS/CERTIFICATIONS.....	4
2.3	RADIATED EMISSIONS TEST SITE DESCRIPTION.....	5
2.3.1	<i>Semi-Anechoic Chamber Test Site</i>	5
2.3.2	<i>Open Area Tests Site (OATS)</i>	6
2.4	CONDUCTED EMISSIONS TEST SITE DESCRIPTION	7
3	APPLICABLE STANDARD REFERENCES	7
4	LIST OF TEST EQUIPMENT.....	8
5	SUPPORT EQUIPMENT	9
6	EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM	9
7	SUMMARY OF TESTS.....	10
7.1	ANTENNA REQUIREMENT – SECTION 15.203	10
7.2	POWER LINE CONDUCTED EMISSIONS – FCC 15.207; IC RSS-GEN 7.2.4	10
7.3	6dB / 99% BANDWIDTH – FCC 15.247(A)(2); IC RSS-210 A8.2(A)	10
7.3.1	<i>Measurement Procedure</i>	10
7.3.2	<i>Measurement Results</i>	10
7.4	FUNDAMENTAL EMISSION OUTPUT POWER – FCC 15.247(B)(3), IC: RSS-210 A8.4(4)	12
7.4.1	<i>Measurement Procedure</i>	12
7.4.2	<i>Measurement Results</i>	12
7.5	EMISSION LEVELS – FCC 15.247(D), 15.205, 15.209; IC RSS-210 2.2/A8.5, RSS-GEN 7.2.2	13
7.5.1	<i>Emissions into Non-restricted Frequency Bands</i>	13
7.5.1.1	<i>Measurement Procedure</i>	13
7.5.1.2	<i>Measurement Results</i>	13
7.5.2	<i>Emissions into Restricted Frequency Bands</i>	16
7.5.2.1	<i>Measurement Procedure</i>	16
7.5.2.2	<i>Duty Cycle Correction</i>	16
7.5.2.3	<i>Measurement Results</i>	16
7.5.2.4	<i>Sample Calculation:</i>	18
7.6	MAXIMUM POWER SPECTRAL DENSITY IN THE FUNDAMENTAL EMISSION – FCC: SECTION 15.247(E) IC: RSS-210 A8.2(B).....	19
7.6.1	<i>Measurement Procedure</i>	19
7.6.2	<i>Measurement Results</i>	19
8	CONCLUSION	20

1 GENERAL

1.1 Purpose

The purpose of this report is to demonstrate compliance with Part 15 Subpart C of the FCC's Code of Federal Regulations and Industry Canada's Radio Standards Specification RSS-210 for limited modular approval.

1.2 Product Description

The YRMZB1 module utilizes an EM351 2.4GHz Zigbee radio with operation on standard channels. The YRMZB1 module is designed to be integrated into the select remote controlled door locks listed below.

Model	Description
YRD210	Push Button Deadbolt
YRD220	Touch Screen Deadbolt
YRD240	Touch Screen Deadbolt w/o Cylinder
YRT210	Push Button Lever Lock
YRT220	Touch Screen Lever Lock

The door locks can be used to remotely control different radio linked devices in the home that the door locks are associated with. The locks are low powered and power is sourced from 4 AA batteries located inside the lock housings.

Technical Information:

Detail	Description
Frequency Range	2405 – 2480 MHz
Number of Channels	16
Modulation Format	O-QPSK
Operating Voltage	6 VDC
Antenna Type / Gain	PCB inverted F / 0 dBi Gain

Manufacturer Information:

Assa Abloy Inc.
110 Sargent Dr.
New Haven, CT 06511

Test Sample Serial Number: ACS#6

Test Sample Condition: The test samples were provided in good working order with no visible defects.

1.3 Test Methodology and Considerations

All host lock model variants were evaluated for radiated emissions in an orientation of typical installation. Data is presented for worst case of each push button and touch screen model variants, YRD220 and YRD210.

2 TEST FACILITIES

2.1 Location

The radiated and conducted emissions test sites are located at the following address:

Advanced Compliance Solutions
5015 B.U. Bowman Drive
Buford, GA 30518
Phone: (770) 831-8048
Fax: (770) 831-8598

2.2 Laboratory Accreditations/Recognitions/Certifications

ACS is accredited to ISO/IEC 17025 by the National Institute of Standards and Technology under their National Voluntary Laboratory Accreditation Program (NVLAP), Lab Code 200612-0. Unless otherwise specified, all tests methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

The Semi-Anechoic Chamber Test Site, Open Area Test Site (OATS) and Conducted Emissions Site have been fully described, submitted to, and accepted by the FCC, Industry Canada and the Japanese Voluntary Control Council for Interference by information technology equipment.

FCC Registration Number: 511277

Industry Canada Lab Code: IC 4175A-1

VCCI Member Number: 1831

- VCCI OATS Registration Number R-1526
- VCCI Conducted Emissions Site Registration Number: C-1608

2.3 Radiated Emissions Test Site Description

2.3.1 Semi-Anechoic Chamber Test Site

The Semi-Anechoic Chamber Test Site consists of a 20' x 30' x 18' shielded enclosure. The chamber is lined with Toyo Ferrite Grid Absorber, model number FFG-1000. The ferrite tile grid is 101 x 101 x 19mm thick and weighs approximately 550 grams. These tiles are mounted on steel panels and installed directly on the inner walls of the chamber.

The turntable is 150cm in diameter and is located 160cm from the back wall of the chamber. The chamber is grounded via 1 - 8' copper ground rod, installed at the center of the back wall, it is bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is all steel, flush mounted table installed in an all steel frame. The table is remotely operated from inside the control room located 25' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Behind the turntable is a 3' x 6' x 4' deep shielded pit used for support equipment if necessary. The pit is equipped with 1 - 4" PVC chases from the turntable to the pit that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit.

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3-1 below:

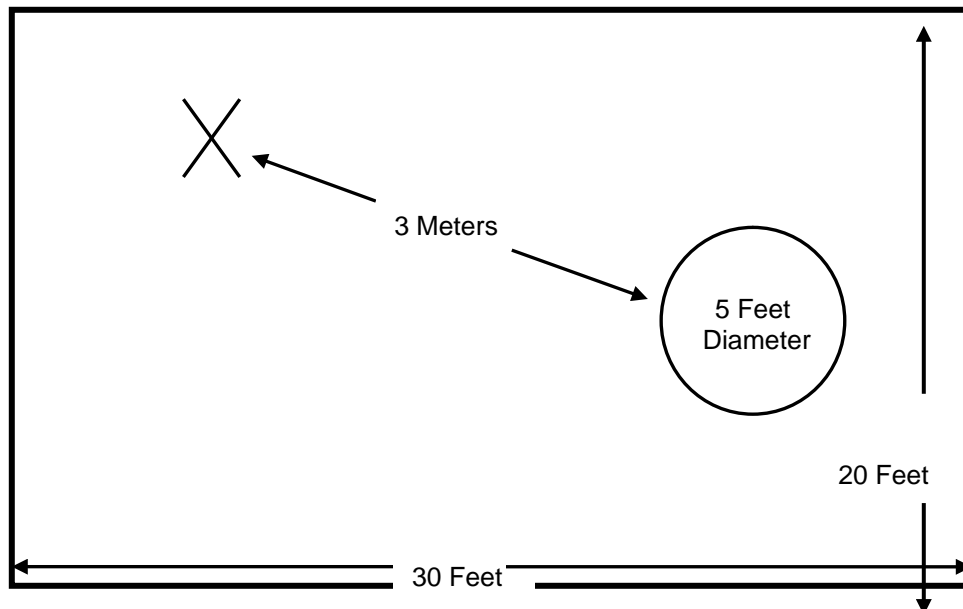


Figure 2.3-1: Semi-Anechoic Chamber Test Site

2.3.2 Open Area Tests Site (OATS)

The open area test site consists of a 40' x 66' concrete pad covered with a perforated electro-plated galvanized sheet metal. The perforations in the sheet metal are 1/8" holes that are staggered every 3/16". The individual sheets are placed to overlap each other by 1/4" and are riveted together to provide a continuous seam. Rivets are spaced every 3" in a 3 x 20 meter perimeter around the antenna mast and EUT area. Rivets in the remaining area are spaced as necessary to properly secure the ground plane and maintain the electrical continuity.

The entire ground plane extends 12' beyond the turntable edge and 16' beyond the antenna mast when set to a 10 meter measurement distance. The ground plane is grounded via 4 - 8' copper ground rods, each installed at a corner of the ground plane and bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is an all aluminum 10' flush mounted table installed in an all aluminum frame. The table is remotely operated from inside the control room located 40' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Adjacent to the turntable is a 7' x 7' square and 4' deep concrete pit used for support equipment if necessary. The pit is equipped with 5 - 4" PVC chases from the pit to the control room that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit. The pit is covered with 2 sheets of 1/4" diamond style re-enforced steel sheets. The sheets are painted to match the perforated steel ground plane; however the underside edges have been masked off to maintain the electrical continuity of the ground plane. All reflecting objects are located outside of the ellipse defined in ANSI C63.4.

A diagram of the Open Area Test Site is shown in Figure 2.3-2 below:

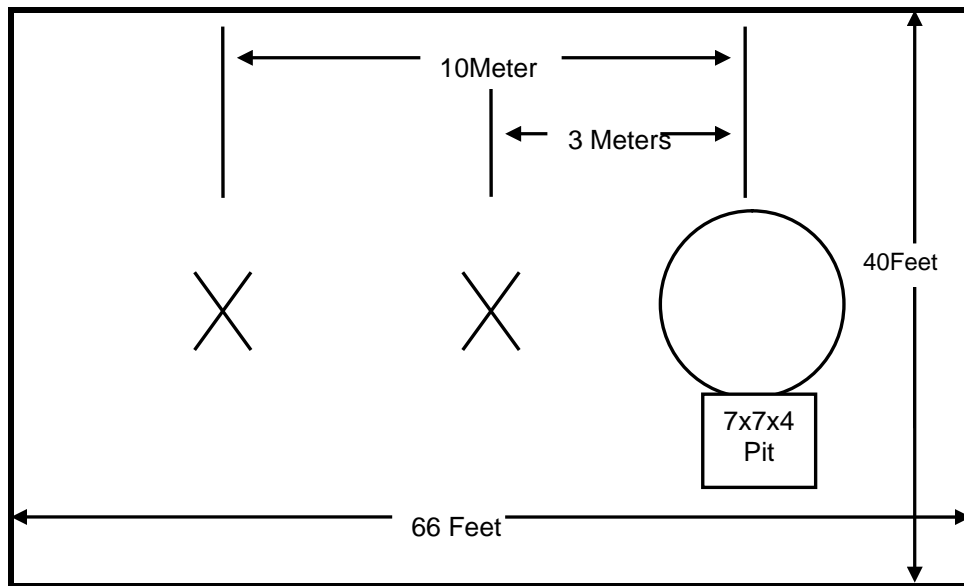


Figure 2.3-2: Open Area Test Site

2.4 Conducted Emissions Test Site Description

The AC mains conducted EMI site is located in the main EMC lab. It consists of an 8' x 8' solid aluminum horizontal ground reference plane (GRP) bonded every 3" to an 8' X 8' vertical ground plane.

The site is of sufficient size to test table top and floor standing equipment in accordance with section 6.1.4 of ANSI C63.4.

A diagram of the room is shown below in figure 4.1.3-1:

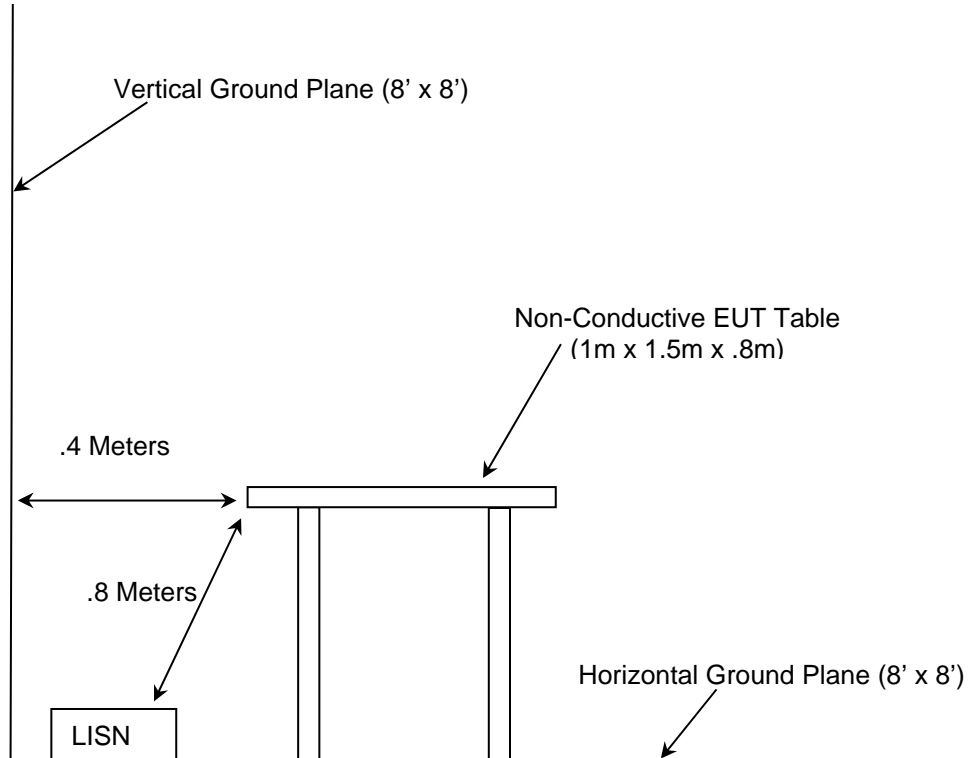


Figure 2.4-1: AC Mains Conducted EMI Site

3 APPLICABLE STANDARD REFERENCES

The following standards were used:

- ❖ ANSI C63.4-2003: Method of Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the 9KHz to 40GHz
- ❖ ANSI C63.10-2009: American National Standard for Testing Unlicensed Wireless Devices
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2014
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 15, Subpart C: Radio Frequency Devices, Intentional Radiators, 2014
- ❖ FCC KDB 558074 D01 DTS Meas Guidance v03r01 - Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247, April 9, 2013
- ❖ Industry Canada Radio Standards Specification: RSS-210 - Low-power License-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment, Issue 8, Dec 2010
- ❖ Industry Canada Radio Standards Specification: RSS-GEN – General Requirements and Information for the Certification of Radiocommunication Equipment, Issue 3, Dec 2010.

4 LIST OF TEST EQUIPMENT

The calibration interval of test equipment is annually or the manufacturer's recommendations. Where the calibration interval deviates from the annual cycle based on the instrument manufacturer's recommendations, it shall be stated below.

Table 4-1: Test Equipment

AssetID	Manufacturer	Model #	Equipment Type	Serial #	Last Calibration Date	Calibration Due Date
1	Rohde & Schwarz	ESMI - Display	Spectrum Analyzers	833771/007	8/2/2012	8/2/2014
2	Rohde & Schwarz	ESMI-Receiver	Spectrum Analyzers	839587/003	8/2/2012	8/2/2014
30	Spectrum Technologies	DRH-0118	Antennas	970102	4/23/2013	4/23/2015
40	EMCO	3104	Antennas	3211	2/14/2013	2/14/2015
73	Agilent	8447D	Amplifiers	2727A05624	7/16/2013	7/16/2014
167	ACS	Chamber EMI Cable Set	Cable Set	167	11/7/2013	11/7/2014
267	Agilent	N1911A	Meters	MY45100129	7/30/2013	7/30/2015
268	Agilent	N1921A	Sensors	MY45240184	7/30/2013	7/30/2015
292	Florida RF Cables	SMR-290AW-480.0-SMR	Cables	None	3/26/2013	3/26/2014
334	Rohde&Schwarz	3160-09	Antennas	49404	11/4/2010	NCR
335	Suhner	SF-102A	Cables	882/2A	7/29/2013	7/29/2014
338	Hewlett Packard	8449B	Amplifiers	3008A01111	7/30/2013	7/30/2015
340	Aeroflex/Weinschel	AS-20	Attenuators	7136	7/30/2013	7/30/2014
345	Suhner Sucoflex	102A	Cables	1077/2A	7/29/2013	7/29/2014
412	Electro Metrics	LPA-25	Antennas	1241	7/27/2012	7/27/2014
422	Florida RF	SMS-200AW-72.0-SMR	Cables	805	11/7/2013	11/7/2014
432	Microwave Circuits	H3G020G4	Filters	264066	6/19/2013	6/19/2014
616	Florida RF Cables	SMRE-200W-12.0-SMRE	Cables	N/A	9/26/2013	9/26/2014
622	Rohde & Schwarz	FSV40	Analyzers	101338	11/19/2013	11/19/2014

5 SUPPORT EQUIPMENT

Table 5-1: Support Equipment

Item	Equipment Type (Host)	Manufacturer	Model Number	Serial Number
1	Push Button Deadbolt	Assa Abloy Inc.	YRD210	NA
2	Touch Screen Deadbolt	Assa Abloy Inc.	YRD220	NA
3	Touch Screen Deadbolt w/o Cylinder	Assa Abloy Inc.	YRD240	NA
4	Push Button Lever Lock	Assa Abloy Inc.	YRT210	NA
5	Touch Screen Lever Lock	Assa Abloy Inc.	YRT220	NA

6 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM

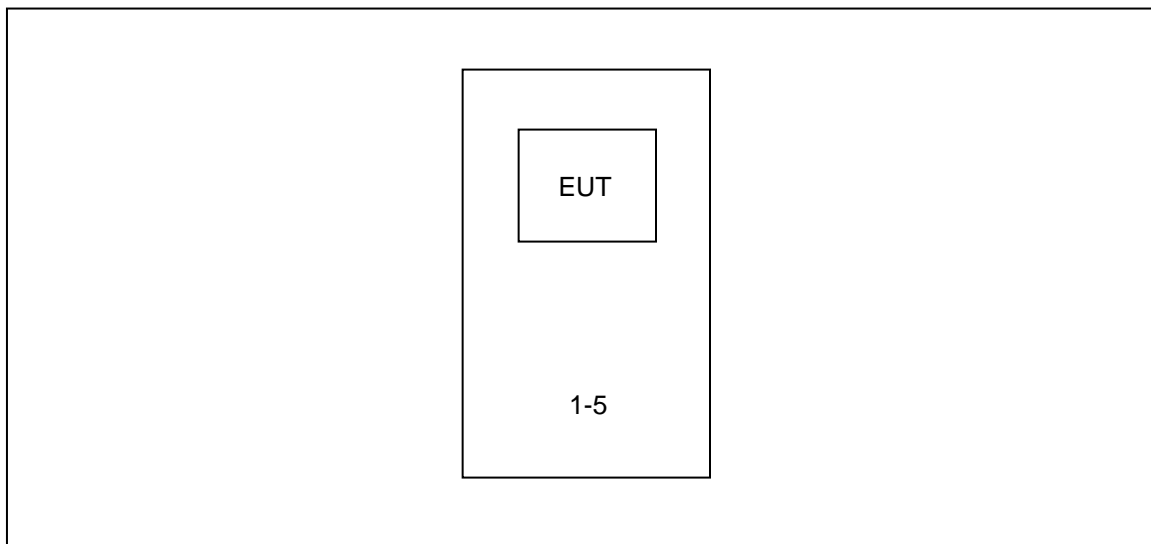


Figure 6-1: EUT Test Setup

7 SUMMARY OF TESTS

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

7.1 Antenna Requirement – Section 15.203

The EUT utilizes a fixed inverted F antenna which cannot be removed without permanently damaging the device thus satisfying Part 15.203.

7.2 Power Line Conducted Emissions – FCC 15.207; IC RSS-Gen 7.2.4

The module is designed for use only in battery powered locks therefore no AC power conducted emissions measurements were performed.

7.3 6dB / 99% Bandwidth – FCC 15.247(a)(2); IC RSS-210 A8.2(a)

7.3.1 Measurement Procedure

The 6dB bandwidth was measured in accordance with the FCC KDB 558074 D01 DTS Meas Guidance v03r01. The Resolution Bandwidth (RBW) of the spectrum analyzer was set to 100 kHz. The Video Bandwidth (VBW) was set to ≥ 3 times the RBW. The trace was set to max hold with a peak detector active. The marker-delta function of the spectrum analyzer was utilized to determine the 6 dB bandwidth of the emission.

The occupied bandwidth measurement function of the spectrum analyzer was used to measure the 99% bandwidth. The span of the analyzer was set to capture all products of the modulation process, including the emission sidebands. The resolution bandwidth was set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth was set to 3 times the resolution bandwidth. A sampling detector was used.

7.3.2 Measurement Results

Results are shown below in table 7.3.2-1 and figures 7.3.2-1 to 7.3.2-6:

Table 7.3.2-1: 6dB / 99% Bandwidth

Frequency [MHz]	6dB Bandwidth [MHz]	99% Bandwidth [MHz]
2405	1.621	2.475
2440	1.592	2.475
2480	1.606	2.489

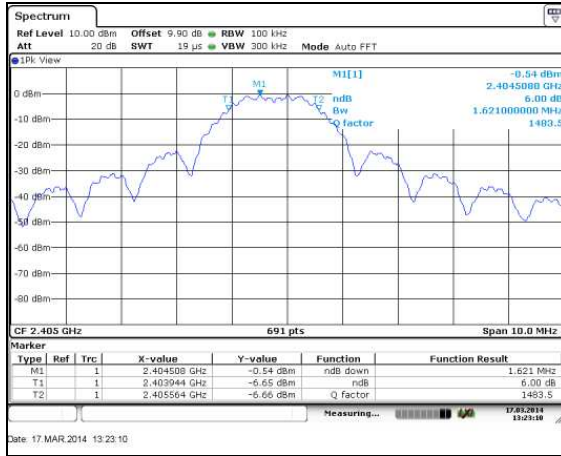


Figure 7.3.2-1: 6dB Bandwidth Plot – 2405 MHz

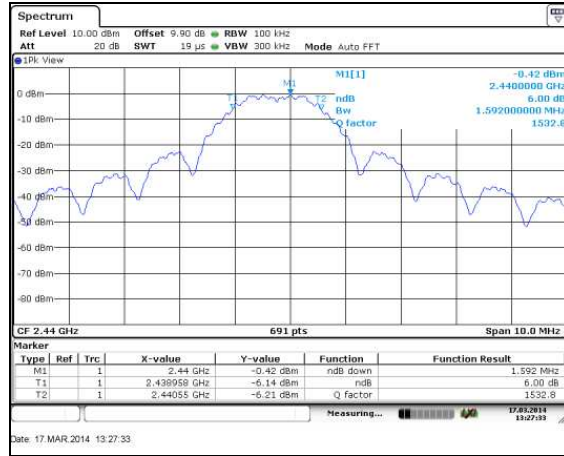


Figure 7.3.2-2: 6dB Bandwidth Plot – 2440 MHz

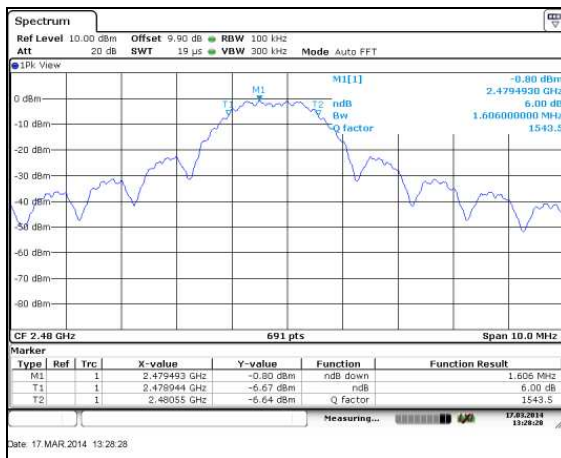


Figure 7.3.2-3: 6dB Bandwidth Plot – 2480 MHz



Figure 7.3.2-4: 99% Bandwidth Plot – 2405 MHz

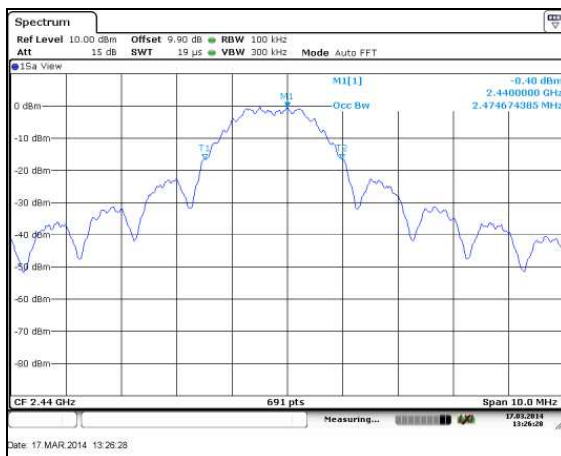


Figure 7.3.2-5: 99% Bandwidth Plot – 2440 MHz

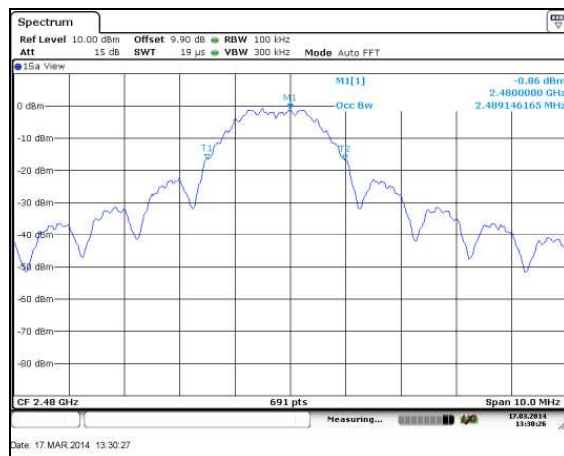


Figure 7.3.2-6: 99% Bandwidth Plot – 2480 MHz

7.4 Fundamental Emission Output Power – FCC 15.247(b)(3), IC: RSS-210 A8.4(4)**7.4.1 Measurement Procedure**

The maximum peak conducted output power was measured in accordance with FCC KDB 558074 D01 DTS Meas Guidance v03r01 utilizing the PKPM1 Peak power meter method. The RF output of the equipment under test was directly connected to the input of the peak power meter applying suitable attenuation.

7.4.2 Measurement Results

Results are shown below in Table 7.4.2-1.

Table 7.4.2-1: Maximum Peak Conducted Output Power

Frequency (MHz)	Output Power (dBm)
2405	3.01
2440	3.04
2480	2.99

7.5 Emission Levels – FCC 15.247(d), 15.205, 15.209; IC RSS-210 2.2/A8.5, RSS-Gen 7.2.2

7.5.1 Emissions into Non-restricted Frequency Bands

7.5.1.1 Measurement Procedure

The unwanted emissions into non-restricted bands were measured conducted in accordance with FCC KDB 558074 D01 DTS Meas Guidance v03r01. The RF output of the equipment under test was directly connected to the input of the spectrum analyzer applying suitable attenuation. The Resolution Bandwidth (RBW) of the spectrum analyzer was set to 100 kHz. The Video Bandwidth (VBW) was set to ≥ 300 kHz. Span was set to 1.5 times the DTS bandwidth. The trace was set to max hold with a peak detector active. The resulting spectrum analyzer peak level was used to determine the reference level with respect to the 20 dBc limit. The spectrum span was then adjusted for the measurement of spurious emissions from 30MHz to 25GHz, 10 times the highest fundamental frequency.

Band-edge compliance was determined using the conducted marker-delta method in which the radio frequency power that is produced by the EUT is at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of desired power.

7.5.1.2 Measurement Results

RF Conducted Emissions are displayed in Figures 7.5.1.2-1 through 7.5.1.2-11.

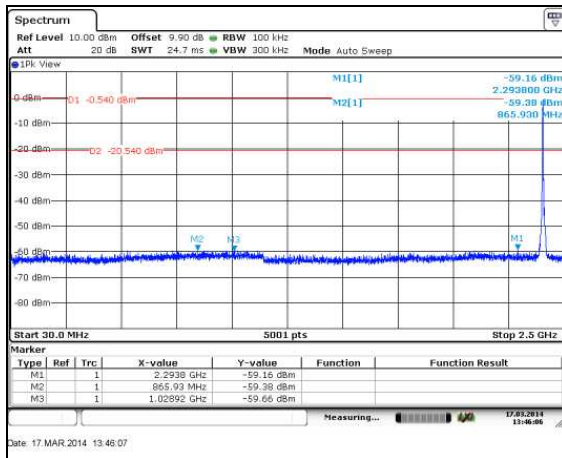


Figure 7.5.1.2-1: 30 MHz – 2.5 GHz – 2405 MHz

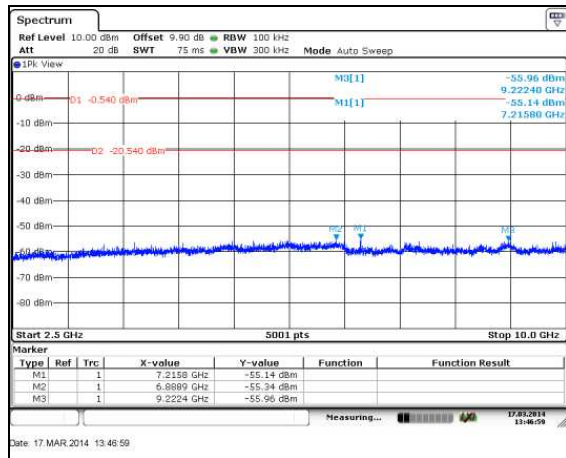


Figure 7.5.1.2-2: 2.5 GHz – 10 GHz – 2405 MHz

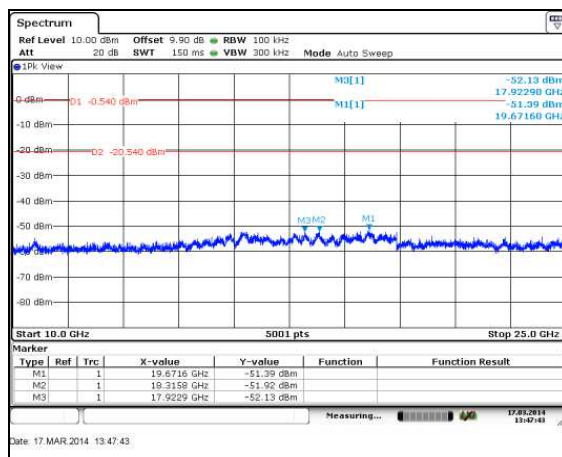


Figure 7.5.1.2-3: 10 GHz – 25 GHz – 2405 MHz

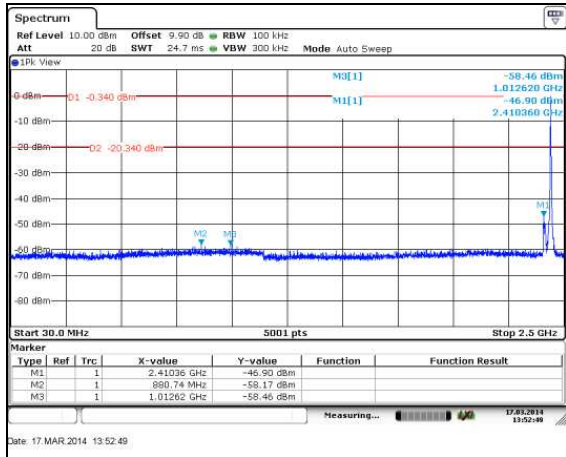


Figure 7.5.1.2-4: 30 MHz – 2.5 GHz – 2440 MHz

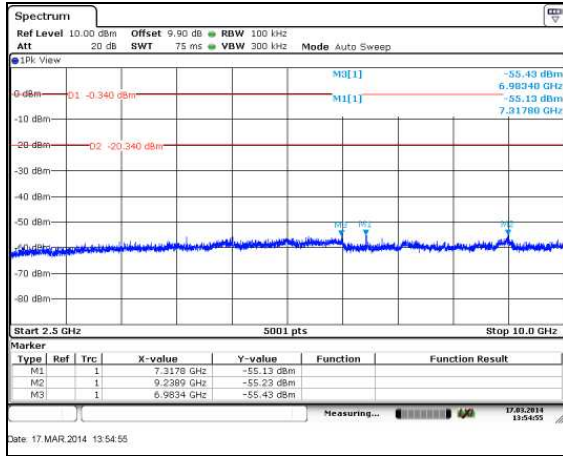


Figure 7.5.1.2-5: 2.5 GHz – 10 GHz – 2440 MHz

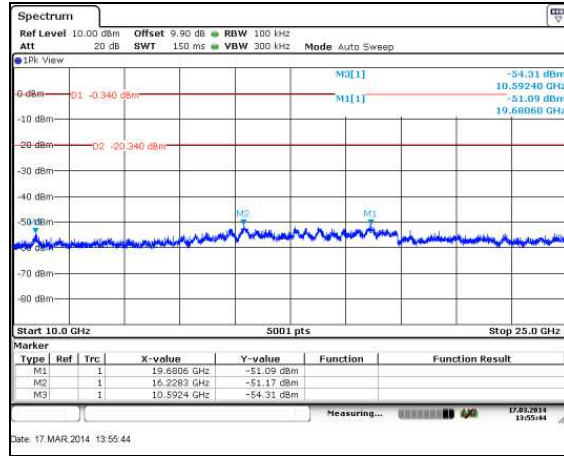


Figure 7.5.1.2-6: 10 GHz – 25 GHz – 2440 MHz

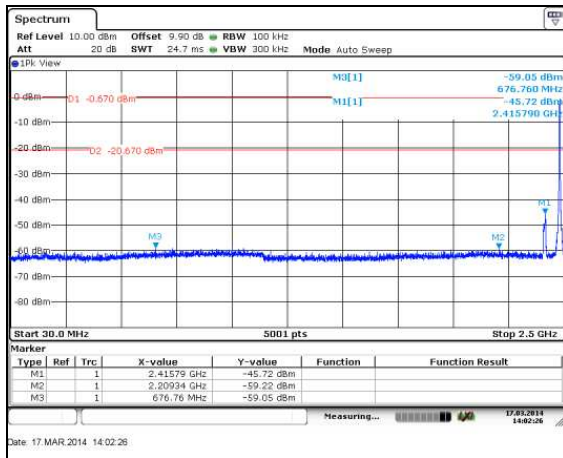


Figure 7.5.1.2-7: 30 MHz – 2.5 GHz – 2480 MHz

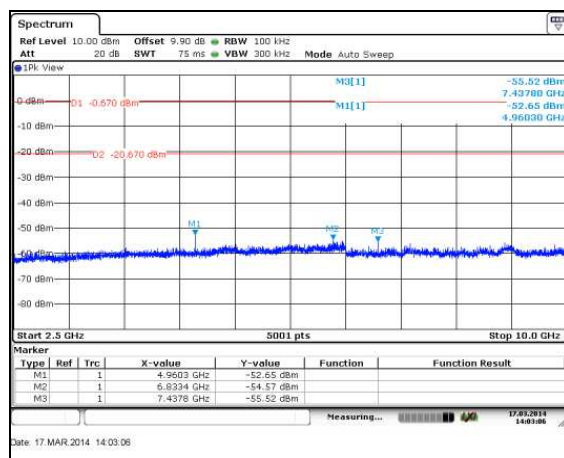


Figure 7.5.1.2-8: 2.5 GHz – 10 GHz – 2480 MHz

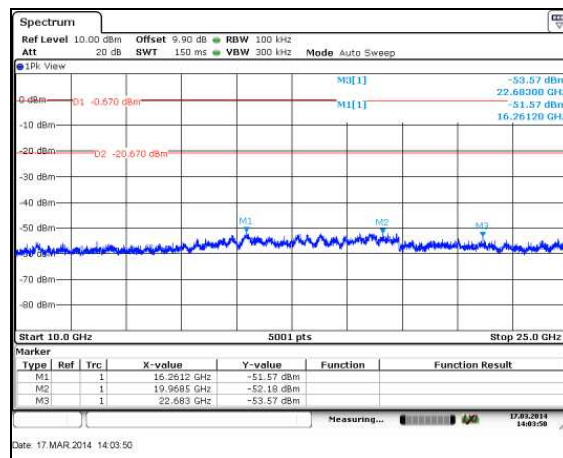


Figure 7.5.1.2-9: 10 GHz – 25 GHz – 2480 MHz

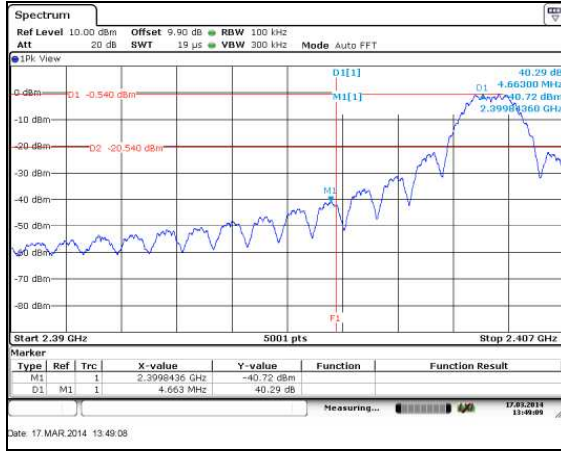


Figure 7.5.1.2-10: Lower Band-edge - 2405 MHz

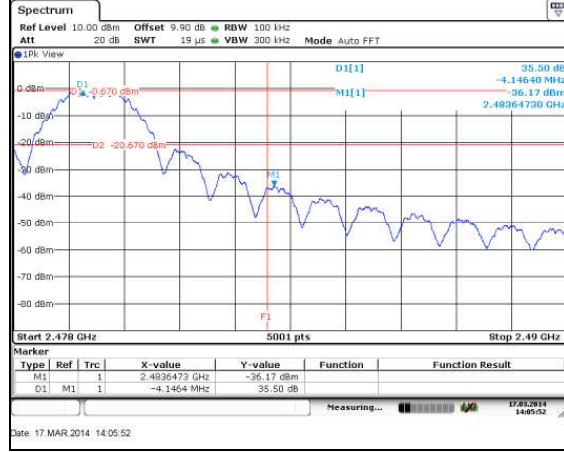


Figure 7.5.1.2-11: Upper Band-edge - 2480 MHz

7.5.2 Emissions into Restricted Frequency Bands

7.5.2.1 Measurement Procedure

The unwanted emissions into restricted bands were measured radiated over the frequency range of 30MHz to 25GHz, 10 times the highest fundamental frequency.

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies below 1000MHz, quasi-peak measurements were made using a resolution bandwidth RBW of 120 kHz and a video bandwidth VBW of 300 kHz. For frequencies above 1000MHz, peak and average measurements were made with RBW and VBW of 1 MHz and 3 MHz respectively. The average emissions were further corrected by applying the duty cycle correction of the EUT for comparison to the average limit.

Each emission found to be in a restricted band as defined by section 15.205, including any emission at the operational band-edge, was compared to the radiated emission limits as defined in section 15.209.

7.5.2.2 Duty Cycle Correction

For average radiated measurements, using a 42% duty cycle, the measured level was reduced by a factor -7.53dB. The duty cycle correction factor is determined using the formula: $20\log(42/100) = -7.53\text{dB}$.

A detailed analysis of the duty cycle timing is provided in the Theory of Operation accompanying the original application for certification.

7.5.2.3 Measurement Results

Radiated spurious emissions found in the band of 30MHz to 25GHz are reported in the tables 7.5.2.3-1 to 7.5.2.3-2 below.

Table 7.5.2.3-1: Radiated Spurious Emissions Tabulated Data – Host Model YRD220

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
2405 MHz										
4810	50.86	40.67	H	1.48	52.34	34.62	74.0	54.0	21.7	19.4
4810	48.31	37.67	V	1.48	49.79	31.62	74.0	54.0	24.2	22.4
2390	50.10	38.69	H	-6.40	43.70	24.75	74.0	54.0	30.3	29.2
2390	46.55	34.93	V	-6.40	40.15	20.99	74.0	54.0	33.9	33.0
2440 MHz										
4880	49.52	38.97	H	1.60	51.12	33.04	74.0	54.0	22.9	21.0
4880	47.32	35.85	V	1.60	48.92	29.92	74.0	54.0	25.1	24.1
7320	47.30	36.30	H	8.00	55.30	36.77	74.0	54.0	18.7	17.2
7320	48.05	37.24	V	8.00	56.05	37.71	74.0	54.0	17.9	16.3
2480 MHz										
4960	52.28	42.73	H	1.74	54.02	36.93	74.0	54.0	20.0	17.1
4960	48.47	37.67	V	1.74	50.21	31.87	74.0	54.0	23.8	22.1
2483.5	68.78	60.17	H	-5.89	62.89	46.74	74.0	54.0	11.1	7.3
2483.5	56.54	47.22	V	-5.89	50.65	33.79	74.0	54.0	23.4	20.2

Table 7.5.2.3-2: Radiated Spurious Emissions Tabulated Data – Host Model YRD210

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
2405 MHz										
4810	51.34	42.37	H	1.48	52.82	36.32	74.0	54.0	21.2	17.7
4810	48.46	37.67	V	1.48	49.94	31.62	74.0	54.0	24.1	22.4
2390	51.53	39.73	H	-6.40	45.13	25.79	74.0	54.0	28.9	28.2
2390	46.31	34.63	V	-6.40	39.91	20.69	74.0	54.0	34.1	33.3
2440 MHz										
4880	49.21	37.88	H	1.60	50.81	31.95	74.0	54.0	23.2	22.1
4880	49.19	38.23	V	1.60	50.79	32.30	74.0	54.0	23.2	21.7
7320	46.15	34.98	H	8.00	54.15	35.45	74.0	54.0	19.8	18.6
7320	46.23	35.69	V	8.00	54.23	36.16	74.0	54.0	19.8	17.8
2480 MHz										
4960	52.10	42.88	H	1.74	53.84	37.08	74.0	54.0	20.2	16.9
4960	49.51	38.28	V	1.74	51.25	32.48	74.0	54.0	22.8	21.5
2483.5	67.36	58.83	H	-5.89	61.47	45.40	74.0	54.0	12.5	8.6
2483.5	60.27	51.44	V	-5.89	54.38	38.01	74.0	54.0	19.6	16.0

7.5.2.4 Sample Calculation:

$$R_c = R_u + CF_T$$

Where:

 $CF_T =$ Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only) $R_u =$ Uncorrected Reading $R_c =$ Corrected Level $AF =$ Antenna Factor $CA =$ Cable Attenuation $AG =$ Amplifier Gain $DC =$ Duty Cycle Correction Factor**Example Calculation: Peak – Model YRD220**Corrected Level: $50.86 + 1.48 = 52.34\text{dBuV/m}$ Margin: $74\text{dBuV/m} - 52.34\text{dBuV/m} = 21.7\text{dB}$ **Example Calculation: Average – Model YRD220**Corrected Level: $40.67 + 1.48 - 7.53 = 34.62\text{dBuV}$ Margin: $54\text{dBuV} - 34.62\text{dBuV} = 19.4\text{dB}$

7.6 Maximum Power Spectral Density in the Fundamental Emission – FCC: Section 15.247(e) IC: RSS-210 A8.2(b)

7.6.1 Measurement Procedure

The power spectral density was measured in accordance with the FCC KDB 558074 D01 DTS Meas Guidance v03r01 utilizing the PKPSD (peak PSD) method. The RF output of the equipment under test was directly connected to the input of the spectrum analyzer applying suitable attenuation. The Resolution Bandwidth (RBW) of the spectrum analyzer was set to 3 kHz. The Video Bandwidth (VBW) was set to 10 kHz. Span was set to 1.5 times the DTS bandwidth. The trace was set to max hold with a peak detector active.

7.6.2 Measurement Results

Results are shown below in table 7.6.2-1 and figures 7.6.2-1 to 7.6.2-3.

Table 7.6.2-1: Peak Power Spectral Density

Frequency (MHz)	PSD Level (dBm)
2405	-11.47
2440	-11.69
2480	-11.68

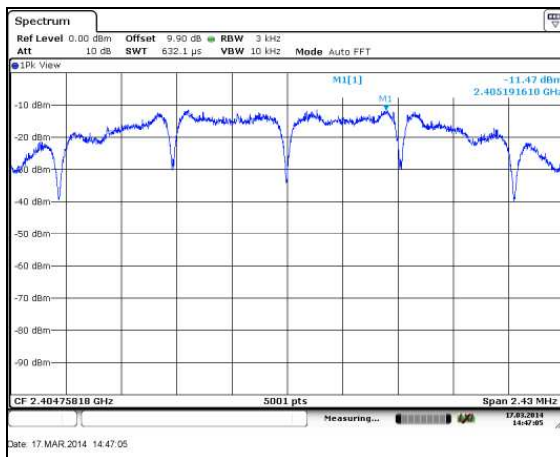


Figure 7.6.2-1: PSD Plot – 2405 MHz

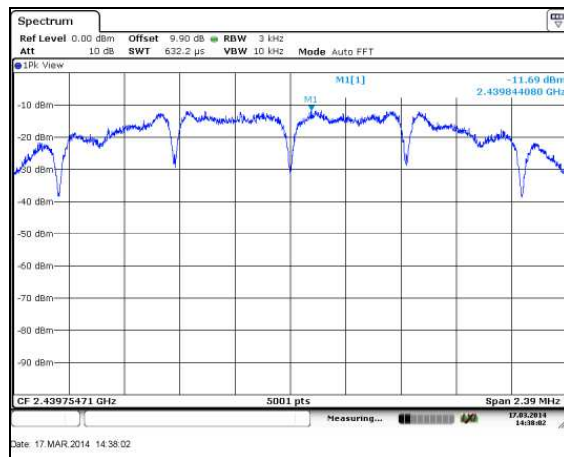


Figure 7.6.2-2: PSD Plot – 2440 MHz

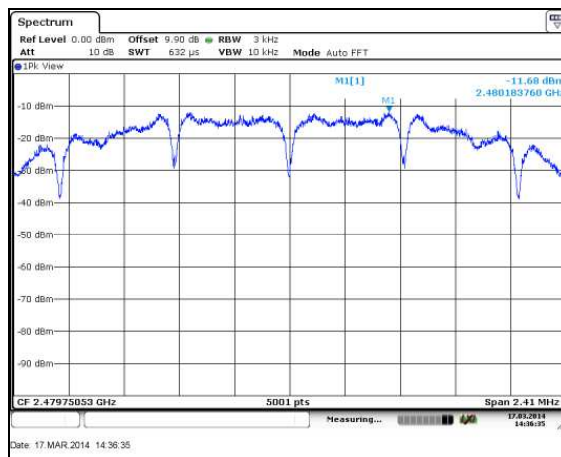


Figure 7.6.2-3: PSD Plot – 2480 MHz

8 CONCLUSION

In the opinion of ACS, Inc. the YRMZB1, manufactured by Assa Abloy Inc. meets the requirements of FCC Part 15 subpart C and Industry Canada's Radio Standards Specification RSS-210.

END REPORT