



**TEST REPORT
FROM
RFI GLOBAL SERVICES LTD**

Test of: PowerScan M8300 910 MHz Barcode Reader
Incorporating Star Module Plus 910

To: FCC Part 15.249: 2009 Subpart C, RSS-210 Issue 7 June 2007
and RSS-Gen Issue 2 June 2007

Test Report Serial No:
RFI/RPT/RP77263JD01B

This Test Report Is Issued Under The Authority Of Brian Watson, COO Payments and Consultancy:		
Checked By:	Tony Henriques	
Signature:		
Date of Issue:	19 May 2010	

This report is issued in Adobe Acrobat portable document format (PDF). It is only a valid copy of the report if it is being viewed in PDF format with the following security options not allowed: Changing the document, Selecting text and graphics, Adding or changing notes and form fields.

This report may not be reproduced other than in full, except with the prior written approval of RFI Global Services Ltd. The results in this report apply only to the sample(s) tested.

RFI Global Services Ltd

Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire RG23 8BG
Telephone: +44 (0)1256 312000 Facsimile: +44 (0)1256 312001
Email: info@rfi-global.com Website: www.rfi-global.com

Registered in England and Wales. Company number:2117901

This page has been left intentionally blank.

Table of Contents

1. Customer Information 4

2. Summary of Testing 5

3. Equipment Under Test (EUT) 7

4. Operation and Monitoring of the EUT during Testing 8

5. Measurements, Examinations and Derived Results 9

6. Measurement Uncertainty 18

Appendix 1. Test Equipment Used 19

1. Customer Information






Company Name:	Datalogic Scanning group S.r.l
Address:	13 Via San Vitalino Calderara di Reno Bologna 40012 Italy

2. Summary of Testing

2.1. General Information

Specification Reference:	47CFR15.249
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications) 2009: Part 15 Subpart C (Radio Frequency Devices) - Section 15.249
Specification Reference:	47CFR15.107 and 47CFR15.109
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications) 2009: Part 15 Subpart B (Radio Frequency Devices) - Sections 15.107 and 15.109
Specification Reference:	RSS-210 Issue 7 June 2007
Specification Title:	Low-power Licence-exempt Radio communication Devices (All Frequency Bands): Category I Equipment.
Specification Reference:	RSS-GEN Issue 2 June 2007
Specification Title:	General Requirements and Information for the Certification of Radio communication Equipment
Site Registration:	FCC: 209735; Industry Canada: 3245B-2
Location of Testing:	RFI Global Services Ltd, Wade Road, Basingstoke, Hampshire, RG24 8AH.
Test Dates:	12 April 2010 to 22 April 2010

2.2. Summary of Test Results

FCC Reference (47CFR)	Industry Canada Reference	Measurement	Result
Part 15.109	RSS-Gen 4.10 RSS-Gen 6.0	Receiver Mode Radiated Spurious Emissions	
Part 15.249(a)	RSS-Gen 4.8 RSS-210 A2.9	Transmitter Fundamental Field Strength	
Part 2.1049	RSS-Gen 4.6.1	Transmitter 20 dB Bandwidth	
Part 15.249(a)(d)(e) & 15.209	RSS-Gen 4.9 RSS-210 A2.9	Transmitter Radiated Spurious Emissions	
Part 15.249(d) & 15.209	RSS-Gen 4.9 RSS-210 A2.9	Transmitter Band Edge Radiated Emissions	

Key to Results

 = Complied  = Did not comply

2.3. Methods and Procedures

Reference:	ANSI C63.4 (2003)
Title:	American National Standard Methods of Measurement of Electromagnetic Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

2.4. Deviations from the Test Specification

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

3. Equipment Under Test (EUT)

3.1. Identification of Equipment Under Test (EUT)

Brand Name:	PowerScan
Model Name or Number:	M8300 910MHz
Serial Number:	None Stated
Industry Canada Certification Number:	3862D-003
FCC ID Number:	U4F0020

3.2. Description of EUT

The equipment under test was a bar code imager gun (reader) incorporating a 910 MHz transceiver.

3.3. Modifications Incorporated in the EUT

No modifications were applied to the EUT during testing.

3.4. Additional Information Related to Testing

Tested Technology:	910 MHz
Type of Equipment	Transceiver
Transmit Channels Tested:	910 MHz
Receive Channels Tested:	910 MHz
Power Supply Requirement:	3.7 V DC Nominal

4. Operation and Monitoring of the EUT during Testing

4.1. Operating Modes

The EUT was tested in the following operating mode(s):

- Continuous transmit at maximum output power.
- Receive Mode.

4.2. Configuration and Peripherals

The EUT was tested in the following configuration(s):

- For all tests the EUT was tested standalone. A test mode was enabled on the EUT to allow continuous transmissions or continuous receiving mode.

5. Measurements, Examinations and Derived Results

5.1. General Comments

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to *Section 6. Measurement Uncertainty* for details.

5.2. Test Results

5.2.1. Receiver Radiated Spurious Emissions

Test Summary:

FCC Part:	15.109
Test Method Used:	As detailed in ANSI C63.4 Section 8 and relevant annexes
Frequency Range:	30 MHz to 1000 MHz

Environmental Conditions:


Temperature Range (°C):	26
Relative Humidity (%):	17

Results:

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
50.876	Vertical	26.2	40.0	13.8	Complied

Note(s):

- All other emissions were investigated and found to be at least 20 dB below the specified limit.

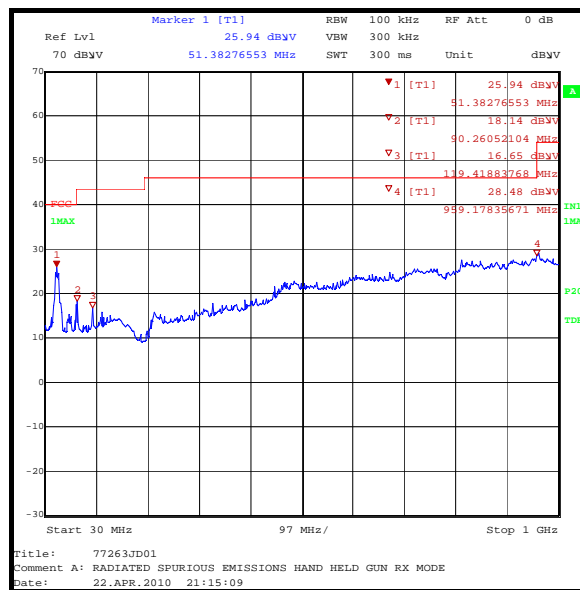

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying table.

Receiver Radiated Spurious Emissions (continued)

Test Summary:

FCC Part:	15.109
Test Method Used:	As detailed in ANSI C63.4 Section 8 and relevant annexes
Frequency Range:	1 GHz to 5 GHz

Environmental Conditions:



Temperature Range (°C):	26
Relative Humidity (%):	17

Results:

Frequency (MHz)	Antenna Polarity	Detector Level (dBµV/m)	Transducer Factor (dB)	Actual Level (dBµV/m)	Average Limit (dBµV/m)	Margin (dB)	Result
3837.675	Vertical	41.8	4.3	46.1	54.0	7.9	Complied

Note(s):

- No spurious emissions were detected above the noise floor of the measuring receiver; therefore, the highest peak noise floor reading of the measuring receiver was recorded as shown in the table above. The peak level was compared to the average limit as opposed to being compared to the peak limit because this is the more onerous limit.

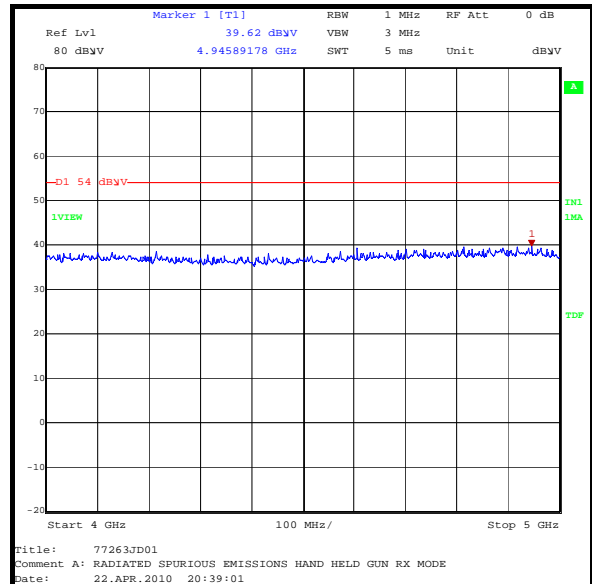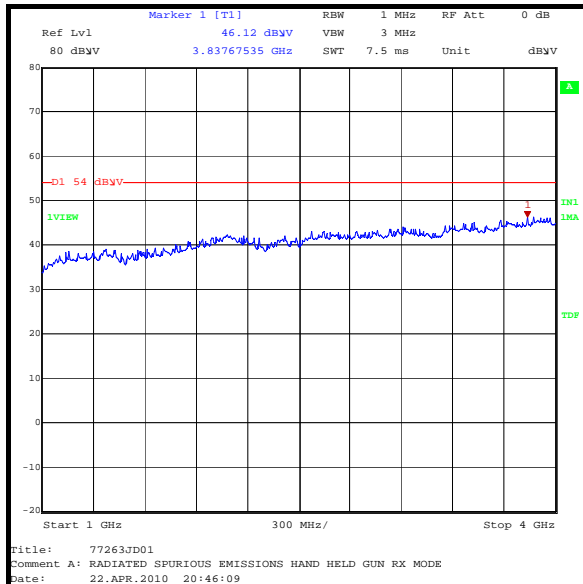

5.2.2. Transmitter Fundamental Field Strength**Test Summary:**

FCC Part:	15.249(a)
Test Method Used:	As detailed in ANSI C63.4 Section 8 and relevant annexes

Environmental Conditions:

Temperature Range (°C):	23
Relative Humidity (%):	24

Results:

Frequency (MHz)	Antenna Polarity	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
910	Vertical	86.7	94.0	7.3	Complied

5.2.3. Transmitter 20 dB Bandwidth

Test Summary:

FCC Part:	2.1049
Test Method Used:	As detailed in ANSI C63.4 Section 13.1.7 and relevant annexes (see note below)

Environmental Conditions:


Temperature (°C):	23
Relative Humidity (%):	34

Results:

20 dB Bandwidth (MHz)
0.607

Note(s):

- In lieu of the test method detailed in ANSI C63.4 Section 13.1.7 the 99% occupied bandwidth was measured using the Occupied Bandwidth function of the spectrum analyser

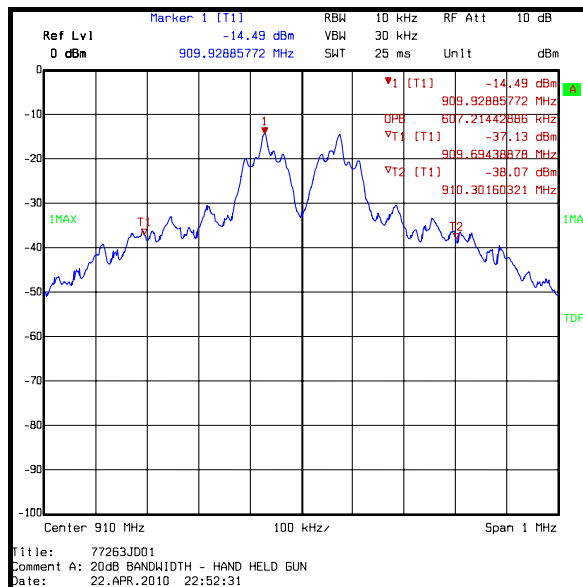

5.2.4. Transmitter Radiated Spurious Emissions

Test Summary:

FCC Part:	15.249(a)(d)(e) & 15.209
Test Method Used:	As detailed in ANSI C63.4 Section 8 and relevant annexes
Frequency Range:	30 MHz to 1000 MHz

Environmental Conditions:


Temperature (°C):	26
Relative Humidity (%):	17

Results:

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
50.876	Vertical	26.3	40.0	13.7	Complied

Note(s):

- The emission shown at approximately 910 MHz on the 30 MHz to 1 GHz plot is the carrier.

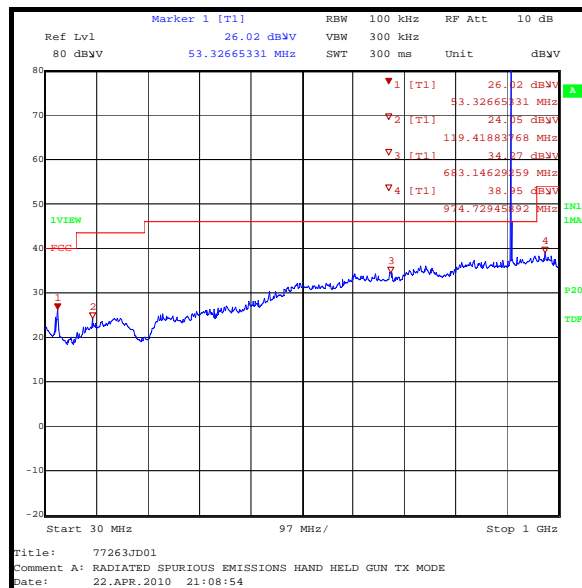

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying table.

Transmitter Radiated Spurious Emissions (continued)**Test Summary:**

FCC Part:	15.249(a)(d)(e) & 15.209
Test Method Used:	As detailed in ANSI C63.4 Section 8 and relevant annexes
Frequency Range:	1 to 10 GHz

Environmental Conditions:

Temperature (°C):	26
Relative Humidity (%):	17

Results: Highest Peak Level

Frequency (MHz)	Antenna Polarity	Detector Level (dB μ V/m)	Transducer Factor (dB)	Actual Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
1819.995	Vertical	53.4	-2.2	51.2	74.0	22.8	Complied
2729.919	Vertical	48.3	1.3	49.6	74.0	24.4	Complied
3640.436	Horizontal	47.1	3.1	50.2	74.0	23.8	Complied
4550.080	Vertical	46.8	-3.5	43.3	74.0	30.7	Complied
5459.588	Vertical	45.4	2.9	48.3	74.0	25.7	Complied
6369.935	Vertical	48.0	1.8	49.8	74.0	24.2	Complied
7280.271	Vertical	41.9	6.9	48.8	74.0	25.2	Complied





Results: Highest Average Level

Frequency (MHz)	Antenna Polarity	Detector Level (dB μ V/m)	Transducer Factor (dB)	Actual Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
1819.995	Vertical	51.6	-2.2	49.4	54.0	4.6	Complied
2729.919	Vertical	45.3	1.3	46.6	54.0	7.4	Complied
3640.436	Horizontal	42.8	3.1	45.9	54.0	8.1	Complied
4550.080	Vertical	37.2	-3.5	40.7	54.0	13.3	Complied
5459.588	Vertical	41.0	2.9	43.9	54.0	10.1	Complied
6369.935	Vertical	42.6	1.8	44.4	54.0	9.6	Complied
7280.271	Vertical	32.8	6.9	39.7	54.0	14.3	Complied

Note(s):

1. All pre-scans were performed with a peak detector against average limits apart from measurements made in the range of 8 to 10 GHz where pre-scans were performed with peak and average detectors and the applicable limit applied. This was due to the noise floor exceeding the average limit when using a peak detector.

Transmitter Radiated Spurious Emissions (continued)

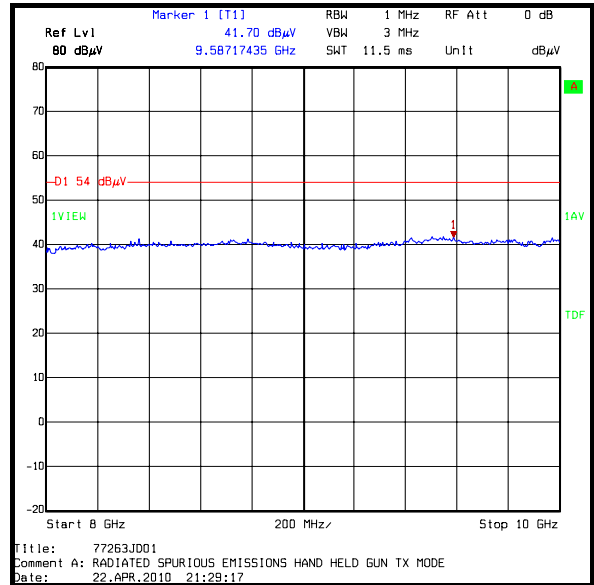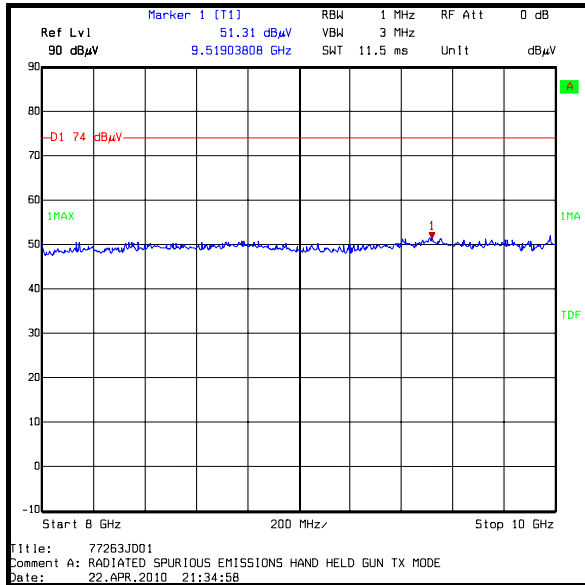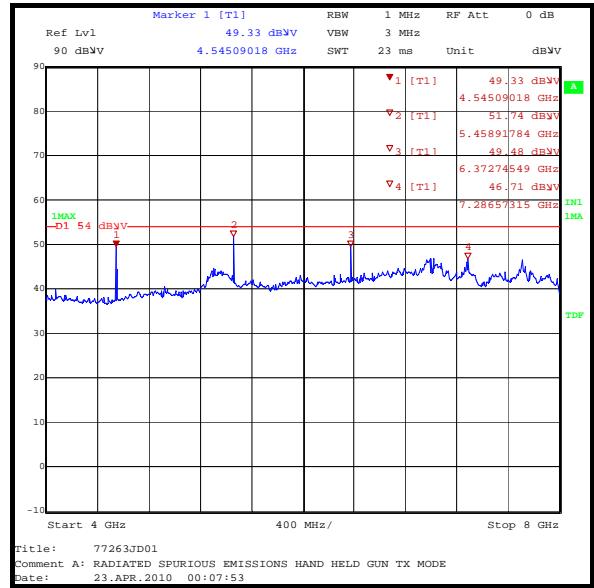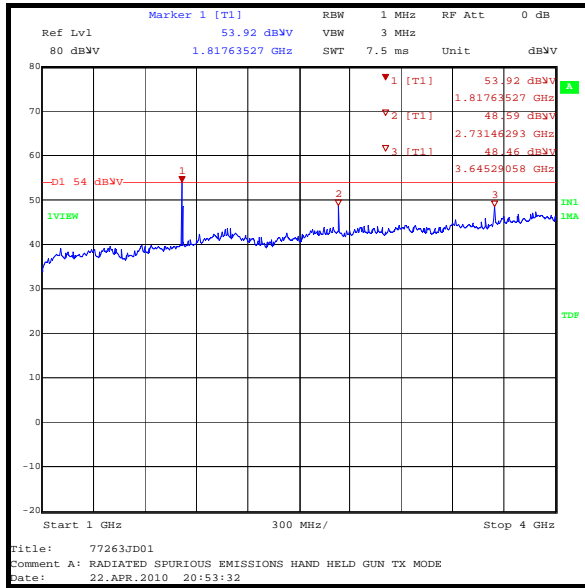

Peak Detector

Average Detector

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

5.2.5. Transmitter Radiated Emissions at Band Edges

Test Summary:

FCC Part:	15.249(d) & 15.209
Test Method Used:	As detailed in ANSI C63.4 Section 8 and relevant annexes

Environmental Conditions:


Temperature (°C):	23
Relative Humidity (%):	24

Results: Bottom Band Edge

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
902	26.5	46.0	19.5	Complied

Results: Top Band Edge

Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
928	26.4	46.0	19.6	Complied

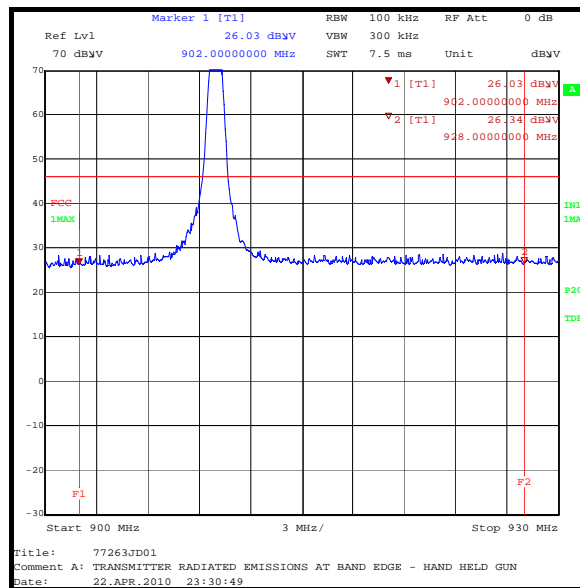

6. Measurement Uncertainty

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document “approximately” is interpreted as meaning “effectively” or “for most practical purposes”.

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
20 dB Bandwidth	N/A	95%	±0.92 ppm
Radiated Spurious Emissions	30 MHz to 10 GHz	95%	±2.94 dB
Transmitter Fundamental Field Strength	30 MHz to 1000 MHz	95%	±2.94 dB

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

Appendix 1. Test Equipment Used

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Last Calibrated	Cal. Interval (Months)
A1534	Pre Amplifier	Hewlett Packard	8449B OPT H02	3008A00405	Calibrated before use	-
A1818	Antenna	EMCO	3115	00075692	27 Nov 2009	12
A288	Antenna	Chase	CBL6111A	1589	16 Mar 2010	12
K0002	3m RSE Chamber	Rainford EMC	N/A	N/A	01 Sep 2009	12
M1242	Spectrum Analyser	Rohde & Schwarz	FSEM30	845986/022	18 Mar 2010	12
M1273	Test Receiver	Rhode & Schwarz	ESIB 26	100275	08 Apr 2010	12

NB In accordance with UKAS requirements all the measurement equipment is on a calibration schedule.