



# TEST REPORT

**Test Report No. : UL-RPT-RP-12354335-716-FCC**

**Applicant** : Datalogic S.r.l.  
**Model No.** : BT-VRG-STD  
**FCC ID** : U4FBT-VRG-STD  
**Technology** : Bluetooth – Low Energy  
**Test Standard(s)** : FCC Parts 15.207, 15.209 & 15.247

For details of applied tests refer to test result summary

1. This test report shall not be reproduced in full or partial, without the written approval of UL International Germany GmbH.
2. The results in this report apply only to the sample tested.
3. The test results in this report are traceable to the national or international standards.
4. Test Report Version 1.0
5. Result of the tested sample: **PASS**

Prepared by: Abdoufataou, Salifou  
Title: Laboratory Engineer  
Date: 31.July.2018

Approved by: Ajit, Phadtare  
Title: Lead Test Engineer  
Date: 31.July.2018



Deutsche  
Akkreditierungsstelle  
D-PL-19381-02-00

This laboratory is accredited by DAkkS.  
The tests reported herein have been performed in  
accordance with its' terms of accreditation.

This page has been left intentionally blank.

**Table of Contents**

**1. Customer Information.....4**  
 1.1.Applicant Information 4  
 1.2.Manufacturer Information 4

**2. Summary of Testing.....5**  
 2.1. General Information 5  
     Applied Standards 5  
     Location 5  
     Date information 5  
 2.2. Summary of Test Results 6  
 2.3. Methods and Procedures 6  
 2.4. Deviations from the Test Specification 6

**3. Equipment Under Test (EUT) .....7**  
 3.1. Identification of Equipment Under Test (EUT) 7  
 3.2. Description of EUT 7  
 3.3. Modifications Incorporated in the EUT 7  
 3.4. Additional Information Related to Testing 8  
 3.5. Support Equipment 8  
     A. Support Equipment (In-house) 8  
     B. Support Equipment (Manufacturer supplied) 8

**4. Operation and Monitoring of the EUT during Testing .....9**  
 4.1. Operating Modes 9  
 4.2. Configuration and Peripherals 9

**5. Measurements, Examinations and Derived Results .....10**  
 5.1. General Comments 10  
 5.2. Test Results 11  
     5.2.1. Transmitter AC Conducted Spurious Emissions 11  
     5.2.2. Transmitter Minimum 6 dB Bandwidth 15  
     5.2.3. Transmitter Duty Cycle 17  
     5.2.4. Transmitter Maximum Peak Output Power 19  
     5.2.5. Transmitter Radiated Emissions 25  
     5.2.6. Transmitter Band Edge Radiated Emissions 32

**6. Measurement Uncertainty .....36**

**7. Used equipment .....37**

**8. Report Revision History .....39**

## **1. Customer Information**

### **1.1.Applicant Information**

<b>Company Name:</b>	Datalogic S.r.l.
<b>Company Address:</b>	Via San Vitalino 13 – 40012 Lippo di Calderara di Reno (BO) -Italy
<b>Contact Person:</b>	Alberto Gamberini
<b>Contact E-Mail Address:</b>	<a href="mailto:alberto.gamberini@datalogic.com">alberto.gamberini@datalogic.com</a>
<b>Contact Phone No.:</b>	+390513147011

### **1.2.Manufacturer Information**

<b>Company Name:</b>	Datalogic S.r.l.
<b>Company Address:</b>	Via San Vitalino 13 – 40012 Lippo di Calderara di Reno (BO) -Italy
<b>Contact Person:</b>	Alberto Gamberini
<b>Contact E-Mail Address:</b>	<a href="mailto:alberto.gamberini@datalogic.com">alberto.gamberini@datalogic.com</a>
<b>Contact Phone No.:</b>	+390513147011

## **2. Summary of Testing**

### **2.1. General Information**

#### **Applied Standards**

<b>Specification Reference:</b>	47CFR15.247
<b>Specification Title:</b>	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart C (Intentional Radiators) - Section 15.247
<b>Specification Reference:</b>	47CFR15.207 and 47CFR15.209
<b>Specification Title:</b>	Code of Federal Regulations Volume 47 (Telecommunications): Part 15 Subpart C (Intentional Radiators) - Sections 15.207 and 15.209
<b>Test Firm Registration:</b>	399704

#### **Location**

<b>Location of Testing:</b>	UL International Germany GmbH Hedelfinger Str. 61 70327 Stuttgart Germany
-----------------------------	--

#### **Date information**

<b>Order Date:</b>	07 June 2018
<b>EUT arrived:</b>	18 June 2018
<b>Test Dates:</b>	25 June2018 to 13 July 2018
<b>EUT returned:</b>	-/-

**2.2. Summary of Test Results**

Clause	Measurement	Complied	Did not comply	Not performed	Not applicable
Part 15.207	Transmitter AC Conducted Emissions	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Part 15.247(a)(2)	Transmitter Minimum 6 dB Bandwidth	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Part 15.247(e)	Transmitter Power Spectral Density <sup>(Note 1)</sup>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Part 15.247(b)(3)	Transmitter Maximum Peak Output Power	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Part 15.247(d)/15.209(a)	Transmitter Radiated Emissions	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Part 15.247(d)/15.209(a)	Transmitter Band Edge Radiated Emissions	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

**Note:**

1. In accordance with FCC KDB 558074 Section 10.1, PSD is not required if the maximum conducted output power is less than the PSD limit of 8 dBm / 3 kHz. The PSD level is therefore deemed to be equal to the measured total output power.

**2.3. Methods and Procedures**

<b>Reference:</b>	ANSI C63.10-2013
<b>Title:</b>	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
<b>Reference:</b>	KDB 558074 D01 DTS Meas Guidance v04 April 5, 2017
<b>Title:</b>	Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247
<b>Reference:</b>	KDB 174176 D01 Line Conducted FAQ v01r01 June 3, 2015
<b>Title:</b>	AC Power-Line Conducted Emissions Frequently Asked Questions

**2.4. Deviations from the Test Specification**

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

### **3. Equipment Under Test (EUT)**

#### **3.1. Identification of Equipment Under Test (EUT)**

<b>Brand Name:</b>	Datalogic
<b>Model Name or Number:</b>	BT-VRG-STD
<b>Test Sample Serial Number:</b>	B18E92536 (Test Sample for Radiated & AC conducted Measurements)
<b>Hardware Version Number:</b>	A
<b>Software Version Number:</b>	A
<b>FCC ID:</b>	U4FBT-VRG-STD

<b>Brand Name:</b>	Datalogic
<b>Model Name or Number:</b>	BT-VRG-STD
<b>Test Sample Serial Number:</b>	B18E92533 (Test Sample used for Conducted Measurements)
<b>Hardware Version Number:</b>	A
<b>Software Version Number:</b>	A
<b>FCC ID:</b>	U4FBT-VRG-STD

#### **3.2. Description of EUT**

The equipment under test was a radio module supporting Bluetooth BR-EDR & Bluetooth Low Energy modes.

#### **3.3. Modifications Incorporated in the EUT**

No modifications were applied to the EUT during testing.

### 3.4. Additional Information Related to Testing

<b>Technology Tested:</b>	Bluetooth Low Energy		
<b>Supported Power Classes:</b>	Class 1: 6 dBm	Class 2: 3 dBm	Class 3 : -12 dBm
<b>Type of Radio Device:</b>	Transceiver		
<b>Power Supply Requirement(s):</b>	Nominal	3.3 V DC	
<b>Data Rates (Mbit/s):</b>	1		
<b>Modulation Technique:</b>	GFSK		
<b>Channel Spacing:</b>	2 MHz		
<b>Transmit Frequency Range:</b>	2400 MHz to 2483.5 MHz (ISM Band)		
<b>Transmit Channels Tested:</b>	<b>Channel ID</b>	<b>Channel Number</b>	<b>Channel Frequency (MHz)</b>
	Bottom	0	2402
	Middle	19	2440
	Top	39	2480
<b>Antenna Designation:</b>	Molex 47950-0011		
<b>Antenna Type:</b>	Omnidirectional		
<b>Antenna Gain:</b>	2.27 dBi		

### 3.5. Support Equipment

The following support equipment was used to exercise the EUT during testing:

#### A. Support Equipment (In-house)

Item	Description	Brand Name	Model Name or Number	Serial Number
1	Laptop PC	HP	HP Probook 650 G1	5CG6143YWB
2	Laptop PC	HP	HP Probook 650 G1	5CG614419V
3	USB extension cable	Not Marked or stated	Not Marked or stated	Not Marked or stated

#### B. Support Equipment (Manufacturer supplied)

Item	Description	Brand Name	Model Name or Number	Serial Number
1	Test jig	DATALOGIC	Not Marked or stated	Not marked or stated
2	USB/TTL UART Converter cable	Not Marked or stated	Not Marked or stated	Not marked or stated
3	Test jig with tuneable module supply voltage	DATALOGIC	Not Marked or stated	Not Marked or stated
4	AC/DC power adapter cable	DATALOGIC	SA115B-12U	PG12-10P55



## **4. Operation and Monitoring of the EUT during Testing**

### **4.1. Operating Modes**

The EUT was tested in the following operating mode(s):

Transmitting in *Bluetooth* LE test mode at maximum power on bottom, middle or top channel as required.

The EUT was set to transmit a continuously with a modulated carrier

### **4.2. Configuration and Peripherals**

The EUT was tested in the following configuration(s):

- The test modes were activated using “Virgilio regulatory test instructions v.1.4.pdf” supplied by customer.
- Transmit tests: The laptop PC with the customer’s test application Datalogic “Host Simulator for Virgilio Bluetooth module” sw 1.1 and BlueTest3 were used to place the EUT into *Bluetooth* LE test mode. Operating channels were selected in the test application.
- The EUT was placed in Test jig and powered via a USB diagnostic cable for all normal condition tests.
- The EUT was placed in Test jig with tuneable module supply voltage and powered via an AC/DC power adapter for AC Conducted Spurious Emissions tests.
- Power verification was performed with all supported Bluetooth Power Classes (1| 2|3). The worst case Power Class (1) with maximum output power was used for all other measurements.
- Radiated spurious emissions were performed with the EUT positioned on the turn table and rotating 360 degrees while the antenna height varies from 1 to 4 m over the measurement frequency range.
- EMC32 V10.1.0 Software was used for the Radiated spurious emission measurement.

## **5. Measurements, Examinations and Derived Results**

### **5.1. General Comments**

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to Section 6 *Measurement Uncertainty* for details.

In accordance with DAkkS requirements all the measurement equipment is on a calibration schedule. All equipment was within the calibration period on the date of testing.

**5.2. Test Results****5.2.1. Transmitter AC Conducted Spurious Emissions****Test Summary:**

<b>Test Engineer:</b>	Asim Shahzad	<b>Test Date:</b>	13 July 2018
<b>Test Sample Serial Number:</b>	B18E92536		
<b>Test Site Identification</b>	SR 7/8		

<b>Clause:</b>	Part 15.207
<b>Test Method:</b>	ANSI C63.10 Section 6.2 / FCC KDB 174176 and notes below

**Environmental Conditions:**

<b>Temperature (°C):</b>	24
<b>Relative Humidity (%):</b>	35

**Settings of the Instrument**


<b>Detector</b>	Quasi Peak/ Average Peak
-----------------	--------------------------

**Note(s):**

1. The EUT was plugged into a Test jig which has 12 VDC AC/DC adapter. The AC/DC power supply was connected to 120 VAC 60 Hz single phase supply via a LISN.
2. The final measured value, for the given emission, in the table below incorporate cable loss.
3. Pre-scans were performed and markers placed on the highest live and neutral measured levels. Final measurements were performed on the marker frequencies and the results entered into the tables below.
4. The tests were performed with the EUT set to the middle channel only.

**Transmitter AC Conducted Spurious Emissions (continued)**

**Test setup:**

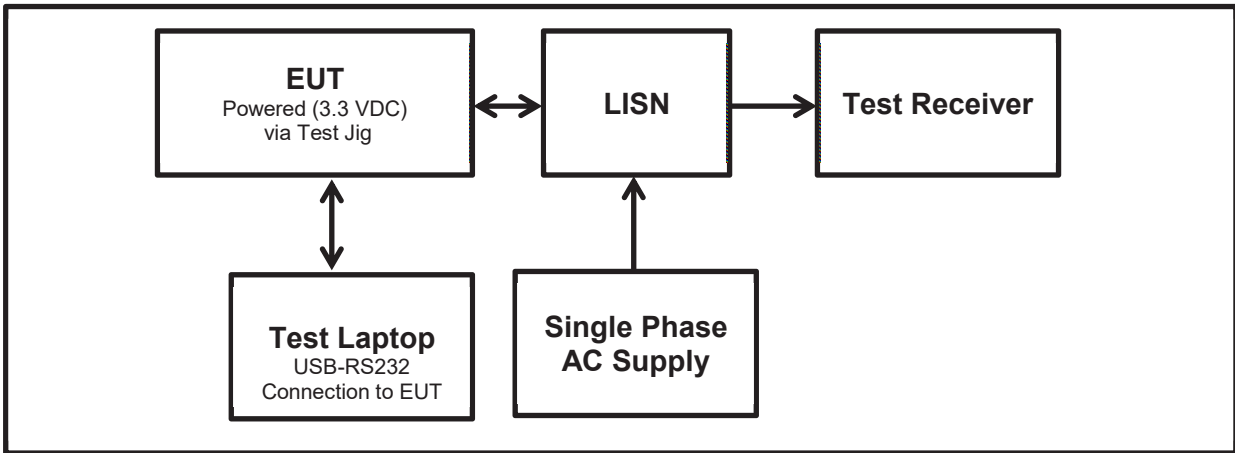

**Results: Live / Quasi Peak / 120 VAC 60 Hz**

Frequency (MHz)	Line	Level (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Result
0.29339	Live	53.7	60.4	6.7	Complied
0.68456	Live	45.8	56	10.2	Complied
1.56305	Live	32.7	56	23.3	Complied
4.60008	Live	29.0	56	27	Complied
8.44586	Live	32.7	60	27.3	Complied
24.0035	Live	32.8	60	27.2	Complied

**Results: Live / Average / 120 VAC 60 Hz**

Frequency (MHz)	Line	Level (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Result
0.29339	Live	25.3	50.4	25.1	Complied
0.68456	Live	24.2	46	21.8	Complied
1.56305	Live	19	46	27	Complied
4.60008	Live	18.5	46	27.5	Complied
8.44586	Live	23.1	50	26.9	Complied
24.0035	Live	26.3	50	23.7	Complied

**Results: Neutral / Quasi Peak / 120 VAC 60 Hz**

Frequency (MHz)	Line	Level (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Result
0.2723	Neutral	53.4	61	7.6	Complied
0.4712	Neutral	50.7	56.5	5.8	Complied
0.64175	Neutral	49.3	56	6.7	Complied
0.90684	Neutral	40.9	56	15.1	Complied
1.56014	Neutral	34.8	56	21.2	Complied
1.95930	Neutral	32.4	56	23.6	Complied


**Results: Neutral / Average / 120 VAC 60 Hz**

Frequency (MHz)	Line	Level (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Result
0.2723	Neutral	35.4	51	15.6	Complied
0.4712	Neutral	40.3	46.5	6.2	Complied
0.64175	Neutral	31.2	46	14.8	Complied
0.90684	Neutral	29.2	46	16.8	Complied
1.56014	Neutral	23.2	46	22.8	Complied
1.95930	Neutral	20.9	46	25.1	Complied

**Result: Pass**

**Transmitter AC Conducted Spurious Emissions (continued)**

**Plot: Live and Neutral Line**

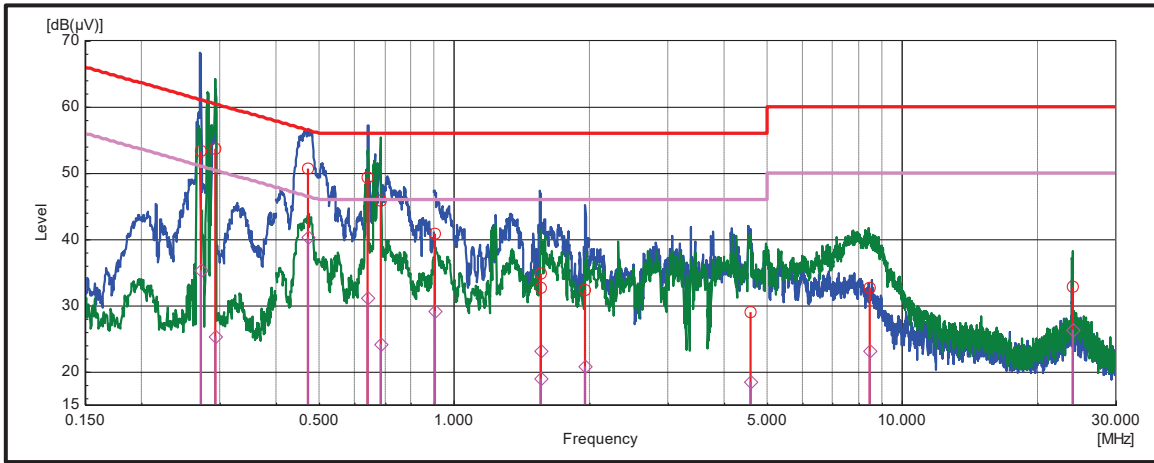

*Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.*

**5.2.2. Transmitter Minimum 6 dB Bandwidth**

**Test Summary:**

<b>Test Engineer:</b>	Abdoufataou Salifou	<b>Test Date:</b>	10 July 2018
<b>Test Sample Serial Number:</b>	B18E92533		
<b>Test Site Identification</b>	SR 9		

<b>FCC Reference:</b>	Part 15.247(a)(2)
<b>Test Method Used:</b>	FCC KDB 558074 Section 8.1 Option 1


**Environmental Conditions:**

<b>Temperature (°C):</b>	23.7
<b>Relative Humidity (%):</b>	42

**Notes:**

1. 6 dB DTS bandwidth tests were performed using a spectrum analyser in accordance with FCC KDB 558074 Section 8.1 Option 1 measurement procedure. The spectrum analyser resolution bandwidth was set to 100 kHz and video bandwidth 300 kHz. A peak detector was used, sweep time was set to auto and the trace mode was Max Hold. The DTS bandwidth was measured at 6 dB down from the peak of the signal.
2. The spectrum analyser was connected to the RF port on the EUT using suitable attenuation and RF cable.


**Test setup:**

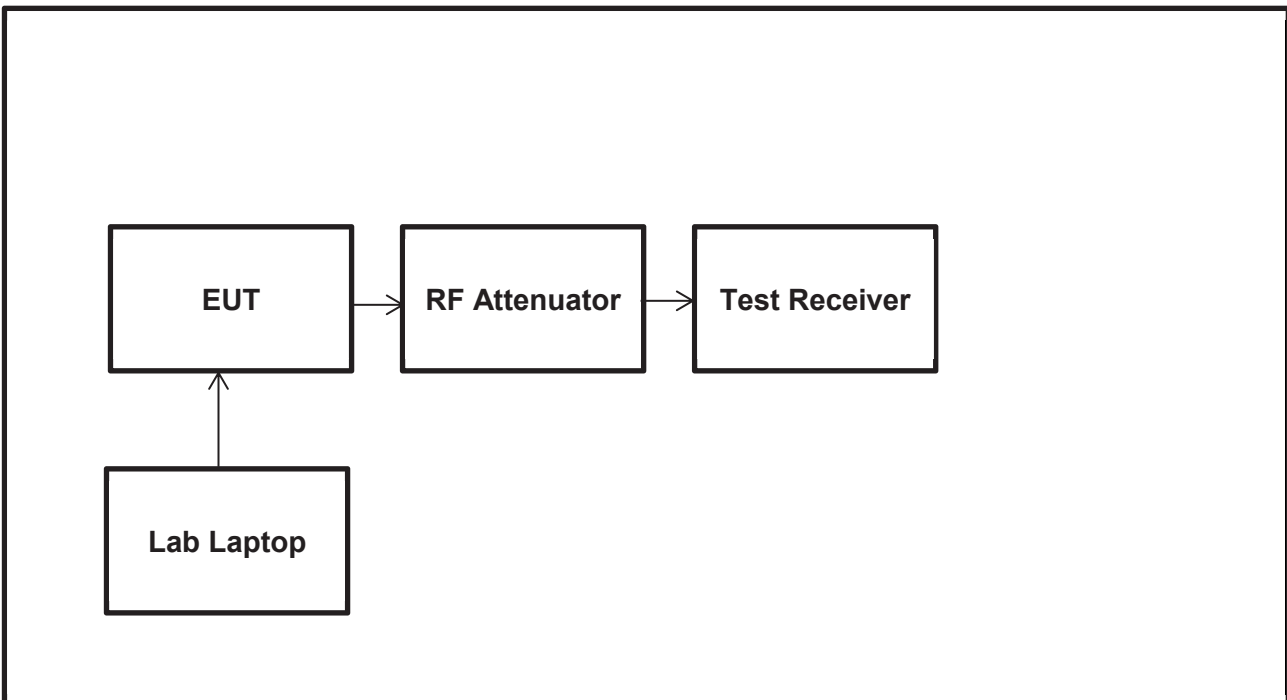


**Transmitter Minimum 6 dB Bandwidth (continued)**

**Results:**


Channel	6 dB Bandwidth (kHz)	Limit (kHz)	Margin (kHz)	Result
Bottom	712.000	≥500	212.000	Complied
Middle	707.700	≥500	207.700	Complied
Top	712.000	≥500	212.000	Complied

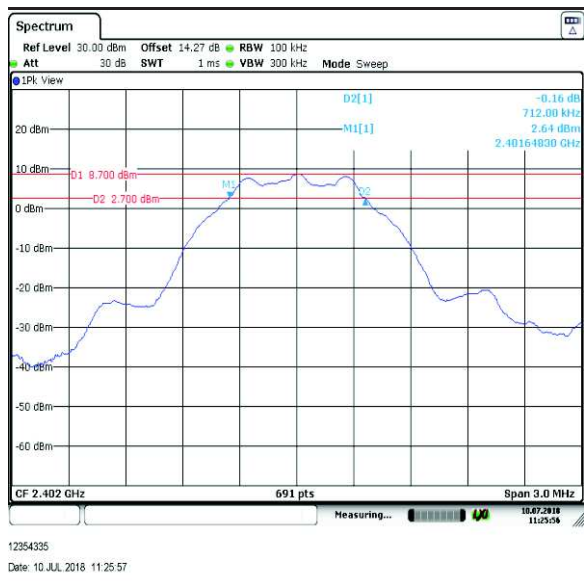

**Bottom Channel**

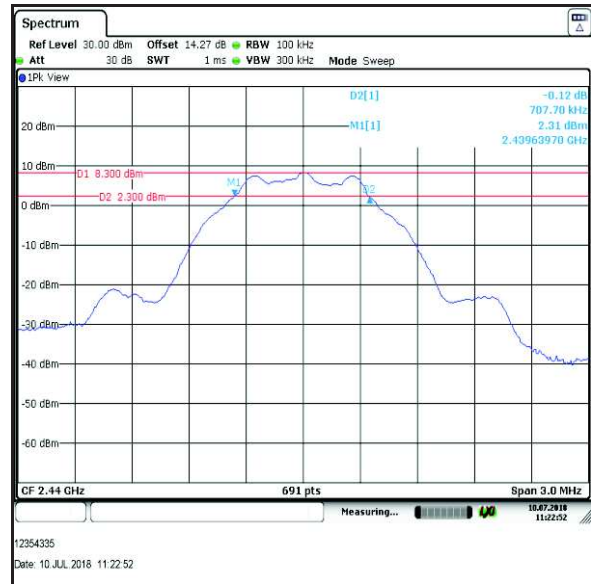

**Middle Channel**

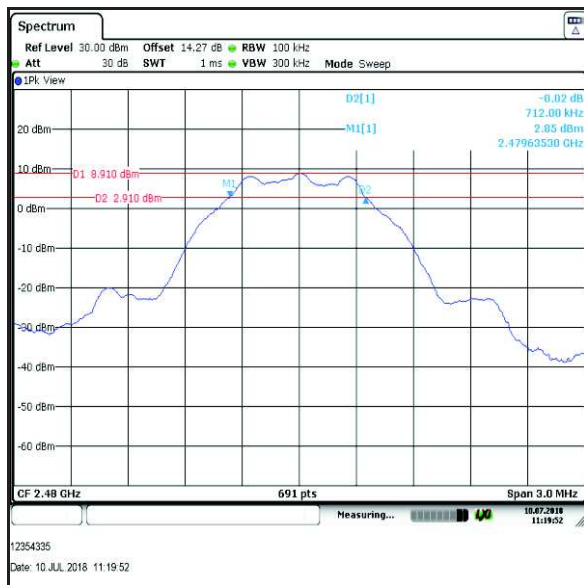

**Top Channel**

**Result: Pass**



**5.2.3. Transmitter Duty Cycle**

**Test Summary:**

<b>Test Engineer:</b>	Abdoufataou Salifou	<b>Test Date:</b>	10 July 2018
<b>Test Sample Serial Number:</b>	B18E92533		
<b>Test Site Identification</b>	SR 9		

<b>FCC Reference:</b>	Part 15.35(c)
<b>Test Method Used:</b>	FCC KDB 558074 Section 6.0

**Environmental Conditions:**

<b>Temperature (°C):</b>	23.5
<b>Relative Humidity (%):</b>	42


**Note:**

The transmitter duty cycle was measured using a spectrum analyser in the time domain and calculated by using the following calculation:

$10 \log (1 / (\text{On Time} / [\text{Period or } 100 \text{ ms whichever is the lesser}] ))$ .

BLE duty cycle:  $10 \log (1 / (774.78 \mu\text{s} / 1.00435 \text{ ms})) = 2.167 \text{ dB}$


**Test setup:**

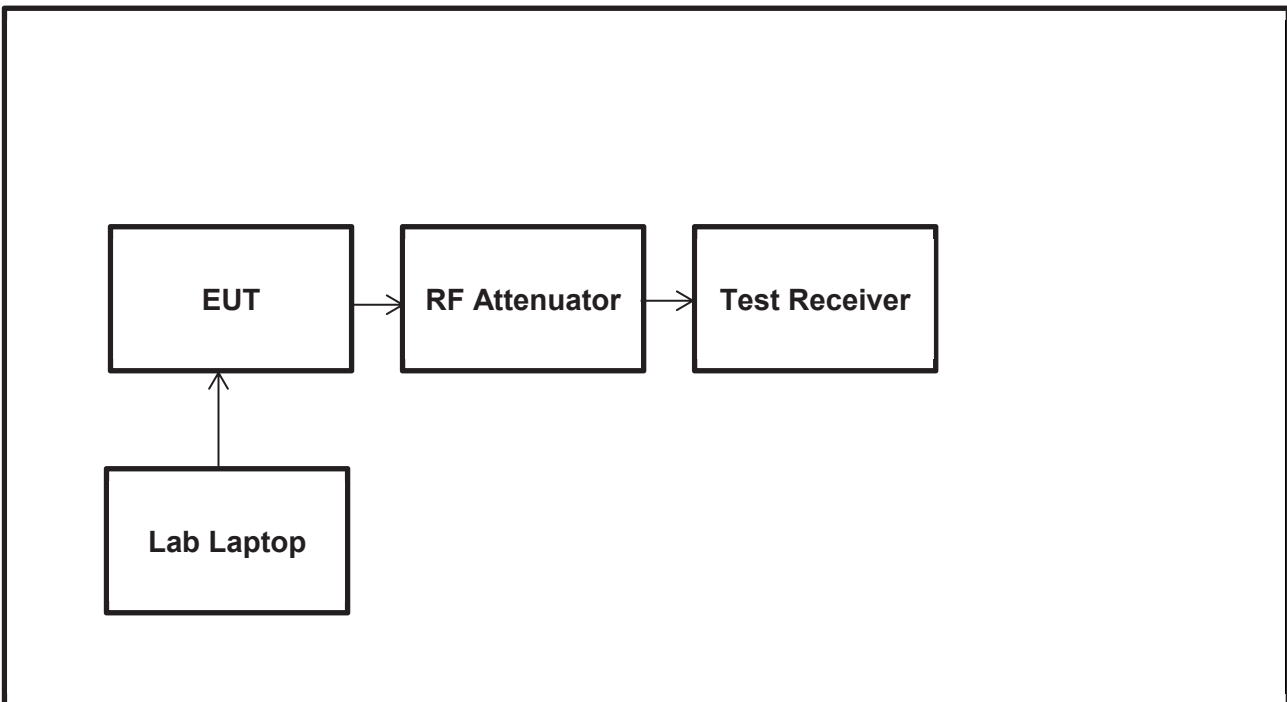

**Transmitter Duty Cycle continued**

**Results:**

Pulse Duration (µs)	Period (µs)	Duty Cycle Correction (dB)
394.2	649.28	2.167

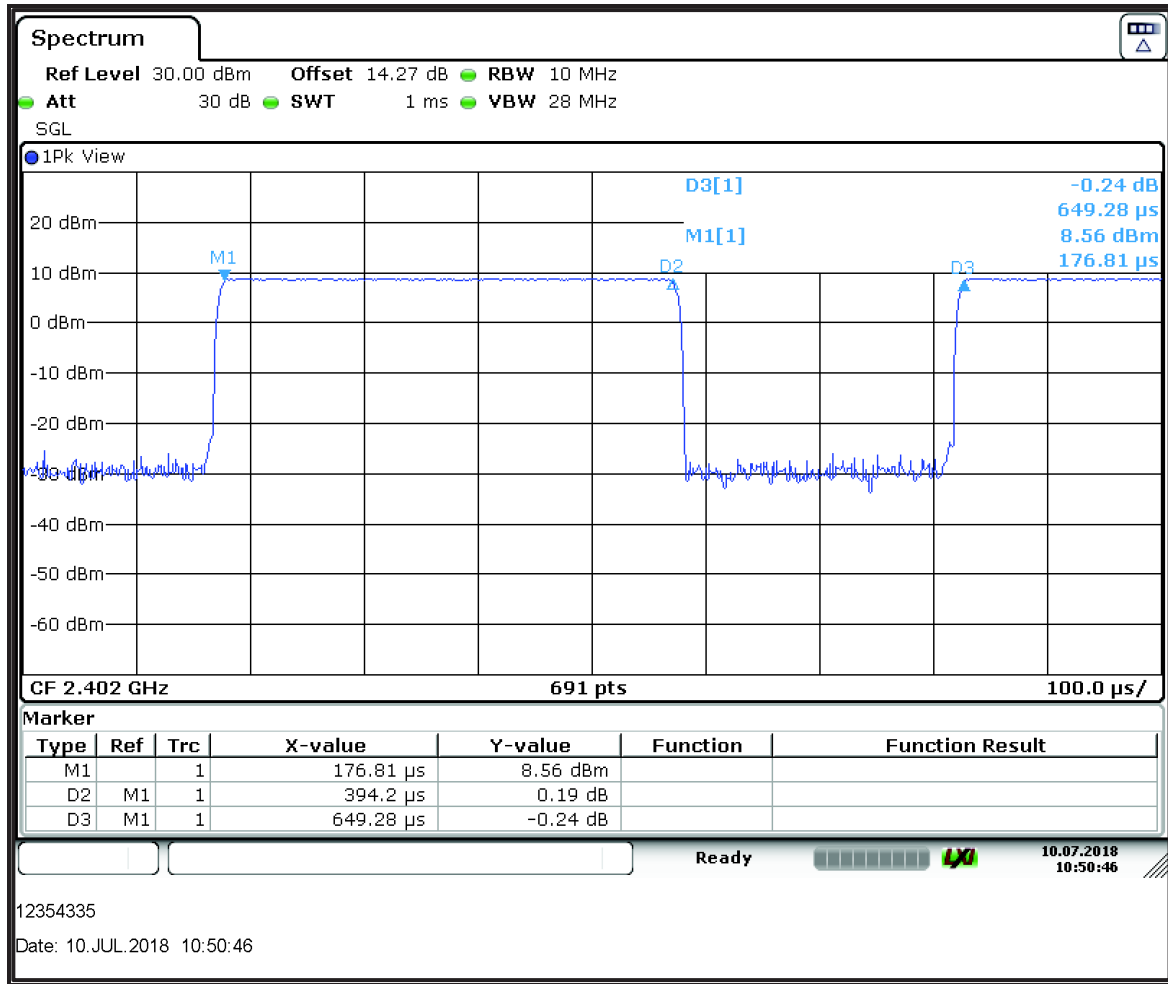

**5.2.4. Transmitter Maximum Peak Output Power**

**Test Summary:**

<b>Test Engineer:</b>	Abdoufataou Salifou	<b>Test Date:</b>	10 & 11 July 2018
<b>Test Sample Serial Number:</b>	B18E92533		
<b>Test Site Identification</b>	SR 9		

<b>FCC Reference:</b>	Part 15.247(b)(3)
<b>Test Method Used:</b>	FCC KDB 558074 Section 9.1.1 and Notes below


**Environmental Conditions:**

<b>Temperature (°C):</b>	23.8 & 23.2
<b>Relative Humidity (%):</b>	42 & 43

**Notes:**

1. Tests were performed using a combination of the conducted test method described in FCC KDB 558074 Section 9.1.1 with the RBW > *DTS bandwidth* procedure.
2. The signal analyser resolution bandwidth was set to 3 MHz and video bandwidth of 10 MHz. A peak detector was used, sweep time was set to auto and trace mode was Max Hold. The span was set to 9 MHz. A marker was placed at the peak of the signal and the results recorded in the table below.
3. The spectrum analyser was connected to the RF port on the EUT using suitable attenuation and RF cable. An RF level offset was entered on the spectrum analyser to compensate for the loss of the attenuator and RF cable.
4. The declared antenna gain was added to the measured conducted power to obtain the EIRP.
5. Power verification was performed with all supported Bluetooth Power Classes (1| 2|3). The worst case Power Class (1) with maximum output power was used for all other measurements.

**Test setup:**

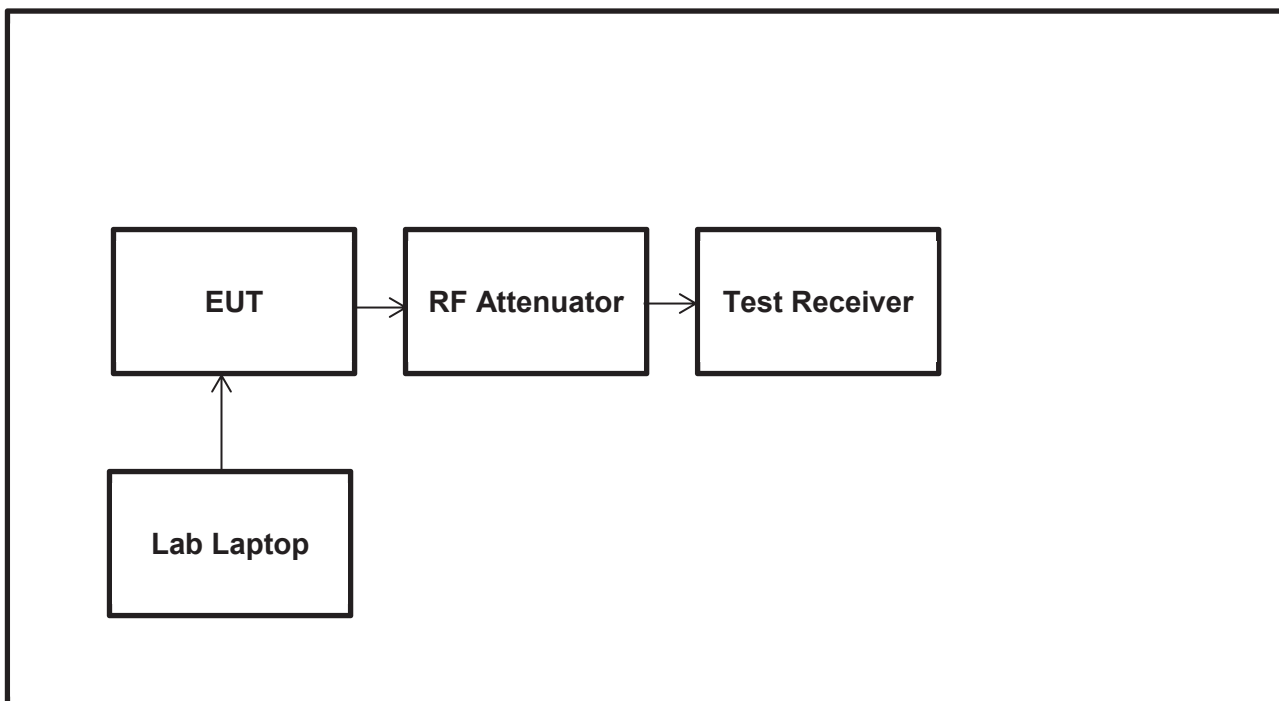

**Transmitter Maximum Peak Output Power (continued)**

**Results Power Class 1:**

Channel	Conducted Peak Power (dBm)	Conducted Peak Power Limit (dBm)	Margin (dB)	Result
Bottom	6.8	30.0	23.2	Complied
Middle	6.7	30.0	23.3	Complied
Top	7.0	30.0	23.0	Complied

Channel	Conducted Peak Power (dBm)	Declared Antenna Gain (dBi)	EIRP (dBm)	De Facto EIRP Limit (dBm)	Margin (dB)	Result
Bottom	6.8	2.3	9.1	36.0	26.9	Complied
Middle	6.7	2.3	9.0	36.0	27.0	Complied
Top	7.0	2.3	9.3	36.0	26.7	Complied

**Results Power Class 2:**

Channel	Conducted Peak Power (dBm)	Conducted Peak Power Limit (dBm)	Margin (dB)	Result
Bottom	3.3	30.0	26.7	Complied
Middle	3.0	30.0	27.0	Complied
Top	3.9	30.0	26.1	Complied

Channel	Conducted Peak Power (dBm)	Declared Antenna Gain (dBi)	EIRP (dBm)	De Facto EIRP Limit (dBm)	Margin (dB)	Result
Bottom	3.3	2.3	5.6	36.0	30.4	Complied
Middle	3.0	2.3	5.3	36.0	30.7	Complied
Top	3.9	2.3	6.2	36.0	29.8	Complied


**Transmitter Maximum Peak Output Power (continued)****Results Power Class 3:**

Channel	Conducted Peak Power (dBm)	Conducted Peak Power Limit (dBm)	Margin (dB)	Result
Bottom	-11.3	30.0	41.3	Complied
Middle	-11.9	30.0	41.9	Complied
Top	-10.9	30.0	40.9	Complied


Channel	Conducted Peak Power (dBm)	Declared Antenna Gain (dBi)	EIRP (dBm)	De Facto EIRP Limit (dBm)	Margin (dB)	Result
Bottom	-11.3	2.3	-9.3	36.0	45.3	Complied
Middle	-11.9	2.3	-9.6	36.0	45.6	Complied
Top	-10.9	2.3	-8.6	36.0	44.6	Complied

**Transmitter Maximum Peak Output Power (continued)**


**Power Class 1:**

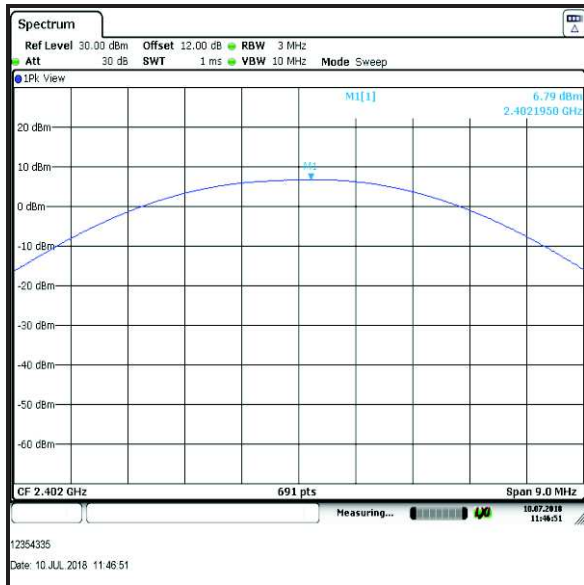

**Bottom Channel**

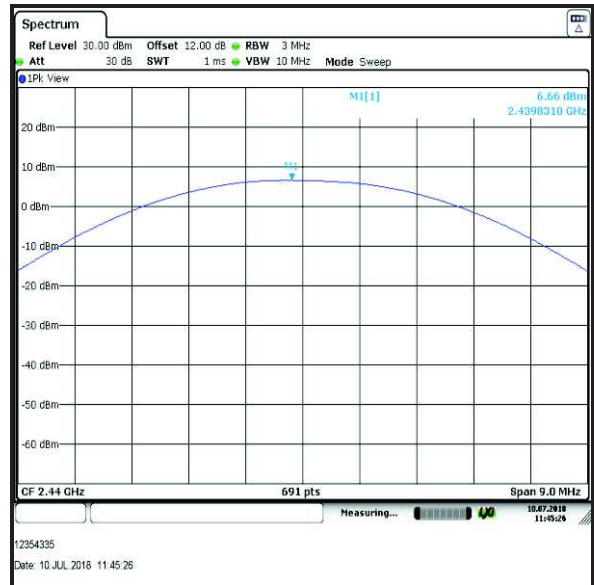

**Middle Channel**

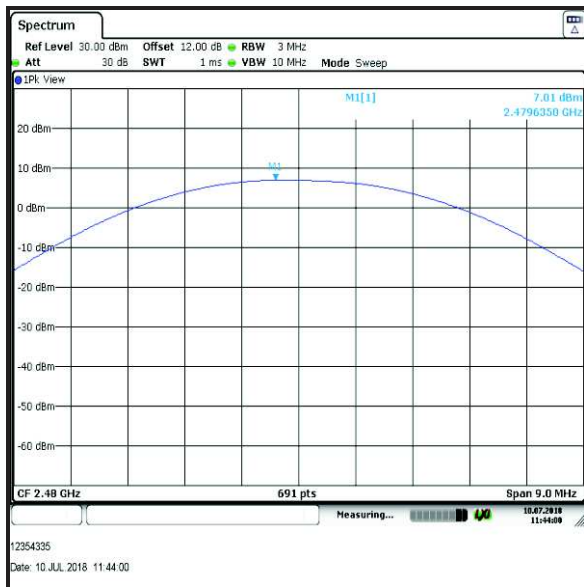


**Top Channel**


**Result: Pass**

### Transmitter Maximum Peak Output Power (continued)


#### Power Class 2:

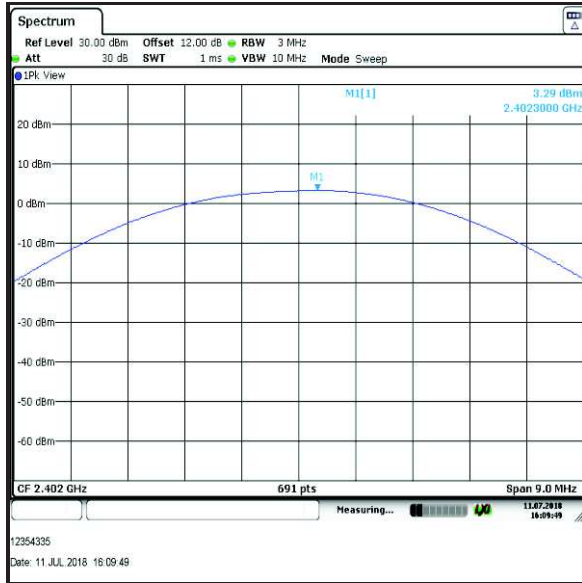

Bottom Channel

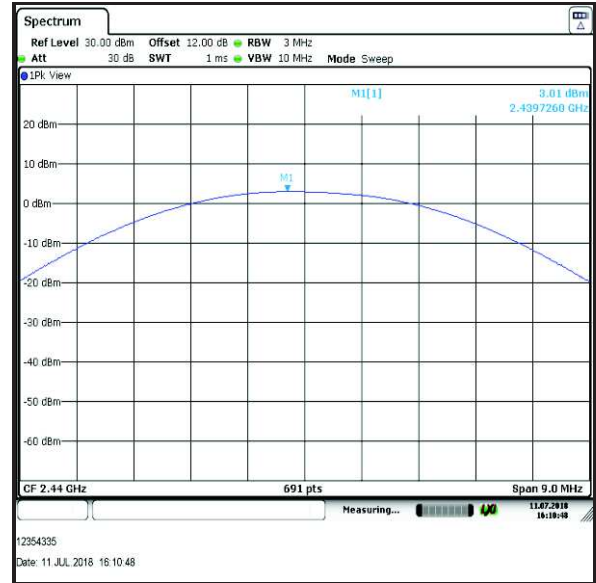

Middle Channel

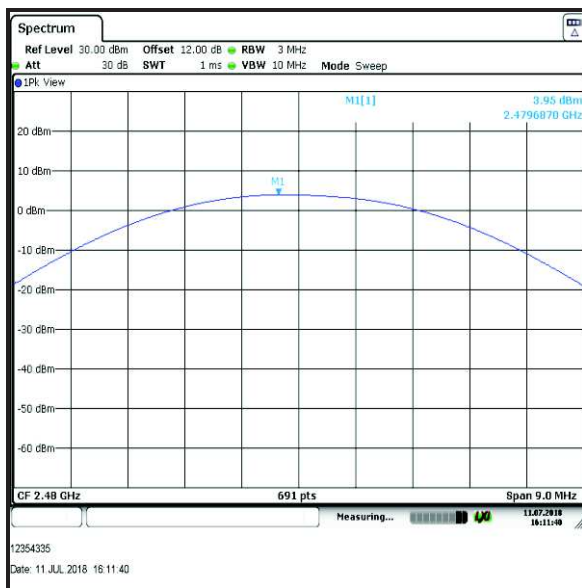


Top Channel


Result: **Pass**

### Transmitter Maximum Peak Output Power (continued)


#### Power Class 3:

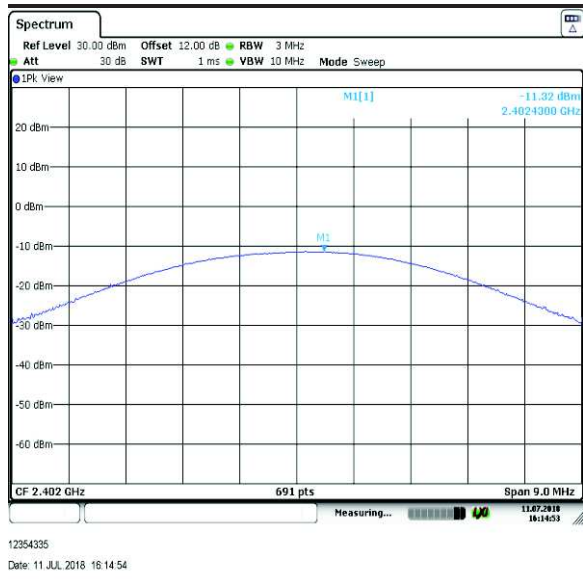

Bottom Channel

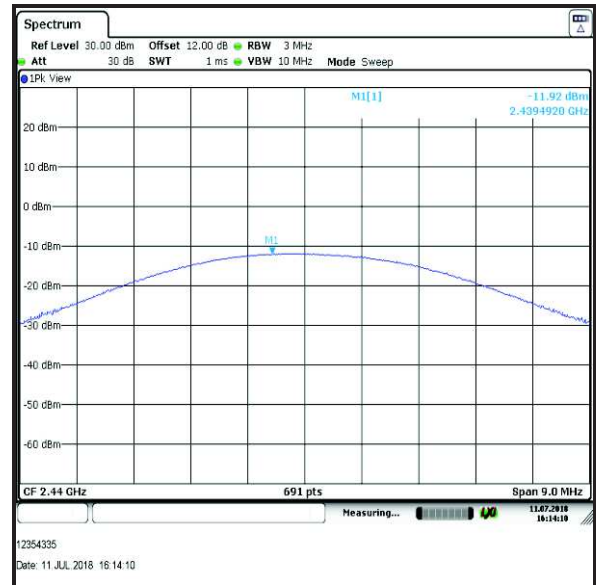

Middle Channel

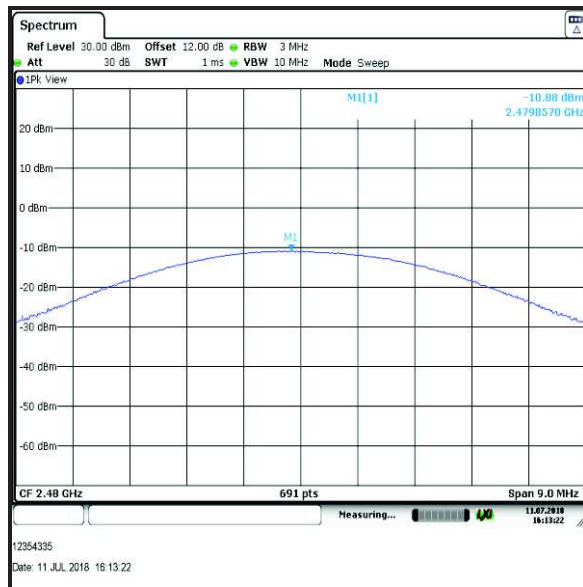

Top Channel

Result: **Pass**



**5.2.5. Transmitter Radiated Emissions****Test Summary:**

<b>Test Engineer:</b>	Abdoufataou Salifou	<b>Test Date:</b>	25 June 2018
<b>Test Sample Serial Number:</b>	B18E92536		
<b>Test Site Identification</b>	SR 1/2		

<b>FCC Reference:</b>	Parts 15.247(d) & 15.209(a)
<b>Test Method Used:</b>	ANSI C63.10 Sections 6.3 and 6.5
<b>Frequency Range</b>	30 MHz to 1000 MHz

**Environmental Conditions:**


<b>Temperature (°C):</b>	22.3
<b>Relative Humidity (%):</b>	34

**Notes:**

1. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
2. The preliminary scans showed similar emission levels below 1 GHz, for each channel of operation. Therefore final radiated emissions measurements were performed with the EUT set to the middle channel only.
3. No spurious emissions were detected above the noise floor of the measuring receiver.
4. Measurements below 1 GHz were performed in a semi-anechoic chamber at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
5. Pre-scans were performed and markers placed on the highest measured levels. The test receiver resolution bandwidth was set to 100 kHz and video bandwidth 300 kHz. A peak detector was used, sweep time was set to auto and trace mode was Max Hold.

**Transmitter Radiated Emissions (continued)**

**Test Setup:**

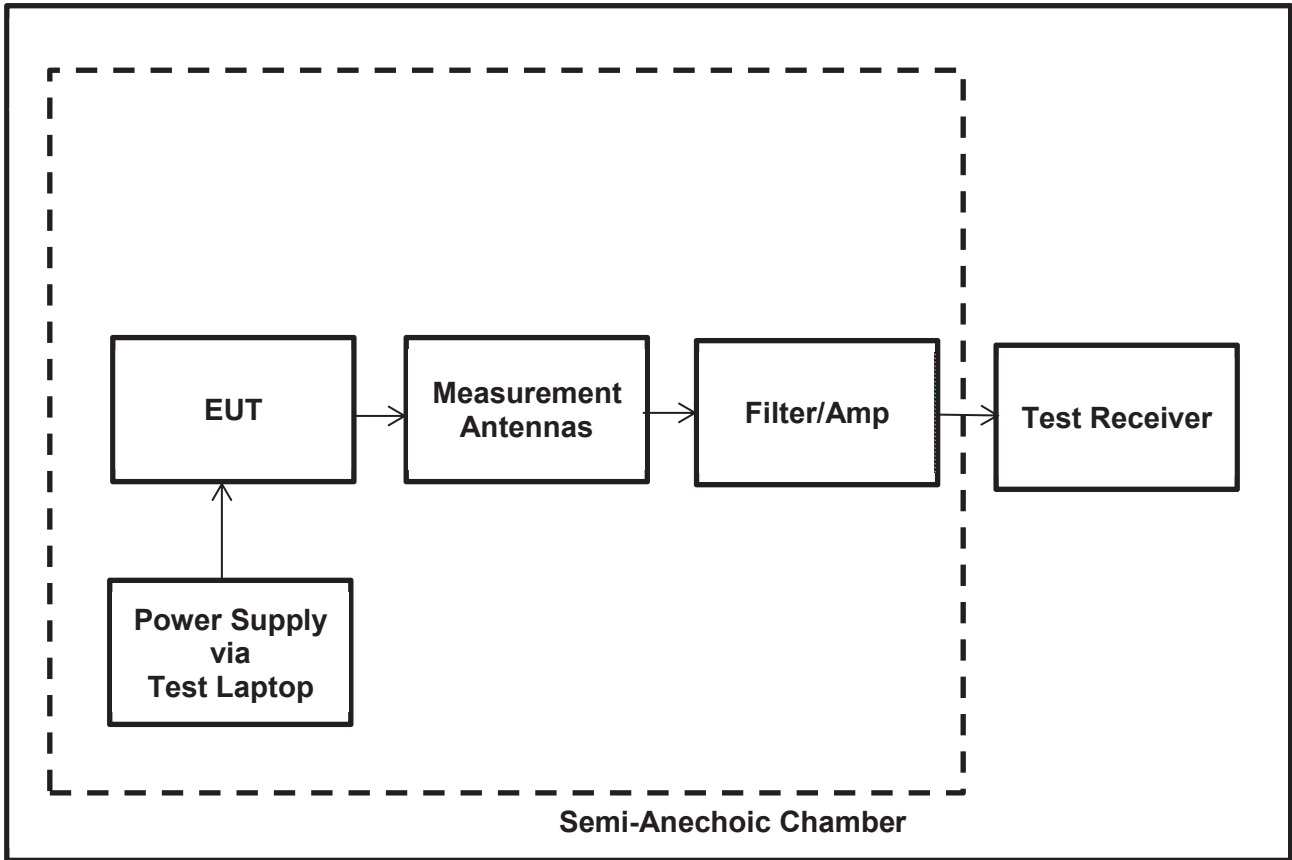


**Transmitter Radiated Emissions (continued)**

**Results: Middle Channel**

Frequency (MHz)	Antenna Polarization	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
No critical spurious was found					

Plot: 30 MHz – 1GHz

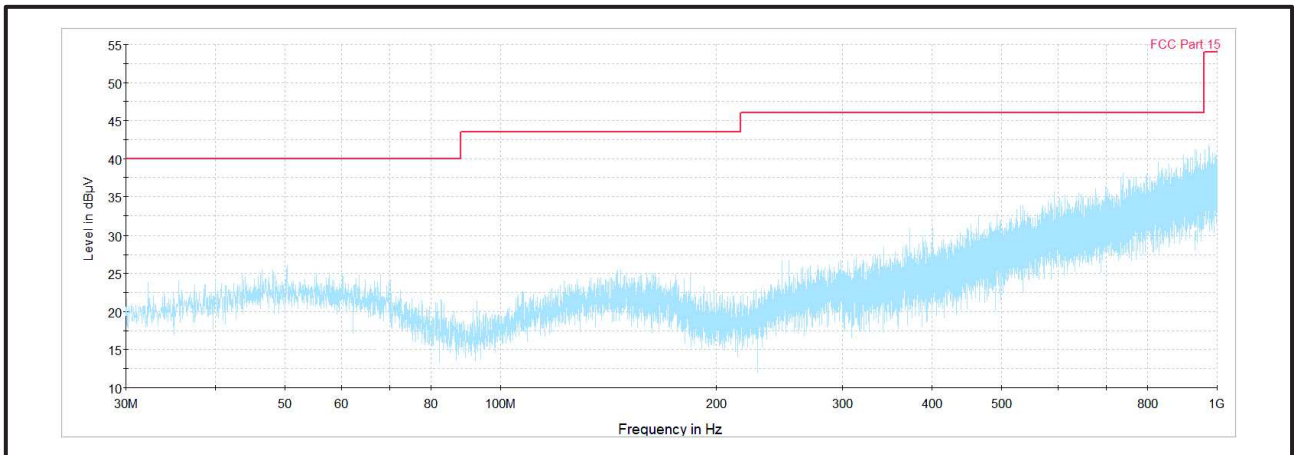

Result: **Pass**

**Test Summary:**

<b>Test Engineer:</b>	Segun Adeniji	<b>Test Date:</b>	09 July 2018
<b>Test Sample Serial Number:</b>	B18E92536		
<b>Test Site Identification</b>	SR 1/2		

<b>FCC Reference:</b>	Parts 15.247(d) & 15.209(a)
<b>Test Method Used:</b>	FCC KDB 558074 Sections 11 & 12 referencing ANSI C63.10 Sections 6.3 and 6.6
<b>Frequency Range</b>	1 GHz to 25 GHz

**Environmental Conditions:**

<b>Temperature (°C):</b>	22
<b>Relative Humidity (%):</b>	34

**Note(s):**

1. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.
2. All other emissions shown on the pre-scan plot were investigated and found to be ambient or >20 dB below the applicable limit or below the measurement system noise floor.
3. For frequency range between 18 GHz and 25 GHz, no critical emission was found so only the measurement receiver noise floor level has been measured and recorded in the table
4. The highest spurious emission found at a level higher than noise floor was measured with peak detector and compared to the average limit as opposed to being compared to the peak limit because this is the more onerous limit.
5. The emission shown around 2.4 GHz in the plot is the EUT fundamental.
6. The emission found on the top channel was the measurement system noise floor.
7. Measurements above 1 GHz were performed in a semi-anechoic chamber at a distance of 3 metres. The EUT was placed at a height of 1.5 m above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
8. Pre-scans were performed and a marker placed on the highest measured level of the appropriate plot. The test receiver resolution bandwidth was set to 1 MHz and video bandwidth 3 MHz. The sweep time was set to auto.
9. \*In accordance with ANSI C63.10 Section 6.6.4.3, Note 1, if the peak measured value complies with the average limit, it is unnecessary to perform an average measurement.
10. The reference level for the emission in the non-restricted band was established by following KDB 558074 Section 11.2 procedure.

**Results:****Results: Peak / Bottom Channel**

Frequency (MHz)	Antenna Polarization	Peak Level (dB $\mu$ V/m)	Average Limit (dB $\mu$ V/m)	Margin (dB)	Result
2489.23	Horizontal	46.25	54.0	7.75	Complied

**Results: Peak / Middle Channel**


Frequency (MHz)	Antenna Polarization	Peak Level (dB $\mu$ V/m)	Average Limit (dB $\mu$ V/m)	Margin (dB)	Result
2595.98	Horizontal	41.53	54.0	12.77	Complied

**Results: Peak / Top Channel**


Frequency (MHz)	Antenna Polarization	Peak Level (dB $\mu$ V/m)	Average Limit (dB $\mu$ V/m)	Margin (dB)	Result
12524.96	Vertical	52.61	54.0	1.39	Complied

**Result: Pass**


Plot: 1 GHz – 18GHz (Bottom channel) with Peak detector

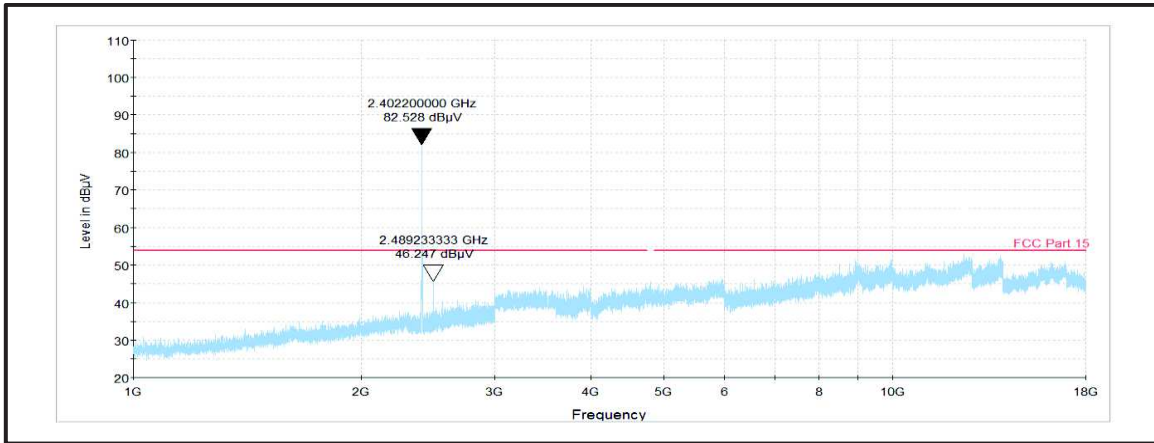


Plot: 1 GHz – 18GHz (Middle channel) with Peak detector

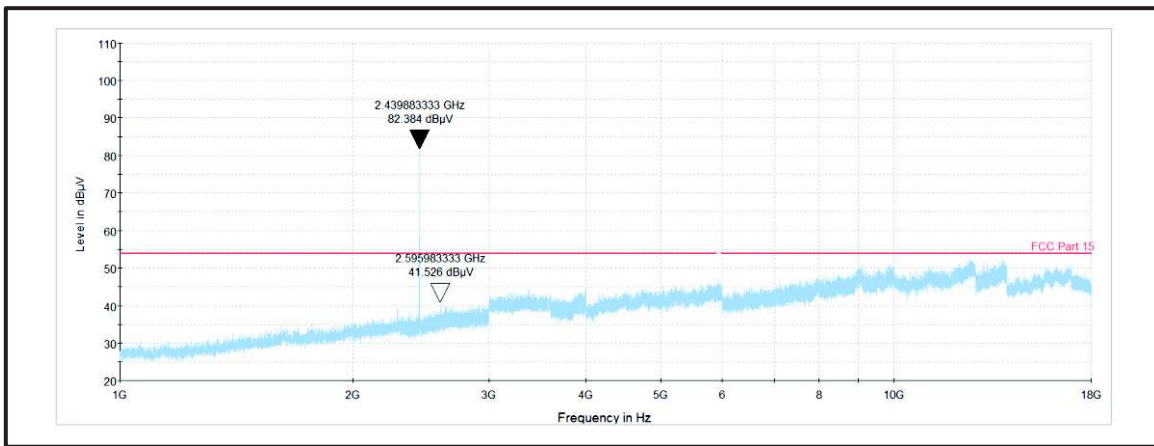

Plot: 1 GHz – 18GHz (Top channel) with Peak detector

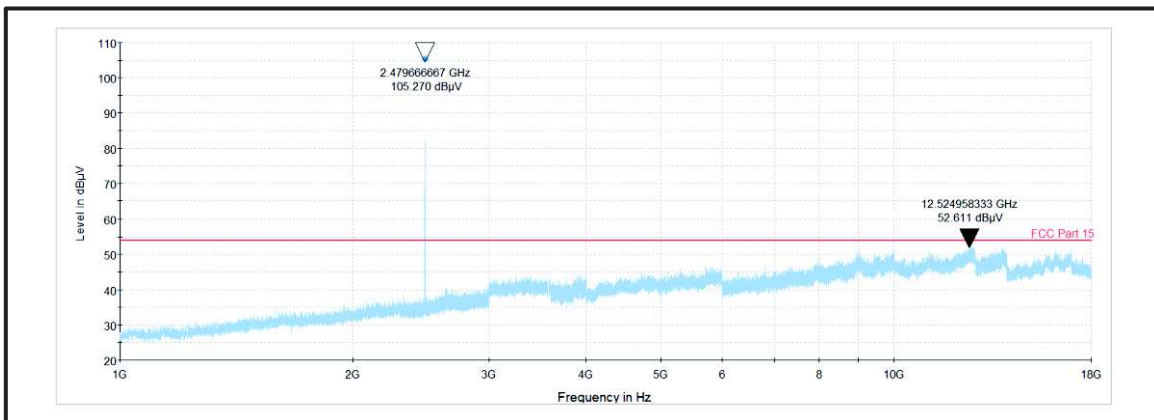

Plot: 18 GHz – 25GHz (Middle channel) with Peak detector

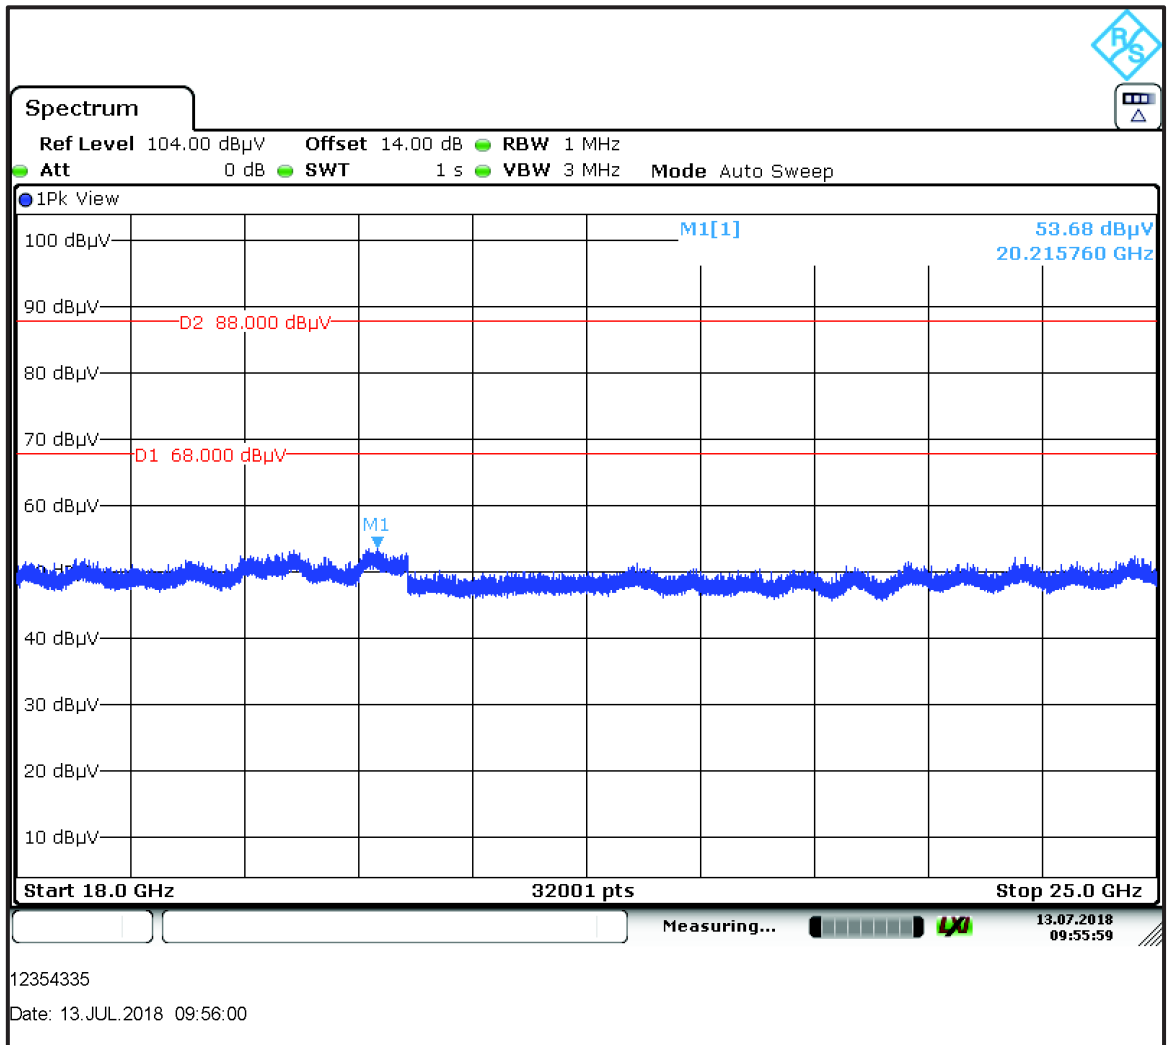

Note: The above plots are pre-scans with peak detector and for indication purposes only. For final measurements, see accompanying tables.

**5.2.6. Transmitter Band Edge Radiated Emissions****Test Summary:**

<b>Test Engineer:</b>	Segun Adeniji	<b>Test Date:</b>	09 July 2018
<b>Test Sample Serial Number:</b>	B18E92536		
<b>Test Site Identification</b>	SR 1/2		

<b>FCC Reference:</b>	Parts 15.247(d) & 15.209(a)
<b>Test Method Used:</b>	ANSI C63.10 Section 6.10.4, 6.10.5 & KDB 558074 Section 11

**Environmental Conditions:**


<b>Temperature (°C):</b>	22
<b>Relative Humidity (%):</b>	34

**Note(s):**

- As the lower band edges fall within non-restricted bands, only peak measurements are required. In accordance with FCC KDB 558074 Section 11.1, the test method in Section 11.3 was followed: the test receiver resolution bandwidth was set to 100 kHz and video bandwidth 300 kHz. A peak detector was used, sweep time was set to auto and trace mode was Max Hold. The test receiver was left to sweep for a sufficient length of time in order to maximise the carrier level and out-of-band emissions. A marker and corresponding reference level line were placed on the peak of the carrier. As the maximum peak conducted output power was measured using a peak detector in accordance with FCC KDB 558074 Section 9.1.1 an out-of-band limit line was placed 20 dB below the peak level (FCC KDB 558074 Section 11.1(a)). A marker was placed on the band edge spot frequencies and a second marker placed on the highest emission level in the adjacent non-restricted band of operation (where a higher level emission was present). Marker frequencies and levels were recorded.
- As the upper band edge falls within a restricted band both peak and average measurements were recorded by placing a marker at the edge of the band. For peak measurements the test receiver resolution bandwidth was set to 1 MHz and the video bandwidth 3 MHz. A peak detector was used, sweep time was set to auto and trace mode was Max Hold. For average measurements the test receiver resolution bandwidth was set to 1 MHz and the video bandwidth 3 MHz. An RMS detector was used, sweep time was set to auto and trace mode was Max Hold. The test receiver was left to sweep for a sufficient length of time in order to maximise the carrier level and out-of-band emissions. A marker was placed on the band edge spot frequencies and a second marker placed on the highest emission level in the adjacent restricted band of operation (where a higher level emission was present). Marker frequencies and levels were recorded.
- There is a restricted band 10 MHz below the lower band edge. The test receiver was set up as follows: the RBW set to 1 MHz, the VBW set to 3 MHz, with the sweep time set to auto couple. Peak and average measurements were performed with their respective detectors. Markers were placed on the highest point on each trace.
- \*Emissions in restricted bands: In accordance with C63.10 Section 6.6.4.3, Note 1, where the peak detected amplitude was shown to comply with the average limit, an average measurement was not performed.
- On the top channel as the device was tested using both peak detector and integrated method.
- The measurement was made with 6 dB Channel filter on the top channel as the EUT was failing with 3 dB Channel filter.



**Test Setup:**

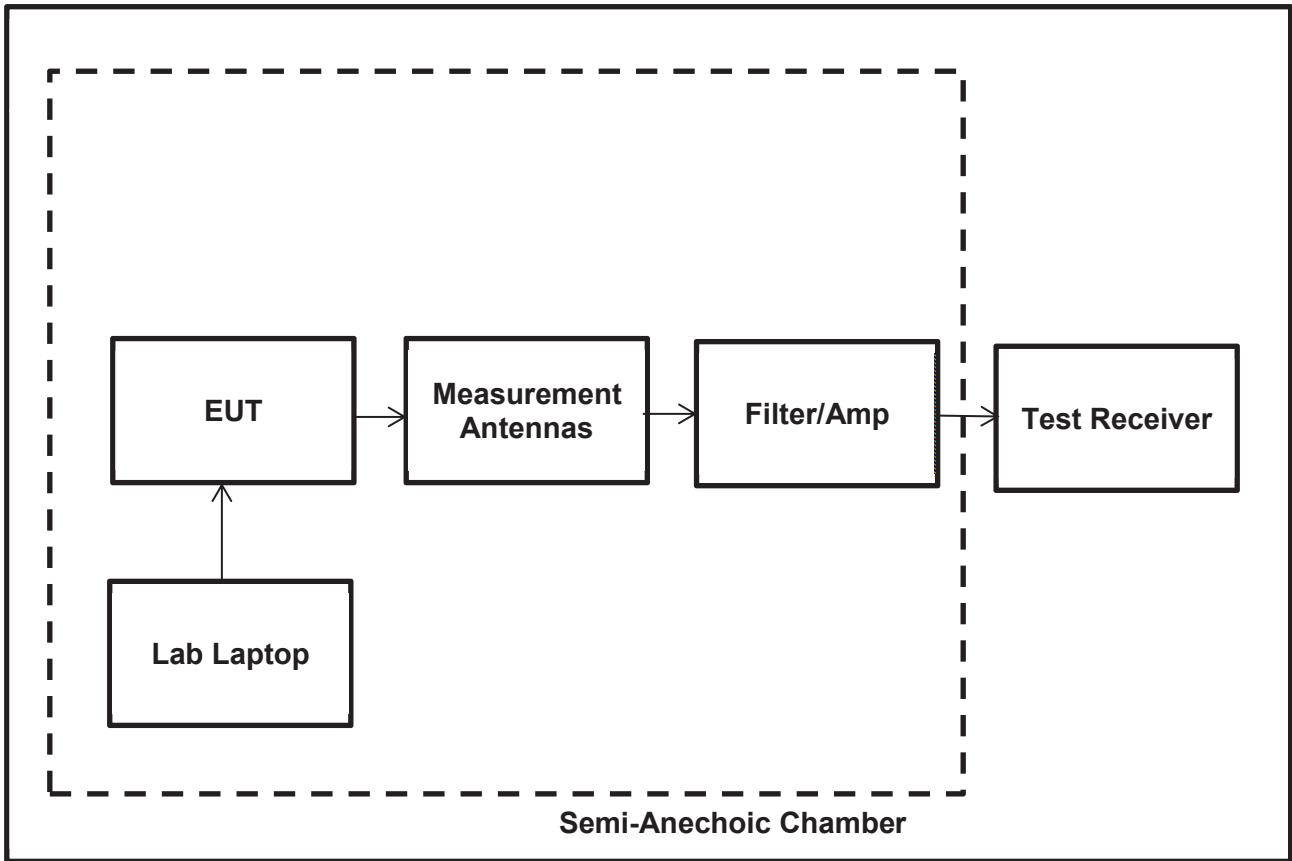

**Results: Lower Band Edge/Peak**

Frequency (MHz)	Peak Level (dB $\mu$ V/m)	-20 dBc Limit (dB $\mu$ V/m)	Margin (dB)	Result
2400.00	51.26	83.93	32.67	Complied
2398.71	49.06	83.93	34.87	Complied

**Results: Upper Band Edge / Restricted Band / Peak**

Frequency (MHz)	Peak Level (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	Margin (dB)	Result
2505.69	50.34	74	23.66	Complied
2483.50	55.24	74	18.76	Complied

**Results: Upper Band Edge / Restricted Band / Integrated**


Frequency (MHz)	Average Level (dB $\mu$ V/m)	Average Limit (dB $\mu$ V/m)	Margin (dB)	Result
2483.50	38.55	54	15.45	Complied

**Results: 2310 to 2390 MHz Restricted Band / Peak**


Frequency (MHz)	Peak Level (dB $\mu$ V/m)	Peak Limit (dB $\mu$ V/m)	Margin (dB)	Result
2321.66	51.34	74.0	22.66	Complied

**Results: 2310 to 2390 MHz Restricted Band / Average**


Frequency (MHz)	Average Level (dB $\mu$ V/m)	Average Limit (dB $\mu$ V/m)	Margin (dB)	Result
2376.03	43.05	54.0	10.95	Complied

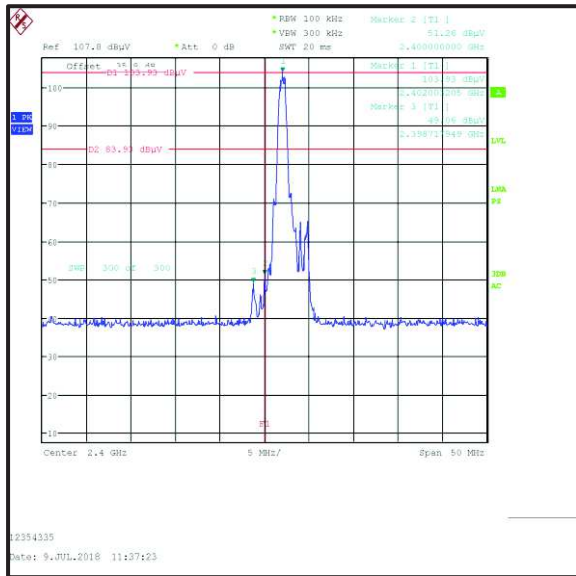


Lower Band Edge Peak Measurement

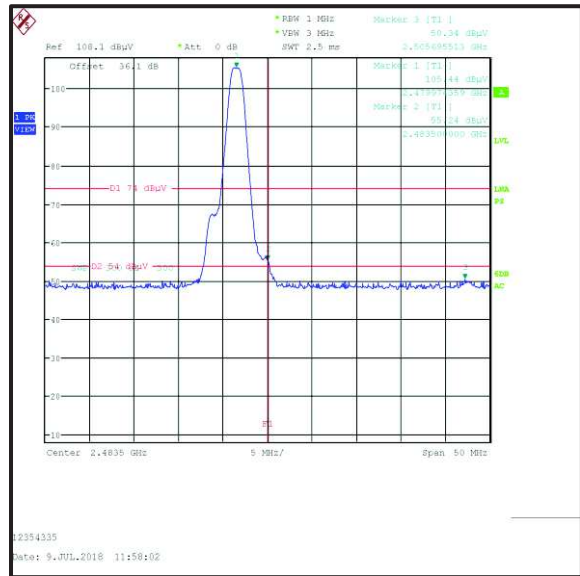

Upper Band Edge Peak Measurement

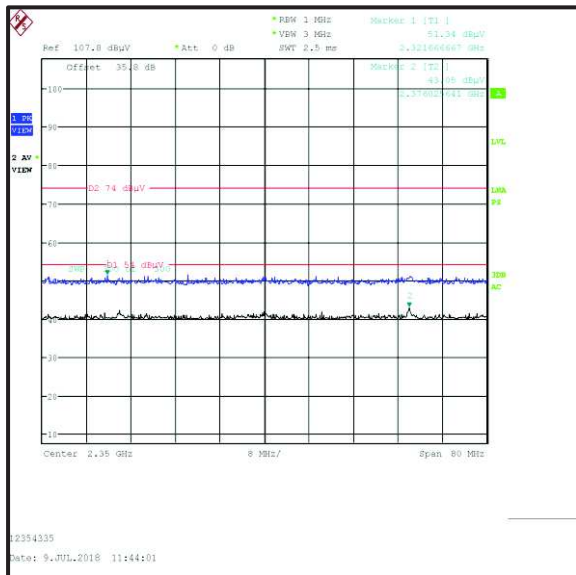

2310 MHz to 2390 MHz Restricted Band Plot

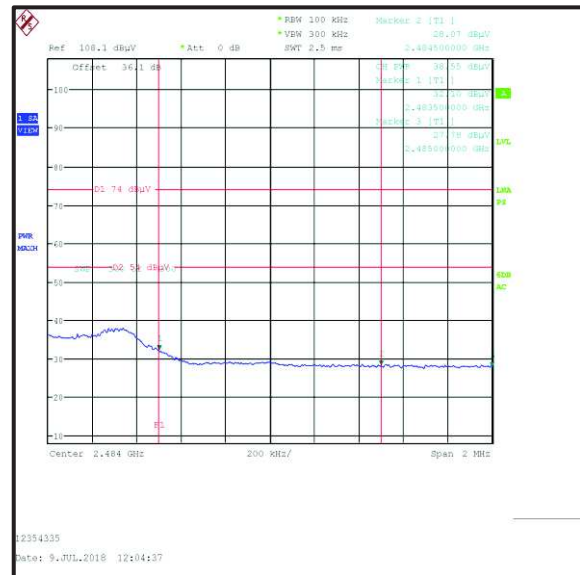

Upper Band Edge Average Measurement

## 6. Measurement Uncertainty

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document “approximately” is interpreted as meaning “effectively” or “for most practical purposes”.

Measurement Type	Confidence Level (%)	Calculated Uncertainty
AC Conducted Spurious Emissions	95%	±2.49 dB
Radiated Maximum Peak Output Power	95%	±3.10 dB
Conducted Maximum Peak Output Power	95%	±0.59 dB
Conducted Spurious Emissions	95%	±0.59 dB
Radiated Spurious Emissions	95%	±3.10 dB
Band Edge Radiated Emissions	95%	±3.10 dB
Minimum 6 dB Bandwidth	95%	±0.87 %
99% Emission Bandwidth	95%	±0.87 %
20 dB Bandwidth	95%	±0.87 %
Spectral Power Density	95%	±0.59 dB

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

## 7. Used equipment

### Test site: SR 1/2

ID	Manufacturer	Type	Model	Serial No.	Calibration Date	Cal. Cycle
1	Rohde & Schwarz	Antenna, Loop	HFH2-Z2	831247/012	8/5/2016	36
103	EMCO	Antenna, Horn	3115	9008/3485	7/20/2016	36
104	EMCO	Antenna, Horn	3115	9008/3486	7/20/2016	36
156	Rohde & Schwarz	V-Network	ESH3-Z6	843864/004	7/11/2018	12
350	Rohde & Schwarz	Receiver, EMI Test	ESIB7	836697/014	7/12/2018	12
377	BONN Elektronik	Amplifier, Low Noise Pre	BLMA 0118-1A	025294B	7/12/2018	12
383	Rohde & Schwarz	Antenna, Rod	HFH2-Z1	890151/11	7/14/2017	24
423	Bonn Elektronik	Amplifier, Low Noise Pre	BLMA 1840-1A	055929	7/12/2018	12
424	EMCO	Antenna, Horn	EMCO 3116	00046537	7/28/2016	24
425	Agilent	Generator, CW Signal	E8247C	MY43320849	7/10/2018	24
426	Agilent	Spectrum Analyzer	E4446A	US44020316	7/11/2018	24
460	Deisl	Turntable	DT 4250 S		n/a	n/a
465	Schwarzbeck	Antenna, Trilog Broadband	VULB 9168	9168-240	8/8/2016	36
474	Agilent	Analyzer, ENA Network	E5071C	MY46100912	7/13/2018	24
495	Rohde & Schwarz	Antenna, Log. - Periodical	HL050	100296	7/20/2016	24
496	Rohde & Schwarz	Antenna, log. - periodical	HL050	100297	7/20/2016	24
497	Schwarzbeck	Antenna, Biconical	VHBB 9124	423	7/7/2016	36
499	Schwarzbeck	Antenna, log.-per	VUSLP 9111	317	8/2/2016	36
587	Maturo	antenna mast, tilting	TAM 4.0-E	011/7180311	n/a	n/a
588	Maturo	Controller	NCD	029/7180311	n/a	n/a
591	Rohde & Schwarz	Receiver	ESU 40	100244/040	7/12/2018	12
607	Schwarzbeck	Antenna broadband horn antenna	BBHA 9170	9170-561	7/28/2016	24
608	Rohde & Schwarz	Switch Matrix	OSP 120	101227	4/8/2014	60
363	Wainwright	Notch Filter GSM900	WW-NF9	100002	Lab verification	n/a
611	Wainwright Instruments	Band Reject Filter DL LTE	WRCGV8-	1	Lab verification	n/a
612	Wainwright Instruments	Band Reject Filter UL LTE	WRCGV8-	1	Lab verification	n/a
613	Wainwright Instruments	Band Reject Filter WLAN/ BT	WRCTF12-	1	Lab verification	n/a
614	Wainwright Instruments	Highpass Filter 3GHz	WHKX10-	1	Lab verification	n/a
615	Wainwright Instruments	Highpass Filter 1GHz	WHKX12-	3	Lab verification	n/a
620	Bonn Elektronik	pre-amplifier	BLNA 0110-01N	1510111	7/12/2017	24
624	Wainwright	6 GHz high-pass filter	WHKX10-5850-6500-18000-40SS	5	Lab verification	n/a
628	Maturo	Antenna mast	CAM 4.0-P	224/19590716	n/a	n/a
629	Maturo	Kippeinrichtung	KE 2.5-R-M	MAT002	n/a	n/a

**Test site: SR 9**

ID	Manufacturer	Type	Model	Serial No.	Calibration Date	Cal. Cycle
424	EMCO	Antenna, Horn	EMCO 3116	00046537	7/28/2016	24
472	Rohde & Schwarz	Generator, Vektorsignal	SMU200A	102409	7/11/2018	12
592	Rohde & Schwarz	Wideband Radio Communication tester	CMW 500	119593	8/15/2017	12
622	Rohde & Schwarz	Step Attenuator	RSC	101904	7/12/2018	12
625	Schwarzbeck	Antenna, H-field	HFSL 7101	109	Verification - only relative measurements	n/a
626	Rohde & Schwarz	Bluetooth Tester	CBT	100481	Signaling Only	24
635	Rohde & Schwarz	Signal generator	SMB100A	179875	7/10/2018	12
636	Rohde & Schwarz	switching unit	OSP120	101698	7/12/2018	12
637	Rohde & Schwarz	Spectrum Analyzer	FSV40	101587	7/11/2018	12
423	Bonn Elektronik	Amplifier, Low Noise Pre	BLMA 1840-1A	55929	7/12/2018	24
451	Rohde & Schwarz	Power Meter, Dual Channel	NRVD	101190	7/10/2018	12
427	Rohde & Schwarz	Probe, Power Sensor	NRV-Z5	100106	7/12/2018	12
195	SPS	Power Supply	TOE8842-24	51455	Verified by Multimeter	12
216	Agilent	Multimeter	34401A	US36017458	7/11/2017	24
378	ESPEC/ Thermotec	Climatic Chamber	PL-1FT	5100869	8/9/2016	36

**Additional Control Equipment**

ID	Manufacturer	Type	Model	Serial No.	Calibration Date	Cal. Cycle
592	Rohde & Schwarz	Wideband Radio Communication tester	CMW 500	119593	8/15/2017	12
626	Rohde & Schwarz	Bluetooth Tester	CBT	100481	Signaling Only	24

**Test site: SR 7/8**

ID	Manufacturer	Type	Model	Serial No.	Calibration Date	Cal. Cycle
22	Rohde & Schwarz	Artificial Mains	50 Ohm// 50uH	831767/014	7/11/2018	12
215	Rohde & Schwarz	Artificial Mains Network	9 kHz - 30 MHz; 3 phase	879675/002	7/11/2018	12
349	Rohde & Schwarz	Receiver, EMI Test	20 Hz - 7 GHz	836697/009	7/10/2018	12
616	Rohde & Schwarz	ISN	8 wire ISN for CAT6	101656	7/12/2018	12

## 8. Report Revision History

Version Number	Revision Details		
	Page No(s)	Clause	Details
1.0	39	-	Initial Version