

Datalogic S.r.l.
Via San Vitalino 13
40012 Calderara di Reno (BO)
Italy
Tel. +39 051 3147011
Fax +39 051 3147205

©2016-2019 Datalogic S.p.A. and/or its affiliates

♦ All rights reserved. ♦ Without limiting the rights under copyright, no part of this documentation may be reproduced, stored in or introduced into a retrieval system, or transmitted in any form or by any means, or for any purpose, without the express written permission of Datalogic S.p.A. and/or its affiliates. Owners of Datalogic products are hereby granted a non-exclusive, revocable license to reproduce and transmit this documentation for the purchaser's own internal business purposes. Purchaser shall not remove or alter any proprietary notices, including copyright notices, contained in this documentation and shall ensure that all notices appear on any reproductions of the documentation. Should future revisions of this manual be published, you can acquire printed versions by contacting your Datalogic representative. Electronic versions may either be downloadable from the Datalogic website (www.datalogic.com) or provided on appropriate media. If you visit our website and would like to make comments or suggestions about this or other Datalogic publications, please let us know via the "Contact Datalogic" page.

Disclaimer


Datalogic has taken reasonable measures to provide information in this manual that is complete and accurate, however, Datalogic reserves the right to change any specification at any time without prior notice. Datalogic and the Datalogic logo are registered trademarks of Datalogic S.p.A. in many countries, including the U.S.A. and the E.U. The Joya logo is a trademark of Datalogic S.p.A. and/or its affiliates, registered in the U.S. and the E.U.

All other trademarks and brands are property of their respective owners.

Patents

See www.patents.datalogic.com for patent list.

Support Through the Website


Datalogic provides several services as well as technical support through its website. Log on to www.datalogic.com. For quick access, from the home page click on the search icon , and type in the name of the product you're looking for. This allows you access to download Data Sheets, Manuals, Software & Utilities, and Drawings. Hover over the Support & Service menu for access to Services and Technical Support.

Warranty Terms and Conditions


The warranty period is 1 year for the device and 90 days for consumables (e.g. battery, power supply, cable etc.) from date of purchase at our company.



Joya 3-Slot Cradle

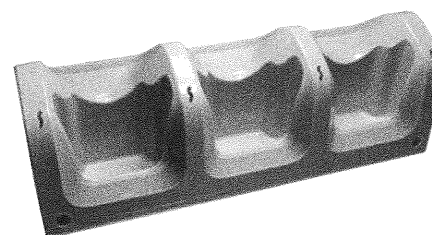

Quick Start Guide



822002153 (Rev. D) April 2019



See the Regulatory Addendum included with your product for additional regulatory, safety and legal information.

©2016-2019 Datalogic S.r.l. ♦ All rights reserved. Datalogic and the Datalogic logo are registered trademarks of Datalogic S.p.A. in many countries, including the U.S.A. and the E.U.



www.datalogic.com




Read this manual carefully before using the Joya Touch 3-Slot Cradle. The user is responsible for any damages caused by incorrect use of the equipment or by inobservance of the indication supplied in this manual.




Keep the original packaging for use when sending products to the technical assistance center. Damage caused by improper packaging is not covered under the warranty.

General View

Front View

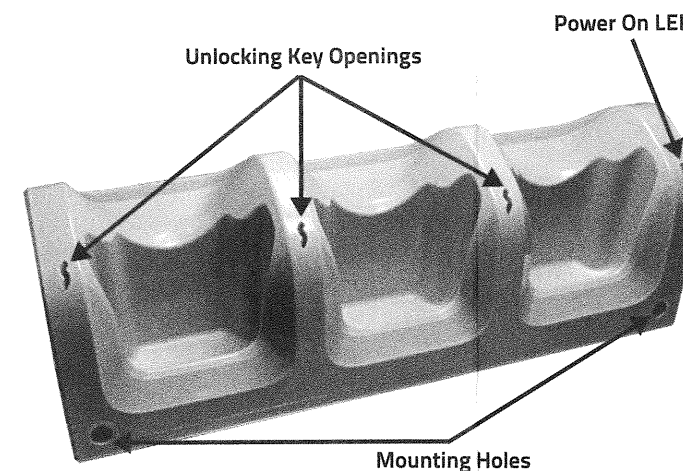

Bottom View

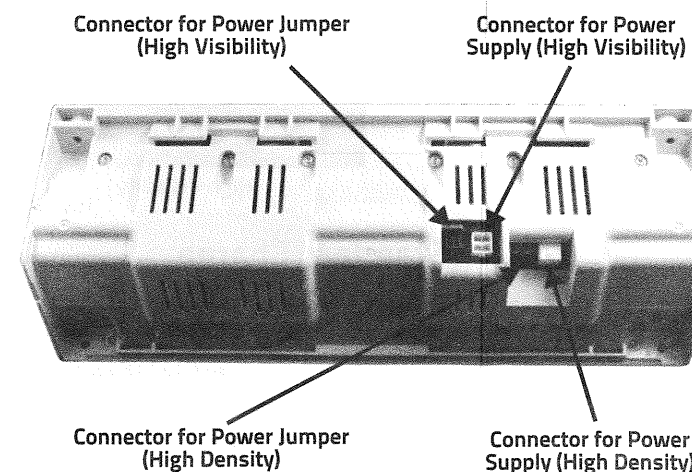


Accessories

- 91ACC0045 Joya Touch Cradle Unlock Key (5 PCS)
- 91ACC0048 Joya Touch 3-Slot Cradle Power Supply. Line Cord required (max 2 cradles on standard charge, max 1 cradle on fast charge)
- 91ACC0049 Joya Touch Cradle Power Jumper (5 PCS)
- 91ACC0050 Joya Touch 3-Slot Cradle Wall Bracket
- 91ACC0051 Blue Kit to convert Plus Handheld to a Pistol Grip
- 91ACC0052 Blue Kit to convert Plus Pistol Grip to a Handheld
- 91ACC0053 Blue Kit to convert Basic Handheld to a Pistol Grip
- 91ACC0054 Blue Kit to convert Basic Pistol Grip to a Handheld


Joya Touch 3-Slot Cradle Installation

There are basically two different solutions organizing the disposition of the devices:

- High Visibility Configuration

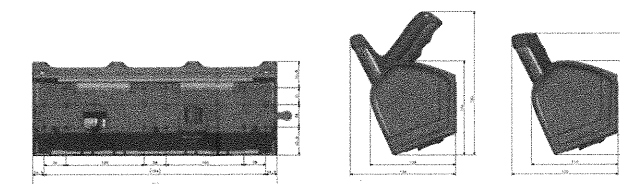


- High Density Configuration

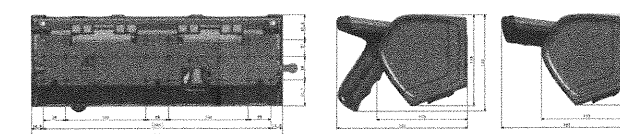

To mount the cradle on the cabinet, follow the steps below:


1. Mount the Joya Touch 3-Slot Cradle Wall Bracket on the cabinet. Use at least 12 screws to fasten each bracket. The red-circled spacer in the figure below is used to set the horizontal pitch in case the panel is not pre-drilled. Remove it from the last bracket of the row by cutting along the engraving line.

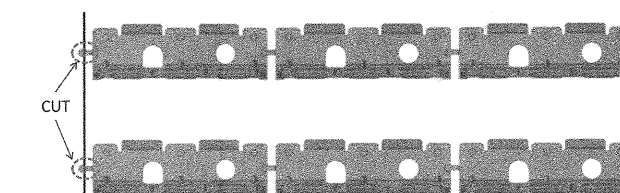

2. Insert the power supply cable through the proper hole (the right hole is for high visibility configuration, the left hole is for high density configuration). Connect the cradle to the power supply (see Powering the Cradle).







High Visibility Configuration

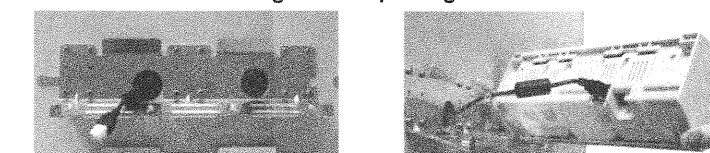

High Density Configuration

3. Place the cradle on the mounting bracket as shown in the following pictures. Ensure there is no gap between the bracket and the cradle. Fix the cradle to the bracket using the two screws included in the bracket's box.

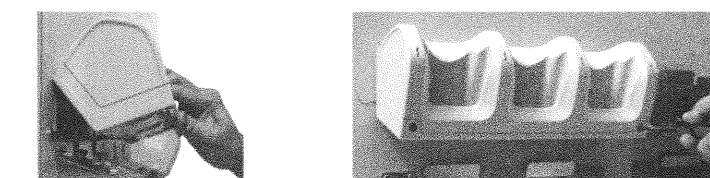


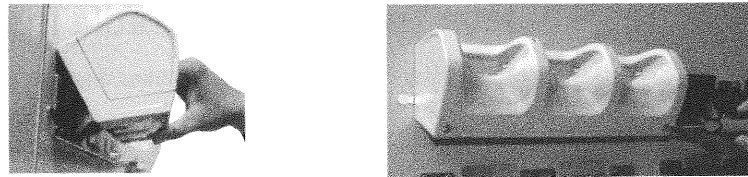

High Density Configuration

Powering the Cradle


Each power supply must be mounted on its bracket inside the cabinet, as shown in the figure below:

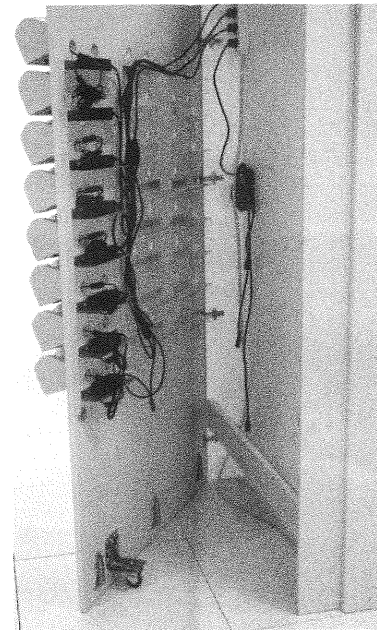

There are two options to connect the cradle to the power supply: fast charge and standard charge.



Do not put any foreign object such as, but not limited to, coins, paper clips, stickers inside the slot of the dock (see the picture below).

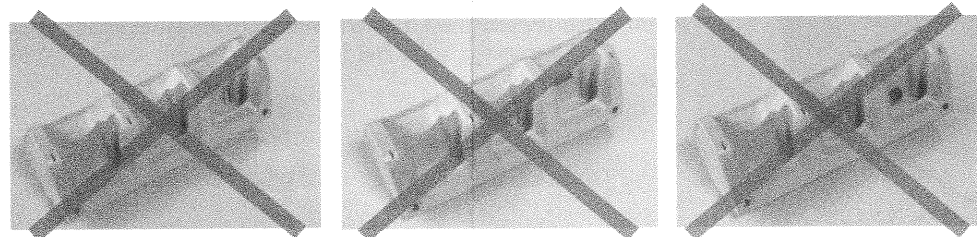

Remove the Joya Touch from the 3-Slot Cradle

The Joya Touch 3-Slot Cradle can be unlocked using the unlock key provided with the cradle or by software sending an unlock command from the inserted device (see the Joya Touch user's manual or the SDK documentation).

To locally unlock the cradle and remove the Joya Touch:

1. Insert the unlock key into the opening and gently press it all the way down:



2. Remove the Joya Touch while keeping the unlock key pressed:




Fast Charge

The fast charge connection allows to power one cradle with one power supply. Plug the power supply cable into the power connector on the back of the cradle, then plug the power supply into the AC/DC plug using a Datalogic power cable. Please see below an example of how to insert the power supply cable through the wall mounting metal bracket:



High Visibility

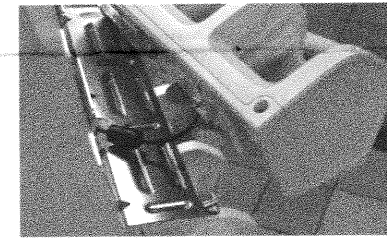


High Density

Standard Charge

The standard charge connection allows to power two cradles with one power supply. To connect a second cradle use the Joya Touch Cradle Power Jumper.

1. Connect the first cradle to the second cradle using the power jumper.
2. Connect the power supply to the first cradle.
3. Plug the power supply into the AC/DC plug using a Datalogic power cable.

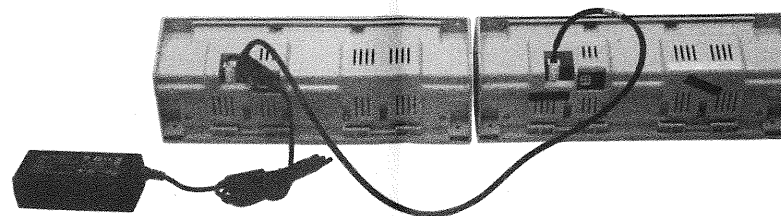

Insert the device into the dock with the screen facing front and the head facing down.
Under the same conditions, the fast charge connection can charge the battery up to twice as fast as the standard charge connection.
The Joya Touch gets warm during charging. This is normal and does not mean a malfunction.

LED Indicators

For details and specifications, see the Joya Touch 3-Slot Cradle Installation Guide, downloadable from www.datalogic.com.

Radio Technologies and Frequency Bands

Joya Touch 3-SLOT CRADLE incorporates the following radio technologies and supports the corresponding frequencies, as specified below:

Radio Technology	Frequency Bands
NFC (Near Field Communication)	13.56MHz
Wireless Charging (Transmitter)	130kHz

Technical Specifications

Electrical Features	
Consumption	12V 5A
Indicators	Power on LED (blue) User LED (green) Maintenance LED (red)
Charge Time	Fast charge: 3h Standard charge: 7h
Environmental Features	
Operating Temperature*	-10° +50°C (14° to 122°F)
Storage Temperature	-20/70°C
Humidity**	95% non condensing for temperatures < 40 °C
Mechanical Features	
Dimensions	Cradle - High Visibility: 313x120x110mm/ 12.32x4.72x4.33in
	Cradle with Joya Touch Handheld - High Visibility: 313x155x136mm/ 12.32x6.10x5.35in
	Cradle with Joya Touch Pistol Grip - High Visibility: 313x183x134mm/ 12.32x7.20x5.28in
	Cradle - High Density: 313x113x113mm/ 12.32x4.45x4.45in
	Cradle with Joya Touch Handheld - High Density: 313x113x162/ 12.32x4.45x6.38in
	Cradle with Joya Touch Pistol Grip - High Density: 313x113x162/ 12.32x4.45x6.38in
Weight	Cradle: 1280g/ 45.15oz
	Cradle with Bracket: 1690g/ 59.61oz
	Cradle with Bracket and n.3 Joya Touch Pistol Grip inserted: 2590g/ 91.36oz
	Cradle with Bracket and n.3 Joya Touch Handheld inserted: 2545g/ 89.77oz

* The Joya Touch should be charged at an ambient temperature between 0 - 35° C to achieve the maximum charging rate. Never charge the main device in a closed space where excessive heat can build up. Close to the limits of the working temperature, some display and/or battery performance degradation may occur.

** Multiple rapid humidity and/or temperature variations may cause condensing.

