




# FCC SAR TEST REPORT

**FCC ID** : U4G-Q104G  
**Equipment** : PDA  
**Brand Name** : DATALOGIC  
**Model Name** : MEMOR 20 WWAN  
**Applicant** : Datalogic S.r.l.  
Via S. Vitalino, 13 40012, Lippo di Calderara di Reno (BO)  
ITALY  
**Manufacturer** : Datalogic S.r.l.  
Via S. Vitalino, 13 40012, Lippo di Calderara di Reno (BO)  
ITALY  
**Standard** : FCC 47 CFR Part 2 (2.1093)  
ANSI/IEEE C95.1-1992  
IEEE 1528-2013

The product was received on Jun. 17, 2019 and testing was started from Jul. 05, 2019 and completed on Sep. 09, 2019. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Cona Huang / Deputy Manager

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**  
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

1. Statement of Compliance ..... 4
2. Guidance Applied..... 4
3. Equipment Under Test (EUT) Information ..... 5
3.1 General Information ..... 5
3.2 General LTE SAR Test and Reporting Considerations ..... 6
4. RF Exposure Limits..... 8
4.1 Uncontrolled Environment..... 8
4.2 Controlled Environment..... 8
5. Specific Absorption Rate (SAR)..... 9
5.1 Introduction ..... 9
5.2 SAR Definition..... 9
6. System Description and Setup .....10
6.1 E-Field Probe .....11
6.2 Data Acquisition Electronics (DAE) .....11
6.3 Phantom.....12
6.4 Device Holder.....13
7. Measurement Procedures .....14
7.1 Spatial Peak SAR Evaluation .....14
7.2 Power Reference Measurement.....15
7.3 Area Scan .....15
7.4 Zoom Scan.....16
7.5 Volume Scan Procedures.....16
7.6 Power Drift Monitoring.....16
8. Test Equipment List .....17
9. System Verification .....18
9.1 Tissue Simulating Liquids.....18
9.2 Tissue Verification .....19
9.3 System Performance Check Results.....20
10. RF Exposure Positions .....22
10.1 Ear and handset reference point .....22
10.2 Definition of the cheek position .....23
10.3 Definition of the tilt position .....24
10.4 Body Worn Accessory .....24
10.5 Product Specific Exposure .....25
10.6 Wireless Router.....25
11. Conducted RF Output Power (Unit: dBm).....26
12. Antenna Location .....70
13. SAR Test Results .....71
13.1 Head SAR .....73
13.2 Hotspot SAR .....77
13.3 Body Worn Accessory SAR.....80
13.4 Product Specific SAR.....83
13.5 Repeated SAR Measurement .....85
14. Simultaneous Transmission Analysis.....86
14.1 Head Exposure Conditions .....87
14.2 Hotspot Exposure Conditions.....88
14.3 Body-Worn Accessory Exposure Conditions .....90
14.4 Product Specific Exposure Conditions .....91
14.5 SPLSR Evaluation and Analysis.....92
15. Uncertainty Assessment .....94
16. References.....94
Appendix A. Plots of System Performance Check
Appendix B. Plots of High SAR Measurement
Appendix C. DASYS Calibration Certificate
Appendix D. Test Setup Photos



### History of this test report

Report No.	Version	Description	Issued Date
FA872411	01	Initial issue of report	Dec. 03, 2019



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for Datalogic S.r.l., PDA, MEMOR 20 WWAN, are as follows.

Table with columns: Equipment Class, Frequency Band, Highest SAR Summary (Head, Body-worn, Hotspot, Product Specific), and Highest Simultaneous Transmission. Rows include Licensed (GSM850, GSM1900, WCDMA II, etc.), DTS, NII, and DSS.

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC test.. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications

Reviewed by: Jason Wang
Report Producer: Wan Liu

2. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013
FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
FCC KDB 865664 D02 SAR Reporting v01r02
FCC KDB 447498 D01 General RF Exposure Guidance v06
FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
FCC KDB 941225 D01 3G SAR Procedures v03r01
FCC KDB 941225 D05 SAR for LTE Devices v02r05
FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
FCC KDB 941225 D06 Hotspot Mode SAR v02r01
FCC KDB 941225 D07 UMPC Mini Tablet v01r02



### 3. Equipment Under Test (EUT) Information

#### 3.1 General Information

Product Feature & Specification	
Equipment Name	PDA
Brand Name	DATALOGIC
Model Name	MEMOR 20 WWAN
FCC ID	U4G-Q104G
IMEI Code	SIM 1: 004403000109183 SIM 2: 004403000109191
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 25: 1850.7 MHz ~ 1914.3 MHz LTE Band 26: 814.7 MHz ~ 848.3 MHz LTE Band 30: 2307.5 MHz ~ 2312.5 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC : 13.56 MHz
Mode	GSM/GPRS/EGPR RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA LTE: QPSK, 16QAM, 64QAM WLAN: 802.11a/b/g/n/ac HT20 / HT40 / VHT20 / VHT40 / VHT80 Bluetooth BR/EDR/LE NFC:ASK
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype
<b>Remark:</b>	
<ol style="list-style-type: none"> <li>The device has two SIM slots and supports Dual SIM Dual Standby. The WWAN radio transmission will be enabled by either one SIM at a time (Single active).</li> <li>This device WLAN 2.4GHz supports Hotspot operation and Bluetooth support tethering applications.</li> <li>When hotspot mode is enabled, power reduction will be activated to limit the maximum power of GSM1900, WCDMA B2 / B4 and LTE B2 / B4 / B25.</li> </ol>	



**3.2 General LTE SAR Test and Reporting Considerations**

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																																										
FCC ID	U4G-Q104G																																																																									
Equipment Name	PDA																																																																									
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 25: 1850.7 MHz ~ 1914.3 MHz LTE Band 26: 814.7 MHz ~ 848.3 MHz LTE Band 30: 2307.5 MHz ~ 2312.5 MHz																																																																									
Channel Bandwidth	LTE Band 02: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 04: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 05: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 07: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 25: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 26: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 30: 5MHz, 10MHz																																																																									
uplink modulations used	QPSK / 16QAM / 64QAM																																																																									
LTE Voice / Data requirements	Voice and Data																																																																									
LTE MPR permanently built-in by design	<p align="center"><b>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</b></p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N<sub>RB</sub>)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>&gt; 5</td> <td>&gt; 4</td> <td>&gt; 8</td> <td>&gt; 12</td> <td>&gt; 16</td> <td>&gt; 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table>												Modulation	Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> )						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> )						MPR (dB)																																																																			
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																																				
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																																			
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																																			
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																																			
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																																			
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																																			
256 QAM	≥ 1						≤ 5																																																																			
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																																									
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																																									
Power reduction applied to satisfy SAR compliance	1. Yes, when operating in hotspot mode that LTE B2 / B4 / B25 power reduction applied to satisfy SAR compliance.																																																																									
LTE Carrier Aggregation Combinations	Inter-Band and Intra-Band possible combinations and the detail power measurement please referred to section 11.																																																																									
LTE Carrier Aggregation Additional Information	1. This device supports LTE Carrier Aggregation (CA) in the uplink for LTE B7/B38 with two component carriers in the uplink. SAR Measurements and conducted powers were evaluated per FCC Guidance. 2. This device supports maximum of 2 carriers in the downlink and 2 carriers in the uplink. Additional following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.																																																																									
Transmission (H, M, L) channel numbers and frequencies in each LTE band																																																																										
LTE Band 2																																																																										
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz																																																															
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)																																																														
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860																																																														
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880																																																														
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900																																																														



LTE Band 4																
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720				
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5				
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745				
LTE Band 5																
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	20407	824.7	20415	825.5	20425	826.5	20450	829	20450	829	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5				
H	20643	848.3	20635	847.5	20625	846.5	20600	844	20600	844	20600	844				
LTE Band 7																
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510	20850	2510	20850	2510				
M	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535				
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560	21350	2560	21350	2560				
LTE Band 12																
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	23017	699.7	23025	700.5	23035	701.5	23060	704	23060	704	23060	704				
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5				
H	23173	715.3	23165	714.5	23155	713.5	23130	711	23130	711	23130	711				
LTE Band 13																
	Bandwidth 5 MHz				Bandwidth 10 MHz				Bandwidth 15 MHz				Bandwidth 20 MHz			
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)	
L	23205		779.5		23230		782		23230		782		23230		782	
M	23230		782		23230		782		23230		782		23230		782	
H	23255		784.5		23230		782		23230		782		23230		782	
LTE Band 17																
	Bandwidth 5 MHz				Bandwidth 10 MHz				Bandwidth 15 MHz				Bandwidth 20 MHz			
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)	
L	23755		706.5		23780		709		23780		709		23780		709	
M	23790		710		23790		710		23790		710		23790		710	
H	23825		713.5		23800		711		23800		711		23800		711	
LTE Band 25																
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	26047	1850.7	26055	1851.5	26065	1852.5	26090	1855	26115	1857.5	26140	1860				
M	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880	26340	1880				
H	26683	1914.3	26675	1913.5	26665	1912.5	26640	1910	26615	1907.5	26590	1905				
LTE Band 26																
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5	26790	824.5				
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5				
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5	26940	838.5				
LTE Band 30																
	Bandwidth 5 MHz				Bandwidth 10 MHz				Bandwidth 15 MHz				Bandwidth 20 MHz			
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)	
L	27685		2307.5		27710		2310		27710		2310		27710		2310	
M	27710		2310		27710		2310		27710		2310		27710		2310	
H	27735		2312.5		27710		2310		27710		2310		27710		2310	



**4. RF Exposure Limits**

**4.1 Uncontrolled Environment**

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

**4.2 Controlled Environment**

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Limits for Occupational/Controlled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

**Limits for General Population/Uncontrolled Exposure (W/kg)**

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.





## **5. Specific Absorption Rate (SAR)**

### **5.1 Introduction**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### **5.2 SAR Definition**

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

## 6. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

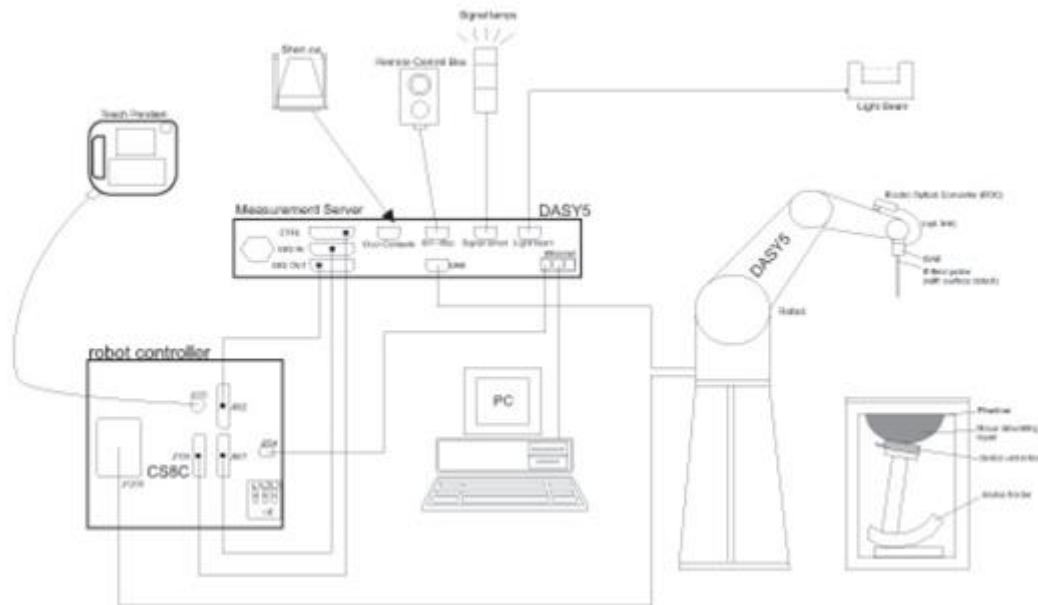


- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.


**6.1 E-Field Probe**

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

**<ES3DV3 Probe>**

<b>Construction</b>	Symmetric design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
<b>Frequency</b>	10 MHz – 4 GHz; Linearity: ±0.2 dB (30 MHz – 4 GHz)	
<b>Directivity</b>	±0.2 dB in TSL (rotation around probe axis) ±0.3 dB in TSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	5 µW/g – >100 mW/g; Linearity: ±0.2 dB	
<b>Dimensions</b>	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 3.0 mm	

**<EX3DV4 Probe>**

<b>Construction</b>	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
<b>Frequency</b>	10 MHz – >6 GHz Linearity: ±0.2 dB (30 MHz – 6 GHz)	
<b>Directivity</b>	±0.3 dB in TSL (rotation around probe axis) ±0.5 dB in TSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	10 µW/g – >100 mW/g Linearity: ±0.2 dB (noise: typically <1 µW/g)	
<b>Dimensions</b>	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

**6.2 Data Acquisition Electronics (DAE)**

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



**Fig 5.1 Photo of DAE**


**6.3 Phantom**

**<SAM Twin Phantom>**

<b>Shell Thickness</b>	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
<b>Filling Volume</b>	Approx. 25 liters	
<b>Dimensions</b>	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
<b>Measurement Areas</b>	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

**<ELI Phantom>**
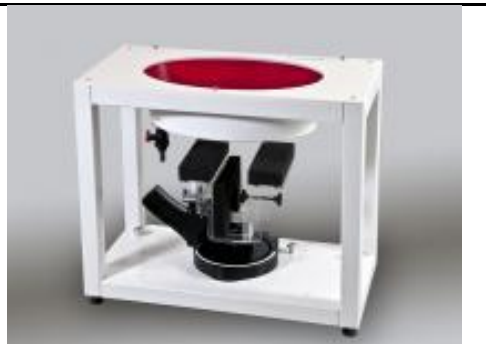
<b>Shell Thickness</b>	2 ± 0.2 mm (sagging: <1%)	
<b>Filling Volume</b>	Approx. 30 liters	
<b>Dimensions</b>	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

## **6.4 Device Holder**

### **<Mounting Device for Hand-Held Transmitter>**

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

### **<Mounting Device for Laptops and other Body-Worn Transmitters>**

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops



## **7. Measurement Procedures**

The measurement procedures are as follows:

### <Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

### <SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### **7.1 Spatial Peak SAR Evaluation**

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g



**7.2 Power Reference Measurement**

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

**7.3 Area Scan**

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

**7.4 Zoom Scan**

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		$\leq 2$ GHz: $\leq 8$ mm $2 - 3$ GHz: $\leq 5$ mm*	$3 - 4$ GHz: $\leq 5$ mm* $4 - 6$ GHz: $\leq 4$ mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	$\leq 5$ mm	$3 - 4$ GHz: $\leq 4$ mm $4 - 5$ GHz: $\leq 3$ mm $5 - 6$ GHz: $\leq 2$ mm
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm $3 - 4$ GHz: $\leq 3$ mm $4 - 5$ GHz: $\leq 2.5$ mm $5 - 6$ GHz: $\leq 2$ mm
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	$3 - 4$ GHz: $\geq 28$ mm $4 - 5$ GHz: $\geq 25$ mm $5 - 6$ GHz: $\geq 22$ mm
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

**7.5 Volume Scan Procedures**

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

**7.6 Power Drift Monitoring**

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.





**8. Test Equipment List**

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1107	Mar. 08, 2019	Mar. 07, 2020
SPEAG	835MHz System Validation Kit	D835V2	4d167	Mar. 08, 2019	Mar. 07, 2020
SPEAG	1750MHz System Validation Kit	D1750V2	1112	Mar. 07, 2019	Mar. 06, 2020
SPEAG	1900MHz System Validation Kit	D1900V2	5d185	Mar. 07, 2019	Mar. 06, 2020
SPEAG	2300MHz System Validation Kit	D2300V2	1006	Jan. 28, 2019	Jan. 27, 2020
SPEAG	2450MHz System Validation Kit	D2450V2	929	Mar. 06, 2019	Mar. 05, 2020
SPEAG	2600MHz System Validation Kit	D2600V2	1008	Aug. 31, 2018	Aug. 30, 2019
SPEAG	5GHz System Validation Kit	D5GHzV2	1128	Mar. 05, 2019	Mar. 04, 2020
SPEAG	Data Acquisition Electronics	DAE3	577	Sep. 19, 2018	Sep. 18, 2019
SPEAG	Data Acquisition Electronics	DAE4	316	Jan. 03, 2019	Jan. 02, 2020
SPEAG	Data Acquisition Electronics	DAE4	699	Jan. 03, 2019	Jan. 02, 2020
SPEAG	Data Acquisition Electronics	DAE4	778	May. 21, 2019	May. 20, 2020
SPEAG	Data Acquisition Electronics	DAE4	853	Jul. 18, 2019	Jul. 17, 2020
SPEAG	Dosimetric E-Field Probe	ES3DV3	3124	Jan. 15, 2019	Jan. 14, 2020
SPEAG	Dosimetric E-Field Probe	ES3DV3	3270	Sep. 24, 2018	Sep. 23, 2019
SPEAG	Dosimetric E-Field Probe	EX3DV4	3728	Jan. 15, 2019	Jan. 14, 2020
SPEAG	Dosimetric E-Field Probe	EX3DV4	3925	May. 24, 2019	May. 23, 2020
SPEAG	Dosimetric E-Field Probe	EX3DV4	7515	Oct. 03, 2018	Oct. 02, 2019
RCPTWN	Thermometer	HTC-1	TM685-1	Nov. 12, 2018	Nov. 11, 2019
RCPTWN	Thermometer	HTC-1	TM560-2	Nov. 12, 2018	Nov. 11, 2019
Anritsu	Radio Communication Analyzer	MT8821C	6201341950	Apr. 21, 2019	Apr. 20, 2020
Agilent	Wireless Communication Test Set	E5515C	MY50267236	Apr. 01, 2019	Mar. 31, 2020
R&S	BT Base Station	CBT32	100522	Mar. 18, 2019	Mar. 17, 2020
SPEAG	Device Holder	N/A	N/A	N/A	N/A
R&S	Signal Generator	SMA100A	101091	Jul. 03, 2019	Jul. 02, 2020
Agilent	ENA Network Analyzer	E5071C	MY46104758	Sep. 19, 2018	Sep. 18, 2019
SPEAG	Dielectric Probe Kit	DAK-3.5	1126	Sep. 19, 2018	Sep. 18, 2019
LINE SEIKI	Digital Thermometer	DTM3000-spezial	3169	Sep. 11, 2018	Sep. 10, 2019
Anritsu	Power Meter	ML2495A	1218006	Oct. 08, 2018	Oct. 07, 2019
Anritsu	Power Sensor	MA2411B	1207363	Oct. 08, 2018	Oct. 07, 2019
Anritsu	Power Meter	ML2495A	1419002	May. 29, 2019	May. 28, 2020
Anritsu	Power Sensor	MA2411B	1339124	May. 29, 2019	May. 28, 2020
Anritsu	Spectrum Analyzer	MS2830A	6201396378	Jun. 27, 2019	Jun. 26, 2020
Mini-Circuits	Power Amplifier	ZVE-8G+	070501814	Oct. 08, 2018	Oct. 07, 2019
Mini-Circuits	Power Amplifier	ZHL-42W+	715701915	May. 10, 2019	May. 09, 2020
ATM	Dual Directional Coupler	C122H-10	P610410z-02	Note 1	
Woken	Attenuator 1	WK0602-XX	N/A	Note 1	
PE	Attenuator 2	PE7005-10	N/A	Note 1	
PE	Attenuator 3	PE7005- 3	N/A	Note 1	


**General Note:**

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.


## **9. System Verification**

### **9.1 Tissue Simulating Liquids**

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.

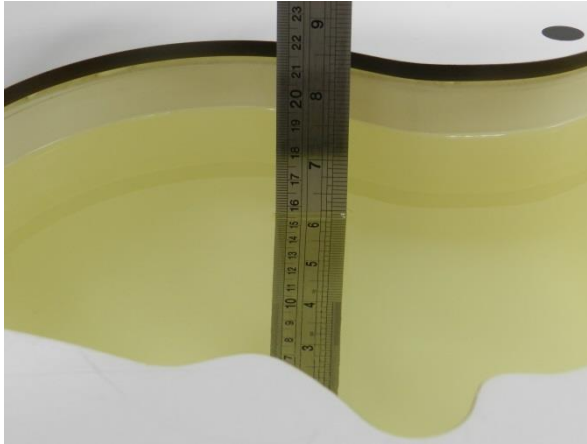

**Fig 10.1** Photo of Liquid Height for Head SAR

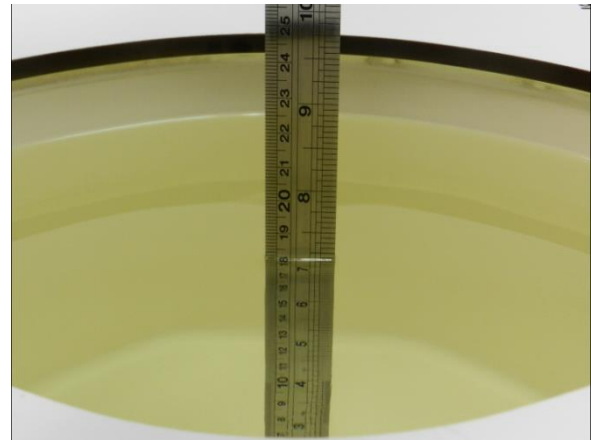

**Fig 10.2** Photo of Liquid Height for Body SAR



**9.2 Tissue Verification**

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
900	40.3	57.9	0.2	1.4	0.2	0	0.97	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0

**Simulating Liquid for 5GHz, Manufactured by SPEAG**

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

**<Tissue Dielectric Parameter Check Results>**

Frequency (MHz)	Liquid Temp. (°C)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )	Conductivity Target ( $\sigma$ )	Permittivity Target ( $\epsilon_r$ )	Delta ( $\sigma$ ) (%)	Delta ( $\epsilon_r$ ) (%)	Limit (%)	Date
750	22.7	0.889	42.883	0.89	41.90	-0.11	2.35	±5	2019/8/16
835	22.1	0.890	42.729	0.90	41.50	-1.11	2.96	±5	2019/8/7
835	22.5	0.925	43.074	0.90	41.50	2.78	3.79	±5	2019/8/14
1750	22.3	1.373	40.867	1.37	40.10	0.22	1.91	±5	2019/8/12
1750	22.5	1.372	40.769	1.37	40.10	0.15	1.67	±5	2019/8/17
1900	22.9	1.416	40.799	1.40	40.00	1.14	2.00	±5	2019/8/11
1900	22.4	1.410	39.087	1.40	40.00	0.71	-2.28	±5	2019/8/19
2300	22.3	1.693	40.391	1.67	39.50	1.38	2.26	±5	2019/7/5
2300	22.6	1.650	40.596	1.67	39.50	-1.20	2.77	±5	2019/8/10
2300	22.7	1.665	38.507	1.67	39.50	-0.30	-2.51	±5	2019/9/9
2450	22.5	1.792	39.144	1.80	39.20	-0.44	-0.14	±5	2019/8/27
2600	22.3	2.049	39.178	1.96	39.00	4.54	0.46	±5	2019/7/5
2600	22.6	2.012	39.497	1.96	39.00	2.65	1.27	±5	2019/8/10
5250	22.9	4.556	35.737	4.71	35.95	-3.27	-0.59	±5	2019/8/26
5250	22.6	4.567	35.825	4.71	35.95	-3.04	-0.35	±5	2019/8/28
5250	22.3	4.603	36.065	4.71	35.95	-2.27	0.32	±5	2019/8/29
5600	22.9	4.870	35.307	5.07	35.50	-3.94	-0.54	±5	2019/8/26
5600	22.6	4.883	35.395	5.07	35.50	-3.69	-0.30	±5	2019/8/28
5750	22.9	5.029	35.107	5.22	35.35	-3.66	-0.69	±5	2019/8/26
5750	22.6	5.042	35.195	5.22	35.35	-3.41	-0.44	±5	2019/8/28
5750	22.3	5.080	35.435	5.22	35.35	-2.68	0.24	±5	2019/8/29




9.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Table with 10 columns: Date, Frequency (MHz), Input Power (mW), Dipole S/N, Probe S/N, DAE S/N, Measured 1g SAR (W/kg), Targeted 1g SAR (W/kg), Normalized 1g SAR (W/kg), Deviation (%). It contains 25 rows of test data.

Date	Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2019/8/17	1750	250	D1750V2-1112	ES3DV3 - SN3270	DAE3 Sn577	4.95	19.40	19.8	2.06
2019/8/19	1900	250	D1900V2-5d185	ES3DV3 - SN3270	DAE3 Sn577	5.02	20.50	20.08	-2.05
2019/8/28	5250	100	D5GHzV2-1128-5250	EX3DV4 - SN7515	DAE4 Sn853	2.03	21.90	20.3	-7.31
2019/8/28	5600	100	D5GHzV2-1128-5600	EX3DV4 - SN7515	DAE4 Sn853	2.32	23.00	23.2	0.87
2019/8/28	5750	100	D5GHzV2-1128-5750	EX3DV4 - SN7515	DAE4 Sn853	2.19	22.20	21.9	-1.35

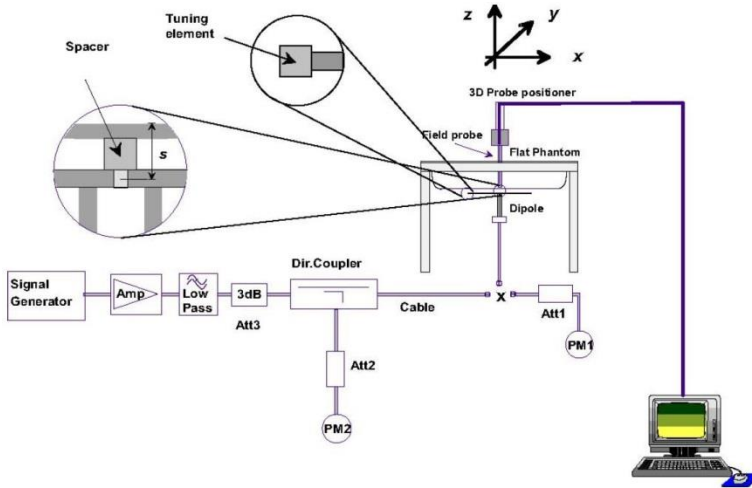

**Fig 8.3.1 System Performance Check Setup**



**Fig 8.3.2 Setup Photo**

## 10. RF Exposure Positions

### 10.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

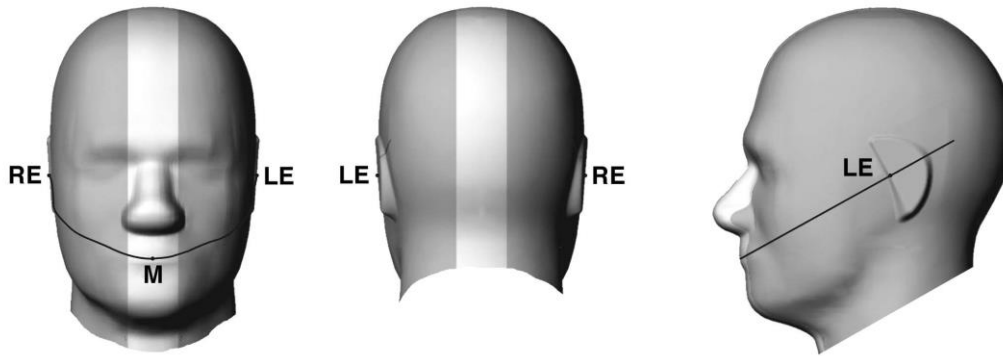


Fig 9.1.1 Front, back, and side views of SAM twin phantom



Fig 9.1.2 Close-up side view of phantom showing the ear region.


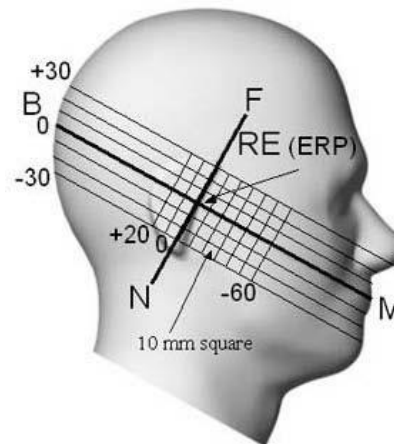



Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

**10.2 Definition of the cheek position**


1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width  $w_t$  of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width  $w_b$  of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

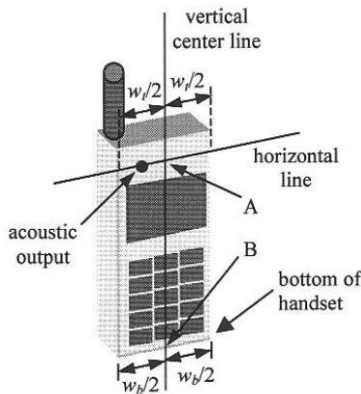

**Fig 9.2.1 Handset vertical and horizontal reference lines—“fixed case”**

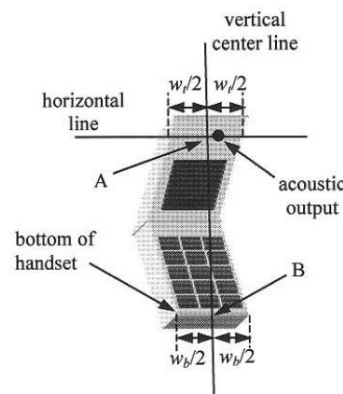


**Fig 9.2.2 Handset vertical and horizontal reference lines—“clam-shell case”**

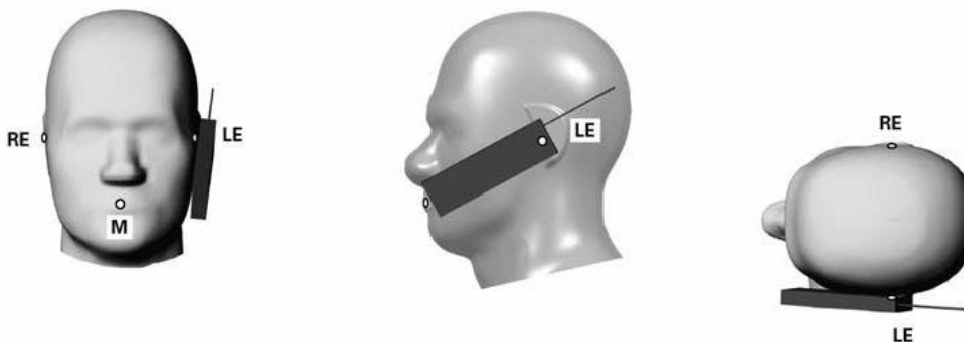

**Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.**

**10.3 Definition of the tilt position**

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

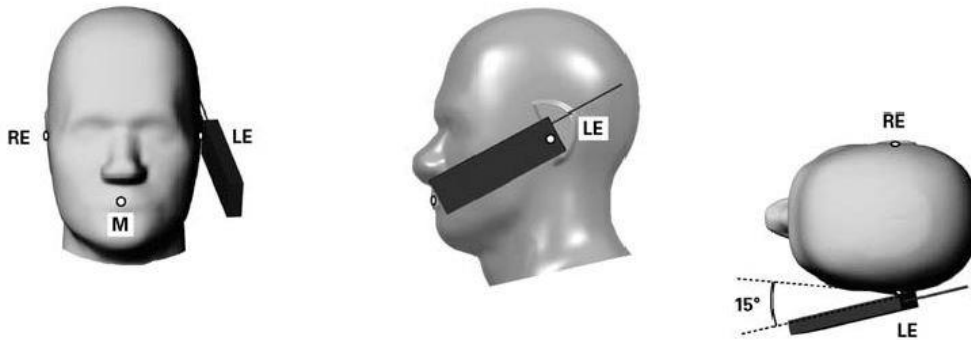


**Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.**

**10.4 Body Worn Accessory**

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

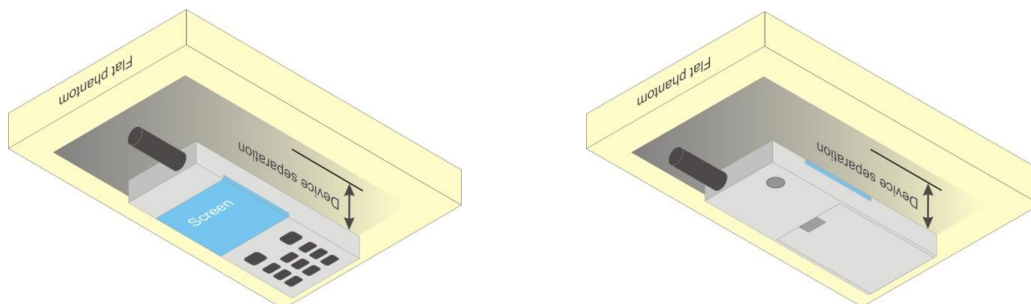

**Fig 9.4 Body Worn Position**





### **10.5 Product Specific Exposure**

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at  $\leq 25$  mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.6 The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

### **10.6 Wireless Router**

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ( $L \times W \geq 9$  cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.



## 11. Conducted RF Output Power (Unit: dBm)

### <GSM Conducted Power>

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode, SAR measurement is not required for the secondary mode
4. Power reduction which is triggered by hotspot mode is implemented in GSM1900 band, for hotspot mode SAR testing EUT was set in reduced power mode and GPRS 4Tx slot due to its highest frame-average power.

### <Default Power Mode>

GSM850 TX Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	32.82	32.93	32.97	33.00	23.82	23.93	23.97	24.00
GPRS 1 Tx slot	32.85	32.95	33.00	33.00	23.85	23.95	24.00	24.00
GPRS 2 Tx slots	30.60	30.79	30.91	31.00	24.60	24.79	24.91	25.00
GPRS 3 Tx slots	29.50	29.74	29.80	30.00	25.24	25.48	25.54	25.74
GPRS 4 Tx slots	28.05	28.31	28.34	29.00	25.05	25.31	25.34	26.00
EDGE 1 Tx slot	26.59	26.80	26.77	27.00	17.59	17.80	17.77	18.00
EDGE 2 Tx slots	26.51	26.66	26.69	27.00	20.51	20.66	20.69	21.00
EDGE 3 Tx slots	25.99	26.16	26.08	26.50	21.73	21.90	21.82	22.24
EDGE 4 Tx slots	25.85	26.08	25.92	26.50	22.85	23.08	22.92	23.50

GSM1900 TX Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	29.73	29.56	29.57	30.00	20.73	20.56	20.57	21.00
GPRS 1 Tx slot	29.76	29.61	29.71	30.00	20.76	20.61	20.71	21.00
GPRS 2 Tx slots	27.68	27.74	27.66	28.00	21.68	21.74	21.66	22.00
GPRS 3 Tx slots	26.90	27.00	26.65	27.00	22.64	22.74	22.39	22.74
GPRS 4 Tx slots	25.46	25.69	25.72	26.00	22.46	22.69	22.72	23.00
EDGE 1 Tx slot	25.52	25.56	25.69	26.00	16.52	16.56	16.69	17.00
EDGE 2 Tx slots	25.46	25.68	25.65	26.00	19.46	19.68	19.65	20.00
EDGE 3 Tx slots	25.39	25.62	25.60	26.00	21.13	21.36	21.34	21.74
EDGE 4 Tx slots	25.15	25.06	25.15	25.50	22.15	22.06	22.15	22.50



**<Reduced Power Mode>**

GSM1900 TX Channel	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	28.78	28.76	28.76	29.50	19.78	19.76	19.76	20.50
GPRS 1 Tx slot	28.86	28.83	28.86	29.50	19.86	19.83	19.86	20.50
GPRS 2 Tx slots	25.73	25.74	25.72	26.50	19.73	19.74	19.72	20.50
GPRS 3 Tx slots	23.74	23.74	23.73	24.50	19.48	19.48	19.47	20.24
GPRS 4 Tx slots	22.66	22.66	22.66	23.50	19.66	19.66	19.66	20.50
EDGE 1 Tx slot	25.89	25.72	25.67	26.00	16.89	16.72	16.67	17.00
EDGE 2 Tx slots	25.82	25.61	25.64	26.00	19.82	19.61	19.64	20.00
EDGE 3 Tx slots	23.73	23.61	23.63	24.50	19.47	19.35	19.37	20.24
EDGE 4 Tx slots	22.33	22.08	22.18	23.00	19.33	19.08	19.18	20.00

**<WCDMA Conducted Power>**

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

**HSDPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each
  - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
  - iii. Set RMC 12.2Kbps + HSDPA mode.
  - iv. Set Cell Power = -86 dBm
  - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
  - vi. Select HSDPA Uplink Parameters
  - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
  - viii. Set Ack-Nack Repetition Factor to 3
  - ix. Set CQI Feedback Cycle (k) to 4 ms
  - x. Set CQI Repetition Factor to 2
  - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

**Table C.10.1.4:  $\beta$  values for transmitter characteristics tests with HS-DPCCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1:  $\Delta_{ACK}, \Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ .

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA,  $\Delta_{ACK}$  and  $\Delta_{NACK} = 30/15$  with  $\beta_{HS} = 30/15 * \beta_c$ , and  $\Delta_{CQI} = 24/15$  with  $\beta_{HS} = 24/15 * \beta_c$ .

Note 3: CM = 1 for  $\beta_c/\beta_d = 12/15, \beta_{HS}/\beta_c = 24/15$ . For all other combinations of DPCCH, DPDCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ .

**Setup Configuration**

**HSUPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting \* :
  - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
  - ii. Set the Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
  - iii. Set Cell Power = -86 dBm
  - iv. Set Channel Type = 12.2k + HSPA
  - v. Set UE Target Power
  - vi. Power Ctrl Mode= Alternating bits
  - vii. Set and observe the E-TFCl
  - viii. Confirm that E-TFCl is equal to the target E-TFCl of 75 for sub-test 1, and other subtest's E-TFCl
- d. The transmitted maximum output power was recorded.

**Table C.11.1.3:  $\beta$  values for transmitter characteristics tests with HS-DPCCH and E-DCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{HS}$ (Note1)	$\beta_{ec}$	$\beta_{ed}$ (Note 4) (Note 5)	$\beta_{ed}$ (SF)	$\beta_{ed}$ (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCl
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4,  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ . For sub-test 5,  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 5/15$  with  $\beta_{hs} = 5/15 * \beta_c$ .

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS- DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5:  $\beta_{ed}$  can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

**Setup Configuration**

**DC-HSDPA 3GPP release 8 Setup Configuration:**


- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set RMC 12.2Kbps + HSDPA mode.
  - ii. Set Cell Power = -25 dBm
  - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
  - iv. Select HSDPA Uplink Parameters
  - v. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
    - a). Subtest 1:  $\beta_c/\beta_d=2/15$
    - b). Subtest 2:  $\beta_c/\beta_d=12/15$
    - c). Subtest 3:  $\beta_c/\beta_d=15/8$
    - d). Subtest 4:  $\beta_c/\beta_d=15/4$
  - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
  - vii. Set Ack-Nack Repetition Factor to 3
  - viii. Set CQI Feedback Cycle (k) to 4 ms
  - ix. Set CQI Repetition Factor to 2
  - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

**C.8.1.12 Fixed Reference Channel Definition H-Set 12**

**Table C.8.1.12: Fixed Reference Channel H-Set 12**

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload ( $N_{INF}$ )	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

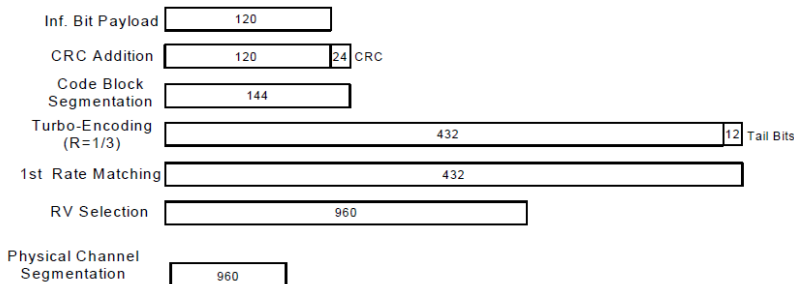

**Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)**

**Setup Configuration**



**<WCDMA Conducted Power>**

**General Note:**

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is  $\leq \frac{1}{4}$  dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than  $\frac{1}{4}$  dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

**<Default Power Mode>**

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)
TX Channel	Rx Channel	9262	9400	9538		1312	1413	1513		4132	4182	4233	
Frequency (MHz)		1852.4	1880	1907.6	1712.4	1732.6	1752.6	826.4	836.4	846.6			
3GPP Rel 99	AMR 12.2Kbps	22.70	22.72	22.79	23.00	23.47	23.43	23.42	23.50	23.41	23.33	23.58	24.00
3GPP Rel 99	RMC 12.2Kbps	22.76	22.78	22.81	23.00	23.49	23.49	23.47	23.50	23.45	23.37	23.62	24.00
3GPP Rel 6	HSDPA Subtest-1	21.74	21.79	21.76	22.50	22.49	22.69	22.62	23.00	22.42	22.37	22.55	23.50
3GPP Rel 6	HSDPA Subtest-2	21.77	21.77	21.78	22.50	22.52	22.72	22.67	23.00	22.50	22.38	22.62	23.50
3GPP Rel 6	HSDPA Subtest-3	21.31	21.32	21.26	22.00	22.02	22.22	21.98	22.50	21.99	21.88	22.10	23.00
3GPP Rel 6	HSDPA Subtest-4	21.28	21.32	21.35	22.00	21.99	22.17	22.05	22.50	21.97	21.90	22.08	23.00
3GPP Rel 8	DC-HSDPA Subtest-1	21.66	21.79	21.73	22.50	22.46	22.61	22.58	23.00	22.33	22.29	22.47	23.50
3GPP Rel 8	DC-HSDPA Subtest-2	21.73	21.67	21.69	22.50	22.47	22.63	22.61	23.00	22.42	22.28	22.52	23.50
3GPP Rel 8	DC-HSDPA Subtest-3	21.30	21.24	21.24	22.00	21.97	22.15	21.85	22.50	21.89	21.80	22.02	23.00
3GPP Rel 8	DC-HSDPA Subtest-4	21.24	21.25	21.33	22.00	21.96	22.13	21.90	22.50	21.90	21.81	22.02	23.00
3GPP Rel 6	HSUPA Subtest-1	21.75	21.82	21.84	22.50	22.50	22.69	22.65	23.00	22.47	22.40	22.59	23.50
3GPP Rel 6	HSUPA Subtest-2	19.75	19.77	19.76	20.50	20.55	20.74	20.69	21.00	20.43	20.32	20.61	21.50
3GPP Rel 6	HSUPA Subtest-3	20.79	20.85	20.79	21.50	21.50	21.73	21.70	22.00	21.48	21.33	21.48	22.50
3GPP Rel 6	HSUPA Subtest-4	19.73	19.82	19.76	20.50	20.54	20.69	20.63	21.00	20.45	20.45	20.58	21.50
3GPP Rel 6	HSUPA Subtest-5	21.80	21.70	21.80	22.50	22.50	22.70	22.70	23.00	22.40	22.50	22.60	23.50


**<Reduced Power Mode>**

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)
TX Channel	Rx Channel	9262	9400	9538		1312	1413	1513	
Frequency (MHz)		1852.4	1880	1907.6	1712.4	1732.6	1752.6		
3GPP Rel 99	AMR 12.2Kbps	19.88	19.80	19.70	20.50	20.48	20.70	20.49	21.00
3GPP Rel 99	RMC 12.2Kbps	19.91	19.85	19.75	20.50	20.52	20.78	20.59	21.00
3GPP Rel 6	HSDPA Subtest-1	18.90	18.88	18.77	19.50	19.56	19.72	19.60	20.00
3GPP Rel 6	HSDPA Subtest-2	18.94	18.90	18.85	19.50	19.54	19.75	19.68	20.00
3GPP Rel 6	HSDPA Subtest-3	18.08	18.43	18.32	19.00	19.08	19.27	19.17	19.50
3GPP Rel 6	HSDPA Subtest-4	18.45	18.41	18.33	19.00	19.08	19.27	19.14	19.50
3GPP Rel 8	DC-HSDPA Subtest-1	18.88	18.79	18.77	19.50	19.48	19.70	19.50	20.00
3GPP Rel 8	DC-HSDPA Subtest-2	18.91	18.86	18.80	19.50	19.54	19.68	19.64	20.00
3GPP Rel 8	DC-HSDPA Subtest-3	18.04	18.36	18.24	19.00	19.00	19.20	19.12	19.50
3GPP Rel 8	DC-HSDPA Subtest-4	18.37	18.32	18.28	19.00	19.00	19.20	19.06	19.50
3GPP Rel 6	HSUPA Subtest-1	18.85	18.87	18.79	19.50	19.53	19.74	19.63	20.00
3GPP Rel 6	HSUPA Subtest-2	16.92	16.88	16.78	17.50	17.51	17.73	17.61	18.00
3GPP Rel 6	HSUPA Subtest-3	17.89	17.85	17.82	18.50	18.49	18.67	18.65	19.00
3GPP Rel 6	HSUPA Subtest-4	16.90	16.85	16.85	17.50	17.53	17.74	17.62	18.00
3GPP Rel 6	HSUPA Subtest-5	18.90	18.90	18.80	19.50	19.50	19.80	19.60	20.00


**<LTE Conducted Power>**

**General Note:**

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4 / B12 / B26 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE band 2 / 5 SAR test was covered by Band 25 / 26; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
  - a. the maximum output power, including tolerance, for the smaller band is  $\leq$  the larger band to qualify for the SAR test exclusion
  - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
10. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.

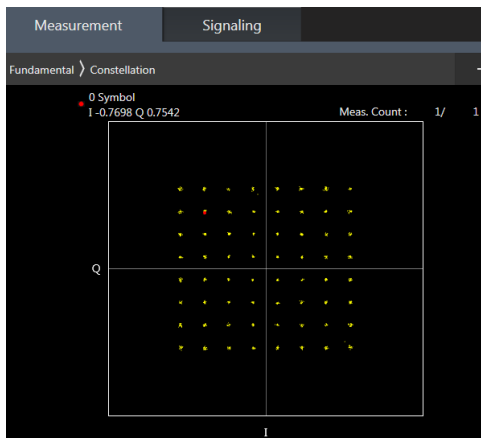

**64QAM**

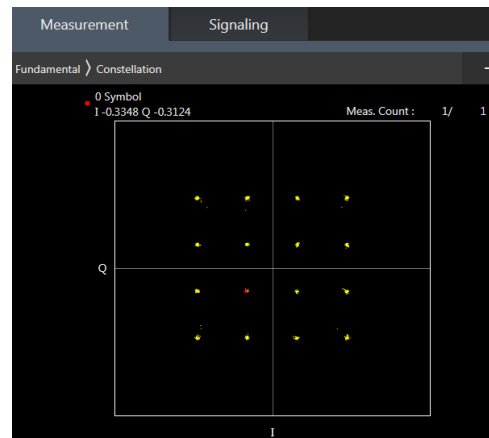

**16QAM**



<Default Power Mode>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	22.41	22.48	22.30	23.5	0
20	QPSK	1	49	22.33	22.37	22.33		
20	QPSK	1	99	22.28	22.31	22.27		
20	QPSK	50	0	21.41	21.45	21.32	22.5	1
20	QPSK	50	24	21.42	21.44	21.43		
20	QPSK	50	50	21.35	21.38	21.39		
20	QPSK	100	0	21.40	21.43	21.31		
20	16QAM	1	0	21.79	21.81	21.64	22.5	1
20	16QAM	1	49	21.68	21.72	21.69		
20	16QAM	1	99	21.66	21.68	21.61		
20	16QAM	50	0	20.52	20.55	20.44	21.5	2
20	16QAM	50	24	20.55	20.55	20.50		
20	16QAM	50	50	20.46	20.49	20.49		
20	16QAM	100	0	20.49	20.54	20.40		
20	64QAM	1	0	20.69	20.70	20.56	21.5	2
20	64QAM	1	49	20.63	20.64	20.63		
20	64QAM	1	99	20.57	20.58	20.56		
20	64QAM	50	0	19.52	19.55	19.46	20.5	3
20	64QAM	50	24	19.54	19.58	19.55		
20	64QAM	50	50	19.48	19.49	19.49		
20	64QAM	100	0	19.49	19.55	19.42		
Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	22.45	22.42	22.38	23.5	0
15	QPSK	1	37	22.45	22.38	22.33		
15	QPSK	1	74	22.39	22.32	22.31		
15	QPSK	36	0	21.53	21.47	21.40	22.5	1
15	QPSK	36	20	21.57	21.49	21.44		
15	QPSK	36	39	21.48	21.40	21.39		
15	QPSK	75	0	21.50	21.45	21.41	22.5	1
15	16QAM	1	0	21.83	21.79	21.76		
15	16QAM	1	37	21.81	21.74	21.72		
15	16QAM	1	74	21.75	21.71	21.62	21.5	2
15	16QAM	36	0	20.61	20.59	20.53		
15	16QAM	36	20	20.66	20.62	20.55		
15	16QAM	36	39	20.59	20.54	20.48	21.5	2
15	16QAM	75	0	20.61	20.57	20.52		
15	64QAM	1	0	20.80	20.70	20.67		
15	64QAM	1	37	20.75	20.66	20.64	21.5	2
15	64QAM	1	74	20.66	20.61	20.56		
15	64QAM	36	0	19.67	19.62	19.56		
15	64QAM	36	20	19.71	19.61	19.59	20.5	3
15	64QAM	36	39	19.62	19.55	19.52		
15	64QAM	75	0	19.63	19.55	19.53		
Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	22.47	22.46	22.38	23.5	0
10	QPSK	1	25	22.36	22.43	22.34		
10	QPSK	1	49	22.36	22.43	22.33		



**FCC SAR TEST REPORT**

**Report No. : FA872411**

10	QPSK	25	0	21.42	21.49	21.41	22.5	1
10	QPSK	25	12	21.45	21.46	21.39		
10	QPSK	25	25	21.38	21.43	21.35		
10	QPSK	50	0	21.41	21.48	21.42		
10	16QAM	1	0	21.86	21.90	21.76	22.5	1
10	16QAM	1	25	21.75	21.79	21.72		
10	16QAM	1	49	21.76	21.81	21.63		
10	16QAM	25	0	20.55	20.62	20.52	21.5	2
10	16QAM	25	12	20.55	20.59	20.53		
10	16QAM	25	25	20.51	20.53	20.48		
10	16QAM	50	0	20.54	20.58	20.50		
10	64QAM	1	0	20.77	20.81	20.66	21.5	2
10	64QAM	1	25	20.65	20.68	20.64		
10	64QAM	1	49	20.65	20.68	20.55		
10	64QAM	25	0	19.57	19.62	19.53	20.5	3
10	64QAM	25	12	19.56	19.61	19.51		
10	64QAM	25	25	19.50	19.56	19.47		
10	64QAM	50	0	19.52	19.56	19.53		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	22.38	22.39	22.34	23.5	0
5	QPSK	1	12	22.39	22.42	22.33		
5	QPSK	1	24	22.32	22.37	22.31		
5	QPSK	12	0	21.44	21.45	21.37	22.5	1
5	QPSK	12	7	21.44	21.47	21.43		
5	QPSK	12	13	21.39	21.41	21.38		
5	QPSK	25	0	21.41	21.44	21.39		
5	16QAM	1	0	21.71	21.74	21.69	22.5	1
5	16QAM	1	12	21.75	21.76	21.69		
5	16QAM	1	24	21.67	21.72	21.63		
5	16QAM	12	0	20.57	20.58	20.51	21.5	2
5	16QAM	12	7	20.54	20.56	20.51		
5	16QAM	12	13	20.51	20.54	20.49		
5	16QAM	25	0	20.49	20.54	20.47		
5	64QAM	1	0	20.67	20.69	20.64	21.5	2
5	64QAM	1	12	20.65	20.69	20.62		
5	64QAM	1	24	20.62	20.64	20.56		
5	64QAM	12	0	19.60	19.62	19.55	20.5	3
5	64QAM	12	7	19.61	19.63	19.58		
5	64QAM	12	13	19.56	19.59	19.54		
5	64QAM	25	0	19.51	19.54	19.49		
Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	22.36	22.40	22.34	23.5	0
3	QPSK	1	8	22.37	22.38	22.34		
3	QPSK	1	14	22.35	22.38	22.31		
3	QPSK	8	0	21.41	21.48	21.38	22.5	1
3	QPSK	8	4	21.44	21.48	21.40		
3	QPSK	8	7	21.42	21.43	21.38		
3	QPSK	15	0	21.41	21.42	21.38		
3	16QAM	1	0	21.71	21.74	21.67	22.5	1
3	16QAM	1	8	21.78	21.80	21.67		
3	16QAM	1	14	21.68	21.75	21.61		
3	16QAM	8	0	20.57	20.62	20.56	21.5	2
3	16QAM	8	4	20.61	20.63	20.58		
3	16QAM	8	7	20.55	20.58	20.53		



**FCC SAR TEST REPORT**

**Report No. : FA872411**

3	16QAM	15	0	20.52	20.56	20.48		
3	64QAM	1	0	20.64	20.65	20.57	21.5	2
3	64QAM	1	8	20.67	20.65	20.58		
3	64QAM	1	14	20.62	20.65	20.56		
3	64QAM	8	0	19.59	19.62	19.55	20.5	3
3	64QAM	8	4	19.61	19.65	19.57		
3	64QAM	8	7	19.56	19.60	19.53		
3	64QAM	15	0	19.55	19.55	19.50		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	22.33	22.36	22.28	23.5	0
1.4	QPSK	1	3	22.38	22.40	22.36		
1.4	QPSK	1	5	22.31	22.34	22.27		
1.4	QPSK	3	0	22.36	22.36	22.31		
1.4	QPSK	3	1	22.41	22.42	22.34		
1.4	QPSK	3	3	22.37	22.37	22.33		
1.4	QPSK	6	0	21.36	21.39	21.34	22.5	1
1.4	16QAM	1	0	21.67	21.71	21.60	22.5	1
1.4	16QAM	1	3	21.75	21.79	21.68		
1.4	16QAM	1	5	21.66	21.69	21.58		
1.4	16QAM	3	0	21.49	21.51	21.38		
1.4	16QAM	3	1	21.52	21.55	21.42		
1.4	16QAM	3	3	21.48	21.49	21.37		
1.4	16QAM	6	0	20.55	20.58	20.49	21.5	2
1.4	64QAM	1	0	20.61	20.63	20.54	21.5	2
1.4	64QAM	1	3	20.66	20.68	20.61		
1.4	64QAM	1	5	20.61	20.61	20.54		
1.4	64QAM	3	0	20.57	20.62	20.55		
1.4	64QAM	3	1	20.60	20.67	20.59		
1.4	64QAM	3	3	20.57	20.61	20.56		
1.4	64QAM	6	0	19.49	19.52	19.43		



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	23.11	23.18	23.03	23.5	0
20	QPSK	1	49	23.03	23.05	23.04		
20	QPSK	1	99	23.01	22.96	22.93		
20	QPSK	50	0	22.10	22.14	22.03	22.5	1
20	QPSK	50	24	22.18	22.15	22.01		
20	QPSK	50	50	22.13	22.07	22.05		
20	QPSK	100	0	22.14	22.12	22.02		
20	16QAM	1	0	22.50	22.49	22.40	22.5	1
20	16QAM	1	49	22.38	22.42	22.43		
20	16QAM	1	99	22.37	22.32	22.31		
20	16QAM	50	0	21.21	21.26	21.14	21.5	2
20	16QAM	50	24	21.33	21.25	21.13		
20	16QAM	50	50	21.24	21.16	21.17		
20	16QAM	100	0	21.26	21.19	21.10		
20	64QAM	1	0	21.41	21.43	21.32	21.5	2
20	64QAM	1	49	21.32	21.35	21.31		
20	64QAM	1	99	21.30	21.25	21.19		
20	64QAM	50	0	20.24	20.26	20.16	20.5	3
20	64QAM	50	24	20.32	20.27	20.15		
20	64QAM	50	50	20.24	20.19	20.17		
20	64QAM	100	0	20.28	20.22	20.11		
Channel				20025	20175	20325		
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	23.15	23.17	23.04	23.5	0
15	QPSK	1	37	23.08	23.09	23.06		
15	QPSK	1	74	23.07	23.02	22.98		
15	QPSK	36	0	22.12	22.16	22.03	22.5	1
15	QPSK	36	20	22.26	22.17	22.11		
15	QPSK	36	39	22.19	22.09	22.07		
15	QPSK	75	0	22.21	22.12	21.99		
15	16QAM	1	0	22.49	22.50	22.42	22.5	1
15	16QAM	1	37	22.40	22.45	22.42		
15	16QAM	1	74	22.42	22.39	22.37		
15	16QAM	36	0	21.22	21.26	21.15	21.5	2
15	16QAM	36	20	21.35	21.25	21.21		
15	16QAM	36	39	21.24	21.19	21.18		
15	16QAM	75	0	21.33	21.23	21.09		
15	64QAM	1	0	21.43	21.44	21.35	21.5	2
15	64QAM	1	37	21.36	21.36	21.38		
15	64QAM	1	74	21.34	21.29	21.27		
15	64QAM	36	0	20.27	20.28	20.19	20.5	3
15	64QAM	36	20	20.36	20.30	20.27		
15	64QAM	36	39	20.30	20.24	20.22		
15	64QAM	75	0	20.33	20.23	20.10		
Channel				20000	20175	20350		
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	23.16	23.17	23.12	23.5	0
10	QPSK	1	25	23.09	23.09	23.06		
10	QPSK	1	49	23.03	23.02	22.99		
10	QPSK	25	0	22.13	22.16	22.11	22.5	1
10	QPSK	25	12	22.17	22.13	22.15		



10	QPSK	25	25	22.10	22.11	22.06		
10	QPSK	50	0	22.12	22.13	22.08		
10	16QAM	1	0	22.49	22.46	22.47	22.5	1
10	16QAM	1	25	22.47	22.47	22.44		
10	16QAM	1	49	22.35	22.40	22.36		
10	16QAM	25	0	21.22	21.27	21.25	21.5	2
10	16QAM	25	12	21.26	21.28	21.24		
10	16QAM	25	25	21.17	21.18	21.15		
10	16QAM	50	0	21.24	21.21	21.23		
10	64QAM	1	0	21.44	21.43	21.42	21.5	2
10	64QAM	1	25	21.38	21.40	21.35		
10	64QAM	1	49	21.30	21.29	21.26		
10	64QAM	25	0	20.24	20.27	20.26	20.5	3
10	64QAM	25	12	20.23	20.25	20.25		
10	64QAM	25	25	20.18	20.21	20.18		
10	64QAM	50	0	20.24	20.23	20.23		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	23.10	23.10	23.05	23.5	0
5	QPSK	1	12	23.11	23.09	23.06		
5	QPSK	1	24	23.04	23.03	23.01		
5	QPSK	12	0	22.14	22.12	22.08	22.5	1
5	QPSK	12	7	22.17	22.14	22.09		
5	QPSK	12	13	22.11	22.11	22.07		
5	QPSK	25	0	22.14	22.12	22.07		
5	16QAM	1	0	22.42	22.42	22.42	22.5	1
5	16QAM	1	12	22.46	22.44	22.43		
5	16QAM	1	24	22.42	22.38	22.34		
5	16QAM	12	0	21.27	21.24	21.20	21.5	2
5	16QAM	12	7	21.26	21.26	21.21		
5	16QAM	12	13	21.20	21.21	21.16		
5	16QAM	25	0	21.25	21.23	21.18		
5	64QAM	1	0	21.41	21.37	21.37	21.5	2
5	64QAM	1	12	21.37	21.37	21.34		
5	64QAM	1	24	21.34	21.32	21.27		
5	64QAM	12	0	20.29	20.30	20.25	20.5	3
5	64QAM	12	7	20.32	20.32	20.28		
5	64QAM	12	13	20.26	20.26	20.20		
5	64QAM	25	0	20.23	20.23	20.18		
Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	23.12	23.09	23.05	23.5	0
3	QPSK	1	8	23.09	23.08	23.01		
3	QPSK	1	14	23.08	23.05	22.99		
3	QPSK	8	0	22.13	22.13	22.06	22.5	1
3	QPSK	8	4	22.16	22.17	22.12		
3	QPSK	8	7	22.11	22.10	22.04		
3	QPSK	15	0	22.12	22.12	22.07		
3	16QAM	1	0	22.46	22.43	22.41	22.5	1
3	16QAM	1	8	22.44	22.44	22.40		
3	16QAM	1	14	22.43	22.39	22.33		
3	16QAM	8	0	21.30	21.27	21.21	21.5	2
3	16QAM	8	4	21.29	21.34	21.26		
3	16QAM	8	7	21.26	21.26	21.21		
3	16QAM	15	0	21.24	21.24	21.19		
3	64QAM	1	0	21.38	21.35	21.33	21.5	2



**FCC SAR TEST REPORT**

**Report No. : FA872411**

3	64QAM	1	8	21.41	21.38	21.32	20.5	3
3	64QAM	1	14	21.34	21.34	21.26		
3	64QAM	8	0	20.30	20.29	20.23		
3	64QAM	8	4	20.32	20.31	20.25		
3	64QAM	8	7	20.25	20.26	20.21		
3	64QAM	15	0	20.24	20.24	20.17		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	23.04	23.05	22.99	23.5	0
1.4	QPSK	1	3	23.10	23.12	23.05		
1.4	QPSK	1	5	23.02	23.03	22.93		
1.4	QPSK	3	0	23.09	23.08	22.98		
1.4	QPSK	3	1	23.11	23.12	23.03		
1.4	QPSK	3	3	23.09	23.08	23.03		
1.4	QPSK	6	0	22.06	22.06	22.00	22.5	1
1.4	16QAM	1	0	22.41	22.37	22.32	22.5	1
1.4	16QAM	1	3	22.50	22.46	22.42		
1.4	16QAM	1	5	22.37	22.38	22.36		
1.4	16QAM	3	0	22.18	22.18	22.10		
1.4	16QAM	3	1	22.25	22.22	22.14		
1.4	16QAM	3	3	22.18	22.17	22.12		
1.4	16QAM	6	0	21.24	21.25	21.18	21.5	2
1.4	64QAM	1	0	21.33	21.27	21.26	21.5	2
1.4	64QAM	1	3	21.39	21.38	21.33		
1.4	64QAM	1	5	21.30	21.29	21.23		
1.4	64QAM	3	0	21.33	21.30	21.22		
1.4	64QAM	3	1	21.36	21.33	21.28		
1.4	64QAM	3	3	21.32	21.30	21.27		
1.4	64QAM	6	0	20.18	20.17	20.12	20.5	3



**<LTE Band 5>**

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	23.59	23.50	23.37	24	0
10	QPSK	1	25	23.50	23.40	23.31		
10	QPSK	1	49	23.42	23.33	22.62		
10	QPSK	25	0	22.63	22.51	22.36	23	1
10	QPSK	25	12	22.57	22.47	22.34		
10	QPSK	25	25	22.55	22.41	22.03		
10	QPSK	50	0	22.57	22.44	22.36		
10	16QAM	1	0	22.90	22.78	22.70	23	1
10	16QAM	1	25	22.80	22.72	22.56		
10	16QAM	1	49	22.70	22.66	21.90		
10	16QAM	25	0	21.67	21.56	21.46	22	2
10	16QAM	25	12	21.64	21.57	21.44		
10	16QAM	25	25	21.60	21.50	21.17		
10	16QAM	50	0	21.66	21.55	21.44		
10	64QAM	1	0	21.84	21.71	21.63	22	2
10	64QAM	1	25	21.75	21.67	21.53		
10	64QAM	1	49	21.69	21.61	21.11		
10	64QAM	25	0	20.68	20.54	20.46	21	3
10	64QAM	25	12	20.64	20.57	20.47		
10	64QAM	25	25	20.60	20.50	20.30		
10	64QAM	50	0	20.68	20.53	20.44		
Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	23.57	23.43	23.27	24	0
5	QPSK	1	12	23.53	23.41	23.05		
5	QPSK	1	24	23.50	23.36	22.99		
5	QPSK	12	0	22.58	22.46	22.33	23	1
5	QPSK	12	7	22.64	22.48	22.03		
5	QPSK	12	13	22.56	22.43	22.01		
5	QPSK	25	0	22.60	22.43	22.20		
5	16QAM	1	0	22.93	22.73	22.54	23	1
5	16QAM	1	12	22.85	22.73	22.20		
5	16QAM	1	24	22.81	22.70	21.84		
5	16QAM	12	0	21.70	21.54	21.38	22	2
5	16QAM	12	7	21.71	21.57	21.16		
5	16QAM	12	13	21.64	21.50	21.05		
5	16QAM	25	0	21.64	21.52	21.35		
5	64QAM	1	0	21.84	21.68	21.52	22	2
5	64QAM	1	12	21.78	21.67	21.15		
5	64QAM	1	24	21.76	21.61	20.70		
5	64QAM	12	0	20.76	20.61	20.44	21	3
5	64QAM	12	7	20.75	20.64	20.22		
5	64QAM	12	13	20.68	20.55	20.16		
5	64QAM	25	0	20.67	20.52	20.40		
Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	23.55	23.41	23.17	24	0
3	QPSK	1	8	23.53	23.39	22.89		
3	QPSK	1	14	23.53	23.35	23.17		
3	QPSK	8	0	22.59	22.42	22.16	23	1
3	QPSK	8	4	22.59	22.45	22.06		



3	QPSK	8	7	22.59	22.43	22.17		
3	QPSK	15	0	22.60	22.43	22.17		
3	16QAM	1	0	22.92	22.67	22.41	23	1
3	16QAM	1	8	22.89	22.69	22.02		
3	16QAM	1	14	22.85	22.69	22.38		
3	16QAM	8	0	21.73	21.56	21.35	22	2
3	16QAM	8	4	21.76	21.58	21.21		
3	16QAM	8	7	21.72	21.57	21.29		
3	16QAM	15	0	21.68	21.55	21.32		
3	64QAM	1	0	21.82	21.65	21.40	22	2
3	64QAM	1	8	21.80	21.64	20.96		
3	64QAM	1	14	21.76	21.60	21.36		
3	64QAM	8	0	20.70	20.58	20.38	21	3
3	64QAM	8	4	20.74	20.59	20.26		
3	64QAM	8	7	20.67	20.55	20.37		
3	64QAM	15	0	20.66	20.52	20.35		
Channel				20407	20525	20643		
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	23.50	23.35	23.13	24	0
1.4	QPSK	1	3	23.57	23.39	23.25		
1.4	QPSK	1	5	23.50	23.33	23.15		
1.4	QPSK	3	0	23.58	23.38	23.14		
1.4	QPSK	3	1	23.58	23.42	23.19		
1.4	QPSK	3	3	23.55	23.39	23.20		
1.4	QPSK	6	0	22.56	22.39	22.24	23	1
1.4	16QAM	1	0	22.84	22.65	22.45	23	1
1.4	16QAM	1	3	22.91	22.73	22.52		
1.4	16QAM	1	5	22.83	22.64	22.43		
1.4	16QAM	3	0	22.65	22.44	22.21		
1.4	16QAM	3	1	22.69	22.51	22.26		
1.4	16QAM	3	3	22.63	22.45	22.19		
1.4	16QAM	6	0	21.73	21.54	21.35	22	2
1.4	64QAM	1	0	21.74	21.60	21.41	22	2
1.4	64QAM	1	3	21.80	21.61	21.32		
1.4	64QAM	1	5	21.72	21.56	21.37		
1.4	64QAM	3	0	21.75	21.58	21.35		
1.4	64QAM	3	1	21.79	21.63	21.34		
1.4	64QAM	3	3	21.74	21.57	21.35		
1.4	64QAM	6	0	20.65	20.46	20.31		





<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	24.20	24.01	23.87	24.5	0
20	QPSK	1	49	24.12	24.02	23.87		
20	QPSK	1	99	24.19	24.07	23.95		
20	QPSK	50	0	23.18	23.08	22.93	23.5	1
20	QPSK	50	24	23.18	23.09	22.99		
20	QPSK	50	50	23.20	23.13	22.95		
20	QPSK	100	0	23.19	23.11	22.96		
20	16QAM	1	0	23.44	23.34	23.22	23.5	1
20	16QAM	1	49	23.47	23.37	23.22		
20	16QAM	1	99	23.49	23.45	23.28		
20	16QAM	50	0	22.28	22.21	22.05	22.5	2
20	16QAM	50	24	22.31	22.21	22.07		
20	16QAM	50	50	22.33	22.20	22.08		
20	16QAM	100	0	22.28	22.17	22.05		
20	64QAM	1	0	22.38	22.27	22.16	22.5	2
20	64QAM	1	49	22.37	22.30	22.15		
20	64QAM	1	99	22.40	22.36	22.21		
20	64QAM	50	0	21.31	21.21	21.05	21.5	3
20	64QAM	50	24	21.33	21.21	21.08		
20	64QAM	50	50	21.33	21.23	21.10		
20	64QAM	100	0	21.32	21.20	21.07		
Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	24.18	24.03	23.89	24.5	0
15	QPSK	1	37	24.13	24.00	23.87		
15	QPSK	1	74	24.19	24.10	23.97		
15	QPSK	36	0	23.21	23.06	22.94	23.5	1
15	QPSK	36	20	23.23	23.11	22.96		
15	QPSK	36	39	23.20	23.09	22.97		
15	QPSK	75	0	23.19	23.10	22.92		
15	16QAM	1	0	23.49	23.36	23.23	23.5	1
15	16QAM	1	37	23.48	23.36	23.20		
15	16QAM	1	74	23.50	23.46	23.29		
15	16QAM	36	0	22.28	22.16	22.05	22.5	2
15	16QAM	36	20	22.31	22.20	22.08		
15	16QAM	36	39	22.33	22.20	22.05		
15	16QAM	75	0	22.30	22.16	22.05		
15	64QAM	1	0	22.42	22.29	22.15	22.5	2
15	64QAM	1	37	22.41	22.31	22.13		
15	64QAM	1	74	22.48	22.38	22.23		
15	64QAM	36	0	21.34	21.20	21.07	21.5	3
15	64QAM	36	20	21.35	21.22	21.10		
15	64QAM	36	39	21.34	21.23	21.10		
15	64QAM	75	0	21.30	21.19	21.05		
Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	24.13	23.98	23.85	24.5	0
10	QPSK	1	25	24.13	24.01	23.84		
10	QPSK	1	49	24.15	24.01	23.88		
10	QPSK	25	0	23.14	23.03	22.91	23.5	1
10	QPSK	25	12	23.16	23.05	22.94		



10	QPSK	25	25	23.16	23.05	22.92		
10	QPSK	50	0	23.17	23.06	22.90		
10	16QAM	1	0	23.44	23.33	23.19	23.5	1
10	16QAM	1	25	23.48	23.36	23.22		
10	16QAM	1	49	23.50	23.39	23.22		
10	16QAM	25	0	22.26	22.11	21.96	22.5	2
10	16QAM	25	12	22.30	22.16	22.04		
10	16QAM	25	25	22.27	22.15	22.00		
10	16QAM	50	0	22.26	22.17	22.01		
10	64QAM	1	0	22.37	22.25	22.13	22.5	2
10	64QAM	1	25	22.39	22.27	22.12		
10	64QAM	1	49	22.42	22.28	22.15		
10	64QAM	25	0	21.25	21.15	21.03	21.5	3
10	64QAM	25	12	21.29	21.17	21.03		
10	64QAM	25	25	21.29	21.19	21.04		
10	64QAM	50	0	21.30	21.19	21.02		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	24.11	23.98	23.83	24.5	0
5	QPSK	1	12	24.11	23.99	23.82		
5	QPSK	1	24	24.15	24.00	23.87		
5	QPSK	12	0	23.16	23.00	22.87	23.5	1
5	QPSK	12	7	23.20	23.05	22.90		
5	QPSK	12	13	23.20	23.05	22.89		
5	QPSK	25	0	23.17	23.03	22.87		
5	16QAM	1	0	23.43	23.31	23.18	23.5	1
5	16QAM	1	12	23.45	23.33	23.19		
5	16QAM	1	24	23.46	23.33	23.23		
5	16QAM	12	0	22.27	22.09	22.01	22.5	2
5	16QAM	12	7	22.30	22.16	22.03		
5	16QAM	12	13	22.28	22.17	22.03		
5	16QAM	25	0	22.29	22.14	22.00		
5	64QAM	1	0	22.38	22.27	22.09	22.5	2
5	64QAM	1	12	22.39	22.27	22.12		
5	64QAM	1	24	22.43	22.28	22.15		
5	64QAM	12	0	21.32	21.16	21.04	21.5	3
5	64QAM	12	7	21.34	21.22	21.06		
5	64QAM	12	13	21.34	21.19	21.08		
5	64QAM	25	0	21.28	21.15	21.03		



<LTE Band 12>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130		
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	23.54	23.72	23.56	24	0
10	QPSK	1	25	23.66	23.63	23.58		
10	QPSK	1	49	23.64	23.58	23.53		
10	QPSK	25	0	22.71	22.69	22.63	23	1
10	QPSK	25	12	22.71	22.65	22.67		
10	QPSK	25	25	22.71	22.64	22.57		
10	QPSK	50	0	22.71	22.65	22.60		
10	16QAM	1	0	22.82	22.90	22.92	23	1
10	16QAM	1	25	22.96	22.94	22.88		
10	16QAM	1	49	22.98	22.93	22.79		
10	16QAM	25	0	21.80	21.78	21.70	22	2
10	16QAM	25	12	21.81	21.75	21.71		
10	16QAM	25	25	21.77	21.73	21.67		
10	16QAM	50	0	21.79	21.74	21.70		
10	64QAM	1	0	21.76	21.92	21.85	22	2
10	64QAM	1	25	21.93	21.85	21.79		
10	64QAM	1	49	21.86	21.83	21.78		
10	64QAM	25	0	20.79	20.80	20.74	21	3
10	64QAM	25	12	20.84	20.77	20.71		
10	64QAM	25	25	20.79	20.75	20.71		
10	64QAM	50	0	20.77	20.76	20.71		
Channel				23035	23095	23155	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	23.54	23.60	23.51	24	0
5	QPSK	1	12	23.68	23.59	23.52		
5	QPSK	1	24	23.66	23.58	23.53		
5	QPSK	12	0	22.76	22.65	22.58	23	1
5	QPSK	12	7	22.77	22.67	22.59		
5	QPSK	12	13	22.71	22.67	22.58		
5	QPSK	25	0	22.72	22.61	22.59		
5	16QAM	1	0	22.85	22.92	22.85	23	1
5	16QAM	1	12	23.00	22.90	22.87		
5	16QAM	1	24	22.97	22.90	22.84		
5	16QAM	12	0	21.84	21.76	21.68	22	2
5	16QAM	12	7	21.84	21.78	21.69		
5	16QAM	12	13	21.82	21.71	21.68		
5	16QAM	25	0	21.81	21.72	21.65		
5	64QAM	1	0	21.79	21.86	21.78	22	2
5	64QAM	1	12	21.89	21.83	21.78		
5	64QAM	1	24	21.92	21.83	21.73		
5	64QAM	12	0	20.90	20.81	20.72	21	3
5	64QAM	12	7	20.92	20.81	20.74		
5	64QAM	12	13	20.87	20.78	20.73		
5	64QAM	25	0	20.84	20.73	20.66		
Channel				23025	23095	23165	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	23.61	23.61	23.53	24	0
3	QPSK	1	8	23.70	23.61	23.50		
3	QPSK	1	14	23.69	23.59	23.53		
3	QPSK	8	0	22.62	22.65	22.57	23	1
3	QPSK	8	4	22.73	22.65	22.57		



3	QPSK	8	7	22.75	22.65	22.55		
3	QPSK	15	0	22.70	22.62	22.54		
3	16QAM	1	0	22.87	22.95	22.88	23	1
3	16QAM	1	8	22.97	22.95	22.82		
3	16QAM	1	14	22.95	22.84	22.77		
3	16QAM	8	0	21.74	21.79	21.70	22	2
3	16QAM	8	4	21.86	21.80	21.73		
3	16QAM	8	7	21.88	21.77	21.65		
3	16QAM	15	0	21.82	21.75	21.64		
3	64QAM	1	0	21.77	21.83	21.77	22	2
3	64QAM	1	8	21.90	21.87	21.74		
3	64QAM	1	14	21.95	21.84	21.76		
3	64QAM	8	0	20.73	20.80	20.70	21	3
3	64QAM	8	4	20.88	20.81	20.70		
3	64QAM	8	7	20.87	20.78	20.70		
3	64QAM	15	0	20.85	20.75	20.67		
Channel				23017	23095	23173		
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	23.55	23.54	23.43	24	0
1.4	QPSK	1	3	23.71	23.61	23.52		
1.4	QPSK	1	5	23.58	23.56	23.43		
1.4	QPSK	3	0	23.57	23.56	23.49		
1.4	QPSK	3	1	23.69	23.63	23.48		
1.4	QPSK	3	3	23.62	23.57	23.48		
1.4	QPSK	6	0	22.60	22.58	22.48	23	1
1.4	16QAM	1	0	22.84	22.85	22.76	23	1
1.4	16QAM	1	3	23.00	22.90	22.82		
1.4	16QAM	1	5	22.85	22.89	22.71		
1.4	16QAM	3	0	22.62	22.67	22.54		
1.4	16QAM	3	1	22.70	22.71	22.58		
1.4	16QAM	3	3	22.65	22.62	22.53		
1.4	16QAM	6	0	21.73	21.72	21.65		
1.4	16QAM	6	0	21.73	21.72	21.65	22	2
1.4	64QAM	1	0	21.80	21.77	21.67	22	2
1.4	64QAM	1	3	21.92	21.84	21.73		
1.4	64QAM	1	5	21.77	21.80	21.62		
1.4	64QAM	3	0	21.81	21.81	21.67		
1.4	64QAM	3	1	21.84	21.85	21.71		
1.4	64QAM	3	3	21.81	21.76	21.68		
1.4	64QAM	6	0	20.69	20.69	20.59		
1.4	64QAM	6	0	20.69	20.69	20.59		
							21	3



<LTE Band 13>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23230				
Frequency (MHz)				782				
10	QPSK	1	0		22.74		24	0
10	QPSK	1	25		23.58			
10	QPSK	1	49		23.66			
10	QPSK	25	0		22.68		23	1
10	QPSK	25	12		22.67			
10	QPSK	25	25		22.63			
10	QPSK	50	0		22.66		23	1
10	16QAM	1	0		21.91			
10	16QAM	1	25		22.82			
10	16QAM	1	49		22.85		22	2
10	16QAM	25	0		21.76			
10	16QAM	25	12		21.77			
10	16QAM	25	25		21.73		22	2
10	16QAM	50	0		21.73			
10	64QAM	1	0		20.87			
10	64QAM	1	25		21.82		22	2
10	64QAM	1	49		21.82			
10	64QAM	25	0		20.76			
10	64QAM	25	12		20.76		21	3
10	64QAM	25	25		20.73			
10	64QAM	50	0		20.75			
Channel				23205	23230	23255	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				779.5	782	784.5		
5	QPSK	1	0	22.60	23.61	23.55	24	0
5	QPSK	1	12	23.54	23.60	23.65		
5	QPSK	1	24	23.60	23.57	23.53		
5	QPSK	12	0	22.20	22.67	22.65	23	1
5	QPSK	12	7	22.71	22.60	22.64		
5	QPSK	12	13	22.66	22.61	22.68		
5	QPSK	25	0	22.68	22.66	22.57	23	1
5	16QAM	1	0	21.84	22.91	22.82		
5	16QAM	1	12	22.85	22.88	22.96		
5	16QAM	1	24	22.87	22.83	22.82	22	2
5	16QAM	12	0	21.33	21.75	21.68		
5	16QAM	12	7	21.82	21.75	21.72		
5	16QAM	12	13	21.79	21.74	21.75	22	2
5	16QAM	25	0	21.78	21.73	21.69		
5	64QAM	1	0	20.74	21.86	21.75		
5	64QAM	1	12	21.74	21.83	21.87	22	2
5	64QAM	1	24	21.81	21.79	21.73		
5	64QAM	12	0	20.36	20.81	20.74		
5	64QAM	12	7	20.86	20.80	20.76	21	3
5	64QAM	12	13	20.79	20.74	20.82		
5	64QAM	25	0	20.77	20.75	20.71		



<LTE Band 17>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800		
Frequency (MHz)				709	710	711		
10	QPSK	1	0	23.50	23.53	23.51	24	0
10	QPSK	1	25	23.63	23.71	23.59		
10	QPSK	1	49	23.59	23.58	23.59		
10	QPSK	25	0	22.55	22.68	22.67	23	1
10	QPSK	25	12	22.67	22.68	22.67		
10	QPSK	25	25	22.64	22.67	22.64		
10	QPSK	50	0	22.70	22.69	22.64		
10	16QAM	1	0	22.89	22.86	22.80	23	1
10	16QAM	1	25	22.96	22.93	22.89		
10	16QAM	1	49	22.93	22.87	22.89		
10	16QAM	25	0	21.66	21.74	21.71	22	2
10	16QAM	25	12	21.77	21.75	21.76		
10	16QAM	25	25	21.72	21.73	21.73		
10	16QAM	50	0	21.75	21.76	21.71		
10	64QAM	1	0	21.74	21.73	21.73	22	2
10	64QAM	1	25	21.89	21.84	21.85		
10	64QAM	1	49	21.83	21.85	21.83		
10	64QAM	25	0	20.65	20.76	20.75	21	3
10	64QAM	25	12	20.78	20.74	20.79		
10	64QAM	25	25	20.79	20.75	20.74		
10	64QAM	50	0	20.77	20.75	20.73		
Channel				23755	23790	23825	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	23.64	23.49	23.58	24	0
5	QPSK	1	12	23.66	23.63	23.57		
5	QPSK	1	24	23.69	23.59	23.58		
5	QPSK	12	0	22.73	22.69	22.59	23	1
5	QPSK	12	7	22.70	22.71	22.65		
5	QPSK	12	13	22.68	22.64	22.61		
5	QPSK	25	0	22.72	22.65	22.61		
5	16QAM	1	0	22.94	22.78	22.88	23	1
5	16QAM	1	12	23.00	22.94	22.89		
5	16QAM	1	24	22.98	22.92	22.86		
5	16QAM	12	0	21.79	21.75	21.68	22	2
5	16QAM	12	7	21.81	21.75	21.74		
5	16QAM	12	13	21.77	21.76	21.70		
5	16QAM	25	0	21.77	21.75	21.67		
5	64QAM	1	0	21.92	21.73	21.84	22	2
5	64QAM	1	12	21.93	21.87	21.82		
5	64QAM	1	24	21.88	21.79	21.82		
5	64QAM	12	0	20.83	20.80	20.74	21	3
5	64QAM	12	7	20.87	20.80	20.77		
5	64QAM	12	13	20.84	20.79	20.74		
5	64QAM	25	0	20.78	20.77	20.69		



<LTE Band 25>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26140	26340	26590		
Frequency (MHz)				1860	1880	1905		
20	QPSK	1	0	22.50	22.47	22.39	23.5	0
20	QPSK	1	49	22.35	22.39	22.34		
20	QPSK	1	99	22.28	22.44	22.39		
20	QPSK	50	0	21.38	21.47	21.46	22.5	1
20	QPSK	50	24	21.40	21.52	21.44		
20	QPSK	50	50	21.34	21.42	21.41		
20	QPSK	100	0	21.39	21.46	21.43		
20	16QAM	1	0	21.79	21.82	21.76	22.5	1
20	16QAM	1	49	21.72	21.75	21.69		
20	16QAM	1	99	21.67	21.80	21.70		
20	16QAM	50	0	20.48	20.60	20.53	21.5	2
20	16QAM	50	24	20.51	20.61	20.53		
20	16QAM	50	50	20.47	20.54	20.50		
20	16QAM	100	0	20.49	20.58	20.53		
20	64QAM	1	0	20.68	20.73	20.67	21.5	2
20	64QAM	1	49	20.64	20.66	20.61		
20	64QAM	1	99	20.56	20.73	20.61		
20	64QAM	50	0	19.51	19.60	19.55	20.5	3
20	64QAM	50	24	19.53	19.62	19.56		
20	64QAM	50	50	19.47	19.55	19.51		
20	64QAM	100	0	19.47	19.58	19.57		
Channel				26115	26340	26615	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1907.5		
15	QPSK	1	0	22.47	22.44	22.39	23.5	0
15	QPSK	1	37	22.45	22.40	22.44		
15	QPSK	1	74	22.38	22.46	22.43		
15	QPSK	36	0	21.56	21.52	21.45	22.5	1
15	QPSK	36	20	21.56	21.52	21.44		
15	QPSK	36	39	21.52	21.47	21.53		
15	QPSK	75	0	21.56	21.47	21.44		
15	16QAM	1	0	21.88	21.78	21.76	22.5	1
15	16QAM	1	37	21.82	21.77	21.80		
15	16QAM	1	74	21.74	21.82	21.74		
15	16QAM	36	0	20.68	20.61	20.53	21.5	2
15	16QAM	36	20	20.67	20.64	20.55		
15	16QAM	36	39	20.65	20.54	20.60		
15	16QAM	75	0	20.68	20.59	20.53		
15	64QAM	1	0	20.78	20.67	20.64	21.5	2
15	64QAM	1	37	20.72	20.64	20.68		
15	64QAM	1	74	20.66	20.71	20.65		
15	64QAM	36	0	19.71	19.63	19.55	20.5	3
15	64QAM	36	20	19.72	19.64	19.59		
15	64QAM	36	39	19.65	19.61	19.64		
15	64QAM	75	0	19.64	19.59	19.51		
Channel				26090	26340	26640	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1910		
10	QPSK	1	0	22.47	22.49	22.48	23.5	0
10	QPSK	1	25	22.39	22.40	22.47		
10	QPSK	1	49	22.40	22.44	22.42		
10	QPSK	25	0	21.41	21.51	21.55	22.5	1
10	QPSK	25	12	21.44	21.51	21.53		



**FCC SAR TEST REPORT**

**Report No. : FA872411**

10	QPSK	25	25	21.36	21.46	21.51		
10	QPSK	50	0	21.41	21.51	21.53		
10	16QAM	1	0	21.85	21.84	21.81	22.5	1
10	16QAM	1	25	21.74	21.75	21.78		
10	16QAM	1	49	21.74	21.78	21.73		
10	16QAM	25	0	20.51	20.63	20.64	21.5	2
10	16QAM	25	12	20.51	20.61	20.64		
10	16QAM	25	25	20.46	20.59	20.60		
10	16QAM	50	0	20.50	20.59	20.63		
10	64QAM	1	0	20.76	20.79	20.80	21.5	2
10	64QAM	1	25	20.62	20.67	20.77		
10	64QAM	1	49	20.65	20.67	20.72		
10	64QAM	25	0	19.53	19.63	19.61	20.5	3
10	64QAM	25	12	19.53	19.61	19.67		
10	64QAM	25	25	19.47	19.59	19.64		
10	64QAM	50	0	19.50	19.61	19.62		
Channel				26065	26340	26665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1912.5		
5	QPSK	1	0	22.39	22.41	22.44	23.5	0
5	QPSK	1	12	22.38	22.40	22.46		
5	QPSK	1	24	22.34	22.38	22.40		
5	QPSK	12	0	21.40	21.48	21.50	22.5	1
5	QPSK	12	7	21.42	21.52	21.55		
5	QPSK	12	13	21.36	21.45	21.47		
5	QPSK	25	0	21.37	21.49	21.49		
5	16QAM	1	0	21.74	21.73	21.76	22.5	1
5	16QAM	1	12	21.74	21.77	21.74		
5	16QAM	1	24	21.66	21.70	21.74		
5	16QAM	12	0	20.54	20.62	20.61	21.5	2
5	16QAM	12	7	20.51	20.61	20.62		
5	16QAM	12	13	20.46	20.58	20.61		
5	16QAM	25	0	20.47	20.55	20.59		
5	64QAM	1	0	20.65	20.67	20.69	21.5	2
5	64QAM	1	12	20.65	20.67	20.67		
5	64QAM	1	24	20.60	20.62	20.66		
5	64QAM	12	0	19.56	19.64	19.64	20.5	3
5	64QAM	12	7	19.56	19.64	19.69		
5	64QAM	12	13	19.55	19.59	19.64		
5	64QAM	25	0	19.49	19.59	19.61		
Channel				26055	26340	26675	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1913.5		
3	QPSK	1	0	22.39	22.42	22.46	23.5	0
3	QPSK	1	8	22.37	22.43	22.44		
3	QPSK	1	14	22.33	22.39	22.41		
3	QPSK	8	0	21.41	21.49	21.51	22.5	1
3	QPSK	8	4	21.44	21.53	21.55		
3	QPSK	8	7	21.39	21.47	21.53		
3	QPSK	15	0	21.39	21.47	21.51		
3	16QAM	1	0	21.72	21.76	21.73	22.5	1
3	16QAM	1	8	21.73	21.78	21.75		
3	16QAM	1	14	21.70	21.71	21.72		
3	16QAM	8	0	20.56	20.64	20.64	21.5	2
3	16QAM	8	4	20.57	20.67	20.67		
3	16QAM	8	7	20.53	20.63	20.64		
3	16QAM	15	0	20.50	20.59	20.62		
3	64QAM	1	0	20.64	20.65	20.68	21.5	2





3	64QAM	1	8	20.67	20.71	20.68	20.5	3
3	64QAM	1	14	20.58	20.65	20.66		
3	64QAM	8	0	19.57	19.65	19.65		
3	64QAM	8	4	19.57	19.69	19.69		
3	64QAM	8	7	19.54	19.64	19.64		
3	64QAM	15	0	19.49	19.58	19.62		
Channel				26047	26340	26683	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1914.3		
1.4	QPSK	1	0	22.33	22.38	22.37	23.5	0
1.4	QPSK	1	3	22.39	22.42	22.45		
1.4	QPSK	1	5	22.31	22.35	22.36		
1.4	QPSK	3	0	22.35	22.40	22.41		
1.4	QPSK	3	1	22.41	22.43	22.43		
1.4	QPSK	3	3	22.39	22.39	22.41		
1.4	QPSK	6	0	21.35	21.43	21.45	22.5	1
1.4	16QAM	1	0	21.68	21.72	21.65	22.5	1
1.4	16QAM	1	3	21.77	21.77	21.77		
1.4	16QAM	1	5	21.64	21.65	21.67		
1.4	16QAM	3	0	21.47	21.52	21.49		
1.4	16QAM	3	1	21.51	21.52	21.51		
1.4	16QAM	3	3	21.45	21.48	21.48		
1.4	16QAM	6	0	20.49	20.63	20.61	21.5	2
1.4	64QAM	1	0	20.62	20.63	20.60	21.5	2
1.4	64QAM	1	3	20.67	20.69	20.67		
1.4	64QAM	1	5	20.58	20.62	20.57		
1.4	64QAM	3	0	20.57	20.61	20.64		
1.4	64QAM	3	1	20.65	20.65	20.66		
1.4	64QAM	3	3	20.57	20.62	20.61		
1.4	64QAM	6	0	19.46	19.56	19.54	20.5	3



<LTE Band 26>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				26765	26865	26965		
Frequency (MHz)				821.5	831.5	841.5		
15	QPSK	1	0	23.51	23.40	23.42		
15	QPSK	1	37	23.50	23.38	23.43	24	0
15	QPSK	1	74	23.53	23.30	23.35		
15	QPSK	36	0	22.59	22.46	22.42		
15	QPSK	36	20	22.56	22.43	22.38	23	1
15	QPSK	36	39	22.64	22.40	22.43		
15	QPSK	75	0	22.53	22.43	22.35		
15	16QAM	1	0	22.81	22.74	22.79	23	1
15	16QAM	1	37	22.89	22.71	22.75		
15	16QAM	1	74	22.89	22.63	22.64		
15	16QAM	36	0	21.67	21.56	21.50	22	2
15	16QAM	36	20	21.67	21.54	21.48		
15	16QAM	36	39	21.69	21.48	21.51		
15	16QAM	75	0	21.62	21.52	21.44	22	2
15	64QAM	1	0	21.72	21.64	21.72		
15	64QAM	1	37	21.78	21.63	21.69		
15	64QAM	1	74	21.77	21.57	21.59	22	2
15	64QAM	36	0	20.72	20.59	20.54		
15	64QAM	36	20	20.72	20.57	20.49		
15	64QAM	36	39	20.72	20.50	20.54	21	3
15	64QAM	75	0	20.63	20.51	20.45		
Channel				26740	26865	26990		
Frequency (MHz)				819	831.5	844		
10	QPSK	1	0	23.52	23.36	23.36		
10	QPSK	1	25	23.51	23.40	23.30		
10	QPSK	1	49	23.50	23.28	23.23		
10	QPSK	25	0	22.63	22.44	22.39		
10	QPSK	25	12	22.64	22.43	22.35	23	1
10	QPSK	25	25	22.54	22.36	22.33		
10	QPSK	50	0	22.59	22.42	22.35		
10	16QAM	1	0	22.80	22.70	22.71	23	1
10	16QAM	1	25	22.92	22.72	22.61		
10	16QAM	1	49	22.85	22.70	22.55		
10	16QAM	25	0	21.72	21.54	21.45	22	2
10	16QAM	25	12	21.70	21.53	21.45		
10	16QAM	25	25	21.65	21.49	21.40		
10	16QAM	50	0	21.68	21.54	21.43	22	2
10	64QAM	1	0	21.77	21.60	21.59		
10	64QAM	1	25	21.86	21.62	21.52		
10	64QAM	1	49	21.80	21.55	21.45	22	2
10	64QAM	25	0	20.72	20.58	20.46		
10	64QAM	25	12	20.75	20.54	20.44		
10	64QAM	25	25	20.66	20.47	20.40	21	3
10	64QAM	50	0	20.70	20.54	20.45		
Channel				26715	26865	27015		
Frequency (MHz)				816.5	831.5	846.5		
5	QPSK	1	0	23.52	23.42	23.30		
5	QPSK	1	12	23.48	23.40	23.27		
5	QPSK	1	24	23.52	23.33	23.23		
5	QPSK	12	0	22.54	22.41	22.32		
5	QPSK	12	7	22.54	22.44	22.31	23	1



5	QPSK	12	13	22.62	22.37	22.29		
5	QPSK	25	0	22.65	22.39	22.29		
5	16QAM	1	0	22.80	22.71	22.60	23	1
5	16QAM	1	12	22.81	22.72	22.57		
5	16QAM	1	24	22.93	22.69	22.51		
5	16QAM	12	0	21.65	21.52	21.39	22	2
5	16QAM	12	7	21.64	21.52	21.42		
5	16QAM	12	13	21.73	21.48	21.38		
5	16QAM	25	0	21.74	21.53	21.39		
5	64QAM	1	0	21.75	21.71	21.56	22	2
5	64QAM	1	12	21.75	21.65	21.50		
5	64QAM	1	24	21.83	21.58	21.46		
5	64QAM	12	0	20.66	20.60	20.45	21	3
5	64QAM	12	7	20.71	20.58	20.48		
5	64QAM	12	13	20.75	20.52	20.42		
5	64QAM	25	0	20.71	20.52	20.39		
Channel				26705	26865	27025	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				815.5	831.5	847.5		
3	QPSK	1	0	23.52	23.43	23.28	24	0
3	QPSK	1	8	23.51	23.39	23.24		
3	QPSK	1	14	23.46	23.36	23.23		
3	QPSK	8	0	22.52	22.43	22.28	23	1
3	QPSK	8	4	22.57	22.47	22.33		
3	QPSK	8	7	22.55	22.41	22.29		
3	QPSK	15	0	22.56	22.44	22.32		
3	16QAM	1	0	22.81	22.74	22.58	23	1
3	16QAM	1	8	22.81	22.71	22.54		
3	16QAM	1	14	22.78	22.69	22.52		
3	16QAM	8	0	21.71	21.57	21.44	22	2
3	16QAM	8	4	21.72	21.59	21.47		
3	16QAM	8	7	21.68	21.55	21.46		
3	16QAM	15	0	21.64	21.51	21.40		
3	64QAM	1	0	21.75	21.65	21.52	22	2
3	64QAM	1	8	21.72	21.66	21.51		
3	64QAM	1	14	21.73	21.63	21.48		
3	64QAM	8	0	20.71	20.54	20.42	21	3
3	64QAM	8	4	20.69	20.59	20.46		
3	64QAM	8	7	20.64	20.53	20.43		
3	64QAM	15	0	20.63	20.52	20.40		
Channel				26697	26865	27033	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				814.7	831.5	848.3		
1.4	QPSK	1	0	23.45	23.35	23.19	24	0
1.4	QPSK	1	3	23.52	23.39	23.26		
1.4	QPSK	1	5	23.42	23.32	23.17		
1.4	QPSK	3	0	23.47	23.35	23.19		
1.4	QPSK	3	1	23.52	23.41	23.26		
1.4	QPSK	3	3	23.48	23.35	23.22	23	1
1.4	QPSK	6	0	22.48	22.37	22.22		
1.4	16QAM	1	0	22.75	22.67	22.47	23	1
1.4	16QAM	1	3	22.84	22.72	22.55		
1.4	16QAM	1	5	22.74	22.62	22.46		
1.4	16QAM	3	0	22.56	22.44	22.30		
1.4	16QAM	3	1	22.58	22.49	22.34		
1.4	16QAM	3	3	22.54	22.41	22.27	22	2
1.4	16QAM	6	0	21.64	21.51	21.39		
1.4	64QAM	1	0	21.71	21.62	21.45	22	2



**FCC SAR TEST REPORT**

**Report No. : FA872411**

1.4	64QAM	1	3	21.77	21.66	21.50		
1.4	64QAM	1	5	21.64	21.58	21.44		
1.4	64QAM	3	0	21.72	21.58	21.45		
1.4	64QAM	3	1	21.74	21.64	21.47		
1.4	64QAM	3	3	21.70	21.54	21.44		
1.4	64QAM	6	0	20.55	20.45	20.33		
							21	3



<LTE Band 30>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				27710				
Frequency (MHz)				2310				
10	QPSK	1	0		22.90		23	0
10	QPSK	1	25		22.84			
10	QPSK	1	49		22.83			
10	QPSK	25	0		21.91		22.5	0.5
10	QPSK	25	12		21.93			
10	QPSK	25	25		21.87			
10	QPSK	50	0		21.87		22.5	0.5
10	16QAM	1	0		22.28			
10	16QAM	1	25		22.23			
10	16QAM	1	49		22.22		21.5	1.5
10	16QAM	25	0		20.72			
10	16QAM	25	12		21.03			
10	16QAM	25	25		20.97		21.5	1.5
10	16QAM	50	0		20.99			
10	64QAM	1	0		21.19			
10	64QAM	1	25		21.19		21.5	1.5
10	64QAM	1	49		21.14			
10	64QAM	25	0		20.01			
10	64QAM	25	12		19.94		20.5	2.5
10	64QAM	25	25		19.98			
10	64QAM	50	0		20.02			
Channel				27685	27710	27735		
Frequency (MHz)				2307.5	2310	2312.5		
5	QPSK	1	0	22.86	22.90	22.71	23	0
5	QPSK	1	12	22.91	22.71	22.72		
5	QPSK	1	24	22.88	22.81	22.66		
5	QPSK	12	0	21.90	21.88	21.80	22.5	0.5
5	QPSK	12	7	21.95	21.93	21.81		
5	QPSK	12	13	21.90	21.88	21.72		
5	QPSK	25	0	21.90	21.91	21.76	22.5	0.5
5	16QAM	1	0	22.28	22.20	22.04		
5	16QAM	1	12	22.28	22.23	22.07		
5	16QAM	1	24	22.22	22.18	22.02	21.5	1.5
5	16QAM	12	0	20.97	20.99	20.86		
5	16QAM	12	7	21.02	21.00	20.88		
5	16QAM	12	13	21.02	20.96	20.87	21.5	1.5
5	16QAM	25	0	20.93	20.99	20.84		
5	64QAM	1	0	21.19	21.09	20.99		
5	64QAM	1	12	21.18	21.15	20.98	21.5	1.5
5	64QAM	1	24	21.14	21.10	20.97		
5	64QAM	12	0	20.06	20.04	19.92		
5	64QAM	12	7	20.09	20.06	19.95	20.5	2.5
5	64QAM	12	13	20.04	20.03	19.79		
5	64QAM	25	0	20.03	19.99	19.87		



<Reduced Power Mode>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				18700	18900	19100	
Frequency (MHz)				1860	1880	1900	
20	QPSK	1	0	19.43	19.48	19.31	20.5
20	QPSK	1	49	19.42	19.48	19.38	
20	QPSK	1	99	19.41	19.43	19.33	
20	QPSK	50	0	19.42	19.51	19.34	20.5
20	QPSK	50	24	19.49	19.52	19.46	
20	QPSK	50	50	19.44	19.46	19.41	
20	QPSK	100	0	19.43	19.47	19.34	
20	16QAM	1	0	19.78	19.84	19.63	20.5
20	16QAM	1	49	19.75	19.81	19.76	
20	16QAM	1	99	19.78	19.71	19.72	
20	16QAM	50	0	19.59	19.61	19.46	20.5
20	16QAM	50	24	19.64	19.63	19.57	
20	16QAM	50	50	19.59	19.57	19.53	
20	16QAM	100	0	19.57	19.61	19.39	
20	64QAM	1	0	19.66	19.81	19.64	20.5
20	64QAM	1	49	19.65	19.73	19.66	
20	64QAM	1	99	19.61	19.70	19.63	
20	64QAM	50	0	19.57	19.61	19.44	20.5
20	64QAM	50	24	19.66	19.65	19.56	
20	64QAM	50	50	19.61	19.59	19.51	
20	64QAM	100	0	19.63	19.62	19.41	
Channel				18675	18900	19125	Tune-up limit (dBm)
Frequency (MHz)				1857.5	1880	1902.5	
15	QPSK	1	0	19.52	19.42	19.38	20.5
15	QPSK	1	37	19.55	19.48	19.35	
15	QPSK	1	74	19.51	19.38	19.34	
15	QPSK	36	0	19.57	19.51	19.41	20.5
15	QPSK	36	20	19.66	19.54	19.45	
15	QPSK	36	39	19.59	19.46	19.39	
15	QPSK	75	0	19.57	19.48	19.39	
15	16QAM	1	0	19.87	19.80	19.71	20.5
15	16QAM	1	37	19.80	19.81	19.68	
15	16QAM	1	74	19.80	19.67	19.70	
15	16QAM	36	0	19.69	19.59	19.53	20.5
15	16QAM	36	20	19.73	19.63	19.55	
15	16QAM	36	39	19.70	19.58	19.49	
15	16QAM	75	0	19.68	19.60	19.53	
15	64QAM	1	0	19.84	19.77	19.71	20.5
15	64QAM	1	37	19.84	19.70	19.67	
15	64QAM	1	74	19.79	19.64	19.60	
15	64QAM	36	0	19.73	19.65	19.56	20.5
15	64QAM	36	20	19.79	19.68	19.60	
15	64QAM	36	39	19.71	19.60	19.51	
15	64QAM	75	0	19.69	19.62	19.53	
Channel				18650	18900	19150	Tune-up limit (dBm)
Frequency (MHz)				1855	1880	1905	
10	QPSK	1	0	19.56	19.59	19.40	20.5
10	QPSK	1	25	19.47	19.49	19.40	
10	QPSK	1	49	19.48	19.53	19.32	



**FCC SAR TEST REPORT**

**Report No. : FA872411**

10	QPSK	25	0	19.49	19.53	19.38	20.5
10	QPSK	25	12	19.52	19.55	19.40	
10	QPSK	25	25	19.43	19.49	19.39	
10	QPSK	50	0	19.47	19.51	19.39	
10	16QAM	1	0	19.92	19.98	19.72	20.5
10	16QAM	1	25	19.78	19.85	19.67	
10	16QAM	1	49	19.80	19.83	19.71	
10	16QAM	25	0	19.64	19.65	19.54	20.5
10	16QAM	25	12	19.64	19.64	19.52	
10	16QAM	25	25	19.61	19.59	19.48	
10	16QAM	50	0	19.63	19.62	19.50	
10	64QAM	1	0	19.88	19.89	19.69	20.5
10	64QAM	1	25	19.81	19.75	19.68	
10	64QAM	1	49	19.75	19.77	19.62	
10	64QAM	25	0	19.64	19.68	19.56	20.5
10	64QAM	25	12	19.67	19.66	19.56	
10	64QAM	25	25	19.62	19.63	19.50	
10	64QAM	50	0	19.64	19.66	19.52	
Channel				18625	18900	19175	Tune-up limit (dBm)
Frequency (MHz)				1852.5	1880	1907.5	
5	QPSK	1	0	19.48	19.51	19.34	20.5
5	QPSK	1	12	19.51	19.49	19.39	
5	QPSK	1	24	19.44	19.45	19.30	
5	QPSK	12	0	19.51	19.51	19.38	20.5
5	QPSK	12	7	19.52	19.53	19.41	
5	QPSK	12	13	19.50	19.50	19.38	
5	QPSK	25	0	19.48	19.47	19.36	
5	16QAM	1	0	19.80	19.75	19.62	20.5
5	16QAM	1	12	19.83	19.87	19.73	
5	16QAM	1	24	19.73	19.71	19.70	
5	16QAM	12	0	19.67	19.63	19.50	20.5
5	16QAM	12	7	19.66	19.64	19.52	
5	16QAM	12	13	19.63	19.58	19.48	
5	16QAM	25	0	19.61	19.59	19.49	
5	64QAM	1	0	19.80	19.76	19.63	20.5
5	64QAM	1	12	19.76	19.77	19.65	
5	64QAM	1	24	19.74	19.72	19.63	
5	64QAM	12	0	19.69	19.66	19.57	20.5
5	64QAM	12	7	19.69	19.70	19.55	
5	64QAM	12	13	19.69	19.67	19.54	
5	64QAM	25	0	19.63	19.62	19.52	
Channel				18615	18900	19185	Tune-up limit (dBm)
Frequency (MHz)				1851.5	1880	1908.5	
3	QPSK	1	0	19.45	19.49	19.39	20.5
3	QPSK	1	8	19.49	19.51	19.38	
3	QPSK	1	14	19.44	19.47	19.35	
3	QPSK	8	0	19.49	19.51	19.39	20.5
3	QPSK	8	4	19.56	19.56	19.41	
3	QPSK	8	7	19.48	19.52	19.39	
3	QPSK	15	0	19.49	19.50	19.38	
3	16QAM	1	0	19.83	19.78	19.73	20.5
3	16QAM	1	8	19.81	19.82	19.73	
3	16QAM	1	14	19.79	19.73	19.67	
3	16QAM	8	0	19.67	19.65	19.56	20.5
3	16QAM	8	4	19.70	19.67	19.59	
3	16QAM	8	7	19.67	19.63	19.56	



3	16QAM	15	0	19.61	19.61	19.50	
3	64QAM	1	0	19.79	19.74	19.63	20.5
3	64QAM	1	8	19.72	19.78	19.74	
3	64QAM	1	14	19.80	19.68	19.65	
3	64QAM	8	0	19.68	19.67	19.57	20.5
3	64QAM	8	4	19.73	19.71	19.57	
3	64QAM	8	7	19.67	19.66	19.53	
3	64QAM	15	0	19.61	19.64	19.50	
Channel				18607	18900	19193	Tune-up limit (dBm)
Frequency (MHz)				1850.7	1880	1909.3	
1.4	QPSK	1	0	19.37	19.40	19.31	20.5
1.4	QPSK	1	3	19.46	19.49	19.38	
1.4	QPSK	1	5	19.40	19.39	19.29	
1.4	QPSK	3	0	19.44	19.46	19.32	
1.4	QPSK	3	1	19.47	19.49	19.37	
1.4	QPSK	3	3	19.46	19.46	19.30	
1.4	QPSK	6	0	19.43	19.46	19.32	20.5
1.4	16QAM	1	0	19.71	19.73	19.66	20.5
1.4	16QAM	1	3	19.80	19.81	19.72	
1.4	16QAM	1	5	19.73	19.75	19.62	
1.4	16QAM	3	0	19.54	19.53	19.41	
1.4	16QAM	3	1	19.58	19.58	19.42	
1.4	16QAM	3	3	19.56	19.53	19.46	
1.4	16QAM	6	0	19.63	19.59	19.50	20.5
1.4	64QAM	1	0	19.70	19.70	19.57	20.5
1.4	64QAM	1	3	19.82	19.73	19.65	
1.4	64QAM	1	5	19.72	19.65	19.58	
1.4	64QAM	3	0	19.68	19.67	19.53	
1.4	64QAM	3	1	19.75	19.69	19.63	
1.4	64QAM	3	3	19.65	19.62	19.52	
1.4	64QAM	6	0	19.58	19.56	19.43	20.5





<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				20050	20175	20300	
Frequency (MHz)				1720	1732.5	1745	
20	QPSK	1	0	20.06	20.10	19.99	21
20	QPSK	1	49	20.06	20.10	20.05	
20	QPSK	1	99	20.09	20.04	19.98	
20	QPSK	50	0	20.10	20.10	20.00	21
20	QPSK	50	24	20.20	20.15	20.00	
20	QPSK	50	50	20.15	20.10	20.07	
20	QPSK	100	0	20.15	20.13	19.99	
20	16QAM	1	0	20.42	20.46	20.34	21
20	16QAM	1	49	20.48	20.46	20.46	
20	16QAM	1	99	20.49	20.39	20.42	
20	16QAM	50	0	20.21	20.26	20.12	21
20	16QAM	50	24	20.35	20.27	20.10	
20	16QAM	50	50	20.27	20.22	20.17	
20	16QAM	100	0	20.28	20.23	20.08	
20	64QAM	1	0	20.35	20.37	20.27	21
20	64QAM	1	49	20.34	20.41	20.37	
20	64QAM	1	99	20.40	20.35	20.31	
20	64QAM	50	0	20.22	20.29	20.13	21
20	64QAM	50	24	20.35	20.31	20.15	
20	64QAM	50	50	20.30	20.23	20.18	
20	64QAM	100	0	20.30	20.26	20.11	
Channel				20025	20175	20325	Tune-up limit (dBm)
Frequency (MHz)				1717.5	1732.5	1747.5	
15	QPSK	1	0	20.10	20.10	19.98	21
15	QPSK	1	37	20.09	20.08	20.03	
15	QPSK	1	74	20.10	20.05	19.98	
15	QPSK	36	0	20.11	20.11	19.96	21
15	QPSK	36	20	20.19	20.14	20.08	
15	QPSK	36	39	20.19	20.09	20.04	
15	QPSK	75	0	20.17	20.10	19.96	
15	16QAM	1	0	20.43	20.50	20.32	21
15	16QAM	1	37	20.42	20.45	20.44	
15	16QAM	1	74	20.49	20.42	20.35	
15	16QAM	36	0	20.19	20.22	20.09	21
15	16QAM	36	20	20.30	20.22	20.23	
15	16QAM	36	39	20.27	20.21	20.18	
15	16QAM	75	0	20.31	20.20	20.05	
15	64QAM	1	0	20.42	20.40	20.27	21
15	64QAM	1	37	20.35	20.40	20.39	
15	64QAM	1	74	20.37	20.33	20.30	
15	64QAM	36	0	20.23	20.25	20.12	21
15	64QAM	36	20	20.37	20.33	20.25	
15	64QAM	36	39	20.35	20.24	20.21	
15	64QAM	75	0	20.32	20.24	20.06	
Channel				20000	20175	20350	Tune-up limit (dBm)
Frequency (MHz)				1715	1732.5	1750	
10	QPSK	1	0	20.16	20.15	20.06	21
10	QPSK	1	25	20.13	20.12	20.06	
10	QPSK	1	49	20.05	20.09	20.00	
10	QPSK	25	0	20.12	20.12	20.08	21
10	QPSK	25	12	20.14	20.15	20.10	



**FCC SAR TEST REPORT**

**Report No. : FA872411**

10	QPSK	25	25	20.09	20.10	20.04	
10	QPSK	50	0	20.16	20.12	20.06	
10	16QAM	1	0	20.48	20.50	20.44	
10	16QAM	1	25	20.42	20.50	20.41	21
10	16QAM	1	49	20.39	20.45	20.43	
10	16QAM	25	0	20.22	20.24	20.18	
10	16QAM	25	12	20.23	20.27	20.21	21
10	16QAM	25	25	20.21	20.25	20.17	
10	16QAM	50	0	20.23	20.28	20.18	
10	64QAM	1	0	20.44	20.43	20.39	21
10	64QAM	1	25	20.41	20.42	20.34	
10	64QAM	1	49	20.37	20.40	20.34	
10	64QAM	25	0	20.24	20.28	20.21	21
10	64QAM	25	12	20.26	20.27	20.23	
10	64QAM	25	25	20.23	20.23	20.18	
10	64QAM	50	0	20.28	20.27	20.23	
Channel				19975	20175	20375	
Frequency (MHz)				1712.5	1732.5	1752.5	
5	QPSK	1	0	20.11	20.12	20.02	21
5	QPSK	1	12	20.16	20.13	20.03	
5	QPSK	1	24	20.12	20.06	20.02	
5	QPSK	12	0	20.14	20.13	20.07	21
5	QPSK	12	7	20.17	20.16	20.09	
5	QPSK	12	13	20.14	20.10	20.06	
5	QPSK	25	0	20.14	20.11	20.03	
5	16QAM	1	0	20.50	20.44	20.36	
5	16QAM	1	12	20.48	20.42	20.48	21
5	16QAM	1	24	20.46	20.44	20.32	
5	16QAM	12	0	20.26	20.24	20.14	
5	16QAM	12	7	20.30	20.28	20.21	21
5	16QAM	12	13	20.26	20.22	20.15	
5	16QAM	25	0	20.22	20.21	20.18	
5	64QAM	1	0	20.42	20.42	20.33	
5	64QAM	1	12	20.42	20.41	20.38	
5	64QAM	1	24	20.39	20.37	20.36	21
5	64QAM	12	0	20.32	20.29	20.24	
5	64QAM	12	7	20.35	20.34	20.26	
5	64QAM	12	13	20.31	20.29	20.23	
5	64QAM	25	0	20.24	20.22	20.19	
Channel				19965	20175	20385	Tune-up limit (dBm)
Frequency (MHz)				1711.5	1732.5	1753.5	
3	QPSK	1	0	20.13	20.10	20.03	21
3	QPSK	1	8	20.17	20.11	20.03	
3	QPSK	1	14	20.08	20.06	20.03	
3	QPSK	8	0	20.15	20.16	20.06	21
3	QPSK	8	4	20.20	20.18	20.09	
3	QPSK	8	7	20.18	20.14	20.08	
3	QPSK	15	0	20.14	20.13	20.05	
3	16QAM	1	0	20.46	20.50	20.39	
3	16QAM	1	8	20.50	20.45	20.39	21
3	16QAM	1	14	20.45	20.44	20.40	
3	16QAM	8	0	20.29	20.28	20.23	
3	16QAM	8	4	20.32	20.31	20.23	21
3	16QAM	8	7	20.29	20.29	20.22	
3	16QAM	15	0	20.26	20.23	20.18	
3	64QAM	1	0	20.43	20.41	20.27	



3	64QAM	1	8	20.42	20.38	20.36	21
3	64QAM	1	14	20.42	20.36	20.34	
3	64QAM	8	0	20.29	20.28	20.24	
3	64QAM	8	4	20.32	20.30	20.26	
3	64QAM	8	7	20.28	20.29	20.23	
3	64QAM	15	0	20.28	20.25	20.17	
Channel				19957	20175	20393	Tune-up limit (dBm)
Frequency (MHz)				1710.7	1732.5	1754.3	
1.4	QPSK	1	0	20.07	20.04	19.95	21
1.4	QPSK	1	3	20.11	20.09	20.01	
1.4	QPSK	1	5	20.06	20.04	19.95	
1.4	QPSK	3	0	20.10	20.06	20.02	
1.4	QPSK	3	1	20.12	20.12	20.05	
1.4	QPSK	3	3	20.09	20.08	19.98	
1.4	QPSK	6	0	20.08	20.07	20.01	21
1.4	16QAM	1	0	20.43	20.45	20.31	21
1.4	16QAM	1	3	20.50	20.50	20.45	
1.4	16QAM	1	5	20.37	20.34	20.32	
1.4	16QAM	3	0	20.23	20.20	20.12	
1.4	16QAM	3	1	20.26	20.22	20.08	
1.4	16QAM	3	3	20.16	20.17	20.11	
1.4	16QAM	6	0	20.27	20.23	20.19	21
1.4	64QAM	1	0	20.39	20.36	20.28	21
1.4	64QAM	1	3	20.41	20.38	20.31	
1.4	64QAM	1	5	20.37	20.30	20.25	
1.4	64QAM	3	0	20.32	20.30	20.25	
1.4	64QAM	3	1	20.42	20.40	20.27	
1.4	64QAM	3	3	20.32	20.30	20.25	
1.4	64QAM	6	0	20.24	20.18	20.13	21



<LTE Band 25>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)
Channel				26140	26340	26590	
Frequency (MHz)				1860	1880	1905	
20	QPSK	1	0	19.48	19.49	19.38	20.5
20	QPSK	1	49	19.45	19.49	19.40	
20	QPSK	1	99	19.46	19.51	19.45	
20	QPSK	50	0	19.49	19.51	19.45	20.5
20	QPSK	50	24	19.52	19.54	19.46	
20	QPSK	50	50	19.47	19.47	19.39	
20	QPSK	100	0	19.47	19.49	19.44	
20	16QAM	1	0	19.78	19.82	19.73	20.5
20	16QAM	1	49	19.79	19.84	19.68	
20	16QAM	1	99	19.73	19.82	19.81	
20	16QAM	50	0	19.62	19.62	19.51	20.5
20	16QAM	50	24	19.63	19.67	19.53	
20	16QAM	50	50	19.59	19.60	19.47	
20	16QAM	100	0	19.58	19.61	19.51	
20	64QAM	1	0	19.69	19.79	19.70	20.5
20	64QAM	1	49	19.75	19.79	19.67	
20	64QAM	1	99	19.69	19.81	19.75	
20	64QAM	50	0	19.57	19.63	19.55	20.5
20	64QAM	50	24	19.64	19.66	19.57	
20	64QAM	50	50	19.57	19.62	19.54	
20	64QAM	100	0	19.57	19.63	19.56	
Channel				26115	26340	26615	Tune-up limit (dBm)
Frequency (MHz)				1857.5	1880	1907.5	
15	QPSK	1	0	19.56	19.45	19.41	20.5
15	QPSK	1	37	19.57	19.46	19.52	
15	QPSK	1	74	19.51	19.53	19.44	
15	QPSK	36	0	19.57	19.50	19.42	20.5
15	QPSK	36	20	19.62	19.55	19.47	
15	QPSK	36	39	19.57	19.48	19.50	
15	QPSK	75	0	19.57	19.50	19.40	
15	16QAM	1	0	19.84	19.75	19.76	20.5
15	16QAM	1	37	19.86	19.83	19.70	
15	16QAM	1	74	19.79	19.86	19.79	
15	16QAM	36	0	19.68	19.60	19.48	20.5
15	16QAM	36	20	19.74	19.63	19.50	
15	16QAM	36	39	19.69	19.59	19.61	
15	16QAM	75	0	19.69	19.61	19.49	
15	64QAM	1	0	19.83	19.74	19.72	20.5
15	64QAM	1	37	19.84	19.75	19.74	
15	64QAM	1	74	19.81	19.78	19.70	
15	64QAM	36	0	19.73	19.67	19.55	20.5
15	64QAM	36	20	19.80	19.72	19.57	
15	64QAM	36	39	19.73	19.64	19.61	
15	64QAM	75	0	19.70	19.62	19.53	
Channel				26090	26340	26640	Tune-up limit (dBm)
Frequency (MHz)				1855	1880	1910	
10	QPSK	1	0	19.61	19.56	19.52	20.5
10	QPSK	1	25	19.51	19.52	19.50	
10	QPSK	1	49	19.54	19.53	19.47	
10	QPSK	25	0	19.53	19.50	19.50	20.5
10	QPSK	25	12	19.53	19.53	19.54	



**FCC SAR TEST REPORT**

**Report No. : FA872411**

10	QPSK	25	25	19.49	19.50	19.52	
10	QPSK	50	0	19.53	19.52	19.52	
10	16QAM	1	0	19.91	19.99	19.76	
10	16QAM	1	25	19.82	19.82	19.83	20.5
10	16QAM	1	49	19.79	19.88	19.82	
10	16QAM	25	0	19.63	19.64	19.60	
10	16QAM	25	12	19.65	19.67	19.60	20.5
10	16QAM	25	25	19.61	19.61	19.61	
10	16QAM	50	0	19.63	19.66	19.62	
10	64QAM	1	0	19.84	19.82	19.78	20.5
10	64QAM	1	25	19.77	19.77	19.78	
10	64QAM	1	49	19.77	19.81	19.75	
10	64QAM	25	0	19.61	19.67	19.64	20.5
10	64QAM	25	12	19.66	19.69	19.64	
10	64QAM	25	25	19.61	19.63	19.61	
10	64QAM	50	0	19.60	19.67	19.64	
Channel				26065	26340	26665	
Frequency (MHz)				1852.5	1880	1912.5	
5	QPSK	1	0	19.46	19.48	19.44	20.5
5	QPSK	1	12	19.50	19.53	19.51	
5	QPSK	1	24	19.47	19.48	19.49	
5	QPSK	12	0	19.52	19.52	19.52	20.5
5	QPSK	12	7	19.54	19.55	19.52	
5	QPSK	12	13	19.50	19.52	19.51	
5	QPSK	25	0	19.49	19.51	19.48	
5	16QAM	1	0	19.81	19.78	19.81	
5	16QAM	1	12	19.84	19.88	19.80	20.5
5	16QAM	1	24	19.74	19.77	19.78	
5	16QAM	12	0	19.65	19.65	19.58	
5	16QAM	12	7	19.63	19.65	19.62	20.5
5	16QAM	12	13	19.60	19.61	19.60	
5	16QAM	25	0	19.62	19.62	19.59	
5	64QAM	1	0	19.68	19.72	19.80	
5	64QAM	1	12	19.73	19.81	19.80	
5	64QAM	1	24	19.65	19.73	19.69	20.5
5	64QAM	12	0	19.66	19.69	19.67	
5	64QAM	12	7	19.68	19.71	19.68	
5	64QAM	12	13	19.62	19.70	19.66	
5	64QAM	25	0	19.58	19.65	19.64	
Channel				26055	26340	26675	Tune-up limit (dBm)
Frequency (MHz)				1851.5	1880	1913.5	
3	QPSK	1	0	19.50	19.47	19.47	20.5
3	QPSK	1	8	19.52	19.49	19.50	
3	QPSK	1	14	19.46	19.45	19.45	
3	QPSK	8	0	19.53	19.51	19.52	20.5
3	QPSK	8	4	19.58	19.57	19.55	
3	QPSK	8	7	19.53	19.51	19.50	
3	QPSK	15	0	19.53	19.49	19.52	
3	16QAM	1	0	19.74	19.83	19.81	
3	16QAM	1	8	19.80	19.83	19.85	20.5
3	16QAM	1	14	19.86	19.82	19.76	
3	16QAM	8	0	19.70	19.67	19.61	
3	16QAM	8	4	19.71	19.73	19.66	20.5
3	16QAM	8	7	19.65	19.65	19.63	
3	16QAM	15	0	19.61	19.62	19.58	
3	64QAM	1	0	19.71	19.72	19.75	



3	64QAM	1	8	19.73	19.77	19.75	20.5
3	64QAM	1	14	19.71	19.72	19.74	
3	64QAM	8	0	19.65	19.73	19.63	
3	64QAM	8	4	19.69	19.73	19.68	
3	64QAM	8	7	19.67	19.69	19.65	
3	64QAM	15	0	19.60	19.65	19.63	
Channel				26047	26340	26683	Tune-up limit (dBm)
Frequency (MHz)				1850.7	1880	1914.3	
1.4	QPSK	1	0	19.48	19.43	19.39	20.5
1.4	QPSK	1	3	19.51	19.49	19.48	
1.4	QPSK	1	5	19.43	19.40	19.39	
1.4	QPSK	3	0	19.48	19.48	19.42	
1.4	QPSK	3	1	19.53	19.51	19.49	
1.4	QPSK	3	3	19.47	19.46	19.43	
1.4	QPSK	6	0	19.47	19.46	19.44	20.5
1.4	16QAM	1	0	19.73	19.85	19.76	20.5
1.4	16QAM	1	3	19.81	19.78	19.90	
1.4	16QAM	1	5	19.71	19.77	19.77	
1.4	16QAM	3	0	19.57	19.55	19.58	
1.4	16QAM	3	1	19.59	19.62	19.55	
1.4	16QAM	3	3	19.55	19.58	19.55	
1.4	16QAM	6	0	19.65	19.65	19.61	20.5
1.4	64QAM	1	0	19.67	19.70	19.66	20.5
1.4	64QAM	1	3	19.71	19.72	19.74	
1.4	64QAM	1	5	19.63	19.67	19.68	
1.4	64QAM	3	0	19.66	19.67	19.68	
1.4	64QAM	3	1	19.69	19.72	19.73	
1.4	64QAM	3	3	19.62	19.67	19.67	
1.4	64QAM	6	0	19.54	19.61	19.53	20.5



**<LTE Carrier Aggregation combinations>**

**General Note:**

1. This device supports Carrier Aggregation on downlink only for inter and intra band, Uplink CA is not supported. For the device supports combination bands and configurations are according to 3GPP.
2. In applying the existing power measurement procedure of KDB 941225 D05A for DL CA SAR test exclusion, only the subset with the largest number of combinations of the frequency band and CCs in each row need consideration, and that configurations require power measurement should be highlighted in the below table.

2CC Downlink Carrier Aggregation				3CC Downlink Carrier Aggregation			
Number	Combination	Restriction	Covered by Measurement Superset	Number	Combination	Restriction	Covered by Measurement Superset
1	CA_2A-4A		3CC-7	1	CA_2C-5A		
2	CA_2A-5A		3CC-3	2	CA_4A-12B		
3	CA_2A-12A		3CC-4	3	CA_2A-2A-5A		
4	CA_2A-13A		3CC-5	4	CA_2A-2A-12A		
5	CA_2A-30A		3CC-6	5	CA_2A-2A-13A		
6	CA_4A-5A		3CC-8	6	CA_2A-2A-30A		
7	CA_4A-7A		3CC-9	7	CA_2A-4A-4A		
8	CA_4A-12A		3CC-10	8	CA_2A-4A-5A		
9	CA_4A-13A		3CC-11	9	CA_2A-4A-7A		
10	CA_5A-7A			10	CA_2A-4A-12A		
11	CA_2A-2A			11	CA_2A-4A-13A		
12	CA_4A-4A			12	CA_2A-5A-30A		
13	CA_7A-7A			13	CA_2A-7A-7A		
14	CA_7C			14	CA_2A-12A-30A		
15	CA_25A-25A			15	CA_4A-4A-5A		
				16	CA_4A-4A-12A		
				17	CA_4A-4A-13A		
				18	CA_4A-7A-12A		



**<Power verification when LTE Carrier Aggregation Active>**

**General Note:**

- i. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device supports downlink two carrier aggregation. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band.
- vi. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1 |BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

**<Two Carrier power verification>**

Configure		PCC						SCC				Power		
		LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)
Inter-Band		5	10	829	20450	QPSK	1	0	7	20	2655	3100	23.47	23.59
Intra-Band	Non-Contiguous	2	20	1880	18900	QPSK	1	0	2	5	1932.5	625	22.35	22.48
		4	20	1732.5	20175	QPSK	1	0	4	5	2112.5	1975	23.05	23.18
		7	20	2510	20850	QPSK	1	0	7	5	2687.5	3425	24.09	24.20
		25	20	1860	26140	QPSK	1	0	25	5	1992.5	8665	22.38	22.50
	Contiguous	7	20	2510	20850	QPSK	1	0	7	20	2649.80	3048	24.06	24.20





<Three Carrier power verification>

Configure	PCC							SCC1				SCC2				Power	
	LTE Band	BW (MHz)	UL Freq. (MHz)	UL Channel	Mod.	UL# RB	UL RB Offset	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	LTE Band	BW (MHz)	DL Freq. (MHz)	DL Channel	With CA Tx.Power (dBm)	W/O CA Tx.Power (dBm)
Inter-Band	2	20	1880	18900	QPSK	1	0	2	5	1932.5	625	5	10	881.5	2525	22.40	22.48
	2	20	1880	18900	QPSK	1	0	2	5	1932.5	625	12	10	737.5	5095	22.35	22.48
	2	20	1880	18900	QPSK	1	0	2	5	1932.5	625	13	10	751	5230	22.42	22.48
	2	20	1880	18900	QPSK	1	0	2	5	1932.5	625	30	10	2355	9820	22.43	22.48
	2	20	1880	18900	QPSK	1	0	4	20	2132.5	2175	4	5	2112.5	1975	22.43	22.48
	2	20	1880	18900	QPSK	1	0	4	20	2132.5	2175	5	10	881.5	2525	22.39	22.48
	2	20	1880	18900	QPSK	1	0	4	20	2132.5	2175	7	20	2655	3100	22.36	22.48
	2	20	1880	18900	QPSK	1	0	4	20	2132.5	2175	12	10	737.5	5095	22.39	22.48
	2	20	1880	18900	QPSK	1	0	4	20	2132.5	2175	13	10	751	5230	22.33	22.48
	2	20	1880	18900	QPSK	1	0	5	10	881.5	2525	30	10	2355	9820	22.38	22.48
	2	20	1880	18900	QPSK	1	0	7	20	2655	3100	7	5	2687.5	3425	22.37	22.48
	2	20	1880	18900	QPSK	1	0	12	10	737.5	5095	30	10	2355	9820	22.36	22.48
	2	20	1880	18900	QPSK	1	0	2	20	1979.8	1098	5	10	881.5	2525	22.41	22.48
	4	20	1732.5	20175	QPSK	1	0	4	5	2112.5	1975	5	10	881.5	2525	23.10	23.18
	4	20	1732.5	20175	QPSK	1	0	4	5	2112.5	1975	12	10	737.5	5095	23.11	23.18
	4	20	1732.5	20175	QPSK	1	0	4	5	2112.5	1975	13	10	751	5230	23.04	23.18
	4	20	1732.5	20175	QPSK	1	0	7	20	2655	3100	12	10	737.5	5095	23.11	23.18
	4	20	1732.5	20175	QPSK	1	0	12	5	732.8	5048	12	10	740	5120	23.10	23.18



**<WLAN Conducted Power>**

**General Note:**

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures. 18 The initial test position procedure is described in the following:
  - a. When the reported SAR of the initial test position is  $\leq 0.4$  W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
  - b. When the reported SAR of the test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8$  W/kg or all required test position are tested.
  - c. For all positions/configurations, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.

**<2.4GHz WLAN>**

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b 1Mbps	1	2412	18.70	19.00	99.20
		6	2437	18.73	19.00	
		11	2462	18.75	19.00	
	802.11g 6Mbps	1	2412	15.96	16.00	95.30
		6	2437	15.82	16.00	
		11	2462	15.90	16.00	
	802.11n-HT20 MCS0	1	2412	15.81	16.00	95.10
		6	2437	15.77	16.00	
		11	2462	15.73	16.00	



<5GHz WLAN>

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.2GHz WLAN	802.11a 6Mbps	36	5180	16.10	16.50	95.10
		40	5200	16.05	16.50	
		44	5220	16.20	16.50	
		48	5240	16.40	16.50	
	802.11n-HT20 MCS0	36	5180	15.41	15.50	95.40
		40	5200	15.39	15.50	
		44	5220	15.35	15.50	
		48	5240	15.24	15.50	
	802.11n-HT40 MCS0	38	5190	15.29	15.50	90.90
		46	5230	15.19	15.50	
	802.11ac-VHT20 MCS0	36	5180	15.44	15.50	95.40
		40	5200	15.42	15.50	
		44	5220	15.39	15.50	
		48	5240	15.28	15.50	
802.11ac-VHT40 MCS0	38	5190	15.33	15.50	90.90	
	46	5230	15.21	15.50		
802.11ac-VHT80 MCS0	42	5210	14.95	15.00	83.40	

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.3GHz WLAN	802.11a 6Mbps	52	5260	16.39	16.50	95.10
		56	5280	16.40	16.50	
		60	5300	16.47	16.50	
		64	5320	16.39	16.50	
	802.11n-HT20 MCS0	52	5260	15.25	15.50	95.40
		56	5280	15.23	15.50	
		60	5300	15.19	15.50	
		64	5320	15.27	15.50	
	802.11n-HT40 MCS0	54	5270	15.06	15.50	90.90
		62	5310	15.29	15.50	
	802.11ac-VHT20 MCS0	52	5260	15.29	15.50	95.40
		56	5280	15.25	15.50	
		60	5300	15.24	15.50	
	802.11ac-VHT40 MCS0	54	5270	15.08	15.50	90.90
62		5310	15.31	15.50		
802.11ac-VHT80 MCS0	58	5290	13.86	14.00	83.40	



	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.5GHz WLAN	802.11a 6Mbps	100	5500	16.48	16.50	95.10
		116	5580	16.28	16.50	
		124	5620	16.29	16.50	
		132	5660	16.39	16.50	
		144	5720	16.16	16.50	
	802.11n-HT20 MCS0	100	5500	15.25	15.50	95.40
		116	5580	15.11	15.50	
		124	5620	15.15	15.50	
		132	5660	15.24	15.50	
		144	5720	15.10	15.50	
	802.11n-HT40 MCS0	102	5510	15.17	15.50	90.90
		110	5550	15.19	15.50	
		126	5630	15.14	15.50	
		134	5670	15.06	15.50	
		142	5710	15.05	15.50	
	802.11ac-VHT20 MCS0	100	5500	15.27	15.50	95.40
		116	5580	15.14	15.50	
		124	5620	15.19	15.50	
		132	5660	15.27	15.50	
		144	5720	15.13	15.50	
	802.11ac-VHT40 MCS0	102	5510	15.20	15.50	90.90
		110	5550	15.21	15.50	
		126	5630	15.15	15.50	
		134	5670	15.10	15.50	
142		5710	15.10	15.50		
802.11ac-VHT80 MCS0	106	5530	14.78	15.00	83.40	
	122	5610	14.89	15.00		
	138	5690	14.92	15.00		

	Mode	Channel	Frequency (MHz)	Average power (dBm)	Tune-Up Limit	Duty Cycle %
5.8GHz WLAN	802.11a 6Mbps	149	5745	16.32	16.50	95.10
		157	5785	16.35	16.50	
		165	5825	16.34	16.50	
	802.11n-HT20 MCS0	149	5745	15.27	15.50	95.40
		157	5785	15.19	15.50	
		165	5825	15.25	15.50	
	802.11n-HT40 MCS0	151	5755	15.11	15.50	90.90
		159	5795	15.02	15.50	
	802.11ac-VHT20 MCS0	149	5745	15.30	15.50	95.40
		157	5785	15.23	15.50	
		165	5825	15.29	15.50	
	802.11ac-VHT40 MCS0	151	5755	15.15	15.50	90.90
		159	5795	15.07	15.50	
	802.11ac-VHT80 MCS0	155	5775	14.57	15.00	83.40



**<2.4GHz Bluetooth>**


Mode	Channel	Frequency (MHz)	Average power (dBm)		
			1Mbps	2Mbps	3Mbps
BR / EDR	CH 00	2402	6.07	2.59	2.58
	CH 39	2441	5.27	1.54	1.52
	CH 78	2480	6.87	3.46	3.43
Tune-up Limit			7	4	4

Mode	Channel	Frequency (MHz)	Average power (dBm)	
			1Mbps	2Mbps
LE	CH 00	2402	1.79	1.27
	CH 19	2440	0.90	0.29
	CH 39	2480	1.81	1.31
Tune-up Limit			2	2

**General Note:**

- For 2.4GHz Bluetooth SAR testing was selected 1Mbps due to its highest average power and duty cycle is 76.3% considered in SAR testing, and the duty cycle would be scaled to theoretical 83.3% in reported SAR calculation.

## 12. Antenna Location

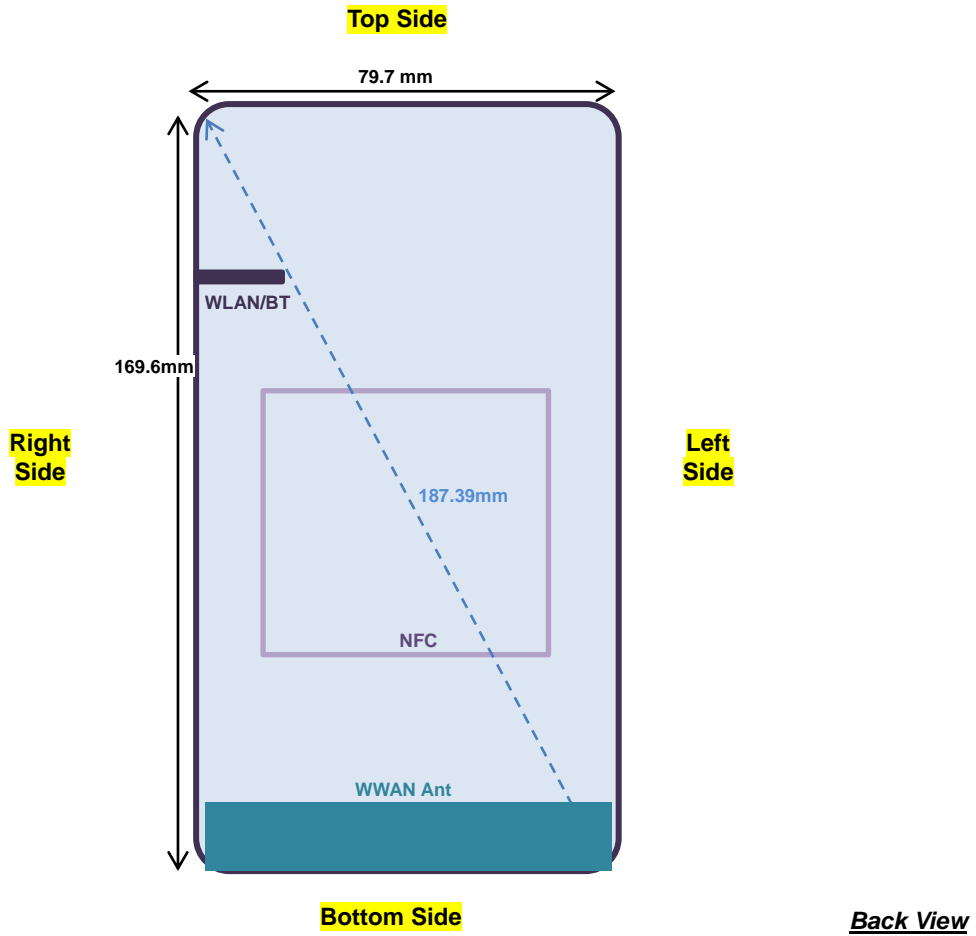

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	≤ 25mm
BT&WLAN	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN	Yes	Yes	No	Yes	Yes	Yes
BT&WLAN	Yes	Yes	Yes	No	Yes	No

**General Note:**

- Referring to KDB 941225 D06 v02r01, when the overall device length and width are  $\geq 9\text{cm} \times 5\text{cm}$ , the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge



## 13. SAR Test Results

### General Note:

- Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
  - For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)\*Tune-up Scaling Factor
  - For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)\* Duty Cycle scaling factor \* Tune-up scaling factor
- Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
  - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
  - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥0.8W/kg.
- When hotspot mode is enabled, power reduction will be activated to limit the maximum power of GSM1900, WCDMA B2 / B4 and LTE B2 / B4 / B25.
- Per KDB648474 D04v01r03, when the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.
- Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g product specific SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold, for this device only for WWAN transmitter scaled to maximum output power is higher than 1.2W/kg of GSM1900, WCDMA B2/B4 and LTE B4/B25, therefore product specific SAR is necessary.
- For 5GHz WLAN product specific SAR is necessary too, due to an overall diagonal dimension is > 16cm.

### GSM Note:

- Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
- Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is ≤ ¼ dB higher than the primary mode, SAR measurement is not required for the secondary mode.
- Power reduction which is triggered by hotspot mode is implemented in GSM1900 band, for hotspot mode SAR testing EUT was set in reduced power mode and GPRS 4Tx slot due to its highest frame-average power.

### UMTS Note:

- Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
- Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is ≤ ¼ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA) are less than ¼ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

**LTE Note:**

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B12 / B26 / B4 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE band 2/5/17 SAR test was covered by Band 25/26/12; according to TCB workshop, SAR test for overlapping LTE bands can be reduced if
  - a. The maximum output power, including tolerance, for the smaller band is  $\leq$  the larger band to qualify for the SAR test exclusion.
  - b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.

**WLAN Note:**

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is  $\leq 0.8$  W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.





**13.1 Head SAR**

**<GSM SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (4 Tx slots)	Right Cheek	0mm	251	848.8	28.34	29.00	1.164	-0.08	0.470	0.547
	GSM850	GPRS (4 Tx slots)	Right Cheek	0mm	128	824.2	28.05	29.00	1.245	0.04	0.388	0.483
01	GSM850	GPRS (4 Tx slots)	Right Cheek	0mm	189	836.4	28.31	29.00	1.172	-0.04	0.492	0.577
	GSM850	GPRS (4 Tx slots)	Right Tilted	0mm	251	848.8	28.34	29.00	1.164	0.09	0.212	0.247
	GSM850	GPRS (4 Tx slots)	Left Cheek	0mm	251	848.8	28.34	29.00	1.164	-0.14	0.468	0.545
	GSM850	GPRS (4 Tx slots)	Left Tilted	0mm	251	848.8	28.34	29.00	1.164	-0.15	0.259	0.302
	GSM1900	GPRS (4 Tx slots)	Right Cheek	0mm	810	1909.8	25.72	26.00	1.067	-0.12	0.068	0.073
	GSM1900	GPRS (4 Tx slots)	Right Cheek	0mm	512	1850.2	25.46	26.00	1.132	-0.17	0.048	0.054
02	GSM1900	GPRS (4 Tx slots)	Right Cheek	0mm	661	1880	25.69	26.00	1.074	-0.02	0.070	0.075
	GSM1900	GPRS (4 Tx slots)	Right Tilted	0mm	810	1909.8	25.72	26.00	1.067	-0.14	0.018	0.019
	GSM1900	GPRS (4 Tx slots)	Left Cheek	0mm	810	1909.8	25.72	26.00	1.067	-0.17	0.057	0.061
	GSM1900	GPRS (4 Tx slots)	Left Tilted	0mm	810	1909.8	25.72	26.00	1.067	0.18	0.025	0.027

**<WCDMA SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
03	WCDMA II	RMC 12.2Kbps	Right Cheek	0mm	9538	1907.6	22.81	23.00	1.045	0.04	0.102	0.107
	WCDMA II	RMC 12.2Kbps	Right Cheek	0mm	9262	1852.4	22.76	23.00	1.057	0.07	0.063	0.067
	WCDMA II	RMC 12.2Kbps	Right Cheek	0mm	9400	1880	22.78	23.00	1.052	-0.06	0.097	0.102
	WCDMA II	RMC 12.2Kbps	Right Tilted	0mm	9538	1907.6	22.81	23.00	1.045	0.12	0.053	0.055
	WCDMA II	RMC 12.2Kbps	Left Cheek	0mm	9538	1907.6	22.81	23.00	1.045	-0.06	0.100	0.104
	WCDMA II	RMC 12.2Kbps	Left Tilted	0mm	9538	1907.6	22.81	23.00	1.045	-0.18	0.042	0.044
04	WCDMA IV	RMC 12.2Kbps	Right Cheek	0mm	1413	1732.6	23.49	23.50	1.002	-0.05	0.104	0.104
	WCDMA IV	RMC 12.2Kbps	Right Cheek	0mm	1312	1712.4	23.49	23.50	1.002	-0.01	0.102	0.102
	WCDMA IV	RMC 12.2Kbps	Right Cheek	0mm	1513	1752.6	23.47	23.50	1.007	-0.16	0.103	0.104
	WCDMA IV	RMC 12.2Kbps	Right Tilted	0mm	1413	1732.6	23.49	23.50	1.002	-0.18	0.024	0.024
	WCDMA IV	RMC 12.2Kbps	Left Cheek	0mm	1413	1732.6	23.49	23.50	1.002	0.01	0.076	0.076
	WCDMA IV	RMC 12.2Kbps	Left Tilted	0mm	1413	1732.6	23.49	23.50	1.002	0.02	0.031	0.031
	WCDMA V	RMC 12.2Kbps	Right Cheek	0mm	4233	846.6	23.62	24.00	1.091	0	0.427	0.466
05	WCDMA V	RMC 12.2Kbps	Right Cheek	0mm	4132	826.4	23.45	24.00	1.135	0.03	0.496	0.563
	WCDMA V	RMC 12.2Kbps	Right Cheek	0mm	4182	836.4	23.37	24.00	1.156	0.01	0.460	0.532
	WCDMA V	RMC 12.2Kbps	Right Tilted	0mm	4233	846.6	23.62	24.00	1.091	0.03	0.230	0.251
	WCDMA V	RMC 12.2Kbps	Left Cheek	0mm	4233	846.6	23.62	24.00	1.091	-0.03	0.353	0.385
	WCDMA V	RMC 12.2Kbps	Left Tilted	0mm	4233	846.6	23.62	24.00	1.091	0.05	0.207	0.226



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 4	20M	QPSK	1	0	Right Cheek	0mm	20175	1732.5	23.18	23.50	1.076	-0.02	0.070	0.075
	LTE Band 4	20M	QPSK	50	24	Right Cheek	0mm	20175	1732.5	22.15	22.50	1.084	-0.11	0.053	0.057
	LTE Band 4	20M	QPSK	1	0	Right Tilted	0mm	20175	1732.5	23.18	23.50	1.076	0.03	0.023	0.025
	LTE Band 4	20M	QPSK	50	24	Right Tilted	0mm	20175	1732.5	22.15	22.50	1.084	-0.02	0.020	0.022
06	LTE Band 4	20M	QPSK	1	0	Left Cheek	0mm	20175	1732.5	23.18	23.50	1.076	0.13	0.071	0.076
	LTE Band 4	20M	QPSK	50	24	Left Cheek	0mm	20175	1732.5	22.15	22.50	1.084	0.01	0.054	0.059
	LTE Band 4	20M	QPSK	1	0	Left Tilted	0mm	20175	1732.5	23.18	23.50	1.076	0.05	0.029	0.031
	LTE Band 4	20M	QPSK	50	24	Left Tilted	0mm	20175	1732.5	22.15	22.50	1.084	-0.18	0.024	0.026
07	LTE Band 7	20M	QPSK	1	0	Right Cheek	0mm	20850	2510	24.20	24.50	1.072	0.13	0.236	0.253
	LTE Band 7	20M	QPSK	1	99	Right Cheek	0mm	21100	2535	24.07	24.50	1.104	-0.12	0.190	0.210
	LTE Band 7	20M	QPSK	1	99	Right Cheek	0mm	21350	2560	23.95	24.50	1.135	0.08	0.186	0.211
	LTE Band 7	20M	QPSK	50	50	Right Cheek	0mm	20850	2510	23.20	23.50	1.072	0.18	0.181	0.194
	LTE Band 7	20M	QPSK	1	0	Right Tilted	0mm	20850	2510	24.20	24.50	1.072	-0.14	0.072	0.077
	LTE Band 7	20M	QPSK	50	50	Right Tilted	0mm	20850	2510	23.20	23.50	1.072	0.16	0.063	0.068
	LTE Band 7	20M	QPSK	1	0	Left Cheek	0mm	20850	2510	24.20	24.50	1.072	0.04	0.133	0.143
	LTE Band 7	20M	QPSK	50	50	Left Cheek	0mm	20850	2510	23.20	23.50	1.072	0.08	0.115	0.123
	LTE Band 7	20M	QPSK	1	0	Left Tilted	0mm	20850	2510	24.20	24.50	1.072	0.17	0.063	0.068
	LTE Band 7	20M	QPSK	50	50	Left Tilted	0mm	20850	2510	23.20	23.50	1.072	0.16	0.051	0.055
08	LTE Band 12	10M	QPSK	1	0	Right Cheek	0mm	23095	707.5	23.72	24.00	1.067	0.06	0.209	0.223
	LTE Band 12	10M	QPSK	25	0	Right Cheek	0mm	23095	707.5	22.69	23.00	1.074	0.03	0.170	0.183
	LTE Band 12	10M	QPSK	1	0	Right Tilted	0mm	23095	707.5	23.72	24.00	1.067	-0.04	0.086	0.092
	LTE Band 12	10M	QPSK	25	0	Right Tilted	0mm	23095	707.5	22.69	23.00	1.074	0.1	0.075	0.081
	LTE Band 12	10M	QPSK	1	0	Left Cheek	0mm	23095	707.5	23.72	24.00	1.067	-0.01	0.179	0.191
	LTE Band 12	10M	QPSK	25	0	Left Cheek	0mm	23095	707.5	22.69	23.00	1.074	0.03	0.148	0.159
	LTE Band 12	10M	QPSK	1	0	Left Tilted	0mm	23095	707.5	23.72	24.00	1.067	-0.01	0.100	0.107
	LTE Band 12	10M	QPSK	25	0	Left Tilted	0mm	23095	707.5	22.69	23.00	1.074	0.02	0.082	0.088
09	LTE Band 13	10M	QPSK	1	49	Right Cheek	0mm	23230	782	23.66	24.00	1.081	0.07	0.423	0.457
	LTE Band 13	10M	QPSK	25	0	Right Cheek	0mm	23230	782	22.68	23.00	1.076	0.06	0.337	0.363
	LTE Band 13	10M	QPSK	1	49	Right Tilted	0mm	23230	782	23.66	24.00	1.081	0.03	0.227	0.245
	LTE Band 13	10M	QPSK	25	0	Right Tilted	0mm	23230	782	22.68	23.00	1.076	0.03	0.174	0.187
	LTE Band 13	10M	QPSK	1	49	Left Cheek	0mm	23230	782	23.66	24.00	1.081	0	0.358	0.387
	LTE Band 13	10M	QPSK	25	0	Left Cheek	0mm	23230	782	22.68	23.00	1.076	0	0.284	0.306
	LTE Band 13	10M	QPSK	1	49	Left Tilted	0mm	23230	782	23.66	24.00	1.081	0.02	0.222	0.240
	LTE Band 13	10M	QPSK	25	0	Left Tilted	0mm	23230	782	22.68	23.00	1.076	0	0.174	0.187
	LTE Band 25	20M	QPSK	1	0	Right Cheek	0mm	26140	1860	22.50	23.50	1.259	0.08	0.093	0.117
10	LTE Band 25	20M	QPSK	50	24	Right Cheek	0mm	26340	1880	21.52	22.50	1.253	0.11	0.108	0.135
	LTE Band 25	20M	QPSK	50	24	Right Cheek	0mm	26140	1860	21.40	22.50	1.288	0.13	0.055	0.071
	LTE Band 25	20M	QPSK	50	0	Right Cheek	0mm	26590	1905	21.46	22.50	1.271	0.14	0.081	0.103
	LTE Band 25	20M	QPSK	1	0	Right Tilted	0mm	26140	1860	22.50	23.50	1.259	0.17	0.024	0.030
	LTE Band 25	20M	QPSK	50	24	Right Tilted	0mm	26340	1880	21.52	22.50	1.253	-0.04	0.045	0.056
	LTE Band 25	20M	QPSK	1	0	Left Cheek	0mm	26140	1860	22.50	23.50	1.259	0.01	0.059	0.074
	LTE Band 25	20M	QPSK	50	24	Left Cheek	0mm	26340	1880	21.52	22.50	1.253	0.12	0.077	0.096
	LTE Band 25	20M	QPSK	1	0	Left Tilted	0mm	26140	1860	22.50	23.50	1.259	0.02	0.022	0.028
	LTE Band 25	20M	QPSK	50	24	Left Tilted	0mm	26340	1880	21.52	22.50	1.253	-0.11	0.028	0.035



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 26	15M	QPSK	1	74	Right Cheek	0mm	26865	831.5	23.30	24.00	1.175	0.07	0.320	0.376
	LTE Band 26	15M	QPSK	36	39	Right Cheek	0mm	26865	831.5	22.40	23.00	1.148	0.07	0.268	0.308
	LTE Band 26	15M	QPSK	1	74	Right Tilted	0mm	26865	831.5	23.30	24.00	1.175	-0.04	0.206	0.242
	LTE Band 26	15M	QPSK	36	39	Right Tilted	0mm	26865	831.5	22.40	23.00	1.148	0.07	0.173	0.199
11	LTE Band 26	15M	QPSK	1	74	Left Cheek	0mm	26865	831.5	23.30	24.00	1.175	-0.01	0.329	0.387
	LTE Band 26	15M	QPSK	36	39	Left Cheek	0mm	26865	831.5	22.40	23.00	1.148	0.01	0.275	0.316
	LTE Band 26	15M	QPSK	1	74	Left Tilted	0mm	26865	831.5	23.30	24.00	1.175	0.01	0.204	0.240
	LTE Band 26	15M	QPSK	36	39	Left Tilted	0mm	26865	831.5	22.40	23.00	1.148	-0.02	0.169	0.194
12	LTE Band 30	10M	QPSK	1	0	Right Cheek	0mm	27710	2310	22.90	23.00	1.023	-0.01	0.363	0.371
	LTE Band 30	10M	QPSK	25	12	Right Cheek	0mm	27710	2310	21.93	22.50	1.140	0.07	0.296	0.338
	LTE Band 30	10M	QPSK	1	0	Right Tilted	0mm	27710	2310	22.90	23.00	1.023	-0.15	0.210	0.215
	LTE Band 30	10M	QPSK	25	12	Right Tilted	0mm	27710	2310	21.93	22.50	1.140	-0.02	0.167	0.190
	LTE Band 30	10M	QPSK	1	0	Left Cheek	0mm	27710	2310	22.90	23.00	1.023	0.11	0.341	0.349
	LTE Band 30	10M	QPSK	25	12	Left Cheek	0mm	27710	2310	21.93	22.50	1.140	-0.03	0.271	0.309
	LTE Band 30	10M	QPSK	1	0	Left Tilted	0mm	27710	2310	22.90	23.00	1.023	0.05	0.203	0.208
	LTE Band 30	10M	QPSK	25	12	Left Tilted	0mm	27710	2310	21.93	22.50	1.140	0.1	0.160	0.182



**<WLAN SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	11	2462	18.75	19.00	1.059	99.2	1.008	-0.02	0.243	0.259
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	11	2462	18.75	19.00	1.059	99.2	1.008	-0.09	0.128	0.137
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	11	2462	18.75	19.00	1.059	99.2	1.008	-0.03	0.419	0.447
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	1	2412	18.70	19.00	1.072	99.2	1.008	-0.07	0.415	0.448
13	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	6	2437	18.73	19.00	1.064	99.2	1.008	-0.1	0.440	0.472
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	11	2462	18.75	19.00	1.059	99.2	1.008	-0.13	0.169	0.180
	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	60	5300	16.47	16.50	1.007	95.1	1.052	0.06	0.099	0.105
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	60	5300	16.47	16.50	1.007	95.1	1.052	-0.18	0.152	0.161
	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	60	5300	16.47	16.50	1.007	95.1	1.052	-0.08	0.201	0.213
	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	52	5260	16.39	16.50	1.026	95.1	1.052	-0.12	0.197	0.213
	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	56	5280	16.40	16.50	1.023	95.1	1.052	-0.01	0.169	0.182
14	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	64	5320	16.39	16.50	1.026	95.1	1.052	-0.12	0.199	0.215
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	60	5300	16.47	16.50	1.007	95.1	1.052	-0.07	0.115	0.122
	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	100	5500	16.48	16.50	1.005	95.1	1.052	-0.08	0.156	0.165
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	100	5500	16.48	16.50	1.005	95.1	1.052	-0.03	0.179	0.189
	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	100	5500	16.48	16.50	1.005	95.1	1.052	-0.07	0.154	0.163
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	100	5500	16.48	16.50	1.005	95.1	1.052	0.06	0.185	0.196
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	116	5580	16.28	16.50	1.052	95.1	1.052	0.06	0.188	0.208
15	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	124	5620	16.29	16.50	1.050	95.1	1.052	0.09	0.192	0.212
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	132	5660	16.39	16.50	1.026	95.1	1.052	0.02	0.174	0.188
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	144	5720	16.16	16.50	1.081	95.1	1.052	0.07	0.179	0.204
	WLAN5GHz	802.11a 6Mbps	Right Cheek	0mm	157	5785	16.35	16.50	1.035	95.1	1.052	-0.02	0.227	0.247
	WLAN5GHz	802.11a 6Mbps	Right Tilted	0mm	157	5785	16.35	16.50	1.035	95.1	1.052	0.03	0.107	0.117
16	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	157	5785	16.35	16.50	1.035	95.1	1.052	-0.01	0.257	0.280
	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	149	5745	16.32	16.50	1.042	95.1	1.052	-0.05	0.215	0.236
	WLAN5GHz	802.11a 6Mbps	Left Cheek	0mm	165	5825	16.34	16.50	1.038	95.1	1.052	-0.06	0.233	0.254
	WLAN5GHz	802.11a 6Mbps	Left Tilted	0mm	157	5785	16.35	16.50	1.035	95.1	1.052	0.08	0.114	0.124

**<Bluetooth SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Right Cheek	0mm	78	2480	6.87	7.00	1.030	76.3	1.092	0.14	0.007	0.008
	Bluetooth	1Mbps	Right Tilted	0mm	78	2480	6.87	7.00	1.030	76.3	1.092	0.19	0.004	0.004
	Bluetooth	1Mbps	Left Cheek	0mm	78	2480	6.87	7.00	1.030	76.3	1.092	0	0.013	0.015
	Bluetooth	1Mbps	Left Cheek	0mm	0	2402	6.07	7.00	1.239	76.3	1.092	0.17	0.004	0.006
17	Bluetooth	1Mbps	Left Cheek	0mm	39	2441	5.27	7.00	1.489	76.3	1.092	0.01	0.013	0.021
	Bluetooth	1Mbps	Left Tilted	0mm	78	2480	6.87	7.00	1.030	76.3	1.092	0.15	0.004	0.005



**13.2 Hotspot SAR**

**<GSM SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (4 Tx slots)	Front	10mm	OFF	251	848.8	28.34	29.00	1.164	-0.15	0.316	0.368
	GSM850	GPRS (4 Tx slots)	Back	10mm	OFF	251	848.8	28.34	29.00	1.164	-0.12	0.495	0.576
	GSM850	GPRS (4 Tx slots)	Back	10mm	OFF	128	824.2	28.05	29.00	1.245	-0.05	0.490	0.610
18	GSM850	GPRS (4 Tx slots)	Back	10mm	OFF	189	836.4	28.31	29.00	1.172	0.04	0.557	0.653
	GSM850	GPRS (4 Tx slots)	Left Side	10mm	OFF	251	848.8	28.34	29.00	1.164	0.11	0.155	0.180
	GSM850	GPRS (4 Tx slots)	Right Side	10mm	OFF	251	848.8	28.34	29.00	1.164	0	0.282	0.328
	GSM850	GPRS (4 Tx slots)	Bottom Side	10mm	OFF	251	848.8	28.34	29.00	1.164	0.02	0.250	0.291
	GSM1900	GPRS (4 Tx slots)	Front	10mm	ON	810	1909.8	22.66	23.50	1.213	-0.18	0.248	0.301
	GSM1900	GPRS (4 Tx slots)	Back	10mm	ON	810	1909.8	22.66	23.50	1.213	0.07	0.758	0.920
19	GSM1900	GPRS (4 Tx slots)	Back	10mm	ON	512	1850.2	22.66	23.50	1.213	-0.01	0.805	0.977
	GSM1900	GPRS (4 Tx slots)	Back	10mm	ON	661	1880	22.66	23.50	1.213	0.03	0.764	0.927
	GSM1900	GPRS (4 Tx slots)	Left Side	10mm	ON	810	1909.8	22.66	23.50	1.213	0.05	0.070	0.085
	GSM1900	GPRS (4 Tx slots)	Right Side	10mm	ON	810	1909.8	22.66	23.50	1.213	-0.01	0.075	0.091
	GSM1900	GPRS (4 Tx slots)	Bottom Side	10mm	ON	810	1909.8	22.66	23.50	1.213	0.13	0.538	0.653

**<WCDMA SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Front	10mm	ON	9262	1852.4	19.91	20.50	1.146	-0.11	0.333	0.381
	WCDMA II	RMC 12.2Kbps	Back	10mm	ON	9262	1852.4	19.91	20.50	1.146	-0.01	0.902	1.033
20	WCDMA II	RMC 12.2Kbps	Back	10mm	ON	9400	1880	19.85	20.50	1.161	-0.03	0.903	1.049
	WCDMA II	RMC 12.2Kbps	Back	10mm	ON	9538	1907.6	19.75	20.50	1.189	-0.01	0.876	1.041
	WCDMA II	RMC 12.2Kbps	Left Side	10mm	ON	9262	1852.4	19.91	20.50	1.146	0.02	0.095	0.109
	WCDMA II	RMC 12.2Kbps	Right Side	10mm	ON	9262	1852.4	19.91	20.50	1.146	0.09	0.081	0.093
	WCDMA II	RMC 12.2Kbps	Bottom Side	10mm	ON	9262	1852.4	19.91	20.50	1.146	0.03	0.648	0.742
	WCDMA IV	RMC 12.2Kbps	Front	10mm	ON	1413	1732.6	20.78	21.00	1.052	0.04	0.285	0.300
	WCDMA IV	RMC 12.2Kbps	Back	10mm	ON	1413	1732.6	20.78	21.00	1.052	-0.11	0.983	1.034
	WCDMA IV	RMC 12.2Kbps	Back	10mm	ON	1312	1712.4	20.52	21.00	1.117	-0.01	0.914	1.021
21	WCDMA IV	RMC 12.2Kbps	Back	10mm	ON	1513	1752.6	20.59	21.00	1.099	-0.11	1.040	1.143
	WCDMA IV	RMC 12.2Kbps	Left Side	10mm	ON	1413	1732.6	20.78	21.00	1.052	-0.12	0.073	0.077
	WCDMA IV	RMC 12.2Kbps	Right Side	10mm	ON	1413	1732.6	20.78	21.00	1.052	0.13	0.061	0.064
	WCDMA IV	RMC 12.2Kbps	Bottom Side	10mm	ON	1413	1732.6	20.78	21.00	1.052	0.05	0.816	0.858
	WCDMA IV	RMC 12.2Kbps	Bottom Side	10mm	ON	1312	1712.4	20.52	21.00	1.117	0.11	0.758	0.847
	WCDMA IV	RMC 12.2Kbps	Bottom Side	10mm	ON	1513	1752.6	20.59	21.00	1.099	0.09	0.865	0.951
	WCDMA V	RMC 12.2Kbps	Front	10mm	OFF	4233	846.6	23.62	24.00	1.091	-0.01	0.263	0.287
	WCDMA V	RMC 12.2Kbps	Back	10mm	OFF	4233	846.6	23.62	24.00	1.091	-0.01	0.407	0.444
	WCDMA V	RMC 12.2Kbps	Back	10mm	OFF	4132	826.4	23.45	24.00	1.135	-0.04	0.398	0.452
22	WCDMA V	RMC 12.2Kbps	Back	10mm	OFF	4182	836.4	23.37	24.00	1.156	-0.04	0.401	0.464
	WCDMA V	RMC 12.2Kbps	Left Side	10mm	OFF	4233	846.6	23.62	24.00	1.091	-0.03	0.145	0.158
	WCDMA V	RMC 12.2Kbps	Right Side	10mm	OFF	4233	846.6	23.62	24.00	1.091	-0.02	0.251	0.274
	WCDMA V	RMC 12.2Kbps	Bottom Side	10mm	OFF	4233	846.6	23.62	24.00	1.091	-0.01	0.211	0.230



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 4	20M	QPSK	1	49	Front	10mm	ON	20175	1732.5	20.10	21.00	1.230	0.08	0.254	0.312
	LTE Band 4	20M	QPSK	50	24	Front	10mm	ON	20175	1732.5	20.15	21.00	1.216	0	0.258	0.314
	LTE Band 4	20M	QPSK	1	49	Back	10mm	ON	20175	1732.5	20.10	21.00	1.230	0.02	0.850	1.046
23	LTE Band 4	20M	QPSK	50	24	Back	10mm	ON	20175	1732.5	20.15	21.00	1.216	0.06	0.868	1.056
	LTE Band 4	20M	QPSK	100	0	Back	10mm	ON	20175	1732.5	20.13	21.00	1.222	0.11	0.840	1.026
	LTE Band 4	20M	QPSK	1	49	Left Side	10mm	ON	20175	1732.5	20.10	21.00	1.230	-0.05	0.072	0.089
	LTE Band 4	20M	QPSK	50	24	Left Side	10mm	ON	20175	1732.5	20.15	21.00	1.216	-0.14	0.073	0.089
	LTE Band 4	20M	QPSK	1	49	Right Side	10mm	ON	20175	1732.5	20.10	21.00	1.230	0.1	0.053	0.065
	LTE Band 4	20M	QPSK	50	24	Right Side	10mm	ON	20175	1732.5	20.15	21.00	1.216	0.15	0.053	0.064
	LTE Band 4	20M	QPSK	1	49	Bottom Side	10mm	ON	20175	1732.5	20.10	21.00	1.230	0.16	0.735	0.904
	LTE Band 4	20M	QPSK	50	24	Bottom Side	10mm	ON	20175	1732.5	20.15	21.00	1.216	0.16	0.746	0.907
	LTE Band 4	20M	QPSK	100	0	Bottom Side	10mm	ON	20175	1732.5	20.13	21.00	1.222	0.13	0.757	0.925
24	LTE Band 7	20M	QPSK	1	0	Front	10mm	OFF	20850	2510	24.20	24.50	1.072	-0.08	0.822	0.881
	LTE Band 7	20M	QPSK	1	99	Front	10mm	OFF	21100	2535	24.07	24.50	1.104	-0.12	0.732	0.808
	LTE Band 7	20M	QPSK	1	99	Front	10mm	OFF	21350	2560	23.95	24.50	1.135	-0.07	0.653	0.741
	LTE Band 7	20M	QPSK	50	50	Front	10mm	OFF	20850	2510	23.20	23.50	1.072	-0.07	0.622	0.666
	LTE Band 7	20M	QPSK	100	0	Front	10mm	OFF	20850	2510	23.19	23.50	1.074	-0.01	0.649	0.697
	LTE Band 7	20M	QPSK	1	0	Back	10mm	OFF	20850	2510	24.20	24.50	1.072	-0.09	0.665	0.713
	LTE Band 7	20M	QPSK	50	50	Back	10mm	OFF	20850	2510	23.20	23.50	1.072	-0.1	0.489	0.524
	LTE Band 7	20M	QPSK	1	0	Left Side	10mm	OFF	20850	2510	24.20	24.50	1.072	0	0.099	0.106
	LTE Band 7	20M	QPSK	50	50	Left Side	10mm	OFF	20850	2510	23.20	23.50	1.072	-0.11	0.087	0.093
	LTE Band 7	20M	QPSK	1	0	Right Side	10mm	OFF	20850	2510	24.20	24.50	1.072	0.01	0.635	0.680
	LTE Band 7	20M	QPSK	50	50	Right Side	10mm	OFF	20850	2510	23.20	23.50	1.072	-0.03	0.482	0.516
	LTE Band 7	20M	QPSK	1	0	Bottom Side	10mm	OFF	20850	2510	24.20	24.50	1.072	-0.01	0.683	0.732
	LTE Band 7	20M	QPSK	50	50	Bottom Side	10mm	OFF	20850	2510	23.20	23.50	1.072	-0.1	0.489	0.524
	LTE Band 12	10M	QPSK	1	0	Front	10mm	OFF	23095	707.5	23.72	24.00	1.067	0.03	0.185	0.197
	LTE Band 12	10M	QPSK	25	0	Front	10mm	OFF	23095	707.5	22.69	23.00	1.074	0.14	0.164	0.176
25	LTE Band 12	10M	QPSK	1	0	Back	10mm	OFF	23095	707.5	23.72	24.00	1.067	0.02	0.287	0.306
	LTE Band 12	10M	QPSK	25	0	Back	10mm	OFF	23095	707.5	22.69	23.00	1.074	0.01	0.237	0.255
	LTE Band 12	10M	QPSK	1	0	Left Side	10mm	OFF	23095	707.5	23.72	24.00	1.067	0.15	0.106	0.113
	LTE Band 12	10M	QPSK	25	0	Left Side	10mm	OFF	23095	707.5	22.69	23.00	1.074	0.06	0.092	0.099
	LTE Band 12	10M	QPSK	1	0	Right Side	10mm	OFF	23095	707.5	23.72	24.00	1.067	0.12	0.220	0.235
	LTE Band 12	10M	QPSK	25	0	Right Side	10mm	OFF	23095	707.5	22.69	23.00	1.074	0.14	0.180	0.193
	LTE Band 12	10M	QPSK	1	0	Bottom Side	10mm	OFF	23095	707.5	23.72	24.00	1.067	-0.04	0.043	0.046
	LTE Band 12	10M	QPSK	25	0	Bottom Side	10mm	OFF	23095	707.5	22.69	23.00	1.074	-0.05	0.035	0.038
	LTE Band 13	10M	QPSK	1	49	Front	10mm	OFF	23230	782	23.66	24.00	1.081	-0.03	0.379	0.410
	LTE Band 13	10M	QPSK	25	0	Front	10mm	OFF	23230	782	22.68	23.00	1.076	0.02	0.311	0.335
26	LTE Band 13	10M	QPSK	1	49	Back	10mm	OFF	23230	782	23.66	24.00	1.081	0.07	0.431	0.466
	LTE Band 13	10M	QPSK	25	0	Back	10mm	OFF	23230	782	22.68	23.00	1.076	0.08	0.358	0.385
	LTE Band 13	10M	QPSK	1	49	Left Side	10mm	OFF	23230	782	23.66	24.00	1.081	0.06	0.228	0.247
	LTE Band 13	10M	QPSK	25	0	Left Side	10mm	OFF	23230	782	22.68	23.00	1.076	0.16	0.186	0.200
	LTE Band 13	10M	QPSK	1	49	Right Side	10mm	OFF	23230	782	23.66	24.00	1.081	0.14	0.400	0.433
	LTE Band 13	10M	QPSK	25	0	Right Side	10mm	OFF	23230	782	22.68	23.00	1.076	0.14	0.329	0.354
	LTE Band 13	10M	QPSK	1	49	Bottom Side	10mm	OFF	23230	782	23.66	24.00	1.081	-0.16	0.107	0.116
	LTE Band 13	10M	QPSK	25	0	Bottom Side	10mm	OFF	23230	782	22.68	23.00	1.076	-0.11	0.082	0.088



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 25	20M	QPSK	1	99	Front	10mm	ON	26340	1880	19.51	23.00	2.234	-0.11	0.289	0.646
	LTE Band 25	20M	QPSK	50	24	Front	10mm	ON	26340	1880	19.54	20.50	1.247	-0.06	0.269	0.336
	LTE Band 25	20M	QPSK	1	99	Back	10mm	ON	26340	1880	19.51	20.50	1.256	-0.07	0.776	0.975
	LTE Band 25	20M	QPSK	1	0	Back	10mm	ON	26140	1860	19.48	20.50	1.265	0.16	0.789	0.998
	LTE Band 25	20M	QPSK	1	99	Back	10mm	ON	26590	1905	19.45	20.50	1.274	0.12	0.771	0.982
	LTE Band 25	20M	QPSK	50	24	Back	10mm	ON	26340	1880	19.54	20.50	1.247	0.04	0.764	0.953
	LTE Band 25	20M	QPSK	50	24	Back	10mm	ON	26140	1860	19.52	20.50	1.253	0.09	0.810	1.015
27	LTE Band 25	20M	QPSK	50	24	Back	10mm	ON	26590	1905	19.46	20.50	1.271	0.12	0.825	1.048
	LTE Band 25	20M	QPSK	100	0	Back	10mm	ON	26340	1880	19.49	20.50	1.262	0.11	0.823	1.038
	LTE Band 25	20M	QPSK	1	99	Left Side	10mm	ON	26340	1880	19.51	20.50	1.256	-0.02	0.079	0.099
	LTE Band 25	20M	QPSK	50	24	Left Side	10mm	ON	26340	1880	19.54	20.50	1.247	0.18	0.077	0.096
	LTE Band 25	20M	QPSK	1	99	Right Side	10mm	ON	26340	1880	19.51	20.50	1.256	-0.06	0.062	0.078
	LTE Band 25	20M	QPSK	50	24	Right Side	10mm	ON	26340	1880	19.54	20.50	1.247	-0.04	0.069	0.086
	LTE Band 25	20M	QPSK	1	99	Bottom Side	10mm	ON	26340	1880	19.51	20.50	1.256	-0.05	0.553	0.695
	LTE Band 25	20M	QPSK	50	24	Bottom Side	10mm	ON	26340	1880	19.54	20.50	1.247	-0.13	0.553	0.690
	LTE Band 26	15M	QPSK	1	74	Front	10mm	OFF	26865	831.5	23.30	24.00	1.175	-0.06	0.273	0.321
	LTE Band 26	15M	QPSK	36	39	Front	10mm	OFF	26865	831.5	22.40	23.00	1.148	-0.01	0.232	0.266
28	LTE Band 26	15M	QPSK	1	74	Back	10mm	OFF	26865	831.5	23.30	24.00	1.175	-0.01	0.395	0.464
	LTE Band 26	15M	QPSK	36	39	Back	10mm	OFF	26865	831.5	22.40	23.00	1.148	0	0.317	0.364
	LTE Band 26	15M	QPSK	1	74	Left Side	10mm	OFF	26865	831.5	23.30	24.00	1.175	-0.05	0.156	0.183
	LTE Band 26	15M	QPSK	36	39	Left Side	10mm	OFF	26865	831.5	22.40	23.00	1.148	0.08	0.134	0.154
	LTE Band 26	15M	QPSK	1	74	Right Side	10mm	OFF	26865	831.5	23.30	24.00	1.175	-0.01	0.271	0.318
	LTE Band 26	15M	QPSK	36	39	Right Side	10mm	OFF	26865	831.5	22.40	23.00	1.148	0.1	0.235	0.270
	LTE Band 26	15M	QPSK	1	74	Bottom Side	10mm	OFF	26865	831.5	23.30	24.00	1.175	-0.02	0.194	0.228
	LTE Band 26	15M	QPSK	36	39	Bottom Side	10mm	OFF	26865	831.5	22.40	23.00	1.148	-0.02	0.152	0.175
	LTE Band 30	10M	QPSK	1	0	Front	10mm	OFF	27710	2310	22.90	23.00	1.023	-0.12	0.382	0.391
	LTE Band 30	10M	QPSK	25	12	Front	10mm	OFF	27710	2310	21.93	22.50	1.140	-0.16	0.307	0.350
	LTE Band 30	10M	QPSK	1	0	Back	10mm	OFF	27710	2310	22.90	23.00	1.023	-0.05	0.367	0.376
	LTE Band 30	10M	QPSK	25	12	Back	10mm	OFF	27710	2310	21.93	22.50	1.140	-0.11	0.293	0.334
	LTE Band 30	10M	QPSK	1	0	Left Side	10mm	OFF	27710	2310	22.90	23.00	1.023	-0.16	0.110	0.113
	LTE Band 30	10M	QPSK	25	12	Left Side	10mm	OFF	27710	2310	21.93	22.50	1.140	-0.09	0.090	0.103
29	LTE Band 30	10M	QPSK	1	0	Right Side	10mm	OFF	27710	2310	22.90	23.00	1.023	-0.03	0.607	0.621
	LTE Band 30	10M	QPSK	25	12	Right Side	10mm	OFF	27710	2310	21.93	22.50	1.140	-0.08	0.476	0.543
	LTE Band 30	10M	QPSK	1	0	Bottom Side	10mm	OFF	27710	2310	22.90	23.00	1.023	-0.1	0.236	0.241
	LTE Band 30	10M	QPSK	25	12	Bottom Side	10mm	OFF	27710	2310	21.93	22.50	1.140	-0.15	0.186	0.212



**<WLAN SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	11	2462	18.75	19.00	1.059	99.2	1.008	-0.15	0.133	0.142
30	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	11	2462	18.75	19.00	1.059	99.2	1.008	-0.13	0.371	0.396
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	1	2412	18.70	19.00	1.072	99.2	1.008	-0.19	0.316	0.341
	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	6	2437	18.73	19.00	1.064	99.2	1.008	-0.16	0.335	0.359
	WLAN2.4GHz	802.11b 1Mbps	Right Side	10mm	11	2462	18.75	19.00	1.059	99.2	1.008	0.15	0.363	0.388
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	11	2462	18.75	19.00	1.059	99.2	1.008	-0.06	0.108	0.115

**<Bluetooth SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	10mm	78	2480	6.87	7.00	1.030	76.3	1.092	0.06	0.006	0.007
	Bluetooth	1Mbps	Back	10mm	78	2480	6.87	7.00	1.030	76.3	1.092	-0.09	0.020	0.023
	Bluetooth	1Mbps	Back	10mm	0	2402	6.07	7.00	1.239	76.3	1.092	-0.16	0.016	0.022
31	Bluetooth	1Mbps	Back	10mm	39	2441	5.27	7.00	1.489	76.3	1.092	0.04	0.016	0.026
	Bluetooth	1Mbps	Right Side	10mm	78	2480	6.87	7.00	1.030	76.3	1.092	0.02	0.020	0.023
	Bluetooth	1Mbps	Top Side	10mm	78	2480	6.87	7.00	1.030	76.3	1.092	-0.08	0.008	0.009

**13.3 Body Worn Accessory SAR**

**<GSM SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS (4 Tx slots)	Front	15mm	-	251	848.8	28.34	29.00	1.164	0.08	0.276	0.321
	GSM850	GPRS (4 Tx slots)	Back	15mm	-	251	848.8	28.34	29.00	1.164	-0.07	0.305	0.355
32	GSM850	GPRS (4 Tx slots)	Back	15mm	-	128	824.2	28.05	29.00	1.245	-0.13	0.324	0.403
	GSM850	GPRS (4 Tx slots)	Back	15mm	-	189	836.4	28.31	29.00	1.172	0	0.309	0.362
	GSM1900	GPRS (4 Tx slots)	Front	15mm	-	810	1909.8	25.72	26.00	1.067	0.02	0.275	0.293
	GSM1900	GPRS (4 Tx slots)	Back	15mm	-	810	1909.8	25.72	26.00	1.067	-0.05	0.723	0.771
33	GSM1900	GPRS (4 Tx slots)	Back	15mm	-	512	1850.2	25.46	26.00	1.132	0.01	0.864	0.978
	GSM1900	GPRS (4 Tx slots)	Back	15mm	-	661	1880	25.69	26.00	1.074	-0.02	0.823	0.884





<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Front	15mm	-	9538	1907.6	22.81	23.00	1.045	-0.03	0.364	0.380
	WCDMA II	RMC 12.2Kbps	Back	15mm	-	9538	1907.6	22.81	23.00	1.045	0.05	1.020	1.066
	WCDMA II	RMC 12.2Kbps	Back	15mm	-	9262	1852.4	22.76	23.00	1.057	-0.05	1.090	1.152
34	WCDMA II	RMC 12.2Kbps	Back	15mm	-	9400	1880	22.78	23.00	1.052	-0.07	1.160	1.220
	WCDMA II	RMC 12.2Kbps	Back	15mm	Headset	9400	1880	22.78	23.00	1.052	-0.05	1.120	1.178
	WCDMA IV	RMC 12.2Kbps	Front	15mm	-	1413	1732.6	23.49	23.50	1.002	-0.11	0.324	0.325
	WCDMA IV	RMC 12.2Kbps	Back	15mm	-	1413	1732.6	23.49	23.50	1.002	0.11	1.080	1.082
	WCDMA IV	RMC 12.2Kbps	Back	15mm	-	1312	1712.4	23.49	23.50	1.002	0.12	1.030	1.032
	WCDMA IV	RMC 12.2Kbps	Back	15mm	-	1513	1752.6	23.47	23.50	1.007	0.01	1.170	1.178
35	WCDMA IV	RMC 12.2Kbps	Back	15mm	Headset	1513	1752.6	23.47	23.50	1.007	0	1.180	1.188
	WCDMA V	RMC 12.2Kbps	Front	15mm	-	4233	846.6	23.62	24.00	1.091	0.02	0.261	0.285
36	WCDMA V	RMC 12.2Kbps	Front	15mm	-	4132	826.4	23.45	24.00	1.135	-0.08	0.320	0.363
	WCDMA V	RMC 12.2Kbps	Front	15mm	-	4182	836.4	23.37	24.00	1.156	0.02	0.283	0.327
	WCDMA V	RMC 12.2Kbps	Back	15mm	-	4233	846.6	23.62	24.00	1.091	0	0.217	0.237

<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Headset	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 4	20M	QPSK	1	0	Front	15mm	-	20175	1732.5	23.18	23.50	1.076	-0.09	0.281	0.302
	LTE Band 4	20M	QPSK	50	24	Front	15mm	-	20175	1732.5	22.15	22.50	1.084	-0.1	0.224	0.243
37	LTE Band 4	20M	QPSK	1	0	Back	15mm	-	20175	1732.5	23.18	23.50	1.076	-0.04	0.934	1.005
	LTE Band 4	20M	QPSK	50	24	Back	15mm	-	20175	1732.5	22.15	22.50	1.084	-0.03	0.777	0.842
	LTE Band 4	20M	QPSK	100	0	Back	15mm	-	20175	1732.5	22.12	22.50	1.091	-0.08	0.776	0.847
38	LTE Band 7	20M	QPSK	1	0	Front	15mm	-	20850	2510	24.20	24.50	1.072	-0.04	0.535	0.573
	LTE Band 7	20M	QPSK	1	99	Front	15mm	-	21100	2535	24.07	24.50	1.104	-0.01	0.456	0.503
	LTE Band 7	20M	QPSK	1	99	Front	15mm	-	21350	2560	23.95	24.50	1.135	-0.06	0.396	0.449
	LTE Band 7	20M	QPSK	50	50	Front	15mm	-	20850	2510	23.20	23.50	1.072	-0.07	0.415	0.445
	LTE Band 7	20M	QPSK	1	0	Back	15mm	-	20850	2510	24.20	24.50	1.072	-0.11	0.318	0.341
	LTE Band 7	20M	QPSK	50	50	Back	15mm	-	20850	2510	23.20	23.50	1.072	-0.12	0.239	0.256
	LTE Band 12	10M	QPSK	1	0	Front	15mm	-	23095	707.5	23.72	24.00	1.067	-0.02	0.178	0.190
	LTE Band 12	10M	QPSK	25	0	Front	15mm	-	23095	707.5	22.69	23.00	1.074	-0.02	0.150	0.161
39	LTE Band 12	10M	QPSK	1	0	Back	15mm	-	23095	707.5	23.72	24.00	1.067	0	0.196	0.209
	LTE Band 12	10M	QPSK	25	0	Back	15mm	-	23095	707.5	22.69	23.00	1.074	0.02	0.165	0.177
40	LTE Band 13	10M	QPSK	1	49	Front	15mm	-	23230	782	23.66	24.00	1.081	-0.02	0.361	0.390
	LTE Band 13	10M	QPSK	25	0	Front	15mm	-	23230	782	22.68	23.00	1.076	-0.01	0.304	0.327
	LTE Band 13	10M	QPSK	1	49	Back	15mm	-	23230	782	23.66	24.00	1.081	-0.03	0.323	0.349
	LTE Band 13	10M	QPSK	25	0	Back	15mm	-	23230	782	22.68	23.00	1.076	0.01	0.269	0.290
	LTE Band 25	20M	QPSK	1	0	Front	15mm	-	26140	1860	22.50	23.50	1.259	-0.03	0.335	0.422
	LTE Band 25	20M	QPSK	50	24	Front	15mm	-	26340	1880	21.52	22.50	1.253	-0.06	0.267	0.335
	LTE Band 25	20M	QPSK	1	0	Back	15mm	-	26140	1860	22.50	23.50	1.259	-0.05	0.920	1.158
	LTE Band 25	20M	QPSK	1	0	Back	15mm	-	26340	1880	22.47	23.50	1.268	-0.07	0.999	1.266
41	LTE Band 25	20M	QPSK	1	0	Back	15mm	-	26590	1905	22.39	23.50	1.291	-0.05	1.010	1.304
	LTE Band 25	20M	QPSK	50	24	Back	15mm	-	26340	1880	21.52	22.50	1.253	-0.11	0.807	1.011
	LTE Band 25	20M	QPSK	50	24	Back	15mm	-	26140	1860	21.40	22.50	1.288	-0.07	0.780	1.005
	LTE Band 25	20M	QPSK	50	0	Back	15mm	-	26590	1905	21.46	22.50	1.271	-0.07	0.805	1.023
	LTE Band 25	20M	QPSK	100	0	Back	15mm	-	26340	1880	21.46	22.50	1.271	-0.06	0.807	1.025
	LTE Band 25	20M	QPSK	1	0	Back	15mm	Headset	26590	1905	22.39	23.50	1.291	-0.07	1.000	1.291



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Headset	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
42	LTE Band 26	15M	QPSK	1	74	Front	15mm	-	26865	831.5	23.30	24.00	1.175	-0.01	0.276	0.324
	LTE Band 26	15M	QPSK	36	39	Front	15mm	-	26865	831.5	22.40	23.00	1.148	0.01	0.235	0.270
	LTE Band 26	15M	QPSK	1	74	Back	15mm	-	26865	831.5	23.30	24.00	1.175	-0.07	0.211	0.248
	LTE Band 26	15M	QPSK	36	39	Back	15mm	-	26865	831.5	22.40	23.00	1.148	-0.08	0.180	0.207
43	LTE Band 30	10M	QPSK	1	0	Front	15mm	-	27710	2310	22.90	23.00	1.023	-0.04	0.245	0.251
	LTE Band 30	10M	QPSK	25	12	Front	15mm	-	27710	2310	21.93	22.50	1.140	-0.04	0.201	0.229
	LTE Band 30	10M	QPSK	1	0	Back	15mm	-	27710	2310	22.90	23.00	1.023	-0.06	0.154	0.158
	LTE Band 30	10M	QPSK	25	12	Back	15mm	-	27710	2310	21.93	22.50	1.140	-0.06	0.128	0.146

**<WLAN SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	15mm	-	11	2462	18.75	19.00	1.059	99.2	1.008	-0.06	0.063	0.067
44	WLAN2.4GHz	802.11b 1Mbps	Back	15mm	-	11	2462	18.75	19.00	1.059	99.2	1.008	-0.1	0.224	0.239
	WLAN2.4GHz	802.11b 1Mbps	Back	15mm	-	1	2412	18.70	19.00	1.072	99.2	1.008	-0.12	0.193	0.208
	WLAN2.4GHz	802.11b 1Mbps	Back	15mm	-	6	2437	18.73	19.00	1.064	99.2	1.008	-0.11	0.211	0.226
	WLAN5GHz	802.11a 6Mbps	Front	15mm	-	60	5300	16.47	16.50	1.007	95.1	1.052	-0.04	0.024	0.025
45	WLAN5GHz	802.11a 6Mbps	Back	15mm	-	60	5300	16.47	16.50	1.007	95.1	1.052	-0.02	0.252	0.267
	WLAN5GHz	802.11a 6Mbps	Back	15mm	-	52	5260	16.39	16.50	1.026	95.1	1.052	-0.09	0.245	0.264
	WLAN5GHz	802.11a 6Mbps	Back	15mm	-	56	5280	16.40	16.50	1.023	95.1	1.052	0.02	0.175	0.188
	WLAN5GHz	802.11a 6Mbps	Back	15mm	-	64	5320	16.39	16.50	1.026	95.1	1.052	-0.16	0.170	0.183
	WLAN5GHz	802.11a 6Mbps	Front	15mm	-	100	5500	16.48	16.50	1.005	95.1	1.052	-0.03	0.028	0.030
	WLAN5GHz	802.11a 6Mbps	Back	15mm	-	100	5500	16.48	16.50	1.005	95.1	1.052	-0.09	0.299	0.316
	WLAN5GHz	802.11a 6Mbps	Back	15mm	-	116	5580	16.28	16.50	1.052	95.1	1.052	-0.15	0.379	0.419
	WLAN5GHz	802.11a 6Mbps	Back	15mm	-	124	5620	16.29	16.50	1.050	95.1	1.052	0.03	0.424	0.468
	WLAN5GHz	802.11a 6Mbps	Back	15mm	-	132	5660	16.39	16.50	1.026	95.1	1.052	-0.15	0.419	0.452
46	WLAN5GHz	802.11a 6Mbps	Back	15mm	-	144	5720	16.16	16.50	1.081	95.1	1.052	-0.14	0.435	0.495
	WLAN5GHz	802.11a 6Mbps	Front	15mm	-	157	5785	16.35	16.50	1.035	95.1	1.052	0.03	0.020	0.022
	WLAN5GHz	802.11a 6Mbps	Back	15mm	-	157	5785	16.35	16.50	1.035	95.1	1.052	-0.06	0.353	0.384
	WLAN5GHz	802.11a 6Mbps	Back	15mm	-	149	5745	16.32	16.50	1.042	95.1	1.052	-0.09	0.282	0.309
47	WLAN5GHz	802.11a 6Mbps	Back	15mm	-	165	5825	16.34	16.50	1.038	95.1	1.052	-0.15	0.382	0.417

**<Bluetooth SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Headset	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps	Front	15mm	-	78	2480	6.87	7.00	1.030	76.3	1.092	0.02	0.003	0.004
	Bluetooth	1Mbps	Back	15mm	-	78	2480	6.87	7.00	1.030	76.3	1.092	0.02	0.012	0.014
	Bluetooth	1Mbps	Back	15mm	-	0	2402	6.07	7.00	1.239	76.3	1.092	0.09	0.009	0.012
48	Bluetooth	1Mbps	Back	15mm	-	39	2441	5.27	7.00	1.489	76.3	1.092	0.03	0.009	0.015



**13.4 Product Specific SAR**

**<GSM SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
49	GSM1900	GPRS (4 Tx slots)	Back	0mm	810	1909.8	25.72	26.00	1.067	0.12	1.860	1.984

**<WCDMA SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WCDMA II	RMC 12.2Kbps	Back	0mm	9538	1907.6	22.81	23.00	1.045	0.11	2.010	2.100
	WCDMA II	RMC 12.2Kbps	Back	0mm	9262	1852.4	22.76	23.00	1.057	0.08	2.090	2.209
	WCDMA II	RMC 12.2Kbps	Back	0mm	9400	1880	22.78	23.00	1.052	0.14	2.110	2.220
	WCDMA II	RMC 12.2Kbps	Bottom Side	0mm	9538	1907.6	22.81	23.00	1.045	0.04	2.260	2.361
50	WCDMA II	RMC 12.2Kbps	Bottom Side	0mm	9262	1852.4	22.76	23.00	1.057	0.05	2.400	2.536
	WCDMA II	RMC 12.2Kbps	Bottom Side	0mm	9400	1880	22.78	23.00	1.052	0.03	2.390	2.514
	WCDMA IV	RMC 12.2Kbps	Back	0mm	1413	1732.6	23.49	23.50	1.002	0.17	2.800	2.806
	WCDMA IV	RMC 12.2Kbps	Back	0mm	1312	1712.4	23.49	23.50	1.002	0.15	2.960	2.967
	WCDMA IV	RMC 12.2Kbps	Back	0mm	1513	1752.6	23.47	23.50	1.007	0.14	2.730	2.749
	WCDMA IV	RMC 12.2Kbps	Bottom Side	0mm	1413	1732.6	23.49	23.50	1.002	0.15	3.380	3.388
51	WCDMA IV	RMC 12.2Kbps	Bottom Side	0mm	1312	1712.4	23.49	23.50	1.002	0.14	3.380	3.388
	WCDMA IV	RMC 12.2Kbps	Bottom Side	0mm	1513	1752.6	23.47	23.50	1.007	0.09	3.360	3.383

**<LTE SAR>**

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	LTE Band 4	20M	QPSK	1	0	Back	0mm	20175	1732.5	23.18	23.50	1.076	-0.09	2.480	2.670
52	LTE Band 4	20M	QPSK	1	0	Bottom Side	0mm	20175	1732.5	23.18	23.50	1.076	0.14	3.030	3.262
	LTE Band 25	20M	QPSK	1	0	Back	0mm	26140	1860	22.50	23.50	1.259	0.07	1.900	2.392
	LTE Band 25	20M	QPSK	1	0	Back	0mm	26340	1880	22.47	23.50	1.268	0.06	1.970	2.497
	LTE Band 25	20M	QPSK	1	0	Back	0mm	26590	1905	22.39	23.50	1.291	0.13	1.970	2.544
	LTE Band 25	20M	QPSK	1	0	Bottom Side	0mm	26140	1860	22.50	23.50	1.259	-0.15	2.080	2.619
53	LTE Band 25	20M	QPSK	1	0	Bottom Side	0mm	26340	1880	22.47	23.50	1.268	-0.14	2.090	2.649
	LTE Band 25	20M	QPSK	1	0	Bottom Side	0mm	26590	1905	22.39	23.50	1.291	-0.14	1.990	2.570



<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
	WLAN5GHz	802.11a 6Mbps	Front	0mm	60	5300	16.47	16.50	1.007	95.1	1.052	-0.12	0.112	0.119
	WLAN5GHz	802.11a 6Mbps	Back	0mm	60	5300	16.47	16.50	1.007	95.1	1.052	-0.14	0.904	0.958
	WLAN5GHz	802.11a 6Mbps	Back	0mm	52	5260	16.39	16.50	1.026	95.1	1.052	-0.11	0.886	0.956
54	WLAN5GHz	802.11a 6Mbps	Back	0mm	56	5280	16.40	16.50	1.023	95.1	1.052	-0.14	0.942	1.014
	WLAN5GHz	802.11a 6Mbps	Back	0mm	64	5320	16.39	16.50	1.026	95.1	1.052	-0.15	0.915	0.987
	WLAN5GHz	802.11a 6Mbps	Right Side	0mm	60	5300	16.47	16.50	1.007	95.1	1.052	-0.15	0.342	0.362
	WLAN5GHz	802.11a 6Mbps	Top Side	0mm	60	5300	16.47	16.50	1.007	95.1	1.052	0.16	0.053	0.056
	WLAN5GHz	802.11a 6Mbps	Front	0mm	100	5500	16.48	16.50	1.005	95.1	1.052	0.04	0.108	0.114
	WLAN5GHz	802.11a 6Mbps	Back	0mm	100	5500	16.48	16.50	1.005	95.1	1.052	-0.07	1.050	1.110
	WLAN5GHz	802.11a 6Mbps	Back	0mm	116	5580	16.28	16.50	1.052	95.1	1.052	-0.13	1.170	1.295
	WLAN5GHz	802.11a 6Mbps	Back	0mm	124	5620	16.29	16.50	1.050	95.1	1.052	-0.06	1.210	1.336
	WLAN5GHz	802.11a 6Mbps	Back	0mm	132	5660	16.39	16.50	1.026	95.1	1.052	-0.07	1.180	1.273
55	WLAN5GHz	802.11a 6Mbps	Back	0mm	144	5720	16.16	16.50	1.081	95.1	1.052	-0.09	1.290	1.468
	WLAN5GHz	802.11a 6Mbps	Right Side	0mm	100	5500	16.48	16.50	1.005	95.1	1.052	-0.05	0.370	0.391
	WLAN5GHz	802.11a 6Mbps	Top Side	0mm	100	5500	16.48	16.50	1.005	95.1	1.052	-0.05	0.107	0.113
	WLAN5GHz	802.11a 6Mbps	Front	0mm	157	5785	16.35	16.50	1.035	95.1	1.052	-0.04	0.089	0.097
	WLAN5GHz	802.11a 6Mbps	Back	0mm	157	5785	16.35	16.50	1.035	95.1	1.052	-0.07	0.938	1.021
56	WLAN5GHz	802.11a 6Mbps	Back	0mm	149	5745	16.32	16.50	1.042	95.1	1.052	-0.18	1.020	1.118
	WLAN5GHz	802.11a 6Mbps	Back	0mm	165	5825	16.34	16.50	1.038	95.1	1.052	-0.15	0.966	1.054
	WLAN5GHz	802.11a 6Mbps	Right Side	0mm	157	5785	16.35	16.50	1.035	95.1	1.052	-0.16	0.302	0.329
	WLAN5GHz	802.11a 6Mbps	Top Side	0mm	157	5785	16.35	16.50	1.035	95.1	1.052	-0.08	0.137	0.149



**13.5 Repeated SAR Measurement**

No.	Band	Mode	Test Position	Gap (mm)	Headset	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	LTE Band 7	20M_QPSK_1_0	Front	10mm	-	OFF	20850	2510	24.20	24.50	1.072	-0.08	0.822	-	0.881
2nd	LTE Band 7	20M_QPSK_1_0	Front	10mm	-	OFF	20850	2510	24.20	24.50	1.072	-0.11	0.821	1.00	0.880
1st	WCDMA II	RMC 12.2Kbps	Back	15mm	-	OFF	9400	1880	22.78	23.00	1.052	-0.07	1.160	-	1.220
2nd	WCDMA II	RMC 12.2Kbps	Back	15mm	-	OFF	9400	1880	22.78	23.00	1.052	0.04	1.080	1.07	1.136
1st	WCDMA IV	RMC 12.2Kbps	Back	15mm	Headset	OFF	1513	1752.6	23.47	23.50	1.007	0	1.180	-	1.188
2nd	WCDMA IV	RMC 12.2Kbps	Back	15mm	Headset	OFF	1513	1752.6	23.47	23.50	1.007	0.04	1.170	1.01	1.178

No.	Band	Mode	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Ratio	Reported 10g SAR (W/kg)
1st	WCDMA II	RMC 12.2Kbps	Bottom Side	0mm	OFF	9262	1852.4	22.76	23.00	1.057	0.05	2.400	-	2.536
2nd	WCDMA II	RMC 12.2Kbps	Bottom Side	0mm	OFF	9262	1852.4	22.76	23.00	1.057	0	2.380	1.01	2.515
1st	WCDMA IV	RMC 12.2Kbps	Bottom Side	0mm	OFF	1312	1712.4	23.49	23.50	1.002	0.14	3.380	-	3.388
2nd	WCDMA IV	RMC 12.2Kbps	Bottom Side	0mm	OFF	1312	1712.4	23.49	23.50	1.002	0.03	3.350	1.01	3.358

**General Note:**

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8W/kg$ .
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is  $\leq 1.2$  and the measured SAR  $< 1.45W/kg$ , only one repeated measurement is required.
3. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. The ratio is the difference in percentage between original and repeated *measured* SAR.
5. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

**14. Simultaneous Transmission Analysis**

NO.	Simultaneous Transmission Configurations	Portable Handset			
		Head	Body-worn	Hotspot	Product Specific
1.	WWAN + WLAN2.4GHz	Yes	Yes	Yes	Yes
2.	WWAN + Bluetooth	Yes	Yes	Yes	Yes
3.	WWAN + WLAN5GHz	Yes	Yes	Yes	Yes
4.	WWAN + WLAN2.4GHz + Bluetooth	Yes	Yes	Yes	Yes
5.	WWAN + WLAN5GHz + Bluetooth	Yes	Yes	Yes	Yes

**General Note:**

1. All licensed modes share the same antenna part and cannot transmit simultaneously.
2. EUT will choose either WLAN 2.4GHz or WLAN 5GHz according to the network signal condition; therefore, 2.4GHz WLAN and 5GHz WLAN will not operate simultaneously at any moment.
3. The Scaled SAR summation is calculated based on the same configuration and test position.
4. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
  - i) Scalar SAR summation < 1.6W/kg.
  - ii)  $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$ , and the peak separation distance is determined from the square root of  $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$ , where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
  - iii) If  $SPLSR \leq 0.04$ , simultaneously transmission SAR measurement is not necessary.
  - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
  - v) The SPLSR calculated results please refer to section 14.5.



**14.1 Head Exposure Conditions**

WWAN Band		Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)	1+2+4 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)
			WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	5GHz WLAN 1g SAR (W/kg)	Bluetooth 1g SAR (W/kg)					
GSM	GSM850	Right Cheek	0.577	0.259	0.247	0.008	0.836	0.824	0.585	0.844	0.832
		Right Tilted	0.247	0.137	0.189	0.004	0.384	0.436	0.251	0.388	0.440
		Left Cheek	0.545	0.472	0.280	0.021	1.017	0.825	0.566	1.038	0.846
		Left Tilted	0.302	0.180	0.212	0.005	0.482	0.514	0.307	0.487	0.519
	GSM1900	Right Cheek	0.075	0.259	0.247	0.008	0.334	0.322	0.083	0.342	0.330
		Right Tilted	0.019	0.137	0.189	0.004	0.156	0.208	0.023	0.160	0.212
		Left Cheek	0.061	0.472	0.280	0.021	0.533	0.341	0.082	0.554	0.362
		Left Tilted	0.027	0.180	0.212	0.005	0.207	0.239	0.032	0.212	0.244
WCDMA	WCDMA II	Right Cheek	0.107	0.259	0.247	0.008	0.366	0.354	0.115	0.374	0.362
		Right Tilted	0.055	0.137	0.189	0.004	0.192	0.244	0.059	0.196	0.248
		Left Cheek	0.104	0.472	0.280	0.021	0.576	0.384	0.125	0.597	0.405
		Left Tilted	0.044	0.180	0.212	0.005	0.224	0.256	0.049	0.229	0.261
	WCDMA IV	Right Cheek	0.104	0.259	0.247	0.008	0.363	0.351	0.112	0.371	0.359
		Right Tilted	0.024	0.137	0.189	0.004	0.161	0.213	0.028	0.165	0.217
		Left Cheek	0.076	0.472	0.280	0.021	0.548	0.356	0.097	0.569	0.377
		Left Tilted	0.031	0.180	0.212	0.005	0.211	0.243	0.036	0.216	0.248
	WCDMA V	Right Cheek	0.563	0.259	0.247	0.008	0.822	0.810	0.571	0.830	0.818
		Right Tilted	0.251	0.137	0.189	0.004	0.388	0.440	0.255	0.392	0.444
		Left Cheek	0.385	0.472	0.280	0.021	0.857	0.665	0.406	0.878	0.686
		Left Tilted	0.226	0.180	0.212	0.005	0.406	0.438	0.231	0.411	0.443
LTE	LTE Band 4	Right Cheek	0.075	0.259	0.247	0.008	0.334	0.322	0.083	0.342	0.330
		Right Tilted	0.025	0.137	0.189	0.004	0.162	0.214	0.029	0.166	0.218
		Left Cheek	0.076	0.472	0.280	0.021	0.548	0.356	0.097	0.569	0.377
		Left Tilted	0.031	0.180	0.212	0.005	0.211	0.243	0.036	0.216	0.248
	LTE Band 7	Right Cheek	0.253	0.259	0.247	0.008	0.512	0.500	0.261	0.520	0.508
		Right Tilted	0.077	0.137	0.189	0.004	0.214	0.266	0.081	0.218	0.270
		Left Cheek	0.143	0.472	0.280	0.021	0.615	0.423	0.164	0.636	0.444
	LTE Band 12	Left Tilted	0.068	0.180	0.212	0.005	0.248	0.280	0.073	0.253	0.285
		Right Cheek	0.223	0.259	0.247	0.008	0.482	0.470	0.231	0.490	0.478
		Right Tilted	0.092	0.137	0.189	0.004	0.229	0.281	0.096	0.233	0.285
		Left Cheek	0.191	0.472	0.280	0.021	0.663	0.471	0.212	0.684	0.492
	LTE Band 13	Left Tilted	0.107	0.180	0.212	0.005	0.287	0.319	0.112	0.292	0.324
		Right Cheek	0.457	0.259	0.247	0.008	0.716	0.704	0.465	0.724	0.712
		Right Tilted	0.245	0.137	0.189	0.004	0.382	0.434	0.249	0.386	0.438
		Left Cheek	0.387	0.472	0.280	0.021	0.859	0.667	0.408	0.880	0.688
	LTE Band 25	Left Tilted	0.240	0.180	0.212	0.005	0.420	0.452	0.245	0.425	0.457
		Right Cheek	0.135	0.259	0.247	0.008	0.394	0.382	0.143	0.402	0.390
		Right Tilted	0.056	0.137	0.189	0.004	0.193	0.245	0.060	0.197	0.249
		Left Cheek	0.096	0.472	0.280	0.021	0.568	0.376	0.117	0.589	0.397
	LTE Band 26	Left Tilted	0.035	0.180	0.212	0.005	0.215	0.247	0.040	0.220	0.252
		Right Cheek	0.376	0.259	0.247	0.008	0.635	0.623	0.384	0.643	0.631
		Right Tilted	0.242	0.137	0.189	0.004	0.379	0.431	0.246	0.383	0.435
		Left Cheek	0.387	0.472	0.280	0.021	0.859	0.667	0.408	0.880	0.688
	LTE Band 30	Left Tilted	0.240	0.180	0.212	0.005	0.420	0.452	0.245	0.425	0.457
Right Cheek		0.371	0.259	0.247	0.008	0.630	0.618	0.379	0.630	0.618	
Right Tilted		0.215	0.137	0.189	0.004	0.352	0.404	0.219	0.352	0.404	
Left Cheek		0.349	0.472	0.280	0.021	0.821	0.629	0.370	0.821	0.629	
		Left Tilted	0.208	0.180	0.212	0.005	0.388	0.420	0.213	0.388	0.420



14.2 Hotspot Exposure Conditions

WWAN Band		Exposure Position	1	2	4	1+2 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)	1+2+4 Summed 1g SAR (W/kg)
			WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	Bluetooth 1g SAR (W/kg)			
GSM	GSM850	Front	0.368	0.142	0.007	0.510	0.375	0.517
		Back	0.653	0.396	0.026	1.049	0.679	1.075
		Left side	0.180			0.180	0.180	0.180
		Right side	0.328	0.388	0.023	0.716	0.351	0.739
		Top side		0.115	0.009	0.115	0.009	0.124
		Bottom side	0.291			0.291	0.291	0.291
	GSM1900	Front	0.301	0.142	0.007	0.443	0.308	0.450
		Back	0.977	0.396	0.026	1.373	1.003	1.399
		Left side	0.085			0.085	0.085	0.085
		Right side	0.091	0.388	0.023	0.479	0.114	0.502
		Top side		0.115	0.009	0.115	0.009	0.124
		Bottom side	0.653			0.653	0.653	0.653
WCDMA	WCDMA II	Front	0.381	0.142	0.007	0.523	0.388	0.530
		Back	1.049	0.396	0.026	1.445	1.075	1.471
		Left side	0.109			0.109	0.109	0.109
		Right side	0.093	0.388	0.023	0.481	0.116	0.504
		Top side		0.115	0.009	0.115	0.009	0.124
		Bottom side	0.742			0.742	0.742	0.742
	WCDMA IV	Front	0.300	0.142	0.007	0.442	0.307	0.449
		Back	1.143	0.396	0.026	1.539	1.169	1.565
		Left side	0.077			0.077	0.077	0.077
		Right side	0.064	0.388	0.023	0.452	0.087	0.475
		Top side		0.115	0.009	0.115	0.009	0.124
		Bottom side	0.951			0.951	0.951	0.951
	WCDMA V	Front	0.287	0.142	0.007	0.429	0.294	0.436
		Back	0.464	0.396	0.026	0.860	0.490	0.886
		Left side	0.158			0.158	0.158	0.158
		Right side	0.274	0.388	0.023	0.662	0.297	0.685
		Top side		0.115	0.009	0.115	0.009	0.124
		Bottom side	0.230			0.230	0.230	0.230
LTE	LTE Band 4	Front	0.314	0.142	0.007	0.456	0.321	0.463
		Back	1.056	0.396	0.026	1.452	1.082	1.478
		Left side	0.089			0.089	0.089	0.089
		Right side	0.065	0.388	0.023	0.453	0.088	0.476
		Top side		0.115	0.009	0.115	0.009	0.124
		Bottom side	0.925			0.925	0.925	0.925
	LTE Band 7	Front	0.881	0.142	0.007	1.023	0.888	1.030
		Back	0.713	0.396	0.026	1.109	0.739	1.135
		Left side	0.106			0.106	0.106	0.106
		Right side	0.680	0.388	0.023	1.068	0.703	1.091
		Top side		0.115	0.009	0.115	0.009	0.124
		Bottom side	0.732			0.732	0.732	0.732
	LTE Band 12	Front	0.197	0.142	0.007	0.339	0.204	0.346
		Back	0.306	0.396	0.026	0.702	0.332	0.728
		Left side	0.113			0.113	0.113	0.113
		Right side	0.235	0.388	0.023	0.623	0.258	0.646
		Top side		0.115	0.009	0.115	0.009	0.124
		Bottom side	0.046			0.046	0.046	0.046
LTE Band 13	Front	0.410	0.142	0.007	0.552	0.417	0.559	
	Back	0.466	0.396	0.026	0.862	0.492	0.888	
	Left side	0.247			0.247	0.247	0.247	





		Right side	0.433	0.388	0.023	<b>0.821</b>	<b>0.456</b>	<b>0.844</b>
		Top side		0.115	0.009	<b>0.115</b>	<b>0.009</b>	<b>0.124</b>
		Bottom side	0.116			<b>0.116</b>	<b>0.116</b>	<b>0.116</b>
	LTE Band 25	Front	0.646	0.142	0.007	<b>0.788</b>	<b>0.653</b>	<b>0.795</b>
		Back	1.048	0.396	0.026	<b>1.444</b>	<b>1.074</b>	<b>1.470</b>
		Left side	0.099			<b>0.099</b>	<b>0.099</b>	<b>0.099</b>
		Right side	0.086	0.388	0.023	<b>0.474</b>	<b>0.109</b>	<b>0.497</b>
		Top side		0.115	0.009	<b>0.115</b>	<b>0.009</b>	<b>0.124</b>
		Bottom side	0.695			<b>0.695</b>	<b>0.695</b>	<b>0.695</b>
	LTE Band 26	Front	0.321	0.142	0.007	<b>0.463</b>	<b>0.328</b>	<b>0.470</b>
		Back	0.464	0.396	0.026	<b>0.860</b>	<b>0.490</b>	<b>0.886</b>
		Left side	0.183			<b>0.183</b>	<b>0.183</b>	<b>0.183</b>
		Right side	0.318	0.388	0.023	<b>0.706</b>	<b>0.341</b>	<b>0.729</b>
		Top side		0.115	0.009	<b>0.115</b>	<b>0.009</b>	<b>0.124</b>
		Bottom side	0.228			<b>0.228</b>	<b>0.228</b>	<b>0.228</b>
	LTE Band 30	Front	0.391	0.142	0.007	<b>0.533</b>	<b>0.398</b>	<b>0.533</b>
		Back	0.376	0.396	0.026	<b>0.772</b>	<b>0.402</b>	<b>0.772</b>
		Left side	0.113			<b>0.113</b>	<b>0.113</b>	<b>0.113</b>
Right side		0.621	0.388	0.023	<b>1.009</b>	<b>0.644</b>	<b>1.009</b>	
Top side			0.115	0.009	<b>0.115</b>	<b>0.009</b>	<b>0.115</b>	
Bottom side		0.241			<b>0.241</b>	<b>0.241</b>	<b>0.241</b>	



**14.3 Body-Worn Accessory Exposure Conditions**

WWAN Band	Exposure Position	1	2	3	4	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4 Summed 1g SAR (W/kg)	1+2+4 Summed 1g SAR (W/kg)	1+3+4 Summed 1g SAR (W/kg)	SPLSR	Case No	
		WWAN 1g SAR (W/kg)	2.4GHz WLAN 1g SAR (W/kg)	5GHz WLAN 1g SAR (W/kg)	Bluetooth 1g SAR (W/kg)								
GSM	GSM850	Front	0.321	0.067	0.030	0.004	0.388	0.351	0.325	0.392	0.355		
		Back	0.403	0.239	0.495	0.015	0.642	0.898	0.418	0.657	0.913		
	GSM1900	Front	0.293	0.067	0.030	0.004	0.360	0.323	0.297	0.364	0.327		
		Back	0.978	0.239	0.495	0.015	1.217	1.473	0.993	1.232	1.488		
WCDMA	WCDMA II	Front	0.380	0.067	0.030	0.004	0.447	0.410	0.384	0.451	0.414		
		Back	1.220	0.239	0.495	0.015	1.459	1.715	1.235	1.474	1.730	0.02	Case 5
	WCDMA IV	Front	0.325	0.067	0.030	0.004	0.392	0.355	0.329	0.396	0.359		
		Back	1.178	0.239	0.495	0.015	1.417	1.673	1.193	1.432	1.688	0.02	Case 6
	WCDMA V	Front	0.363	0.067	0.030	0.004	0.430	0.393	0.367	0.434	0.397		
		Back	0.237	0.239	0.495	0.015	0.476	0.732	0.252	0.491	0.747		
LTE	LTE Band 4	Front	0.302	0.067	0.030	0.004	0.369	0.332	0.306	0.373	0.336		
		Back	1.005	0.239	0.495	0.015	1.244	1.500	1.020	1.259	1.515		
	LTE Band 7	Front	0.573	0.067	0.030	0.004	0.640	0.603	0.577	0.644	0.607		
		Back	0.341	0.239	0.495	0.015	0.580	0.836	0.356	0.595	0.851		
	LTE Band 12	Front	0.190	0.067	0.030	0.004	0.257	0.220	0.194	0.261	0.224		
		Back	0.209	0.239	0.495	0.015	0.448	0.704	0.224	0.463	0.719		
	LTE Band 13	Front	0.390	0.067	0.030	0.004	0.457	0.420	0.394	0.461	0.424		
		Back	0.349	0.239	0.495	0.015	0.588	0.844	0.364	0.603	0.859		
	LTE Band 25	Front	0.422	0.067	0.030	0.004	0.489	0.452	0.426	0.493	0.456		
		Back	1.304	0.239	0.495	0.015	1.543	1.799	1.319	1.558	1.814	0.02	Case 4
	LTE Band 26	Front	0.324	0.067	0.030	0.004	0.391	0.354	0.328	0.395	0.358		
		Back	0.248	0.239	0.495	0.015	0.487	0.743	0.263	0.502	0.758		
	LTE Band 30	Front	0.251	0.067	0.030	0.004	0.318	0.281	0.255	0.318	0.281		
		Back	0.158	0.239	0.495	0.015	0.397	0.653	0.173	0.397	0.653		



14.4 Product Specific Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	1+2	1+3	1+4	1+2+4	1+3+4	SPLSR	Case No	
		WWAN 10g SAR (W/kg)	2.4GHz WLAN 10g SAR (W/kg)	5GHz WLAN 10g SAR (W/kg)	Bluetooth 10g SAR (W/kg)	Summed 10g SAR (W/kg)	Summed 10g SAR (W/kg)	Summed 10g SAR (W/kg)	Summed 10g SAR (W/kg)	Summed 10g SAR (W/kg)			
GSM	GSM1900	Front		0.119		0.000	0.119	0.000	0.000	0.119			
		Back	1.984		1.468		1.984	3.452	1.984	1.984	3.452		
		Left side					0.000	0.000	0.000	0.000	0.000		
		Right side			0.391		0.000	0.391	0.000	0.000	0.391		
		Top side			0.149		0.000	0.149	0.000	0.000	0.149		
		Bottom side					0.000	0.000	0.000	0.000	0.000		
WCDMA	WCDMA II	Front		0.119		0.000	0.119	0.000	0.000	0.119			
		Back	2.220		1.468		2.220	3.688	2.220	2.220	3.688		
		Left side					0.000	0.000	0.000	0.000	0.000		
		Right side			0.391		0.000	0.391	0.000	0.000	0.391		
		Top side			0.149		0.000	0.149	0.000	0.000	0.149		
		Bottom side	2.536				2.536	2.536	2.536	2.536	2.536		
	WCDMA IV	Front			0.119		0.000	0.119	0.000	0.000	0.119		
		Back	2.967		1.468		2.967	4.435	2.967	2.967	4.435	0.09	Case 2
		Left side					0.000	0.000	0.000	0.000	0.000		
		Right side			0.391		0.000	0.391	0.000	0.000	0.391		
		Top side			0.149		0.000	0.149	0.000	0.000	0.149		
		Bottom side	3.388				3.388	3.388	3.388	3.388	3.388		
LTE	LTE Band 4	Front		0.119		0.000	0.119	0.000	0.000	0.119			
		Back	2.670		1.468		2.670	4.138	2.670	2.670	4.138	0.08	Case 3
		Left side					0.000	0.000	0.000	0.000	0.000		
		Right side			0.391		0.000	0.391	0.000	0.000	0.391		
		Top side			0.149		0.000	0.149	0.000	0.000	0.149		
		Bottom side	3.262				3.262	3.262	3.262	3.262	3.262		
	LTE Band 25	Front			0.119		0.000	0.119	0.000	0.000	0.119		
		Back	2.544		1.468		2.544	4.012	2.544	2.544	4.012	0.07	Case 1
		Left side					0.000	0.000	0.000	0.000	0.000		
		Right side			0.391		0.000	0.391	0.000	0.000	0.391		
		Top side			0.149		0.000	0.149	0.000	0.000	0.149		
		Bottom side	2.649				2.649	2.649	2.649	2.649	2.649		


General Note:

1. According to KDB 941225 D06 v02r01 and KDB 648474 D04v01r03, for SAR was excluded, due to transmitting antenna located larger 25mm from that surface or hotspot SAR was < 1.2W/kg


**14.5 SPLSR Evaluation and Analysis**

**General Note:**

1.  $SPLSR = (SAR_1 + SAR_2)^{1.5} / (\text{min. separation distance, mm})$ . If  $SPLSR \leq 0.04$ , simultaneously transmission SAR measurement is not necessary, a factor 2.5 for 10g SAR SPLSR analysis, so if 10g SAR  $SPLSR \leq 0.1$ , simultaneously transmission SAR measurement is not necessary
2. Case1-3 is for product specific 10g SAR, a factor 2.5 for 10g SAR SPLSR analysis, so if 10g SAR  $SPLSR \leq 0.1$ , simultaneously transmission SAR measurement is not necessary.
3. The detail hotspot point for each transmitter in each exposure condition are showing as below figure and the minimum 3D distance for each sum combination is used for SPLSR analysis.

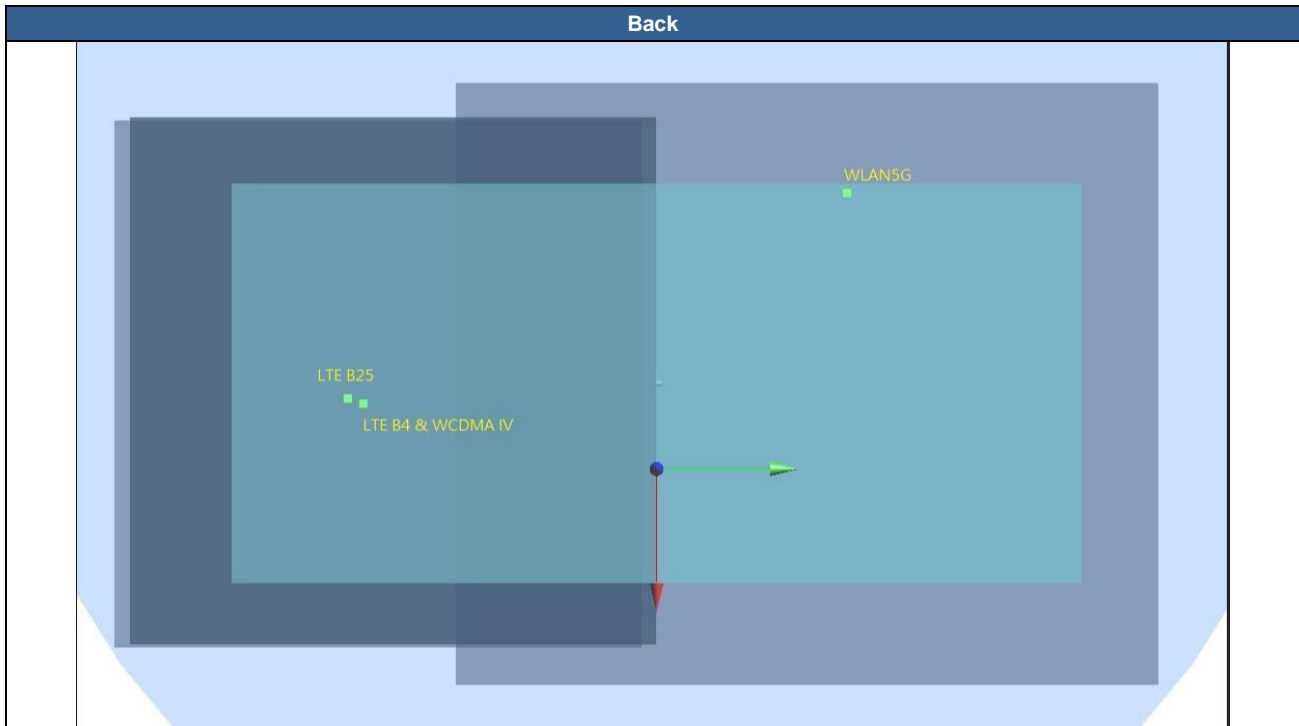

Case	Band	Position	10g SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 1	LTE Band 25	Back	2.544	0mm	7.8	-58.3	-3.55	107.5	4.01	0.07	Not required
	WLAN5GHz		1.468	0mm	-30.8	42	-1.66				
Case 2	WCDMA IV	Back	2.967	0mm	7.2	-58.5	-3.98	107.5	4.44	0.09	Not required
	WLAN5GHz		1.468	0mm	-30.8	42	-1.66				
Case 3	LTE Band 4	Back	2.67	0mm	5.6	-58.5	-3.89	106.9	4.14	0.08	Not required
	WLAN5GHz		1.468	0mm	-30.8	42	-1.66				

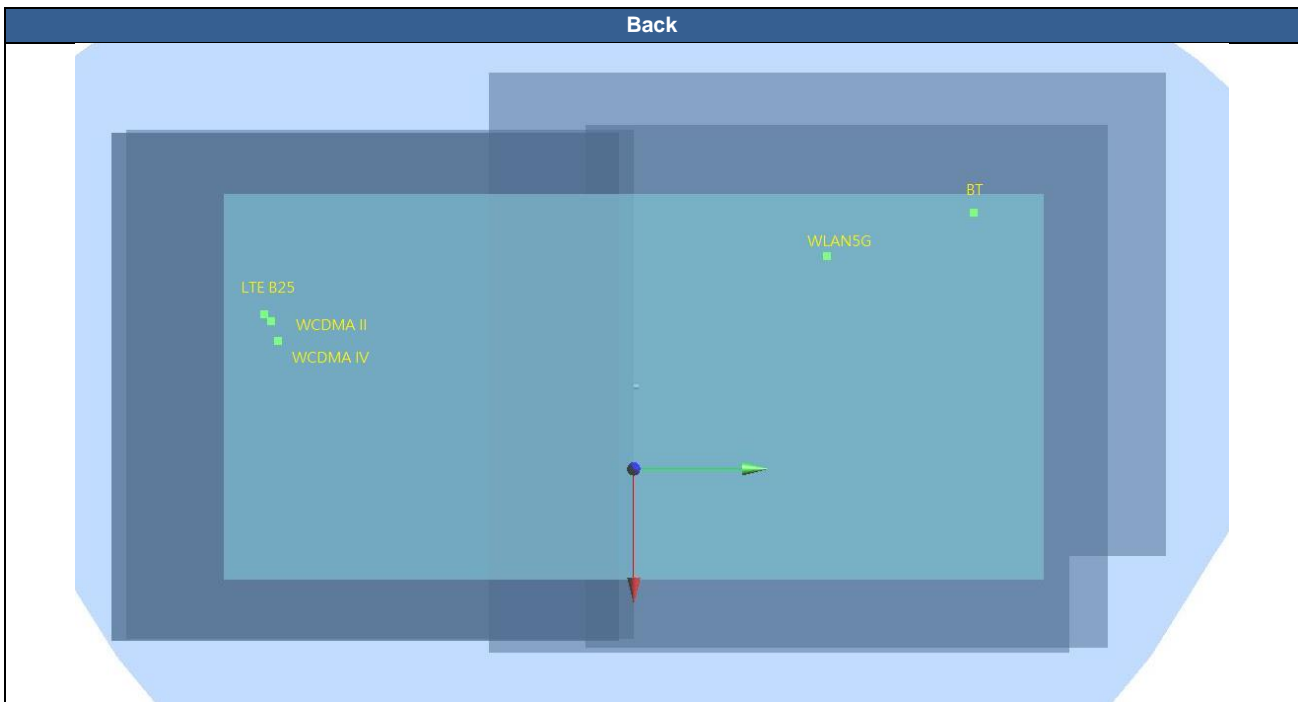

	Band	Position	1g SAR (W/kg)	Gap (mm)	SAR peak location (mm)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					X	Y	Z				
Case 4	LTE Band 25	Back	1.304	15mm	-11.8	-78.1	-1.11	119.4	1.80	0.02	Not required
	WLAN5GHz		0.495	15mm	-31.8	39.6	-2.23				
	LTE Band 25	Back	1.304	15mm	-11.8	-78.1	-1.11	144.9	1.32	0.01	Not required
	Bluetooth		0.015	15mm	-32	65.4	-1.22				
	Bluetooth	Back	0.015	15mm	-32	65.4	-1.22	25.8	0.51	0.01	Not required
	WLAN5GHz		0.495	15mm	-31.8	39.6	-2.23				
Case 5	WCDMA II	Back	1.22	15mm	-13.5	-76.6	-1.13	117.6	1.72	0.02	Not required
	WLAN5GHz		0.495	15mm	-31.8	39.6	-2.23				
	WCDMA II	Back	1.22	15mm	-13.5	-76.6	-1.13	143.2	1.24	0.01	Not required
	Bluetooth		0.015	15mm	-32	65.4	-1.22				
	Bluetooth	Back	0.015	15mm	-32	65.4	-1.22	25.8	0.51	0.01	Not required
	WLAN5GHz		0.495	15mm	-31.8	39.6	-2.23				
Case 6	WCDMA IV	Back	1.178	15mm	-11.1	-73.5	-1.81	115.0	1.67	0.02	Not required
	WLAN5GHz		0.495	15mm	-31.8	39.6	-2.23				
	WCDMA IV	Back	1.178	15mm	-11.1	-73.5	-1.81	140.5	1.19	0.01	Not required
	Bluetooth		0.015	15mm	-32	65.4	-1.22				
	Bluetooth	Back	0.015	15mm	-32	65.4	-1.22	25.8	0.51	0.01	Not required
	WLAN5GHz		0.495	15mm	-31.8	39.6	-2.23				

**Test Engineer : Tom Jiang Iran Wang Tommy Chen Mood Huang and Nick Yu**



## **15. Uncertainty Assessment**

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be  $\leq 30\%$ , for a confidence interval of  $k = 2$ . If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

## **16. References**

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [8] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [9] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [10] FCC KDB 941225 D05A v01r02, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Oct 2015
- [11] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [12] FCC KDB 941225 D07 v01r02, " SAR Evaluation Procedures for UMPC Mini-Tablet Devices", Oct 2015.
- [13] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [14] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.