

## #01\_WLAN2.4GHz\_802.11b 1Mbps\_Left Cheek\_Ch6;Ant 1

Communication System: 802.11b ; Frequency: 2437 MHz;Duty Cycle: 1:1.008

Medium: HSL\_2450\_190503 Medium parameters used :  $f = 2437$  MHz;  $\sigma = 1.802$  S/m;  $\epsilon_r = 38.936$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(4.6, 4.6, 4.6) ; Calibrated: 2018/9/24
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2018/9/19
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1477
- Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Area Scan (91x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.434 W/kg



**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.30 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.723 W/kg

**SAR(1 g) = 0.352 W/kg; SAR(10 g) = 0.171 W/kg**

Maximum value of SAR (measured) = 0.444 W/kg

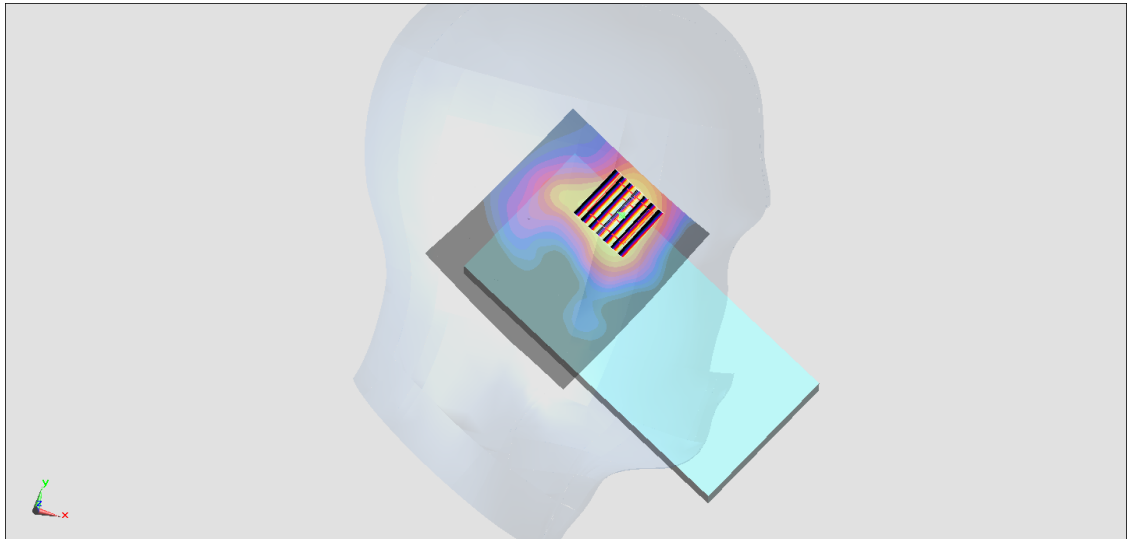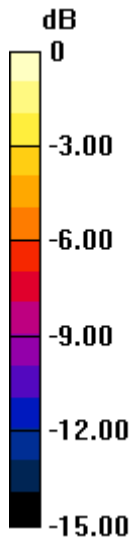

0 dB = 0.444 W/kg = -3.53 dBW/kg

**#02\_WLAN5GHz\_802.11a 6Mbps\_Right Cheek\_Ch60;Ant 2**

Communication System: 802.11a; Frequency: 5300 MHz; Duty Cycle: 1:1.06

Medium: HSL\_5G\_190504 Medium parameters used :  $f = 5300$  MHz;  $\sigma = 4.8$  S/m;  $\epsilon_r = 36.023$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(5.12, 5.12, 5.12) ; Calibrated: 2018/9/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2018/11/16
- Phantom: SAM\_Right; Type: SAM; Serial: TP:1479
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Area Scan (111x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.09 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 11.70 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.76 W/kg

**SAR(1 g) = 0.476 W/kg; SAR(10 g) = 0.169 W/kg**

Maximum value of SAR (measured) = 1.11 W/kg

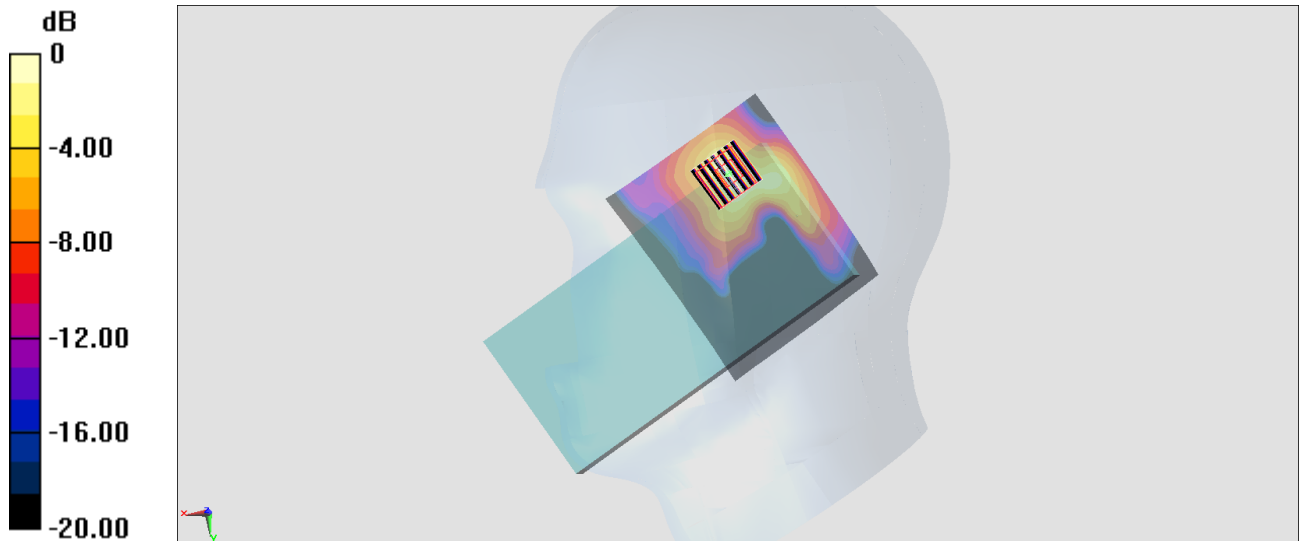

0 dB = 1.11 W/kg = 0.45 dBW/kg

**#03\_WLAN5GHz\_802.11a 6Mbps\_Right Cheek\_Ch100;Ant 2**

Communication System: 802.11a ; Frequency: 5500 MHz;Duty Cycle: 1:1.06

Medium: HSL\_5G\_190506 Medium parameters used:  $f = 5500$  MHz;  $\sigma = 4.982$  S/m;  $\epsilon_r = 35.679$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7515; ConvF(4.83, 4.83, 4.83) ; Calibrated: 2018/10/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn918; Calibrated: 2018/6/20
- Phantom: SAM\_Right; Type: SAM; Serial: TP:1479
- Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Area Scan (111x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.838 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 8.984 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 1.37 W/kg

**SAR(1 g) = 0.338 W/kg; SAR(10 g) = 0.105 W/kg**

Maximum value of SAR (measured) = 0.830 W/kg

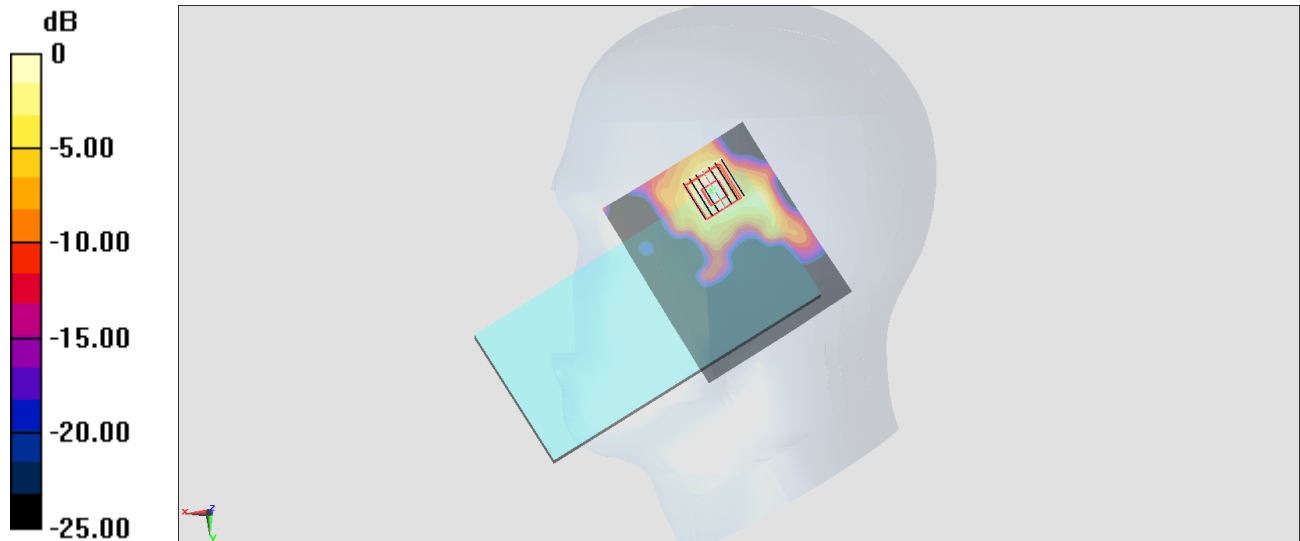

0 dB = 0.830 W/kg = -0.81 dBW/kg

**#04\_WLAN5GHz\_802.11a 6Mbps\_Right Cheek\_Ch157;Ant 2**

Communication System: 802.11a ; Frequency: 5785 MHz;Duty Cycle: 1:1.06

Medium: HSL\_5G\_190507 Medium parameters used :  $f = 5785$  MHz;  $\sigma = 5.219$  S/m;  $\epsilon_r = 35.868$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(4.72, 4.72, 4.72) ; Calibrated: 2018/9/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn918; Calibrated: 2018/6/20
- Phantom: SAM\_Right; Type: SAM; Serial: TP:1479
- Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Area Scan (121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.854 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 13.41 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.61 W/kg

**SAR(1 g) = 0.350 W/kg; SAR(10 g) = 0.107 W/kg**

Maximum value of SAR (measured) = 0.916 W/kg

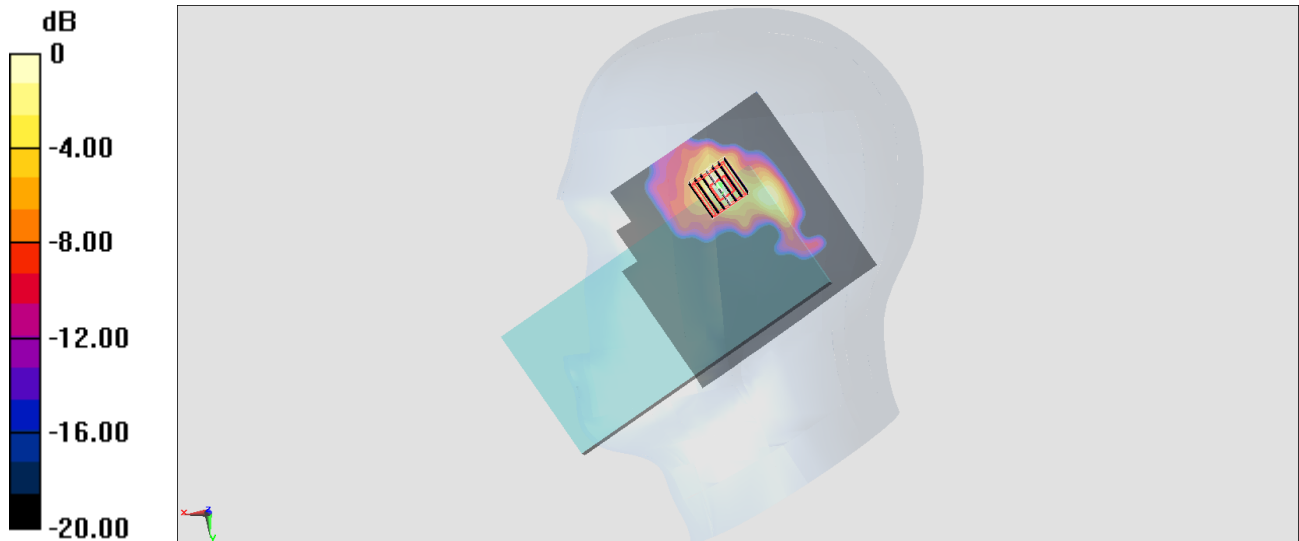

**#05\_Bluetooth\_1Mbps\_Left Cheek\_Ch39;Ant 1**

Communication System: Bluetooth ; Frequency: 2441 MHz;Duty Cycle: 1:1.311

Medium: HSL\_2450\_190503 Medium parameters used:  $f = 2441$  MHz;  $\sigma = 1.806$  S/m;  $\epsilon_r = 38.922$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(4.6, 4.6, 4.6) ; Calibrated: 2018/9/24
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2018/9/19
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1477
- Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Area Scan (101x91x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0226 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.079 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.0360 W/kg

**SAR(1 g) = 0.018 W/kg; SAR(10 g) = 0.0078 W/kg**

Maximum value of SAR (measured) = 0.0231 W/kg

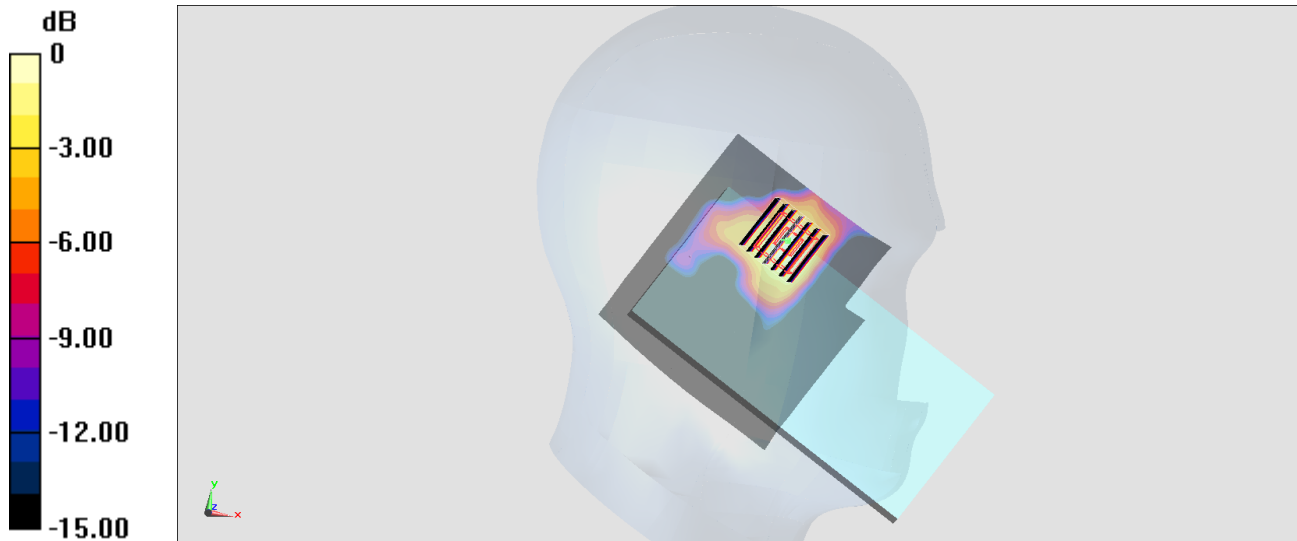

0 dB = 0.0231 W/kg = -16.36 dBW/kg

**#06\_WLAN2.4GHz\_802.11b 1Mbps\_Back\_10mm\_Ch11;Ant 2**

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1.008

Medium: HSL\_2450\_190503 Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.828$  S/m;  $\epsilon_r = 38.837$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(4.6, 4.6, 4.6) ; Calibrated: 2018/9/24
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2018/9/19
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1477
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Area Scan (101x91x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.422 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.94 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.614 W/kg

**SAR(1 g) = 0.321 W/kg; SAR(10 g) = 0.167 W/kg**

Maximum value of SAR (measured) = 0.403 W/kg

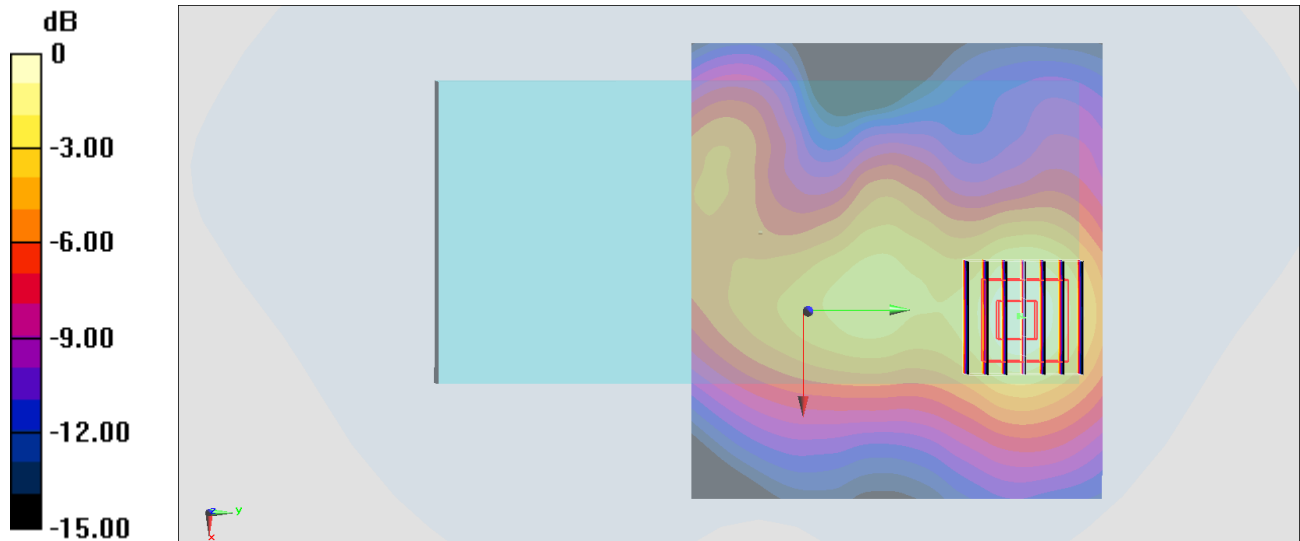

0 dB = 0.403 W/kg = -3.95 dBW/kg

## #07\_WLAN5GHz\_802.11a 6Mbps\_Back\_10mm\_Ch60;Ant 2

Communication System: 802.11a; Frequency: 5300 MHz; Duty Cycle: 1:1.06

Medium: HSL\_5G\_190504 Medium parameters used :  $f = 5300$  MHz;  $\sigma = 4.8$  S/m;  $\epsilon_r = 36.023$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(5.12, 5.12, 5.12) ; Calibrated: 2018/9/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2018/11/16
- Phantom: SAM\_Right; Type: SAM; Serial: TP:1479
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Area Scan (101x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.85 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 13.88 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.38 W/kg

**SAR(1 g) = 0.923 W/kg; SAR(10 g) = 0.335 W/kg**

Maximum value of SAR (measured) = 2.10 W/kg

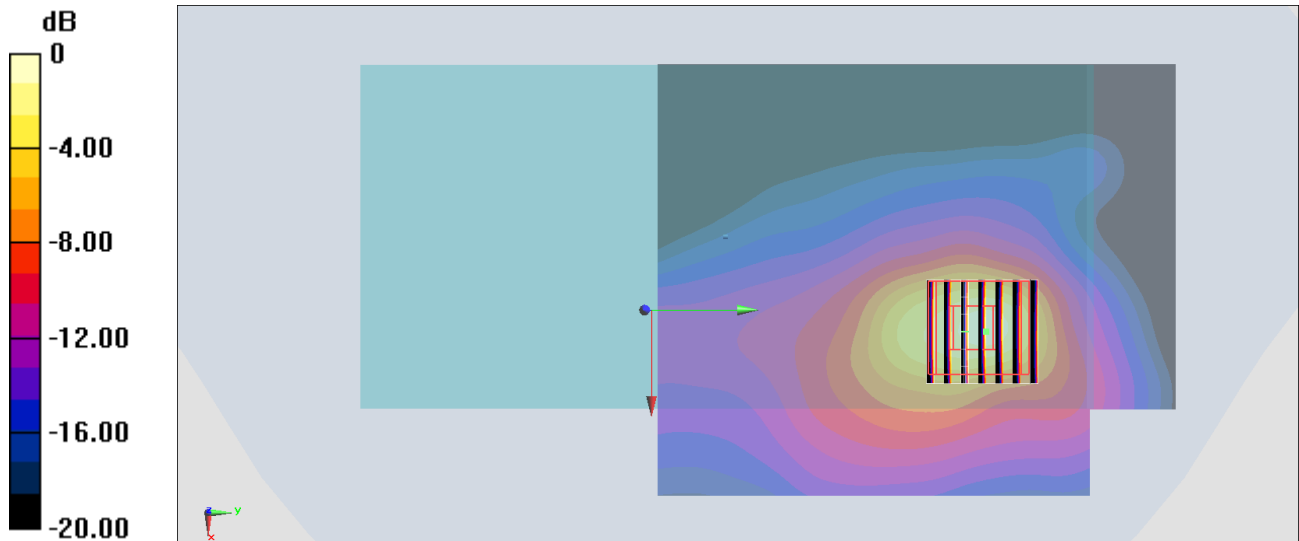

0 dB = 2.10 W/kg = 3.22 dBW/kg

**#08\_WLAN5GHz\_802.11a 6Mbps\_Back\_10mm\_Ch144;Ant 2**

Communication System: 802.11a ; Frequency: 5720 MHz;Duty Cycle: 1:1.06

Medium: HSL\_5G\_190506 Medium parameters used:  $f = 5720$  MHz;  $\sigma = 5.199$  S/m;  $\epsilon_r = 35.45$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(4.72, 4.72, 4.72) ; Calibrated: 2018/9/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn918; Calibrated: 2018/6/20
- Phantom: SAM\_Right; Type: SAM; Serial: TP:1479
- Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Area Scan (111x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.22 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 16.47 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 3.55 W/kg

**SAR(1 g) = 0.898 W/kg; SAR(10 g) = 0.333 W/kg**

Maximum value of SAR (measured) = 2.07 W/kg

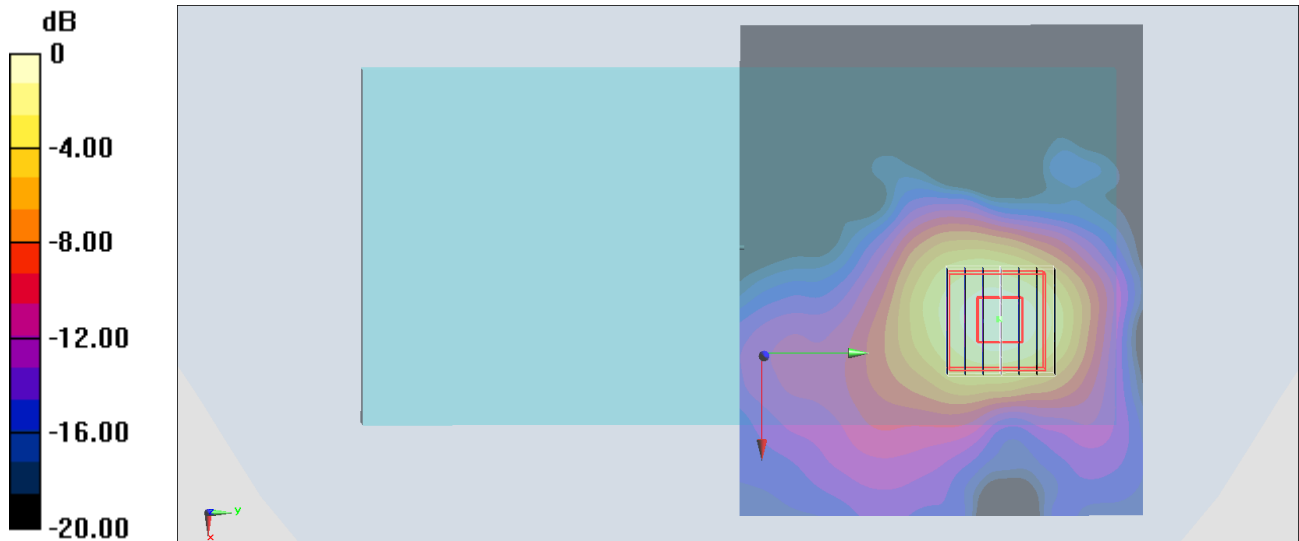

0 dB = 2.22 W/kg = 3.46 dBW/kg



## #09\_WLAN5GHz\_802.11a 6Mbps\_Back\_10mm\_Ch157;Ant 2

Communication System: 802.11a ; Frequency: 5785 MHz;Duty Cycle: 1:1.06

Medium: HSL\_5G\_190506 Medium parameters used :  $f = 5785 \text{ MHz}$ ;  $\sigma = 5.265 \text{ S/m}$ ;  $\epsilon_r = 35.385$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.2 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.2 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(4.72, 4.72, 4.72) ; Calibrated: 2018/9/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn918; Calibrated: 2018/6/20
- Phantom: SAM\_Right; Type: SAM; Serial: TP:1479
- Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Area Scan (111x91x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) =  $2.07 \text{ W/kg}$


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=1.4\text{mm}$

Reference Value =  $17.30 \text{ V/m}$ ; Power Drift =  $-0.14 \text{ dB}$

Peak SAR (extrapolated) =  $3.39 \text{ W/kg}$

**SAR(1 g) =  $0.857 \text{ W/kg}$ ; SAR(10 g) =  $0.330 \text{ W/kg}$**

Maximum value of SAR (measured) =  $1.94 \text{ W/kg}$

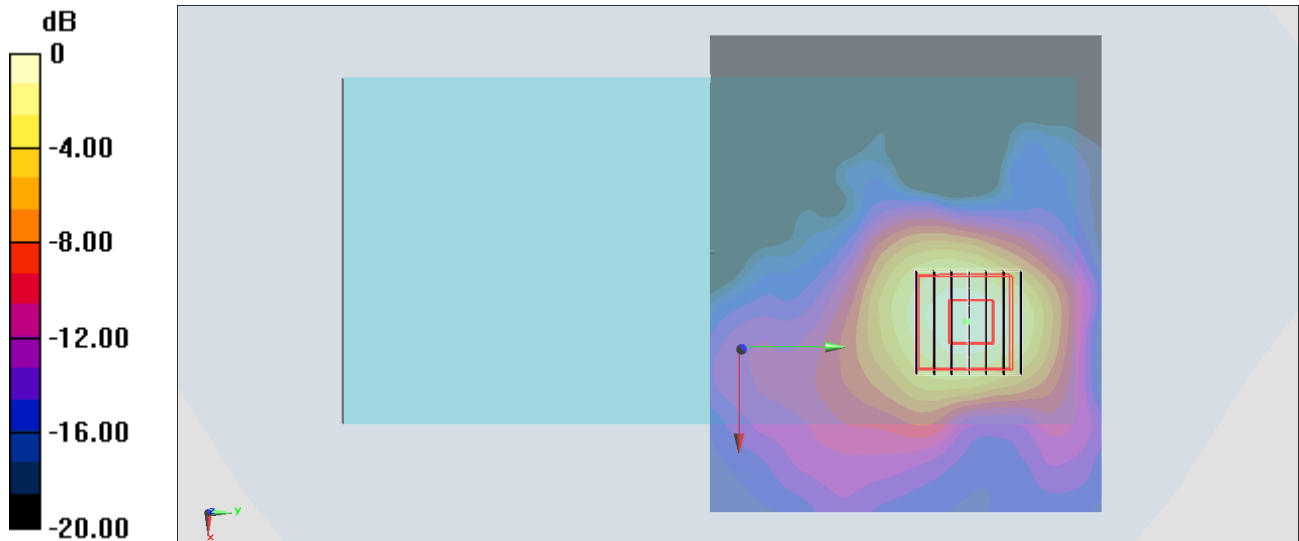

0 dB =  $2.07 \text{ W/kg}$  =  $3.16 \text{ dBW/kg}$

## #10\_Bluetooth\_1Mbps\_Back\_10mm\_Ch39;Ant 1

Communication System: Bluetooth ; Frequency: 2441 MHz;Duty Cycle: 1:1.311

Medium: HSL\_2450\_190503 Medium parameters used:  $f = 2441$  MHz;  $\sigma = 1.806$  S/m;  $\epsilon_r = 38.922$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(4.6, 4.6, 4.6) ; Calibrated: 2018/9/24
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2018/9/19
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1477
- Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Area Scan (91x91x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0168 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.944 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.0250 W/kg

**SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.00605 W/kg**

Maximum value of SAR (measured) = 0.0157 W/kg

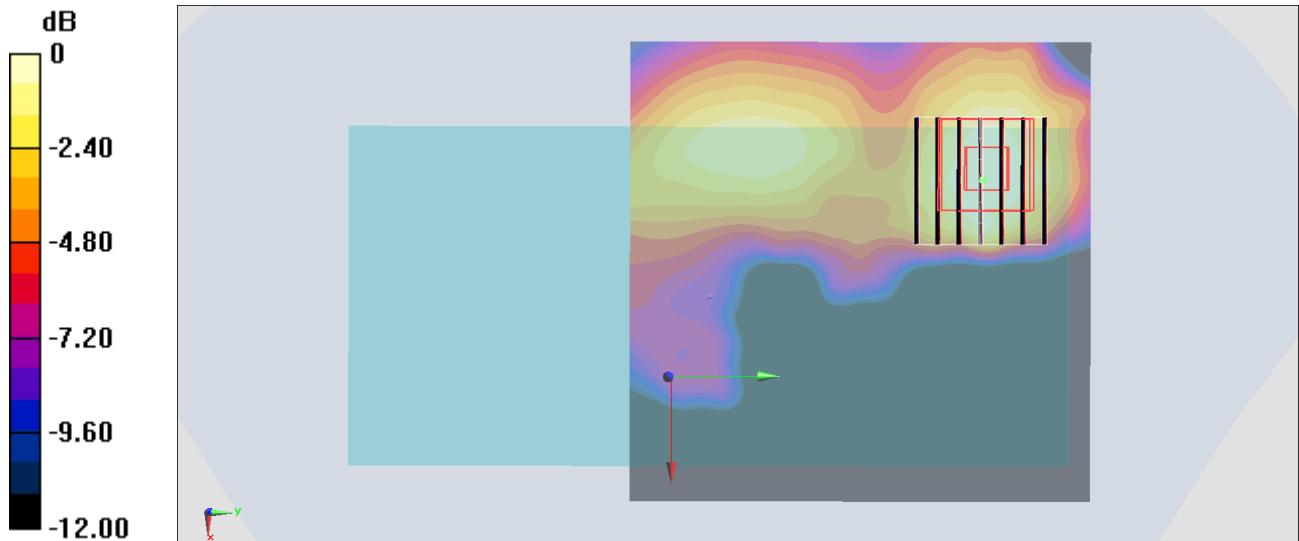

0 dB = 0.0157 W/kg = -18.04 dBW/kg

## #11\_WLAN2.4GHz\_802.11b 1Mbps\_Left Side\_0mm\_Ch11;Ant 2

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1.008

Medium: HSL\_2450\_190503 Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.828$  S/m;  $\epsilon_r = 38.837$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(4.6, 4.6, 4.6) ; Calibrated: 2018/9/24
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2018/9/19
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1477
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Area Scan (61x91x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 2.97 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 30.78 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 7.18 W/kg

**SAR(1 g) = 2.32 W/kg; SAR(10 g) = 0.826 W/kg**

Maximum value of SAR (measured) = 3.35 W/kg

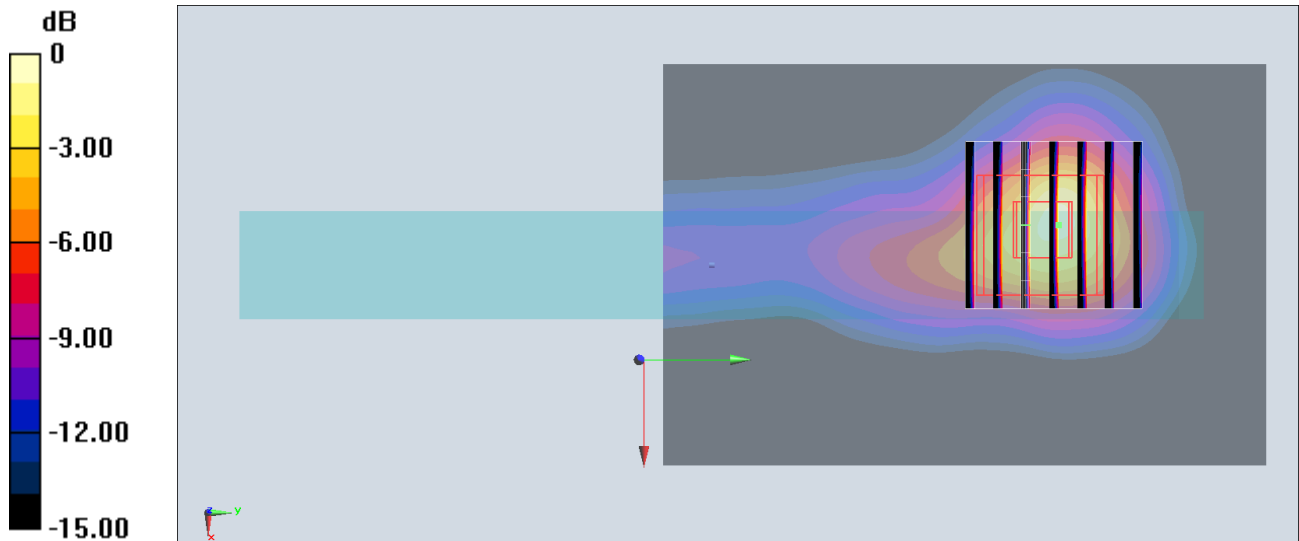

0 dB = 3.35 W/kg = 5.25 dBW/kg

**#12\_WLAN5GHz\_802.11a 6Mbps\_Back\_0mm\_Ch60;Ant 2**

Communication System: 802.11a; Frequency: 5300 MHz; Duty Cycle: 1:1.06

Medium: HSL\_5G\_190504 Medium parameters used :  $f = 5300$  MHz;  $\sigma = 4.8$  S/m;  $\epsilon_r = 36.023$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(5.12, 5.12, 5.12) ; Calibrated: 2018/9/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1399; Calibrated: 2018/11/16
- Phantom: SAM\_Right; Type: SAM; Serial: TP:1479
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Area Scan (101x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 12.0 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 16.73 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 57.1 W/kg

**SAR(1 g) = 9.1 W/kg; SAR(10 g) = 1.75 W/kg**

Maximum value of SAR (measured) = 25.5 W/kg

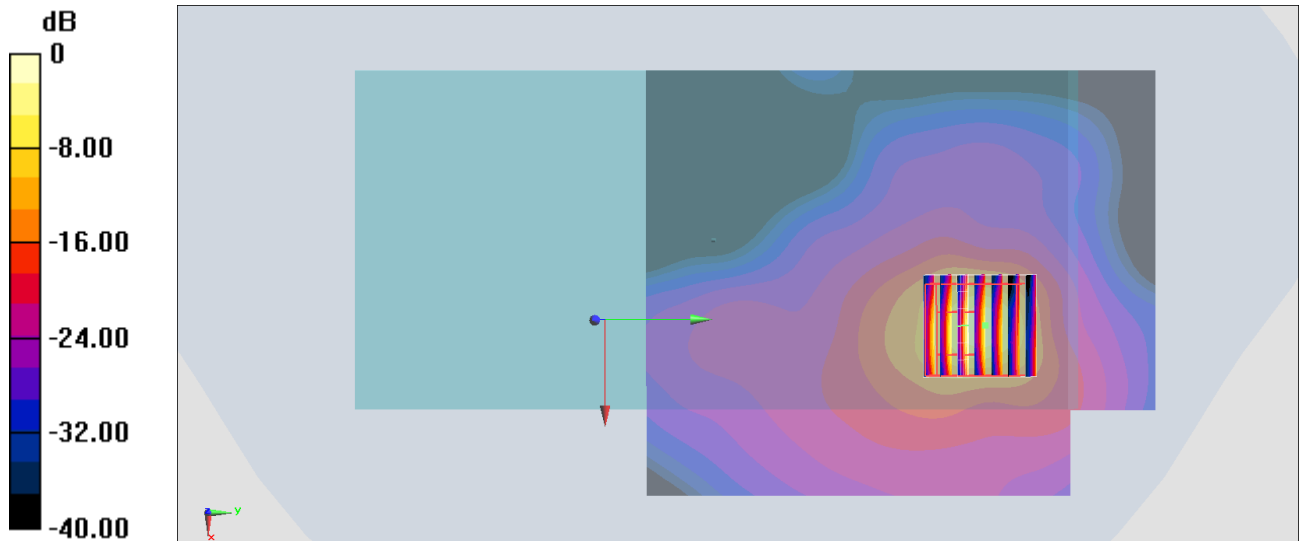

0 dB = 25.5 W/kg = 14.07 dBW/kg

**#13\_WLAN5GHz\_802.11a 6Mbps\_Back\_0mm\_Ch100;Ant 1**

Communication System: 802.11a; Frequency: 5500 MHz; Duty Cycle: 1:1.06

Medium: HSL\_5G\_190507 Medium parameters used:  $f = 5500$  MHz;  $\sigma = 4.908$  S/m;  $\epsilon_r = 36.192$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(4.47, 4.47, 4.47) ; Calibrated: 2018/9/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn918; Calibrated: 2018/6/20
- Phantom: SAM\_Right; Type: SAM; Serial: TP:1479
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

**Area Scan (111x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 19.0 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 11.07 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 44.8 W/kg

**SAR(1 g) = 6.13 W/kg; SAR(10 g) = 1.14 W/kg**

Maximum value of SAR (measured) = 18.0 W/kg

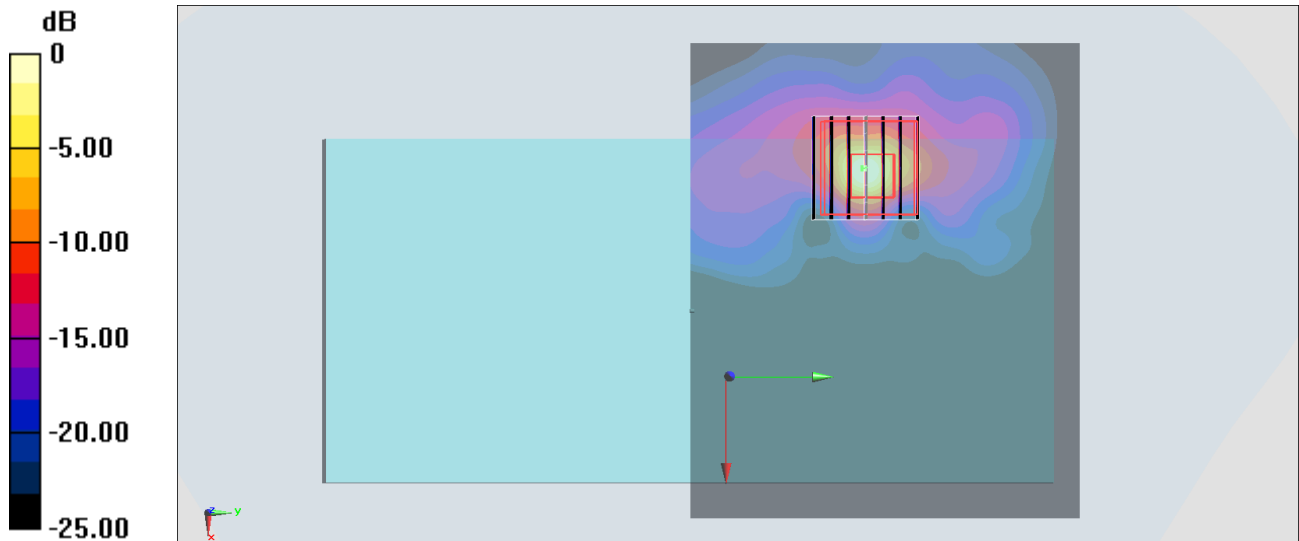

0 dB = 18.0 W/kg = 12.55 dBW/kg

**#14\_WLAN5GHz\_802.11a\_6Mbps\_Back\_0mm\_Ch149;Ant 2**

Communication System: 802.11a ; Frequency: 5745 MHz;Duty Cycle: 1:1.06

Medium: HSL\_5G\_190507 Medium parameters used :  $f = 5745$  MHz;  $\sigma = 5.174$  S/m;  $\epsilon_r = 35.868$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(4.72, 4.72, 4.72) ; Calibrated: 2018/9/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn918; Calibrated: 2018/6/20
- Phantom: SAM\_Right; Type: SAM; Serial: TP:1479
- Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Area Scan (111x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 11.4 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 10.92 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 32.0 W/kg

**SAR(1 g) = 4.7 W/kg; SAR(10 g) = 0.948 W/kg**

Maximum value of SAR (measured) = 14.3 W/kg

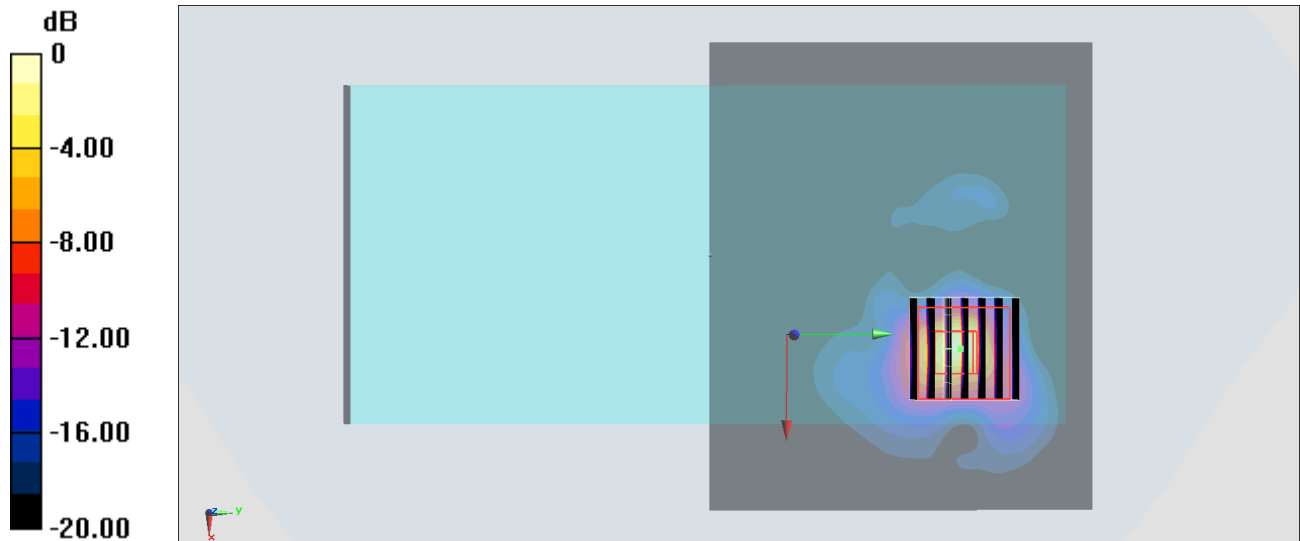

**#15\_Bluetooth\_1Mbps\_Right Side\_0mm\_Ch39;Ant 1**

Communication System: Bluetooth ; Frequency: 2441 MHz;Duty Cycle: 1:1.311

Medium: HSL\_2450\_190503 Medium parameters used:  $f = 2441$  MHz;  $\sigma = 1.806$  S/m;  $\epsilon_r = 38.922$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3270; ConvF(4.6, 4.6, 4.6) ; Calibrated: 2018/9/24
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn577; Calibrated: 2018/9/19
- Phantom: SAM\_Left; Type: QD000P40CD; Serial: TP:1477
- Measurement SW: DASY52, Version 52.10 (2);SEMCAD X Version 14.6.12 (7450)

**Area Scan (51x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.101 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.133 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.190 W/kg

**SAR(1 g) = 0.071 W/kg; SAR(10 g) = 0.029 W/kg**

Maximum value of SAR (measured) = 0.102 W/kg

