

FCC 15.247 & RSS-247 2.4 GHz Test Report

for

Datalogic S.r.l.

Via S. Vitalino 13 Calderara di Reno Italy 40012

Product Name : 802.11abgn M.2 module w/SDIO interface
Model Name : M2SD50NBT
FCC ID : U4G-RHINOIIWEC7
IC : 3862E-RHINOIIWEC7

**Prepared by: : AUDIX Technology Corporation,
EMC Department**



TABLE OF CONTENTS

Description	Page
TEST REPORT CERTIFICATION.....	4
1. REVISION RECORD OF TEST REPORT.....	5
2. SUMMARY OF TEST RESULTS.....	6
3. GENERAL INFORMATION.....	7
3.1. Description of Application.....	7
3.2. Description of EUT.....	8
3.3. Antenna Information.....	9
3.4. EUT Specifications Assessed in Current Report.....	9
3.5. Description of Key Components.....	11
3.6. Test Configuration.....	11
3.7. Tested Supporting System List.....	12
3.8. Setup Configuration.....	12
3.9. Operating Condition of EUT.....	12
3.10. Description of Test Facility.....	13
3.11. Measurement Uncertainty.....	13
4. MEASUREMENT EQUIPMENT LIST.....	14
4.1. Conducted Emission Measurement.....	14
4.2. Radiated Emission Measurement.....	14
4.3. RF Conducted Measurement.....	14
5. CONDUCTED EMISSION.....	15
5.1. Block Diagram of Test Setup.....	15
5.2. Conducted Emission Limit.....	15
5.3. Test Procedure.....	15
5.4. Test Results.....	16
6. RADIATED EMISSION.....	17
6.1. Block Diagram of Test Setup.....	17
6.2. Radiated Emission Limits.....	18
6.3. Test Procedure.....	19
6.4. Measurement Result Explanation.....	20
6.5. Test Results.....	20
7. 20dB BANDWIDTH.....	21
7.1. Block Diagram of Test Setup.....	21
7.2. Specification Limits.....	21
7.3. Test Procedure.....	21
7.4. Test Results.....	21
8. CARRIER FREQUENCY SEPARATION.....	22
8.1. Block Diagram of Test Setup.....	22
8.2. Specification Limits.....	22
8.3. Test Procedure.....	22
8.4. Test Results.....	22
9. TIME OF OCCUPANCY.....	23
9.1. Block Diagram of Test Setup.....	23
9.2. Specification Limits.....	23

9.3. Test Procedure	23
9.4. Test Results	23
10. NUMBER OF HOPPING CHANNELS	24
10.1. Block Diagram of Test Setup	24
10.2. Specification Limits.....	24
10.3. Test Procedure	24
10.4. Test Results	24
11. MAXIMUM PEAK OUTPUT POWER	25
11.1. Block Diagram of Test Setup	25
11.2. Specification Limits.....	25
11.3. Test Procedure	25
11.4. Test Results	25
12. EMISSION LIMITATIONS	26
12.1. Block Diagram of Test Setup	26
12.2. Specification Limits.....	26
12.3. Test Procedure	26
12.4. Test Results	26
13. DEVIATION TO TEST SPECIFICATIONS	27

APPENDIX A TEST DATA AND PLOTS
APPENDIX B TEST PHOTOGRAPHS

TEST REPORT CERTIFICATION

Applicant : Datalogic S.r.l.
Manufacturer : LAIRD TECHNOLOGIES
EUT Description
(1) Product : 802.11abgn M.2 module w/SDIO interface
(2) Model : M2SD50NBT
(3) Power Supply: DC 3.3V

Applicable Standards:


47 CFR FCC Part 15 Subpart C
RSS-Gen (Issue 4), November 2014
RSS-247 (Issue 2), February 2017
ANSI C63.10:2013

Audix Technology Corp. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Audix Technology Corp. does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens and samples.

Date of Report: 2017. 10. 20

Reviewed by:



(Tina Huang/Administrator)

Approved by:



(Ben Cheng/Manager)

1. REVISION RECORD OF TEST REPORT

Edition No	Issued Data	Revision Summary	Report Number
0	2017. 10. 20	Original Report	EM-F170660

2. SUMMARY OF TEST RESULTS

Rule		Description	Results
FCC	IC		
15.207	RSS-Gen §8.8	Conducted Emission	PASS
15.247(d)/15.205	RSS-Gen §8.9 RSS-247 §5.5	Radiated Band Edge and Radiated Spurious Emission	PASS
15.247(a)(1)	RSS-247 §5.1(2)	20dB Bandwidth	PASS
15.247(a)(1)	RSS-247 §5.1(2)	Carrier Frequency Separation	PASS
15.247(a)(1)(iii)	RSS-247 §5.1(4)	Time of Occupancy	PASS
15.247(a)(1)(iii)	RSS-247 §5.1(4)	Number of Hopping Channels	PASS
15.247(b)(1)	RSS-247 §5.1(2)	Maximum Peak Output Power	PASS
15.247(d)	RSS-247 §5.5	Conducted Band Edges and Conducted Spurious Emission	PASS
15.203	---	Antenna Requirement	Compliance

3. GENERAL INFORMATION

3.1. Description of Application

Applicant	Datalogic S.r.l. Via S. Vitalino 13 Calderara di Reno Italy 40012
Manufacturer	LAIRD TECHNOLOGIES W66N220 Commerce Court Cedarburg WI 53012 United States Of America
Product	802.11abgn M.2 module w/SDIO interface
Model	M2SD50NBT

3.2. Description of EUT

Test Model	M2SD50NBT	
Serial Number	N/A	
Power Rating	DC 3.3V	
RF Features	WLAN:802.11a/b/g/n/ Bluetooth: BT and BLE	
Transmit Type	2.4 GHz with PCB antenna	
	802.11b	2T2R
	802.11g	2T2R
	802.11n-HT20	2T2R
	BT/BLE (Chain 0)	1T1R
	2.4 GHz with omni-s antenna	
	802.11b	1T1R
	802.11g	1T1R
	802.11n-HT20	1T1R
	BT/BLE (Chain 0)	1T1R
	UNII Bands with PCB antenna	
	802.11a	2T2R
	802.11n-HT20	2T2R
	802.11n-HT40	2T2R
	UNII Bands with omni-s antenna	
	802.11a	1T1R
802.11n-HT20	1T1R	
802.11n-HT40	1T1R	
Sample Status	Production	
Date of Receipt	2017. 08. 17	
Date of Test	2017. 10. 03 ~ 19	
I/O Ports List	N/A	
Accessories Supplied	N/A	

3.3. Antenna Information

2.4G Antenna					
No.	Antenna Part Number	Manufacture	Antenna Type	Frequency (MHz)	Max Gain (dBi)
1	1399.99.0124 (Tx1 Antenna)	HUBER+SUHNER	PCB	2400 to 2500	1
2	1399.99.0124 (Tx2 Antenna)		PCB	2400 to 2500	1
3	1399.17.0106	HUBER+SUHNER	Omni-S	2400 to 2500	6
				2500 to 2700	6

5G Antenna					
No.	Antenna Part Number	Manufacture	Antenna Type	Frequency (MHz)	Max Gain (dBi)
1	1399.99.0124 (Tx1 Antenna)	HUBER+SUHNER	PCB	5150 to 5875	1
2	1399.99.0124 (Tx2 Antenna)		PCB	5150 to 5875	1
3	1399.17.0106	HUBER+SUHNER	Omni-S	4900 to 5470	8
				5470 to 5935	8

Note: The two type antennas can't simultaneous use. They will be setup done by software before market. The output power depends on antenna type accordingly.

3.4. EUT Specifications Assessed in Current Report

Mode	Fundamental Range (MHz)	Channel Number	Modulation	Data Rate (Mbps)
Bluetooth	2402-2480	79	FHSS (GFSK, $\pi/4$ DQPSK, 8-DPSK)	1/2/3

Channel List					
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

3.5. Description of Key Components

None

3.6. Test Configuration

Mode	Duty Cycle (x)	T (ms)	Duty Cycle Factor (dB)
BT	N/A	2.9	N/A

AC Conduction	
Test Case	Normal operation

Item		Modulation	Data Rate	Test Channel	
Radiated Test Case	Radiated Band Edge ^{Note1}	with PCB antenna	GFSK	1Mbps	00/78
			8-DPSK	3Mbps	00/78
	with Omni-s antenna	GFSK	1Mbps	00/78	
		8-DPSK	3Mbps	00/78	
Radiated Spurious Emission ^{Note1}	with PCB antenna	GFSK	1Mbps	00/39/78	
	with Omni-s antenna	GFSK	1Mbps	00/39/78	
Conducted Test Case ^{Note2}	20dB Bandwidth	GFSK	1Mbps	00/39/78	
		8-DPSK	3Mbps	00/39/78	
	Carrier Frequency Separation	GFSK	1Mbps	00/39/78	
		8-DPSK	3Mbps	00/39/78	
	Time of Occupancy	GFSK	1Mbps	00/39/78	
		8-DPSK	3Mbps	00/39/78	
	Number of Hopping Channels	GFSK	1Mbps	39	
		8-DPSK	3Mbps	39	
	Maximum Peak Output Power	GFSK	1Mbps	00/39/78	
		8-DPSK	3Mbps	00/39/78	
	Band Edges	GFSK	1Mbps	00/78	
		8-DPSK	3Mbps	00/78	
	Spurious Emission	GFSK	1Mbps	00/39/78	
		8-DPSK	3Mbps	00/39/78	

Note 1:

Mobile Device.

Portable Device, and 3 axis were assessed.

Lie

Side

Stand

Note 2: We performed testing of the highest and lowest data rate.

3.7. Tested Supporting System List

3.7.1. Support Peripheral Unit

No.	Product	Brand	Model No.	Serial No.	FCC ID
1.	Notebook PC	COMPAQ	Presario B1200	CNU807035Q	N/A
2.	Jig	N/A	N/A	N/A	N/A
3.	AC Adapter	COMPAQ	BS-2005	N/A	N/A

3.7.2. Cable Lists


No.	Cable Description Of The Above Support Units
1.	RS232 Cable: Shielded, Detachable, 1.0m AC Adapter: hp, M/N PA-1650-02HC DC Power Cord: Unshielded, Detachable, 1.8m AC Power Cord: Unshielded, Detachable, 1.1m

3.8. Setup Configuration

3.8.1. EUT Configuration for Power Line & Radiated Emission



3.8.2. EUT Configuration for RF Conducted Test Items



3.9. Operating Condition of EUT

Test program “CSR” is used for enabling EUT BT function under continues transmitting and choosing data rate/ channel.

3.10. Description of Test Facility

Name of Test Firm	Audix Technology Corporation / EMC Department No. 53-11, Dingfu, Linkou Dist., New Taipei City 244, Taiwan Tel: +886-2-26092133 Fax: +886-2-26099303 Website : www.audixtech.com Contact e-mail: sales@audixtech.com
Accreditations	The laboratory is accredited by following organizations under ISO/IEC 17025:2005 (1) NVLAP(USA) NVLAP Lab Code 200077-0 (2) TAF(Taiwan) No. 1724 (3) FCC OET Designation No. TW1004 & TW1090 & TW1724
Test Facilities	(1) No. 7 Shielding Room (2) Semi-Anechoic Chamber (IC Test Site Registration No.: 5183B-1) (3) Fully Anechoic Chamber (IC Test Site Registration No.: 5183B-4)

3.11. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty
Conduction Test	150kHz~30MHz	±3.50dB
Radiation Test (Distance: 3m)	30MHz~1000MHz	± 3.68dB
	Above 1GHz	± 5.82dB

Remark : Uncertainty = $ku_c(y)$

Test Item	Uncertainty
20dB Bandwidth	±0.2kHz
Carrier Frequency Separation	±0.2kHz
Time of Occupancy	±0.03sec
Maximum peak Output power	± 0.52dB
Conducted Emission Limitations	± 0.13dB

4. MEASUREMENT EQUIPMENT LIST

4.1. Conducted Emission Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
1.	Test Receiver	R&S	ESCI	101276	2017. 03. 23	1 Year
2.	A.M.N.	R&S	ESH2-Z5	100366	2017. 07. 20	1 Year
3.	L.I.S.N.	Kyoritsu	KNW-407	8-881-13	2016. 12. 28	1 Year
4.	Pulse Limiter	R&S	ESH3-Z2	101495	2017. 01. 16	1 Year
5.	Test Software	Audix	e3	V.120619C	N.C.R.	N.C.R.

4.2. Radiated Emission Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
1.	Spectrum Analyzer	Agilent	N9010A-526	MY53400071	2017. 09. 13	1 Year
2.	Spectrum Analyzer	Agilent	N9010A-526	MY52220368	2016. 12. 01	1 Year
3.	Test Receiver	R & S	ESCS30	100338	2017. 06. 19	1 Year
4.	Amplifier	HP	8447D	2944A06305	2017. 02. 16	1 Year
5.	Amplifier	Sonoma	310N	187161	2017. 06. 08	1 Year
6.	Bilog Antenna	CHASE	CBL6112D	33821	2017. 01. 21	1 Year
7.	Loop Antenna	R&S	HFH2-Z2	891847/27	2016. 12. 23	1 Year
8.	Double-Ridged Waveguide Horn	ETS-Lindgren	3117	00135902	2017. 03. 08	1 Year
9.	2.4GHz Notch Filter	K&L	7NSL10-244 1.5E130.5-00	1	2017. 07. 26	1 Year
10.	3GHz Notch Filter	Microwave	H3G018G1	484798	2017. 08. 25	1 Year
11.	Test Software	Audix	e3	V.6.110601	N.C.R.	N.C.R.

4.3. RF Conducted Measurement


Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
2.	Spectrum Analyzer	Keysight	N9010B-544	MY55460198	2017. 04. 18	1 Year

5. CONDUCTED EMISSION

5.1. Block Diagram of Test Setup

5.1.1. Block Diagram of EUT
 Indicated as section 3.8

5.1.2. Shielded Room Setup Diagram

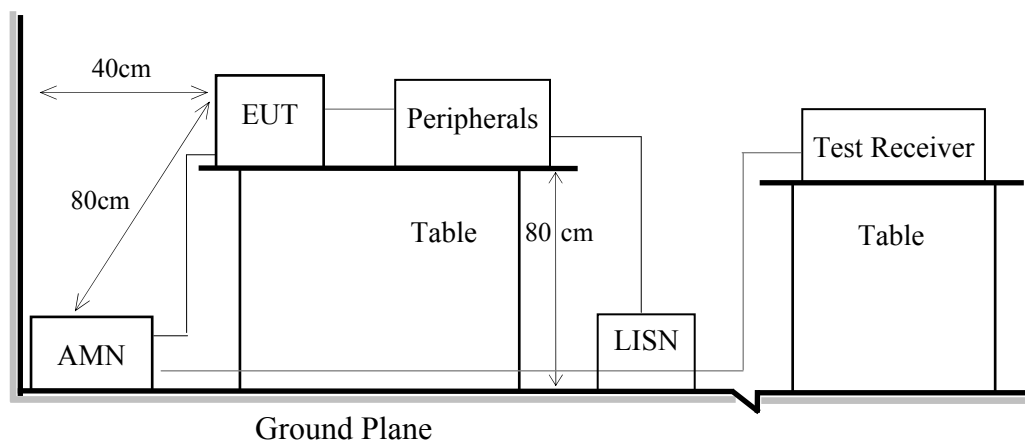

5.2. Conducted Emission Limit

Frequency	Conducted Limit	
	Quasi-Peak Level	Average Level
150kHz ~ 500kHz	66 ~ 56 dB μ V	56 ~ 46 dB μ V
500kHz ~ 5MHz	56 dB μ V	46 dB μ V
5MHz ~ 30MHz	60 dB μ V	50 dB μ V

Remark 1.: If the average limit is met when using a Quasi-Peak detector, the measurement using the average detector is not required.

2.: The lower limit applies to the band edges.

5.3. Test Procedure

- 5.3.1. To set up the EUT as indicated in ANSI C 63.10. The EUT was placed on the table which has 80 cm height to the ground and 40 cm distance to the conducting wall.
- 5.3.2. Power supplier of the EUT was connected to the AC mains through an Artificial Mains Network (A.M.N.).
- 5.3.3. The AC power supplies to all peripheral devices must be provided through line impedance stabilization network (L.I.S.N.)
- 5.3.4. Checking frequency range from 150 kHz to 30 MHz and record the emission which does not have 20 dB below limit.

5.4. Test Results

Please refer to Appendix A.


6. RADIATED EMISSION

6.1. Block Diagram of Test Setup


6.1.1. Block Diagram of EUT

Indicated as section 3.8


6.1.2. Setup Diagram for 9kHz-30MHz

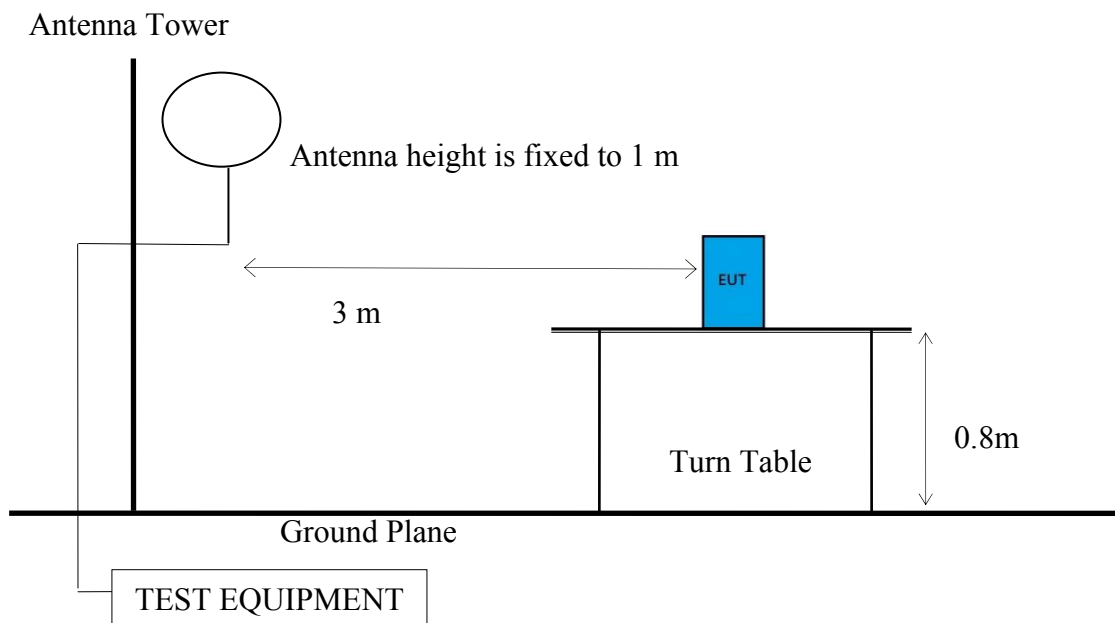

6.1.3. Setup Diagram for 30-1000 MHz

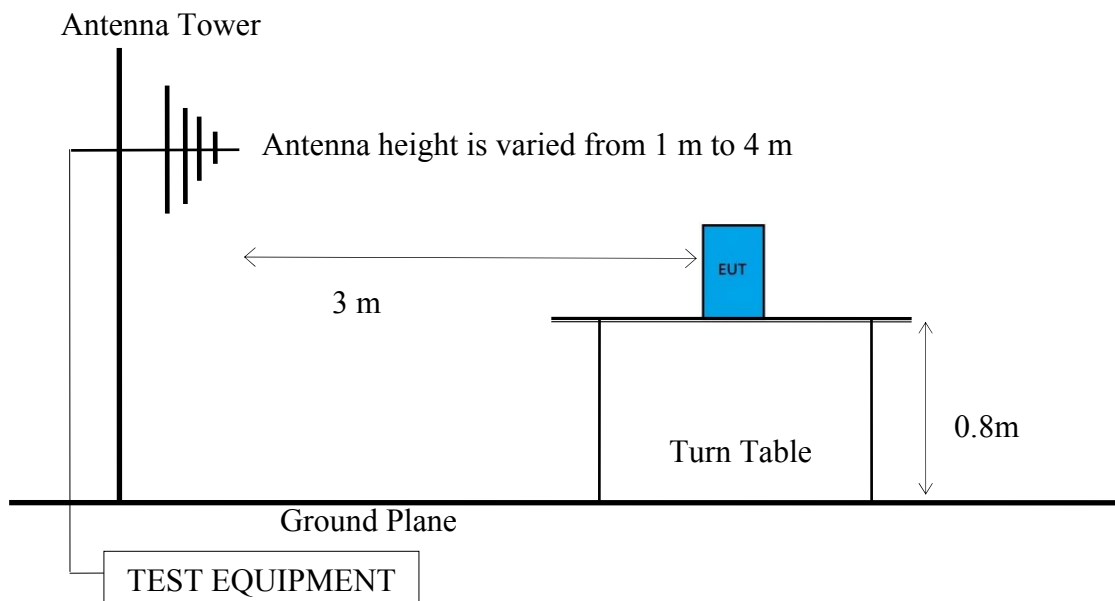

6.1.4. Setup Diagram for above 1GHz

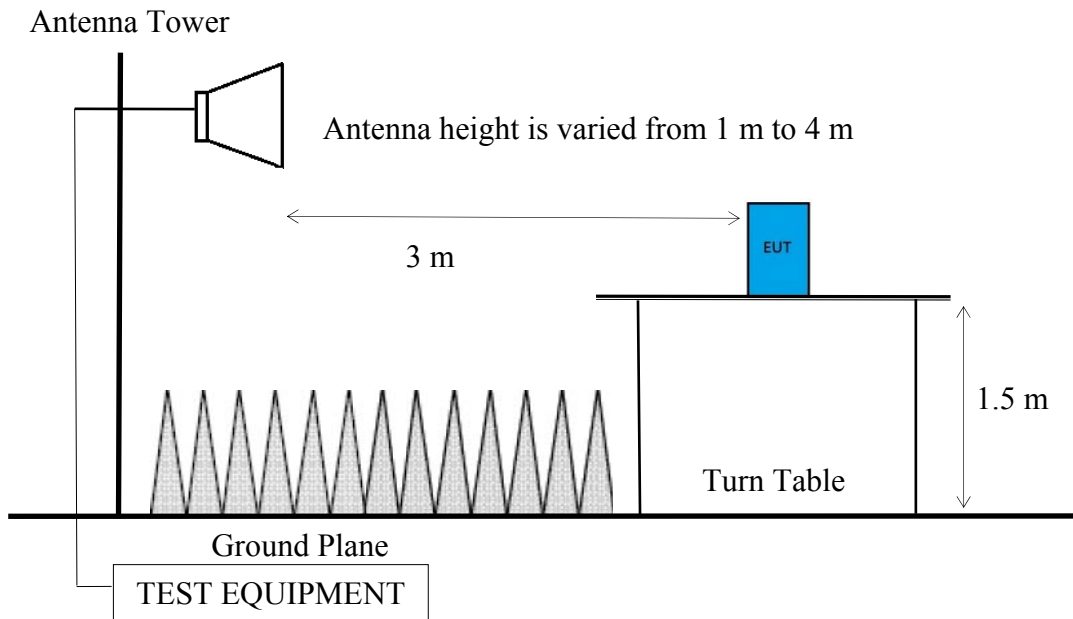

6.2. Radiated Emission Limits

In any 100kHz bandwidth outside the frequency band, the radio frequency power produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205/RSS-Gen Section 8.10 table 6, must also comply with the radiated emission limits specified as below.

Frequency (MHz)	Distance (m)	Limits	
		dB μ V/m	μ V/m
0.009 - 0.490	300	67.6	2400/kHz
0.490 - 1.705	30	87.6	24000/kHz
1.705 - 30	30	29.5	30
30 - 88	3	40.0	100
88- 216	3	43.5	150
216- 960	3	46.0	200
Above 960	3	54.0	500
Above 1000	3	74.0 dB μ V/m (Peak) 54.0 dB μ V/m (Average)	

Remark : (1) dB μ V/m = 20 log (μ V/m)

- (2) The tighter limit applies to the edge between two frequency bands.
- (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- (4) Fundamental and emission fall within operation band are exempted from this section.
- (5) Pursuant to ANSI C63.10: 6.6.4.3, if the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement.

6.3. Test Procedure

Frequency Range 9kHz~30MHz:

The EUT setup on the turn table which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

- (1) RBW = 9kHz with peak and average detector.
- (2) Detector: average and peak (9kHz-490kHz)
Q.P. (490kHz-30MHz)

Frequency Range 30MHz ~ 25GHz:

The EUT setup on the turn find table which has 80 cm (for 30-1000 MHz) and 1.5m (for above 1GHz) height to the ground. The turn table rotated 360 degrees and antenna varied from 1 m to 4 m to find the maximum emission level. Both horizontal and vertical polarization are required. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

Frequency below 1 GHz:

Spectrum Analyzer is used for pre-testing with following setting:

- (1)RBW = 120KHz
- (2)VBW \geq 3 x RBW.
- (3)Detector = Peak.
- (4)Sweep time = auto.
- (5)Trace mode = max hold.
- (6)Allow sweeps to continue until the trace stabilizes.
- (7)When peak-detected value is lower than limit that the measurement using the Q.P. detector is not required. Otherwise using Q.P. for finally measurement.

Frequency above 1GHz to 10th harmonic (up to 25 GHz):

Peak Detector:

- (1)RBW = 1MHz
- (2)VBW \geq 3 x RBW.
- (3)Detector = Peak.
- (4)Sweep time = auto.
- (5)Trace mode = max hold.
- (6)Allow sweeps to continue until the trace stabilizes.
- (7)When peak-detected value is lower than limit that the measurement using the average detector is not required. Otherwise using average detector for finally measurement.

Average Detector: **Option 1:**

- (1) RBW = 1MHz
- (2) VBW $\geq 1/T$.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.

 Option 2:

Average Emission Level = Peak Emission Level + D.C.C.F.

6.4. Measurement Result Explanation

Peak Emission Level = Antenna Factor + Cable Loss + Meter Reading

Average Emission Level = Antenna Factor + Cable Loss + Meter Reading

Average Emission Level = Peak Emission Level + DCCF

Duty Cycle Correction Factor (DCCF) = $20 \log (TX_{on}/TX_{on+off})$ presented in section 3.6


ERP = Peak Emission Level - 95.2dB - 2.14dB

6.5. Test Results

Please refer to Appendix A.

7. 20dB BANDWIDTH

7.1. Block Diagram of Test Setup

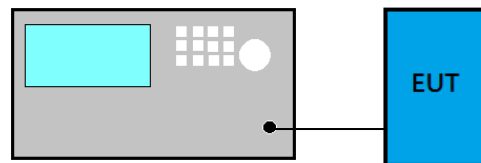

7.2. Specification Limits

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

7.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:


- (1) Set RBW close to 1% to 5% of OBW.
- (2) Set $VBW \geq 3RBW$.
- (3) Detector = Peak.
- (4) Trace mode = Max hold.
- (5) Sweep = Auto couple.
- (6) Allow the trace to stabilize.
- (7) Setting channel bandwidth function x dB to -20 dB to record the final bandwidth.

7.4. Test Results

Please refer to Appendix A

8. CARRIER FREQUENCY SEPARATION

8.1. Block Diagram of Test Setup

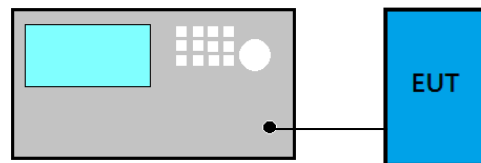

8.2. Specification Limits

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output no greater than 125mW.

8.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:


- (1) Span = Wide enough to capture the peaks of two adjacent channels
- (2) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- (3) VBW = RBW
- (4) Sweep = Auto
- (5) Detector function = Peak
- (6) Trace = Max hold
- (7) Allow the trace to stabilize.

8.4. Test Results

Please refer to Appendix A

9. TIME OF OCCUPANCY

9.1. Block Diagram of Test Setup

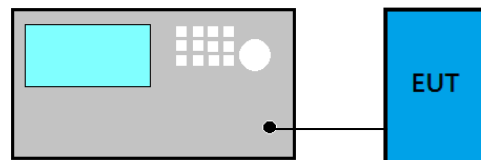

9.2. Specification Limits

Frequency hopping systems in the 2400-2483.5MHz shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by number of hopping channels employed.

9.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:


- (1) Span: Zero span, centered on a hopping channel.
- (2) RBW shall be \leq channel spacing and where possible RBW should be set $> 1/T$, where T is the expected dwell time per channel.
- (3) Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- (4) Detector function = Peak
- (5) Trace = Max hold

9.4. Test Results

Please refer to Appendix A

10. NUMBER OF HOPPING CHANNELS

10.1. Block Diagram of Test Setup

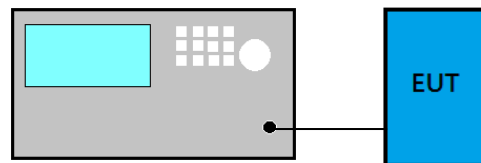

10.2. Specification Limits

Frequency hopping systems which use fewer than 20 hopping frequencies may employ intelligent hopping techniques to avoid interference to other transmissions. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 non-overlapping channels.

10.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:


- (1) Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- (2) RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- (3) VBW \geq RBW
- (4) Sweep = Auto
- (5) Detector function = Peak
- (6) Trace = m=Max hold
- (7) Allow the trace to stabilize.

10.4. Test Results

Please refer to Appendix A

11. MAXIMUM PEAK OUTPUT POWER

11.1. Block Diagram of Test Setup

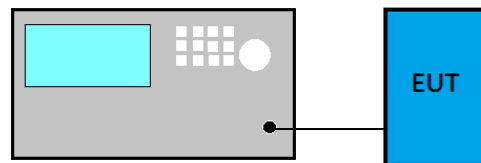

11.2. Specification Limits

The Limits of maximum Peak Output Power for frequency hopping systems in 2400-2483.5MHz is: 0.125Watt. (21dBm)

11.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:


- (1) Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
- (2) RBW \geq 1% of the span
- (3) VBW \geq RBW
- (4) Sweep = Auto
- (5) Detector function = Peak
- (6) Trace = Max hold

11.4. Test Results

Please refer to Appendix A

12. EMISSION LIMITATIONS

12.1. Block Diagram of Test Setup

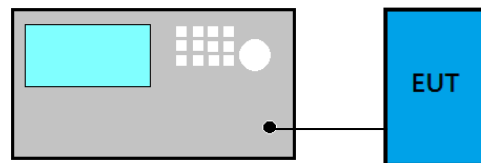

12.2. Specification Limits

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, that the required attenuation shall be 30 dB instead of 20 dB.

Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (See Section 15.205(c)).

12.3. Test Procedure

Following measurement procedure is reference to ANSI C63.10:2013:

- (1) Set span wide enough to capture the peak level of the in-band emission and all spurious emissions; up to 10th harmonic.
- (2) RBW = 100 kHz
- (3) VBW \geq RBW
- (4) Sweep = Auto
- (5) Detector function = Peak
- (6) Trace = Max hold

12.4. Test Results

Please refer to Appendix A

13.DEVIATION TO TEST SPECIFICATIONS

【NONE】



*Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan*

APPENDIX A

*Tel: +886 2 26099301
Fax: +886 2 26099303*

APPDNDIX A

TEST DATA AND PLOTS


(Model: M2SD50NBT)

TABLE OF CONTENTS

A.1 CONDUCTED EMISSION	2
A.2 RADIATED EMISSION	4
A.2.1 Emissions within Restricted Frequency Bands.....	4
A.2.2 Emissions outside the frequency band:.....	22
A.2.3 Emissions in Non-restricted Frequency Bands:.....	25
A.3 20dB BANDWIDTH	26
A.3.1 6dB Bandwidth Result.....	26
A.3.2 Measurement Plots	27
A.4 CARRIER FREQUENCY SEPARATION	28
A.5 TIME OF OCCUPANCY	30
A.5.1 Time of Occupancy	30
A.6 NUMBER OF HOPPING CHANNELS	40
A.7 MAXIMUM PEAK OUTPUT POWER	41
A.7.1 Maximum Peak Output Power	41
A.7.2 Measurement Plots	42
A.8 EMISSION LIMITATIONS MEASUREMENT	43
A.8.1 Band Edge.....	43
A.8.2 Spurious Emission	45

A.1 CONDUCTED EMISSION

Test Date	2017/10/11	Temp./Hum.	27°C/58%
Test Voltage	DC 3.3V (though Jig via Notebook PC)		
Antenna	PCB Antenna		

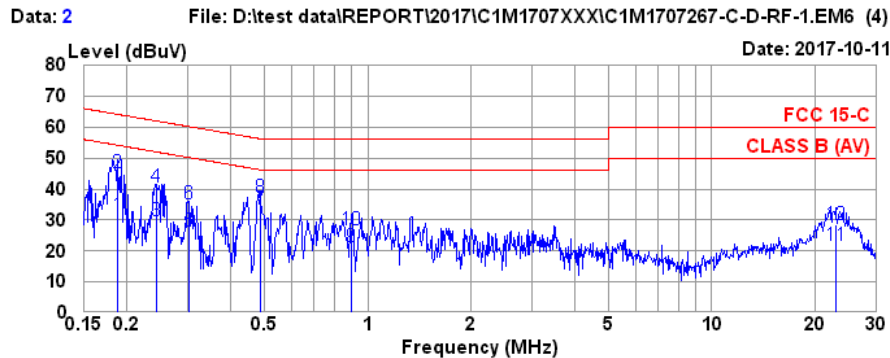


Site no. : No.7 Shielded Room Data no. : 2
 Condition : ESH2-Z5 366(ADAPTER) Phase : NEUTRAL
 Limit : FCC 15-C
 Env. / Ins. : 27°C / 58% ESCI(1276) Engineer : Nick Du
 EUT : M2SD50NBT
 Power Rating : DC 3.3V
 Test Mode : Operaing

	AMN	Cable	Pulse	Emission			Margin	Remark	
Freq. (MHz)	Factor (dB)	Loss (dB)	Att. (dB)	Reading (dBμV)	Level (dBμV)	Limits (dBμV)	(dB)		
1	0.187	0.17	0.04	9.86	21.36	31.43	54.15	22.72	Average
2	0.187	0.17	0.04	9.86	35.05	45.12	64.15	19.03	QP
3	0.243	0.18	0.04	9.86	19.75	29.83	52.00	22.17	Average
4	0.243	0.18	0.04	9.86	30.65	40.73	62.00	21.27	QP
5	0.303	0.18	0.04	9.86	16.36	26.44	50.15	23.71	Average
6	0.303	0.18	0.04	9.86	25.17	35.25	60.15	24.90	QP
7	0.486	0.20	0.04	9.86	23.55	33.65	46.23	12.58	Average
8	0.486	0.20	0.04	9.86	27.34	37.44	56.23	18.79	QP
9	0.899	0.22	0.05	9.86	11.20	21.33	46.00	24.67	Average
10	0.899	0.22	0.05	9.86	16.76	26.89	56.00	29.11	QP
11	22.896	0.96	0.32	9.96	10.42	21.66	50.00	28.34	Average
12	22.896	0.96	0.32	9.96	17.22	28.46	60.00	31.54	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

Test Date	2017/10/11	Temp./Hum.	27°C/58%
Test Voltage	DC 3.3V (though Jig via Notebook PC)		
Antenna	PCB Antenna		

Data: 1 File: D:\test data\REPORT\2017\1M1707XXX\1M1707267-C-D-RF-1.EM6 (4)

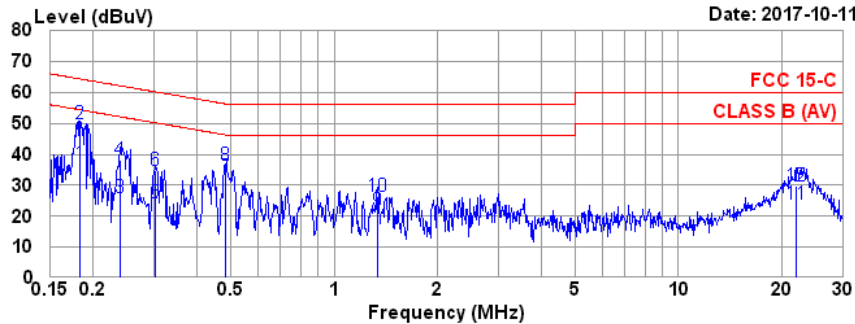

Site no. : No.7 Shielded Room Data no. : 1
 Condition : ESH2-Z5 366(ADAPTER) Phase : LINE
 Limit : FCC 15-C
 Env. / Ins. : 27°C / 58% ESCI(1276) Engineer : Nick Du
 EUT : DC 3.3V
 Power Rating : 120Vac/60Hz
 Test Mode : Operaing

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.182	0.17	0.04	9.86	26.99	37.06	54.37	17.31	Average
2	0.182	0.17	0.04	9.86	39.59	49.66	64.37	14.71	QP
3	0.239	0.17	0.04	9.86	15.88	25.95	52.13	26.18	Average
4	0.239	0.17	0.04	9.86	28.14	38.21	62.13	23.92	QP
5	0.303	0.17	0.04	9.86	14.28	24.35	50.15	25.80	Average
6	0.303	0.17	0.04	9.86	24.65	34.72	60.15	25.43	QP
7	0.484	0.19	0.04	9.86	22.71	32.80	46.27	13.47	Average
8	0.484	0.19	0.04	9.86	26.24	36.33	56.27	19.94	QP
9	1.338	0.23	0.06	9.86	11.71	21.86	46.00	24.14	Average
10	1.338	0.23	0.06	9.86	16.41	26.56	56.00	29.44	QP
11	21.946	1.16	0.31	9.96	12.40	23.83	50.00	26.17	Average
12	21.946	1.16	0.31	9.96	18.32	29.75	60.00	30.25	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
 2. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

A.2 RADIATED EMISSION

Test Date	2017/10/19	Temp./Hum.	24/51%
Test Voltage	DC 3.3V (though Jig via Notebook PC)		

A.2.1 Emissions within Restricted Frequency Bands

A.2.1.1 Frequency 9kHz~30MHz

The emissions (9kHz~30MHz) not reported for there is no emission be found.

A.2.1.2 Frequency Below 1 GHz

● **Antenna: PCB Antenna**

Mode	GFSK	Frequency	TX 2441MHz
------	------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
42.61	18.17	1.44	5.77	25.38	40.00	14.62	Peak
101.78	17.60	2.29	7.14	27.03	43.50	16.47	Peak
279.29	19.36	4.11	19.96	43.43	46.00	2.57	Peak
497.54	23.12	6.41	5.77	35.30	46.00	10.70	Peak
870.02	26.55	8.00	1.65	36.20	46.00	9.80	Peak
979.63	27.63	8.70	1.50	37.83	54.00	16.17	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
42.61	18.17	1.44	18.31	37.92	40.00	2.08	Peak
126.03	18.50	2.57	10.36	31.43	43.50	12.07	Peak
278.32	19.35	4.10	11.22	34.67	46.00	11.33	Peak
499.48	23.14	6.42	6.31	35.87	46.00	10.13	Peak
848.68	26.36	7.89	2.79	37.04	46.00	8.96	Peak
979.63	27.63	8.70	1.45	37.78	54.00	16.22	Peak

● Antenna: Omni-S Antenna

Mode	GFSK	Frequency	TX 2441MHz
------	------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
61.04	12.57	1.75	6.88	21.20	40.00	18.80	Peak
101.78	17.60	2.29	7.04	26.93	43.50	16.57	Peak
277.35	19.34	4.09	19.63	43.06	46.00	2.94	Peak
367.56	21.31	5.19	11.23	37.73	46.00	8.27	Peak
499.48	23.14	6.42	5.80	35.36	46.00	10.64	Peak
997.09	27.80	8.81	0.83	37.44	54.00	16.56	Peak

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
42.61	18.17	1.44	18.83	38.44	40.00	1.56	Peak
148.34	17.17	2.81	10.82	30.80	43.50	12.70	Peak
278.32	19.35	4.10	11.80	35.25	46.00	10.75	Peak
497.54	23.12	6.41	6.39	35.92	46.00	10.08	Peak
853.53	26.41	7.92	1.26	35.59	46.00	10.41	Peak
965.08	27.49	8.61	1.45	37.55	54.00	16.45	Peak

A.2.1.3 Frequency Above 1 GHz to 10th harmonics

Band Edge:


- **Antenna: PCB Antenna**

Mode	GFSK	Frequency	TX 2402MHz
------	------	-----------	------------

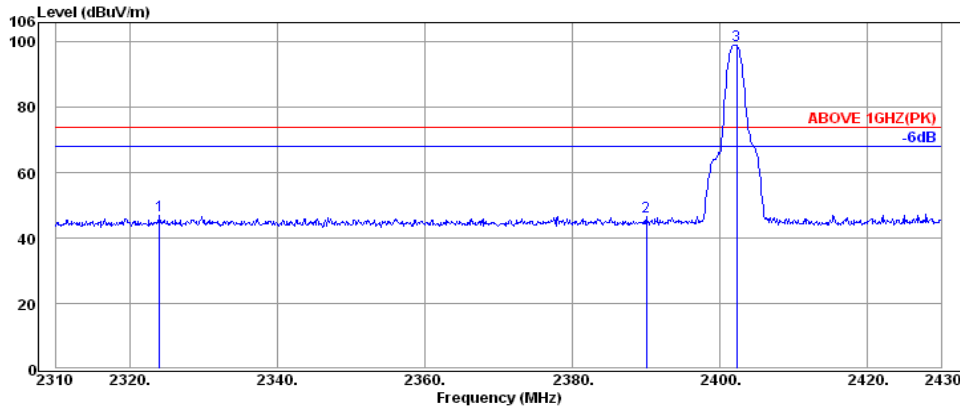

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2324.04	32.06	6.49	8.32	46.87	74.00	27.13	Peak
2390.04	32.16	6.57	7.89	46.62	74.00	27.38	Peak
2402.28	32.16	6.57	60.40	99.13	---	---	Peak

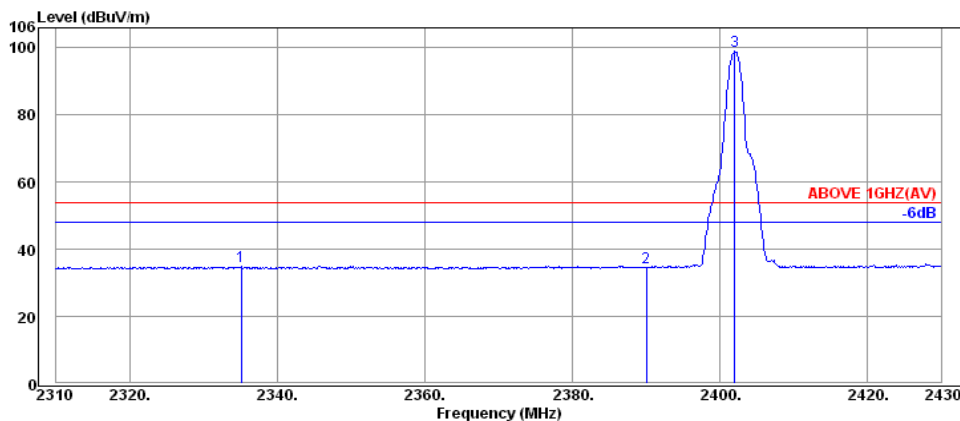

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2335.08	32.08	6.51	-3.54	35.05	54.00	18.95	Average
2390.04	32.16	6.57	-4.10	34.63	54.00	19.37	Average
2402.04	32.16	6.57	60.18	98.91	---	---	Average

Mode	GFSK	Frequency	TX 2402MHz
------	------	-----------	------------

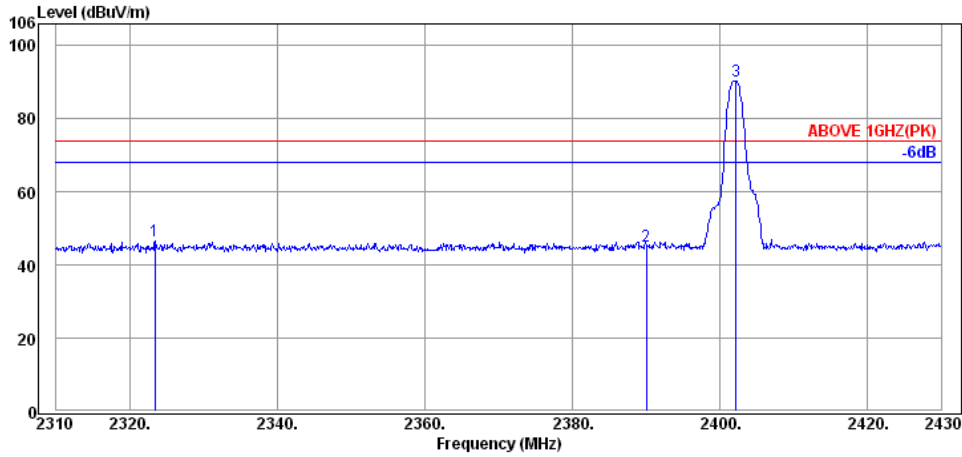

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2323.44	32.06	6.49	8.12	46.67	74.00	27.33	Peak
2390.04	32.16	6.57	6.26	44.99	74.00	29.01	Peak
2402.16	32.16	6.57	51.57	90.30	---	---	Peak

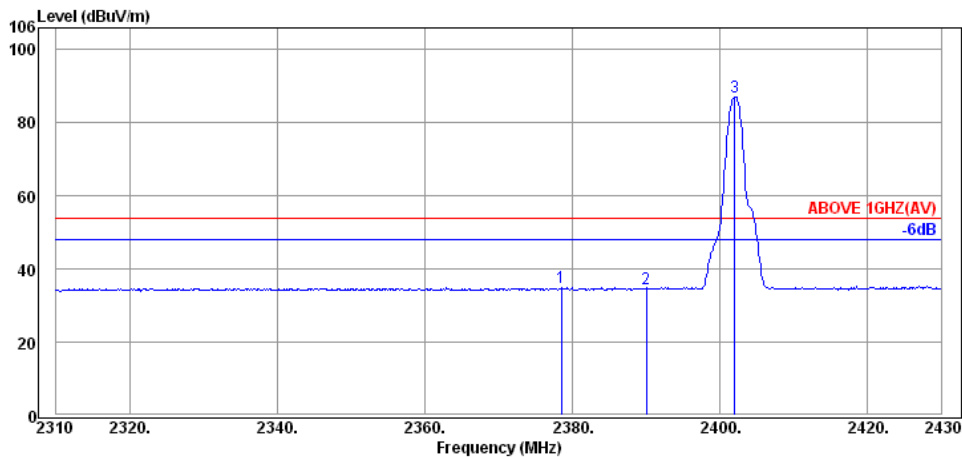

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2378.52	32.13	6.55	-3.71	34.97	54.00	19.03	Average
2390.04	32.16	6.57	-4.00	34.73	54.00	19.27	Average
2402.04	32.16	6.57	48.49	87.22	---	---	Average

Mode	GFSK	Frequency	TX 2480MHz
------	------	-----------	------------

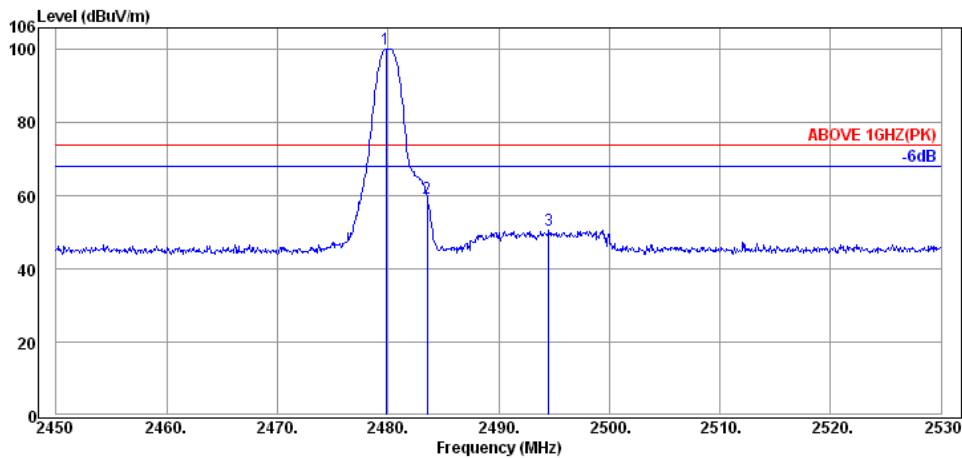

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2479.84	32.28	6.67	61.32	100.27	---	---	Peak
2483.52	32.28	6.67	20.58	59.53	74.00	14.47	Peak
2494.56	32.30	6.69	11.46	50.45	74.00	23.55	Peak

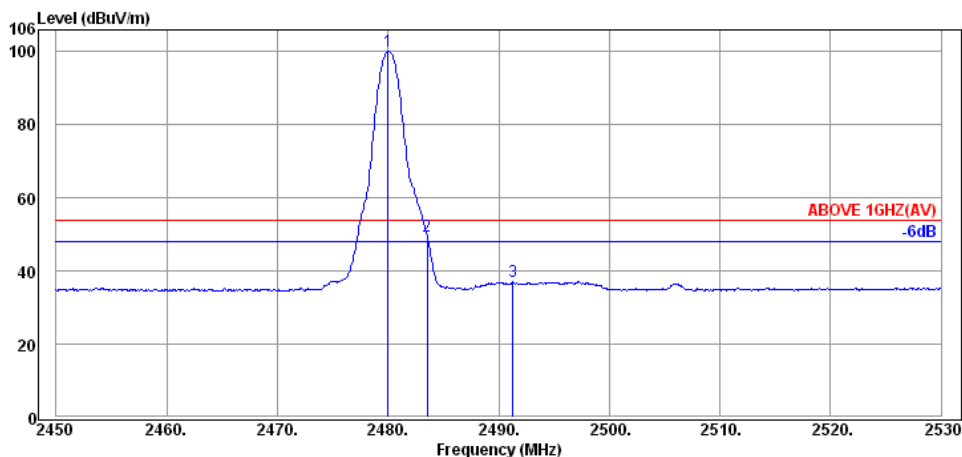

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2480.00	32.28	6.67	61.05	100.00	---	---	Average
2483.52	32.28	6.67	10.55	49.50	54.00	4.50	Average
2491.28	32.30	6.69	-1.93	37.06	54.00	16.94	Average

Mode	GFSK	Frequency	TX 2480MHz
------	------	-----------	------------

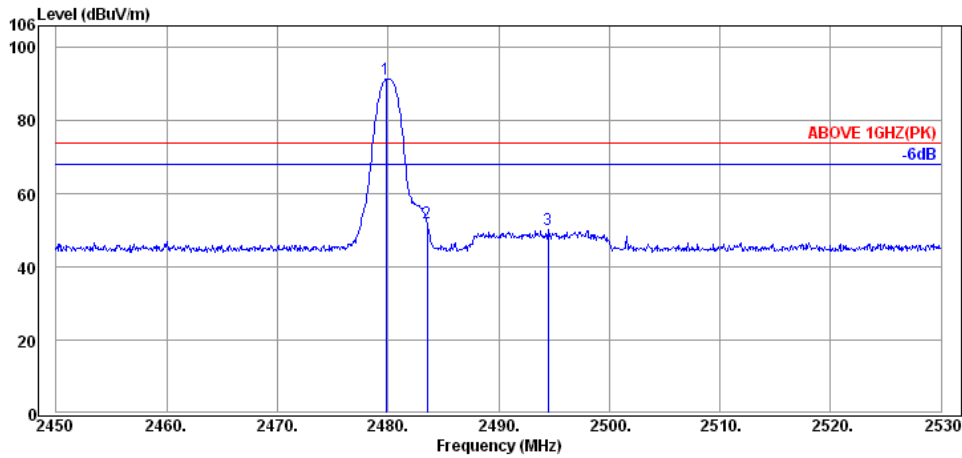

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2479.84	32.28	6.67	52.45	91.40	---	---	Peak
2483.52	32.28	6.67	13.01	51.96	74.00	22.04	Peak
2494.48	32.30	6.69	11.23	50.22	74.00	23.78	Peak

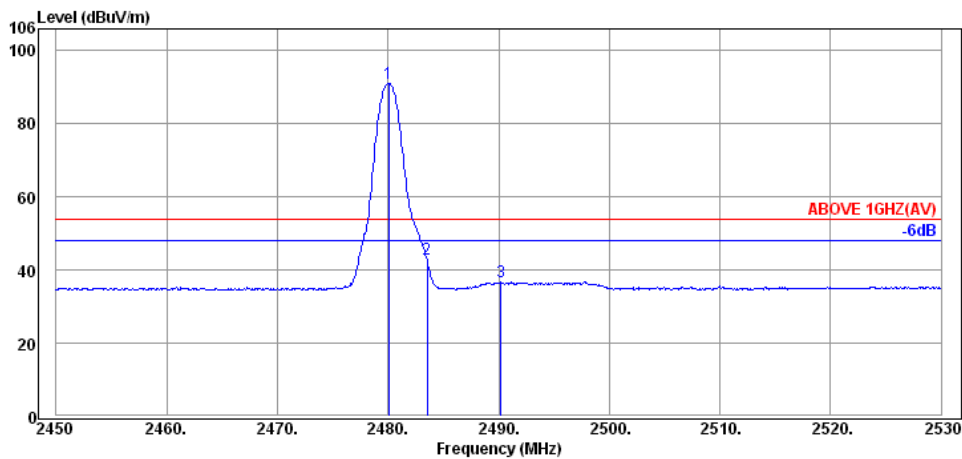

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2480.08	32.28	6.67	52.19	91.14	---	---	Average
2483.52	32.28	6.67	3.96	42.91	54.00	11.09	Average
2490.24	32.30	6.69	-2.24	36.75	54.00	17.25	Average

Mode	8-DPSK	Frequency	TX 2402MHz
------	--------	-----------	------------

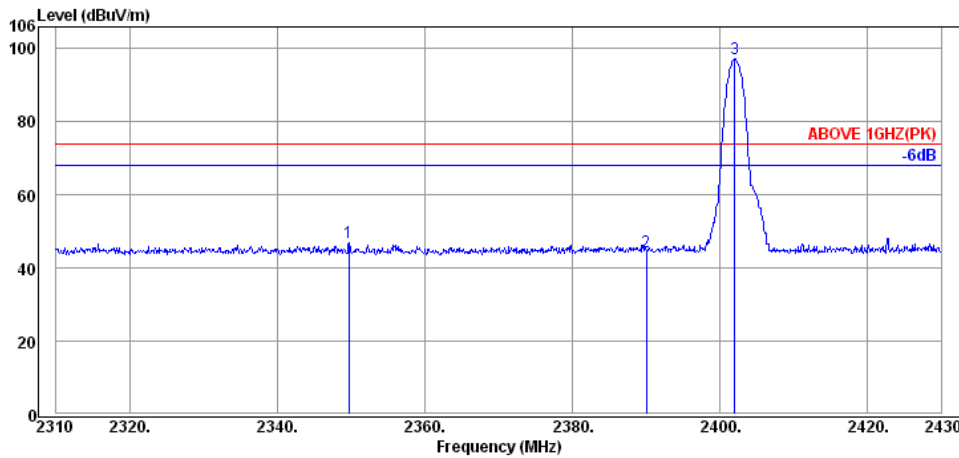

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2349.72	32.08	6.51	8.29	46.88	74.00	27.12	Peak
2390.04	32.16	6.57	5.53	44.26	74.00	29.74	Peak
2402.04	32.16	6.57	58.40	97.13	---	---	Peak

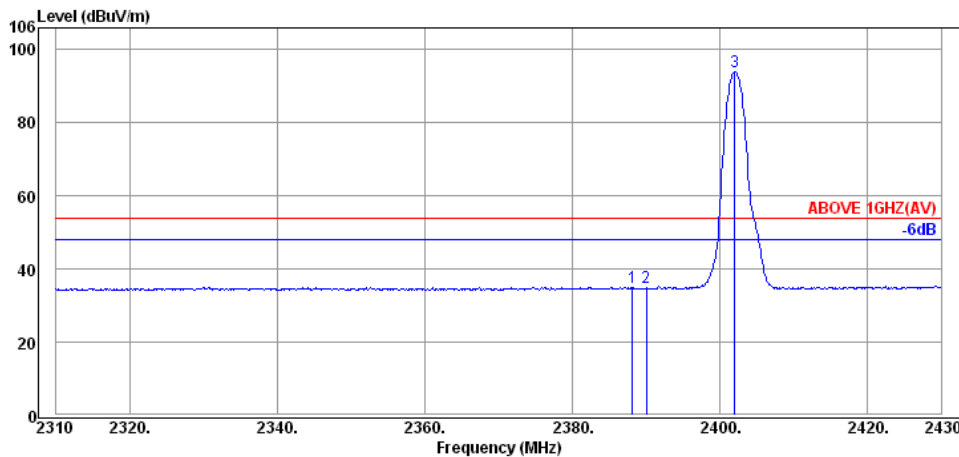

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.12	32.16	6.57	-3.66	35.07	54.00	18.93	Average
2390.04	32.16	6.57	-3.67	35.06	54.00	18.94	Average
2402.04	32.16	6.57	55.13	93.86	---	---	Average

Mode	8-DPSK	Frequency	TX 2402MHz
------	--------	-----------	------------

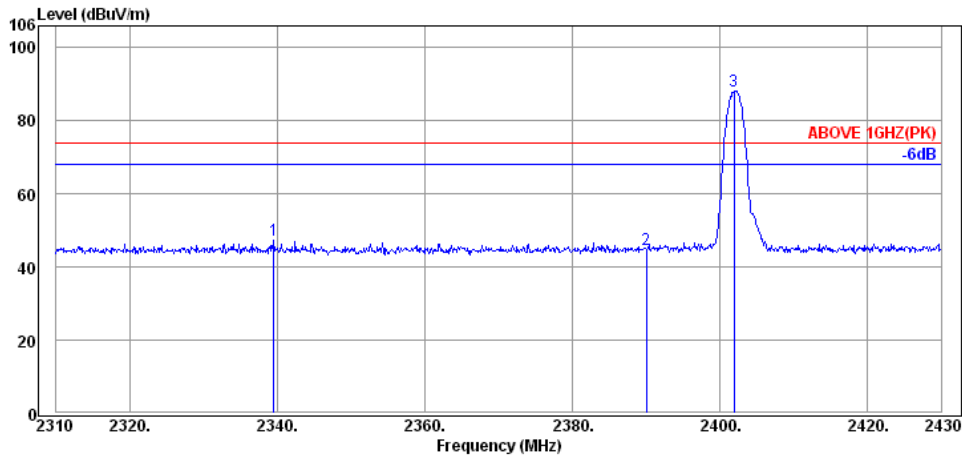

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2339.52	32.08	6.51	8.71	47.30	74.00	26.70	Peak
2390.04	32.16	6.57	6.00	44.73	74.00	29.27	Peak
2401.92	32.16	6.57	49.54	88.27	---	---	Peak

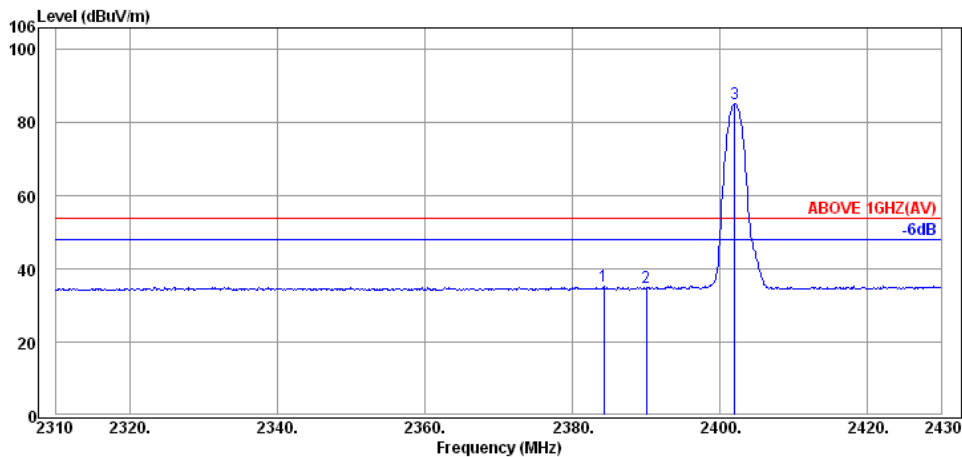

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2384.28	32.13	6.55	-3.52	35.16	54.00	18.84	Average
2390.04	32.16	6.57	-3.93	34.80	54.00	19.20	Average
2402.04	32.16	6.57	46.42	85.15	---	---	Average

Mode	8-DPSK	Frequency	TX 2480MHz
------	--------	-----------	------------

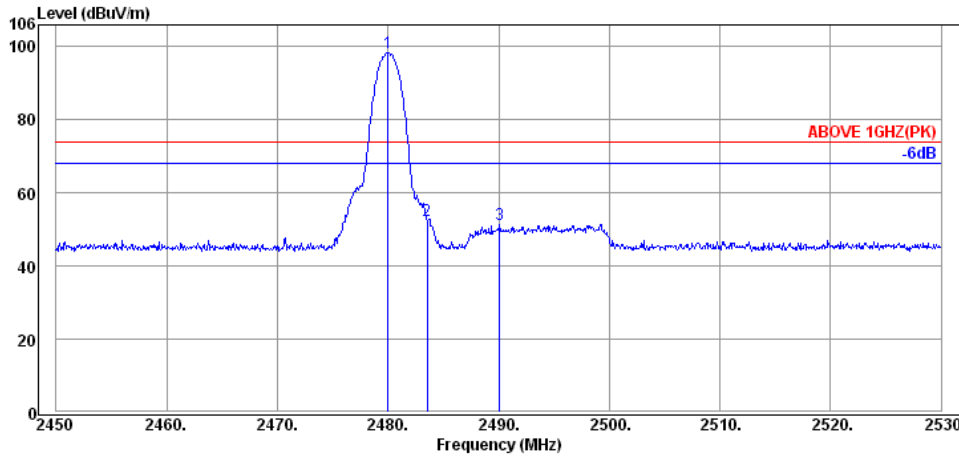

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2480.00	32.28	6.67	59.35	98.30	---	---	Peak
2483.52	32.28	6.67	13.41	52.36	74.00	21.64	Peak
2490.08	32.30	6.69	12.34	51.33	74.00	22.67	Peak

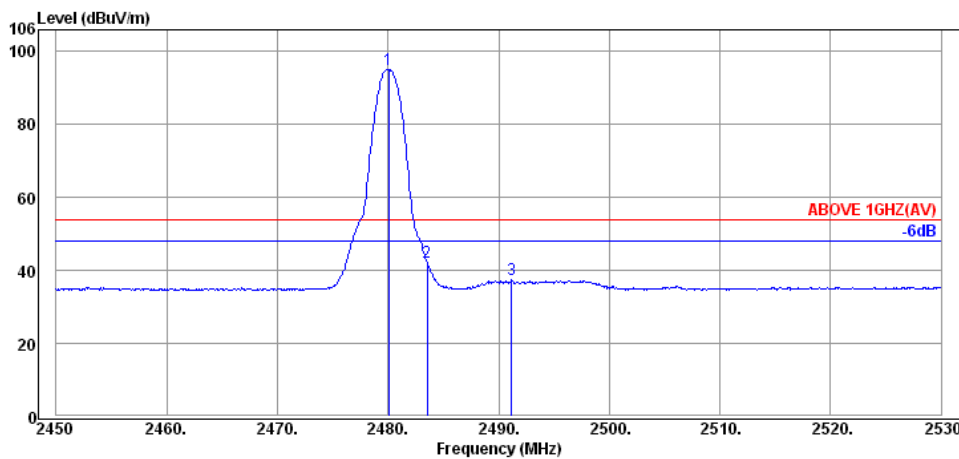

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2480.08	32.28	6.67	56.30	95.25	---	---	Average
2483.52	32.28	6.67	3.42	42.37	54.00	11.63	Average
2491.20	32.30	6.69	-1.65	37.34	54.00	16.66	Average

Mode	8-DPSK	Frequency	TX 2480MHz
------	--------	-----------	------------

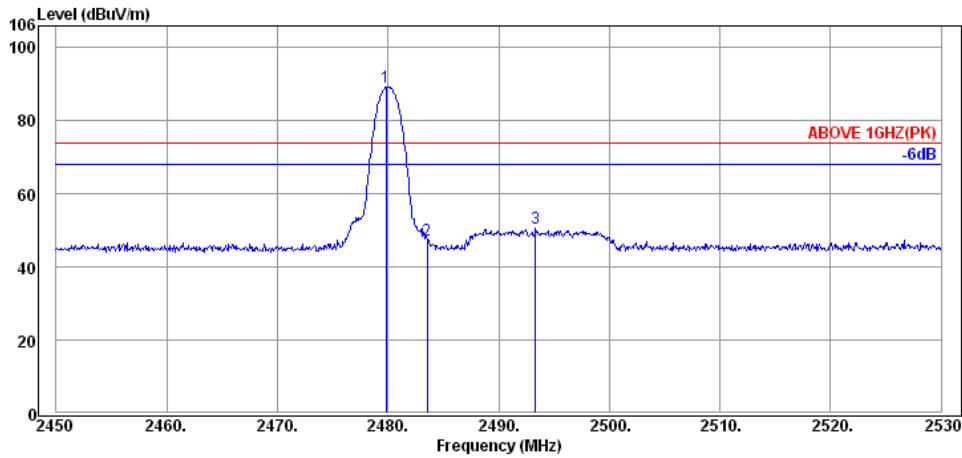

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2479.84	32.28	6.67	50.35	89.30	---	---	Peak
2483.52	32.28	6.67	8.27	47.22	74.00	26.78	Peak
2493.36	32.30	6.69	11.51	50.50	74.00	23.50	Peak

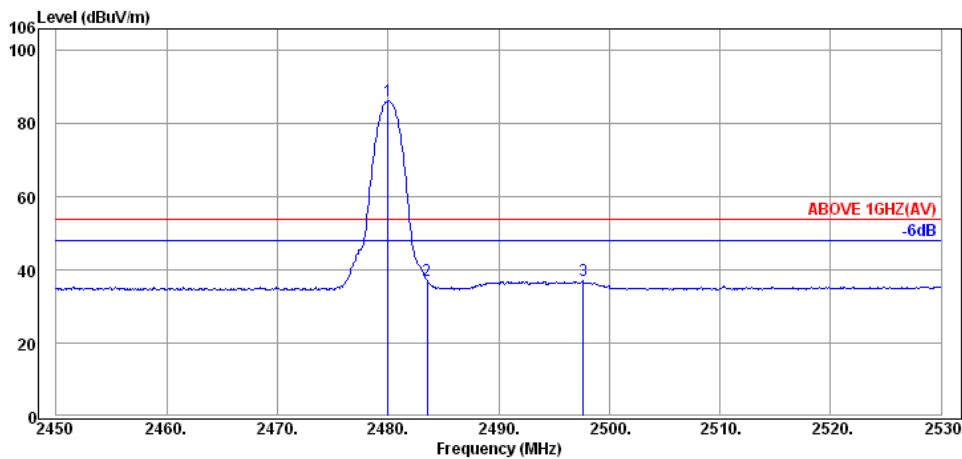


Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2480.00	32.28	6.67	47.38	86.33	---	---	Average
2483.52	32.28	6.67	-1.94	37.01	54.00	16.99	Average
2497.68	32.30	6.69	-2.00	36.99	54.00	17.01	Average


● Antenna: Omni-S Antenna

Mode	GFSK	Frequency	TX 2402MHz
------	------	-----------	------------

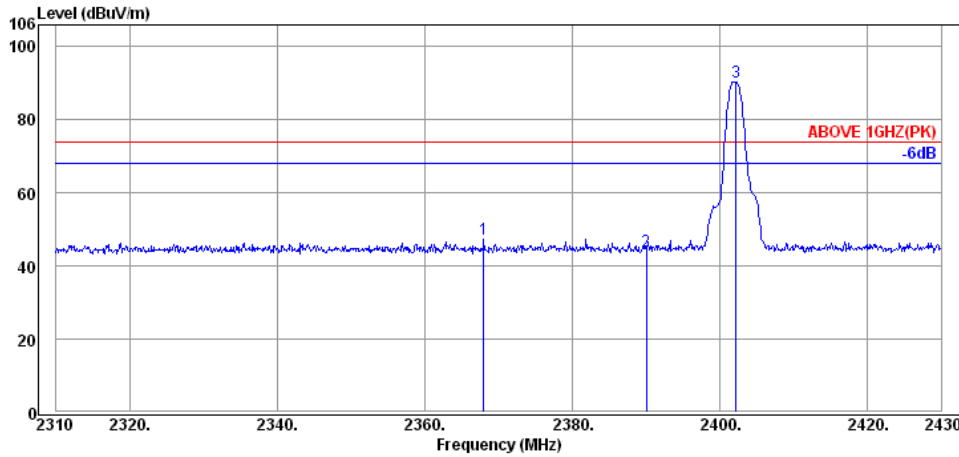

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2367.96	32.11	6.53	8.58	47.22	74.00	26.78	Peak
2390.04	32.16	6.57	5.48	44.21	74.00	29.79	Peak
2402.16	32.16	6.57	51.76	90.49	---	---	Peak

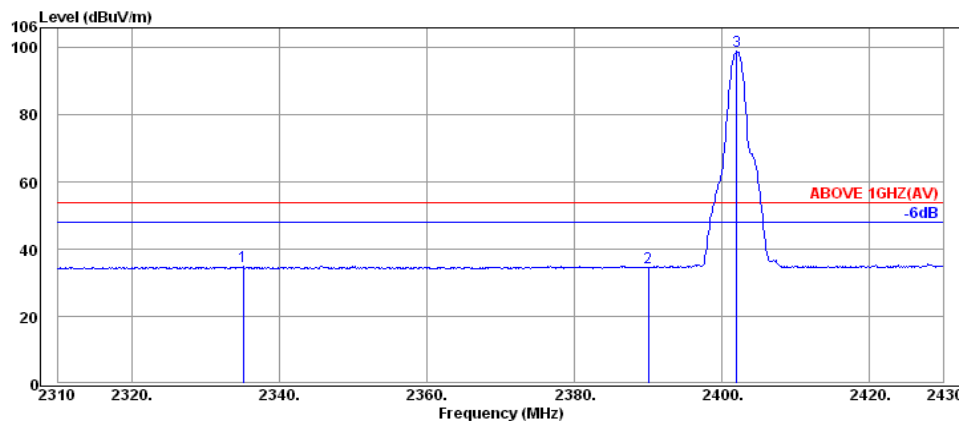

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2373.00	32.13	6.55	-3.55	35.13	54.00	18.87	Average
2390.04	32.16	6.57	-3.61	35.12	54.00	18.88	Average
2402.04	32.16	6.57	51.52	90.25	---	---	Average

Mode	GFSK	Frequency	TX 2402MHz
------	------	-----------	------------

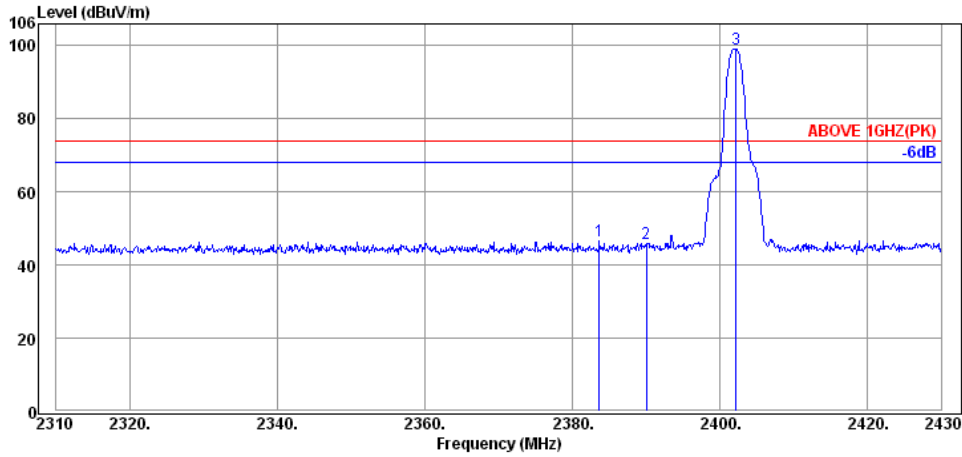

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2383.68	32.13	6.55	7.86	46.54	74.00	27.46	Peak
2390.04	32.16	6.57	7.07	45.80	74.00	28.20	Peak
2402.16	32.16	6.57	60.30	99.03	---	---	Peak

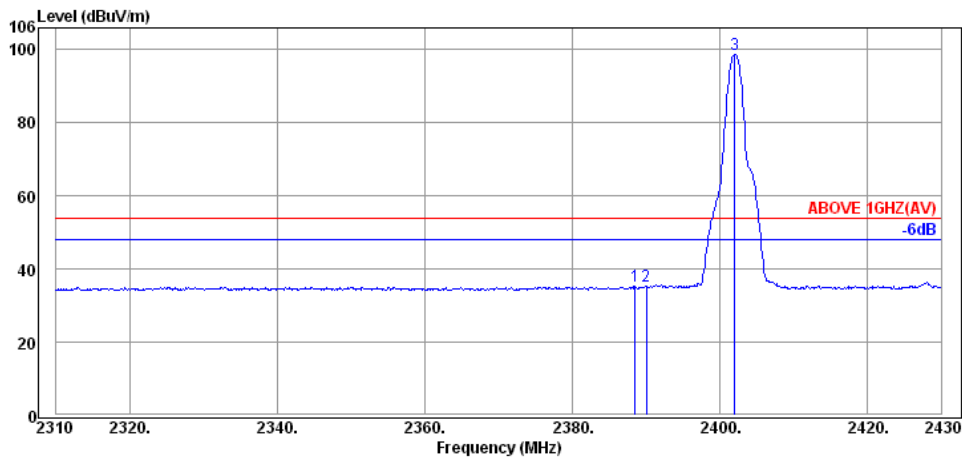

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2388.48	32.16	6.57	-3.52	35.21	54.00	18.79	Average
2390.04	32.16	6.57	-3.49	35.24	54.00	18.76	Average
2402.04	32.16	6.57	60.09	98.82	---	---	Average

Mode	GFSK	Frequency	TX 2480MHz
------	------	-----------	------------

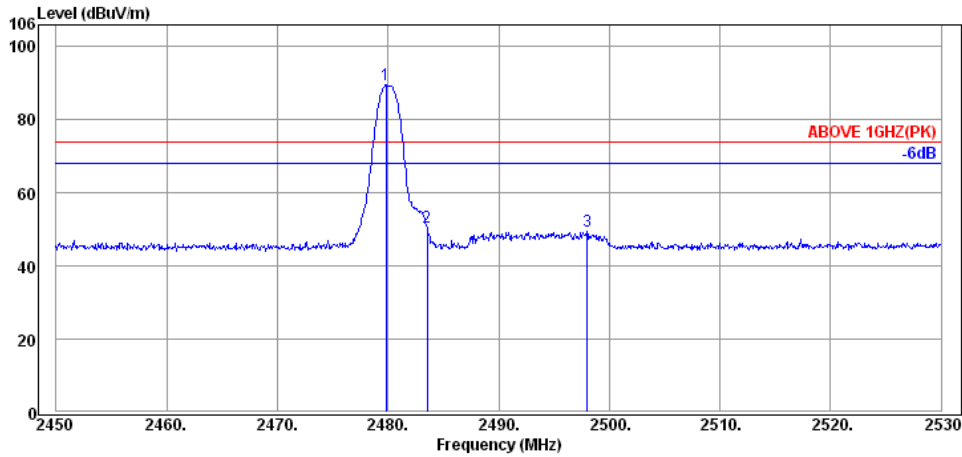

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2479.84	32.28	6.67	50.51	89.46	---	---	Peak
2483.52	32.28	6.67	11.77	50.72	74.00	23.28	Peak
2498.00	32.30	6.69	10.58	49.57	74.00	24.43	Peak

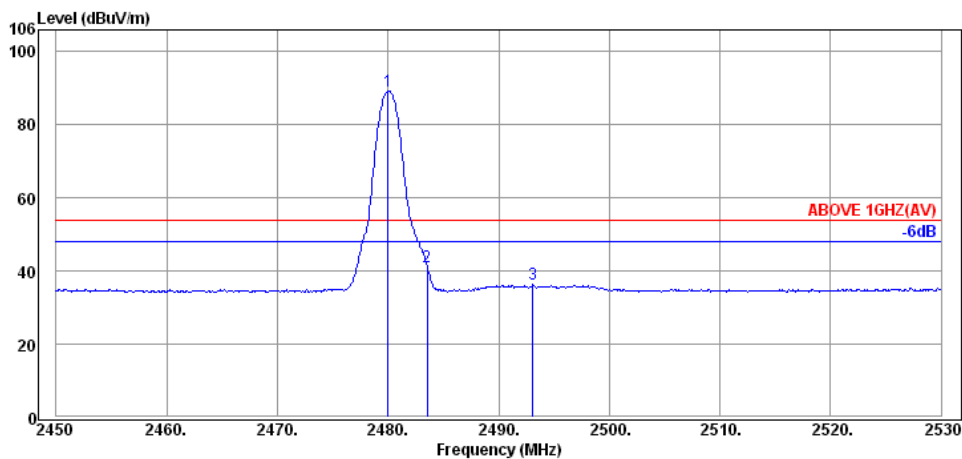

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2480.00	32.28	6.67	50.21	89.16	---	---	Average
2483.52	32.28	6.67	2.31	41.26	54.00	12.74	Average
2493.12	32.30	6.69	-2.73	36.26	54.00	17.74	Average

Mode	GFSK	Frequency	TX 2480MHz
------	------	-----------	------------

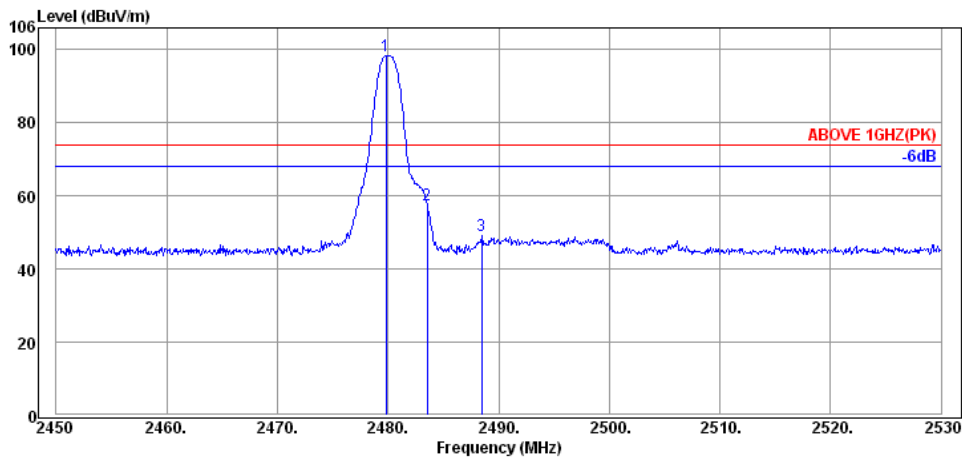

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2479.84	32.28	6.67	59.52	98.47	---	---	Peak
2483.52	32.28	6.67	18.74	57.69	74.00	16.31	Peak
2488.48	32.30	6.69	10.01	49.00	74.00	25.00	Peak

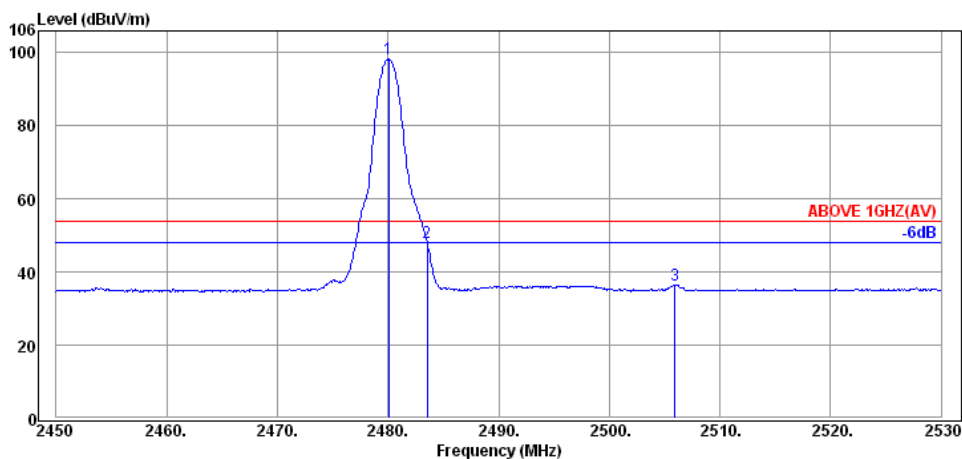

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2480.08	32.28	6.67	59.24	98.19	---	---	Average
2483.52	32.28	6.67	9.02	47.97	54.00	6.03	Average
2505.92	32.32	6.72	-2.49	36.55	54.00	17.45	Average

Mode	8-DPSK	Frequency	TX 2402MHz
------	--------	-----------	------------

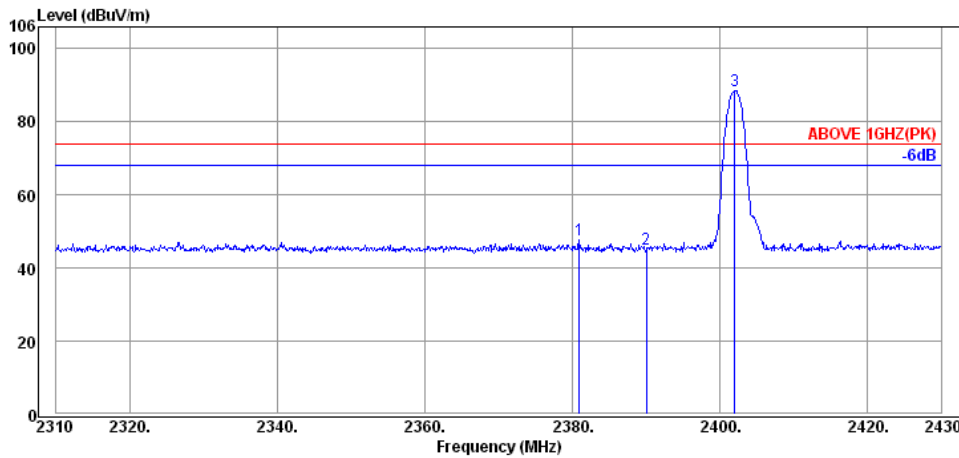

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2380.92	32.13	6.55	8.89	47.57	74.00	26.43	Peak
2390.04	32.16	6.57	6.34	45.07	74.00	28.93	Peak
2402.04	32.16	6.57	49.82	88.55	---	---	Peak

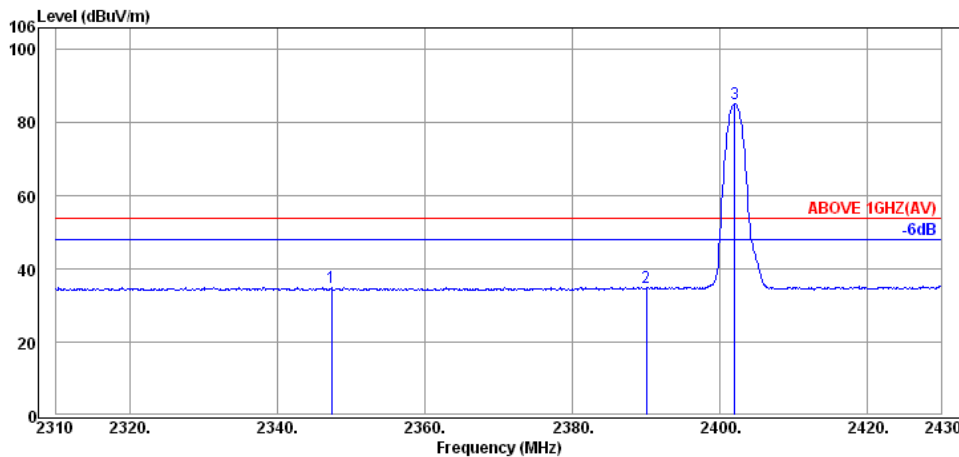

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2347.32	32.08	6.51	-3.50	35.09	54.00	18.91	Average
2390.04	32.16	6.57	-3.71	35.02	54.00	18.98	Average
2402.04	32.16	6.57	46.43	85.16	---	---	Average

Mode	8-DPSK	Frequency	TX 2402MHz
------	--------	-----------	------------

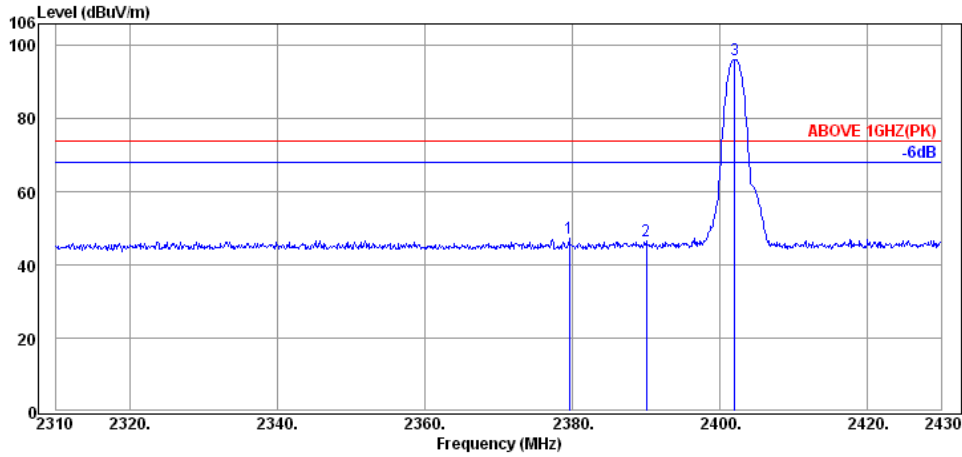

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2379.60	32.13	6.55	8.52	47.20	74.00	26.80	Peak
2390.04	32.16	6.57	7.82	46.55	74.00	27.45	Peak
2402.04	32.16	6.57	57.61	96.34	---	---	Peak

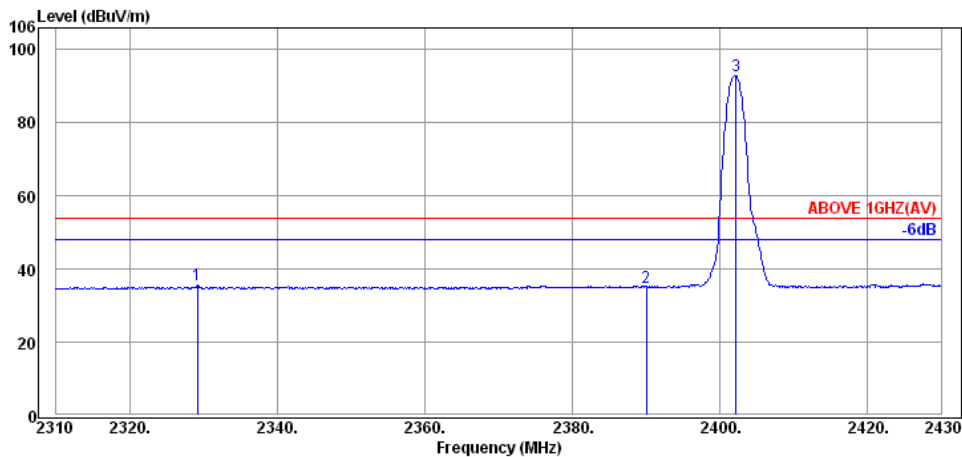

Antenna at Vertical Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2329.20	32.06	6.49	-2.96	35.59	54.00	18.41	Average
2390.04	32.16	6.57	-3.67	35.06	54.00	18.94	Average
2402.16	32.16	6.57	54.25	92.98	---	---	Average

Mode	8-DPSK	Frequency	TX 2480MHz
------	--------	-----------	------------

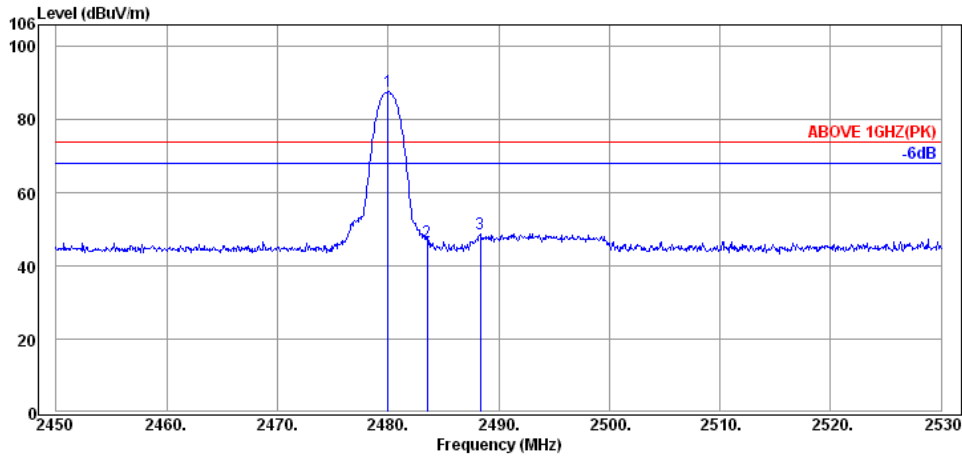

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2480.00	32.28	6.67	48.71	87.66	---	---	Peak
2483.52	32.28	6.67	7.69	46.64	74.00	27.36	Peak
2488.32	32.30	6.69	9.85	48.84	74.00	25.16	Peak

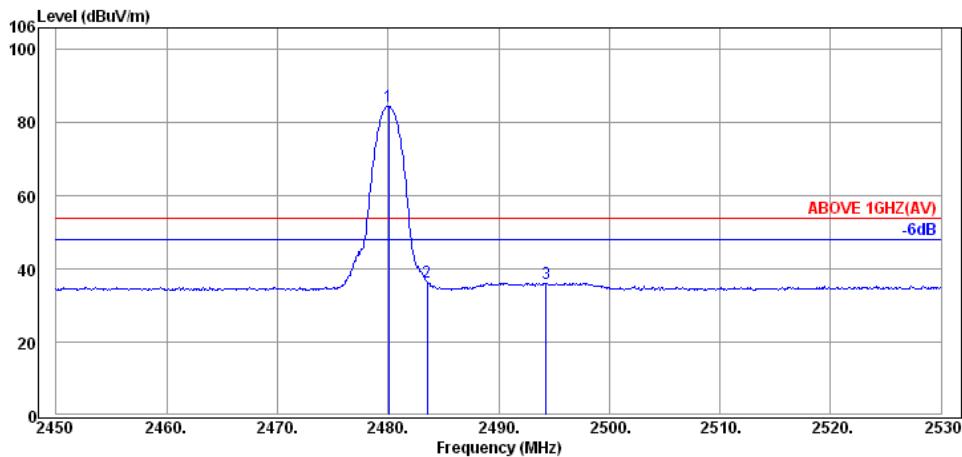

Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2480.08	32.28	6.67	45.55	84.50	---	---	Average
2483.52	32.28	6.67	-2.61	36.34	54.00	17.66	Average
2494.32	32.30	6.69	-2.78	36.21	54.00	17.79	Average

Mode	8-DPSK	Frequency	TX 2480MHz
------	--------	-----------	------------

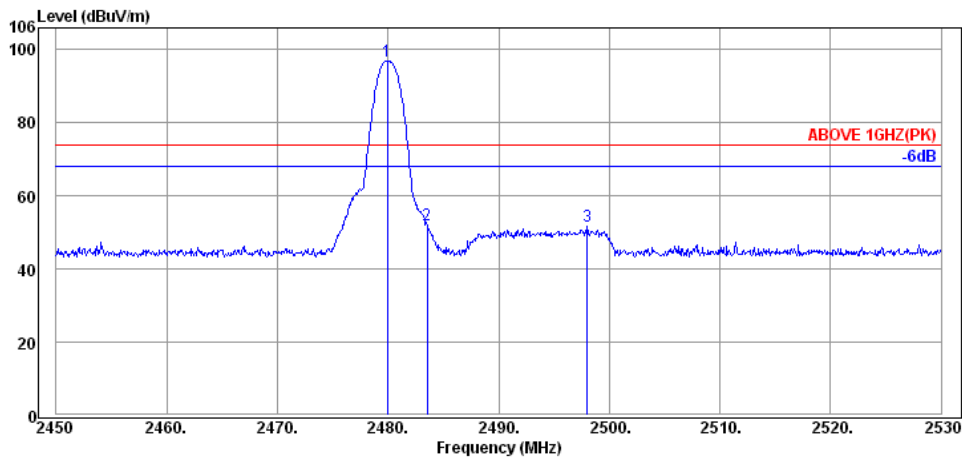

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2479.92	32.28	6.67	58.06	97.01	---	---	Peak
2483.52	32.28	6.67	13.22	52.17	74.00	21.83	Peak
2498.00	32.30	6.69	12.59	51.58	74.00	22.42	Peak

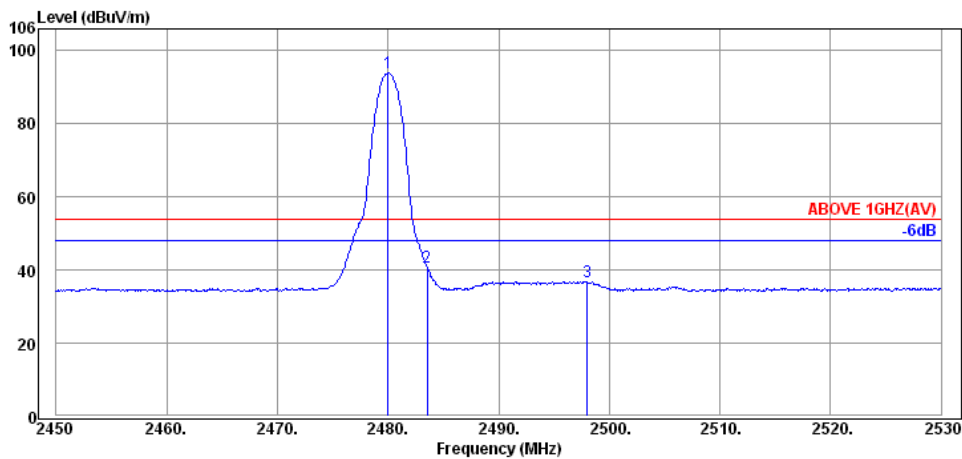

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
2480.00	32.28	6.67	54.94	93.89	---	---	Average
2483.52	32.28	6.67	1.71	40.66	54.00	13.34	Average
2498.00	32.30	6.69	-2.03	36.96	54.00	17.04	Average

A.2.2 Emissions outside the frequency band:

The emissions (up to 25GHz) not reported for there is no emission be found.

● **Antenna: PCB Antenna**

Mode		GFSK		Frequency		TX 2402MHz	
Antenna at Horizontal Polarization							
Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
3215.00	32.86	7.76	7.30	47.92	54.00	6.08	Peak
4805.00	34.22	9.54	7.72	51.48	54.00	2.52	Peak

Antenna at Vertical Polarization							
Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
4805.00	34.22	9.54	7.33	51.09	54.00	2.91	Average
4805.00	34.22	9.54	10.41	54.17	74.00	19.83	Peak

Mode		GFSK		Frequency		TX 2441MHz	
Antenna at Horizontal Polarization							
Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
3215.00	32.86	7.76	8.07	48.69	54.00	5.31	Peak
4880.00	34.25	9.56	9.04	52.85	54.00	1.15	Peak

Antenna at Vertical Polarization							
Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
4880.00	34.25	9.56	7.16	50.97	54.00	3.03	Average
4880.00	34.25	9.56	10.25	54.06	74.00	19.94	Peak

Mode	GFSK	Frequency	TX 2480MHz
------	------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
3215.00	32.86	7.76	7.57	48.19	54.00	5.81	Peak
4960.00	34.29	9.60	6.58	50.47	54.00	3.53	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
4960.00	34.29	9.60	6.80	50.69	54.00	3.31	Peak

● **Antenna: Omni-S Antenna**

Mode	GFSK	Frequency	TX 2402MHz
------	------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
4805.00	34.22	9.54	3.82	47.58	54.00	6.42	Peak
1048.00	28.09	4.39	15.05	47.53	54.00	6.47	Peak
1150.00	28.07	4.61	15.03	47.71	54.00	6.29	Peak
1246.00	28.05	4.73	12.51	45.29	54.00	8.71	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
1048.00	28.09	4.39	11.51	43.99	54.00	10.01	Peak
1150.00	28.07	4.61	13.57	46.25	54.00	7.75	Peak
1246.00	28.05	4.73	10.68	43.46	54.00	10.54	Peak
4805.00	34.22	9.54	6.36	50.12	54.00	3.88	Peak

Mode	GFSK	Frequency	TX 2441MHz
------	------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
1048.00	28.09	4.39	11.60	44.08	54.00	9.92	Peak
1146.00	28.07	4.61	13.17	45.85	54.00	8.15	Peak
1250.00	28.05	4.75	9.49	42.29	54.00	11.71	Peak
4880.00	34.25	9.56	2.31	46.12	54.00	7.88	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
1048.00	28.09	4.39	11.60	44.08	54.00	9.92	Peak
1146.00	28.07	4.61	13.17	45.85	54.00	8.15	Peak
1250.00	28.05	4.75	9.49	42.29	54.00	11.71	Peak
4885.00	34.26	9.57	4.59	48.42	54.00	5.58	Peak

Mode	GFSK	Frequency	TX 2480MHz
------	------	-----------	------------

Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
1050.00	28.09	4.39	15.21	47.69	54.00	6.31	Peak
1148.00	28.07	4.61	15.09	47.77	54.00	6.23	Peak
1248.00	28.05	4.75	11.86	44.66	54.00	9.34	Peak
4960.00	34.29	9.60	3.07	46.96	54.00	7.04	Peak

Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
1046.00	28.09	4.39	11.23	43.71	54.00	10.29	Peak
1150.00	28.07	4.61	13.38	46.06	54.00	7.94	Peak
1246.00	28.05	4.73	10.31	43.09	54.00	10.91	Peak
4960.00	34.29	9.60	4.54	48.43	54.00	5.57	Peak

A.2.3 Emissions in Non-restricted Frequency Bands:

All emission levels below the 15.209 general radiated emissions limits is not required.

A.3 20dB BANDWIDTH

Test Date	2017/10/03	Temp./Hum.	24°C/55%
Cable Loss	0.7dB	Test Voltage	DC 3.3V (though Jig via Notebook PC)

A.3.1 6dB Bandwidth Result

Mode	Centre Frequency (MHz)	20dB Bandwidth (MHz)	2/3 (20dB Bandwidth)
GFSK	2402	0.9238	0.616
	2441	0.9235	0.616
	2480	0.9235	0.616
8-DPSK	2402	1.266	0.844
	2441	1.267	0.845
	2480	1.268	0.845


Remark: The maximum two-thirds of the 20dB bandwidth is the limit for carrier frequency separation presented.


A.3.2 Measurement Plots



A.4 CARRIER FREQUENCY SEPARATION

Test Date	2017/10/03	Temp./Hum.	24°C/55%
Cable Loss	0.7dB	Test Voltage	DC 3.3V (though Jig via Notebook PC)

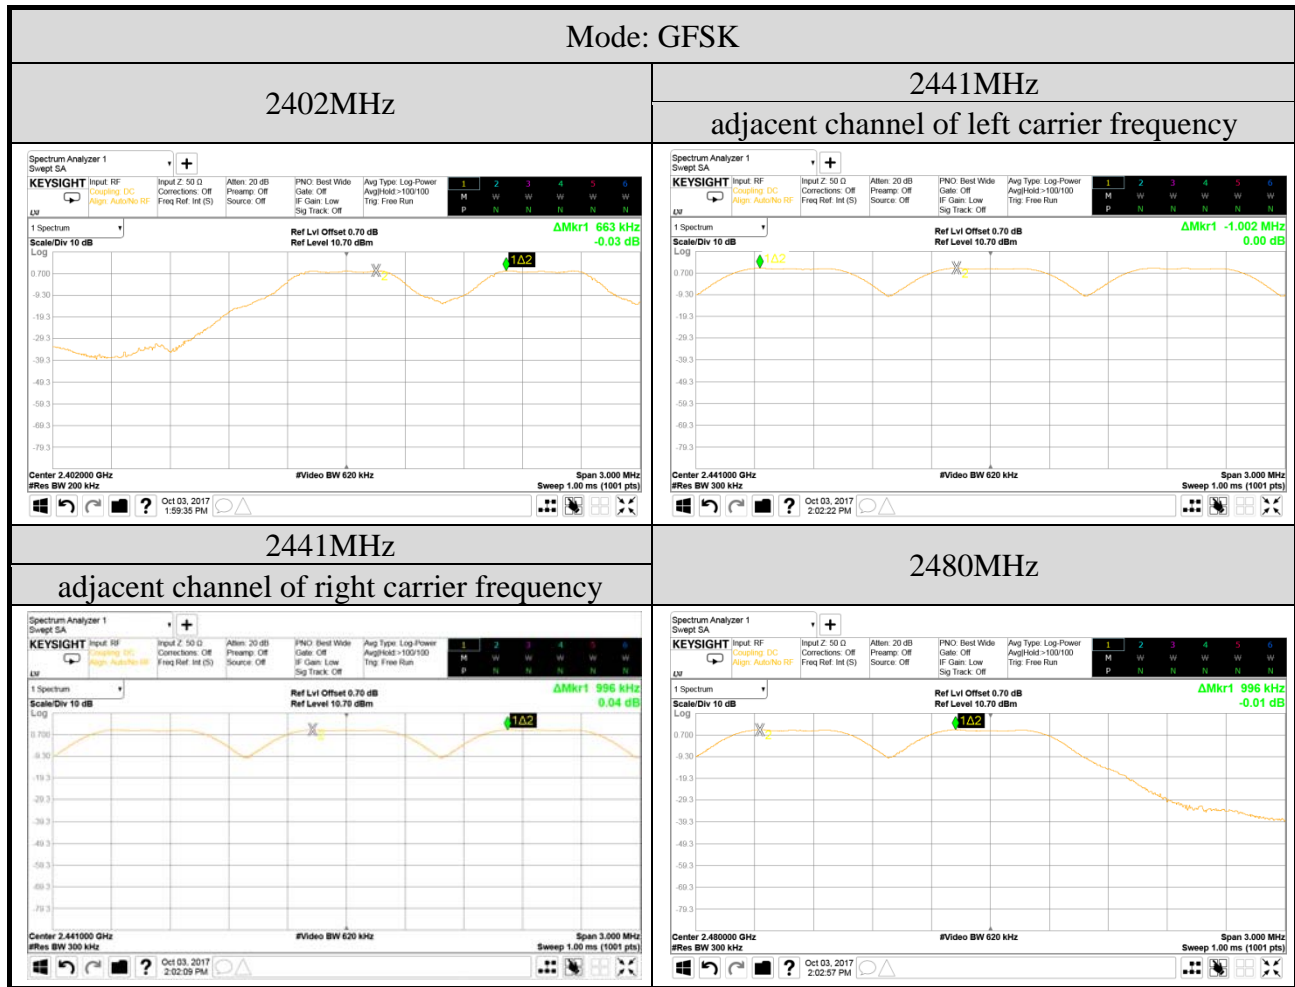

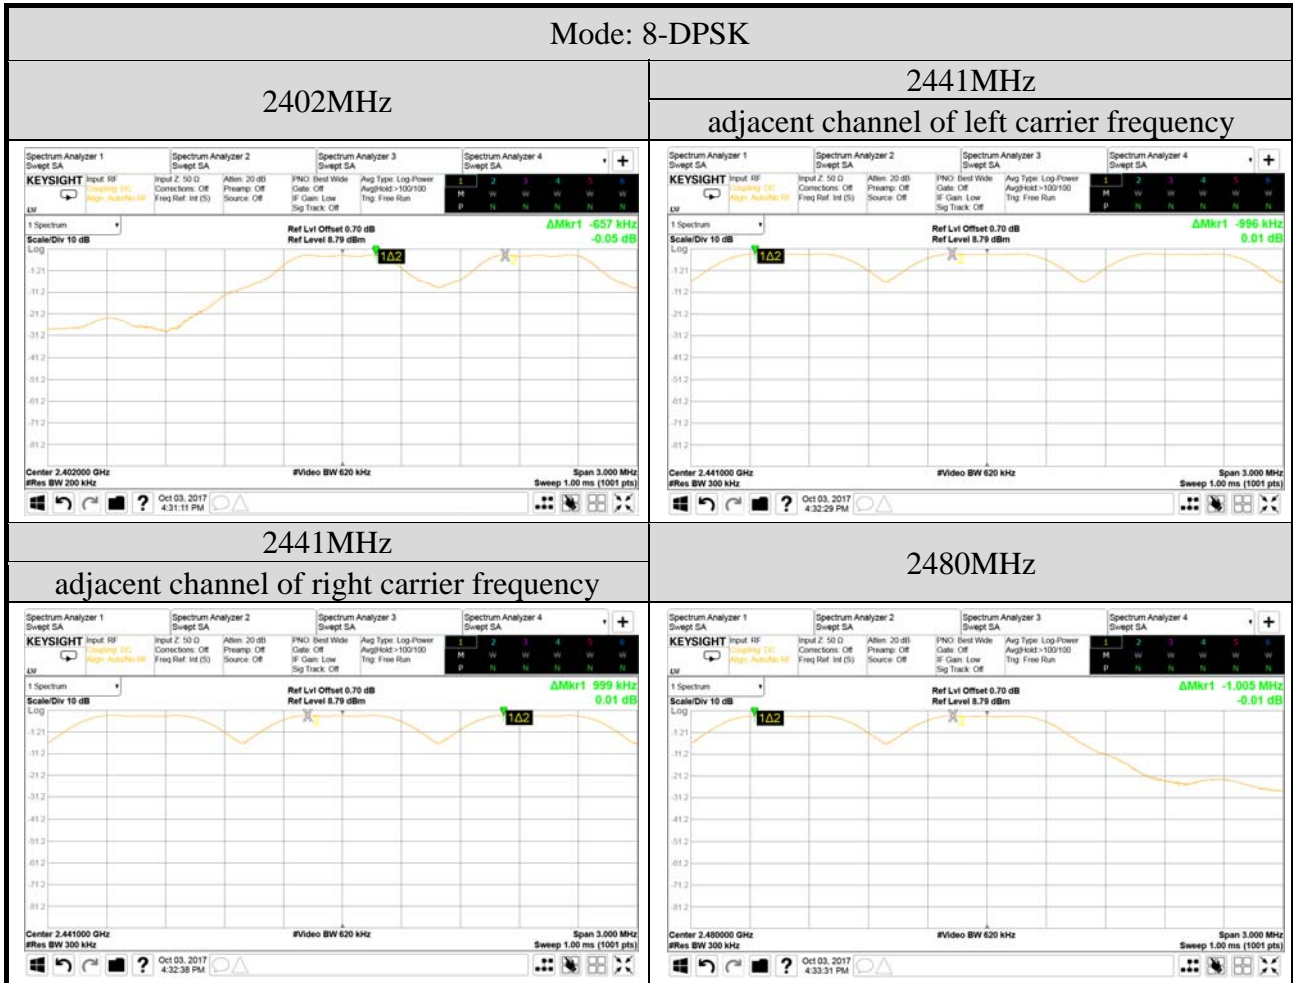

A.5 TIME OF OCCUPANCY

Test Date	2017/10/03	Temp./Hum.	24°C/55%
Cable Loss	0.7dB	Test Voltage	DC 3.3V (though Jig via Notebook PC)

A.5.1 Time of Occupancy

Mode	Centre Frequency (MHz)	Mode	Time of Occupancy (ms)	Maximum accumulated Time of Occupancy (ms)	Limit (ms)
GFSK	2402	DH1	0.390	123.240	<400
		DH3	1.650	260.700	
		DH5	2.890	273.972	
	2441	DH1	0.380	120.080	<400
		DH3	1.650	260.700	
		DH5	2.890	273.972	
	2480	DH1	0.380	120.080	<400
		DH3	1.640	259.120	
		DH5	2.890	273.972	

Observation Period: 79 channels*0.4 seconds = 31.6 seconds

Centre Frequency: 2402MHz

DH1: For each second of 10 channel appearance, the longest time of occupancy for each of 31.6 seconds is:

$$10 \text{ channels} * 31.6 \text{ seconds} * 0.390 \text{ ms} = 123.240 \text{ ms}$$

DH3: For each second of 5 channel appearance, the longest time of occupancy for each of 31.6 seconds is:

$$5 \text{ channels} * 31.6 \text{ seconds} * 1.650 \text{ ms} = 260.700 \text{ ms}$$

DH5: For each second of 3 channel appearance, the longest time of occupancy for each of 31.6 seconds is:

$$3 \text{ channels} * 31.6 \text{ seconds} * 2.890 \text{ ms} = 273.972 \text{ ms}$$

Centre Frequency: 2441MHz

DH1: For each second of 10 channel appearance, the longest time of occupancy for each of 31.6 seconds is:

$$10 \text{ channels} * 31.6 \text{ seconds} * 0.380 \text{ ms} = 120.080 \text{ ms}$$

DH3: For each second of 5 channel appearance, the longest time of occupancy for each of 31.6 seconds is:

$$5 \text{ channels} * 31.6 \text{ seconds} * 1.650 \text{ ms} = 260.700 \text{ ms}$$

DH5: For each second of 3 channel appearance, the longest time of occupancy for each of 31.6 seconds is:

$$3 \text{ channels} * 31.6 \text{ seconds} * 2.890 \text{ ms} = 273.972 \text{ ms}$$

Centre Frequency: 2480MHz

DH1: For each second of 10 channel appearance, the longest time of occupancy for each of 31.6 seconds is:

$$10 \text{ channels} * 31.6 \text{ seconds} * 0.380 \text{ ms} = 120.080 \text{ ms}$$


DH3: For each second of 5 channel appearance, the longest time of occupancy for each of 31.6 seconds is:


$$5 \text{ channels} * 31.6 \text{ seconds} * 1.640 \text{ ms} = 259.120 \text{ ms}$$


DH5: For each second of 2 channel appearance, the longest time of occupancy for each of 31.6 seconds is:

$$3 \text{ channels} * 31.6 \text{ seconds} * 2.890 \text{ ms} = 273.972 \text{ ms}$$

● Measurement Plots

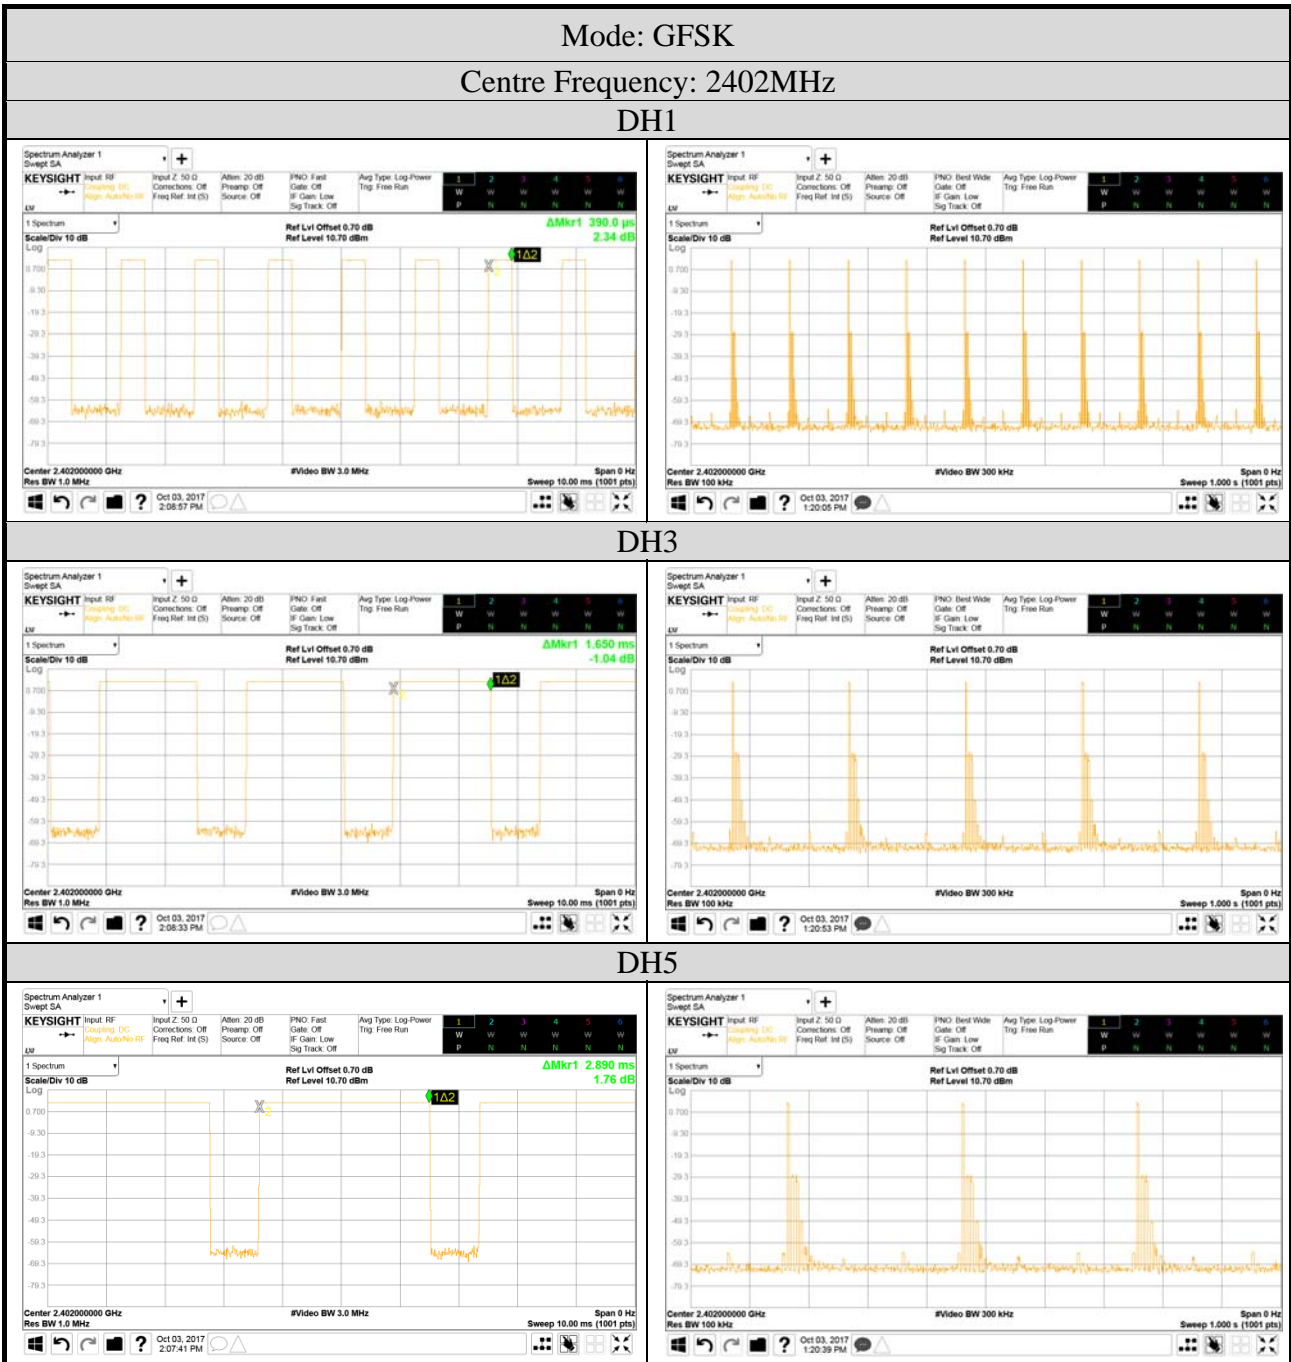

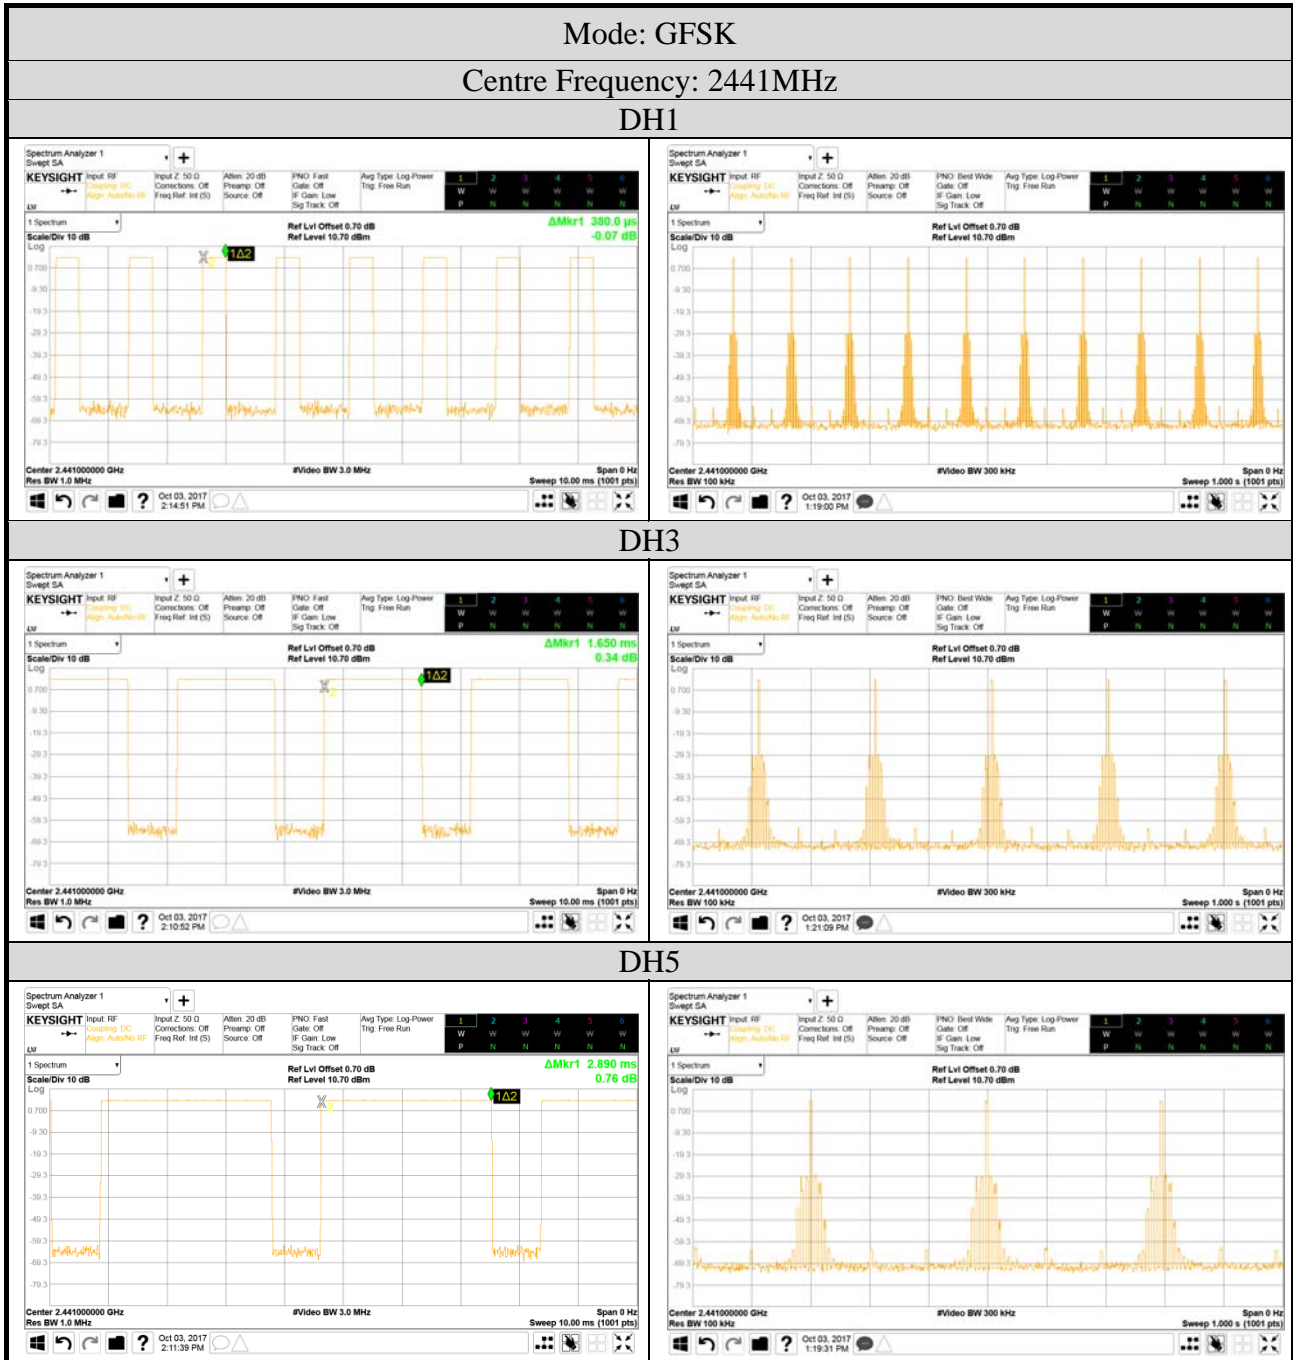

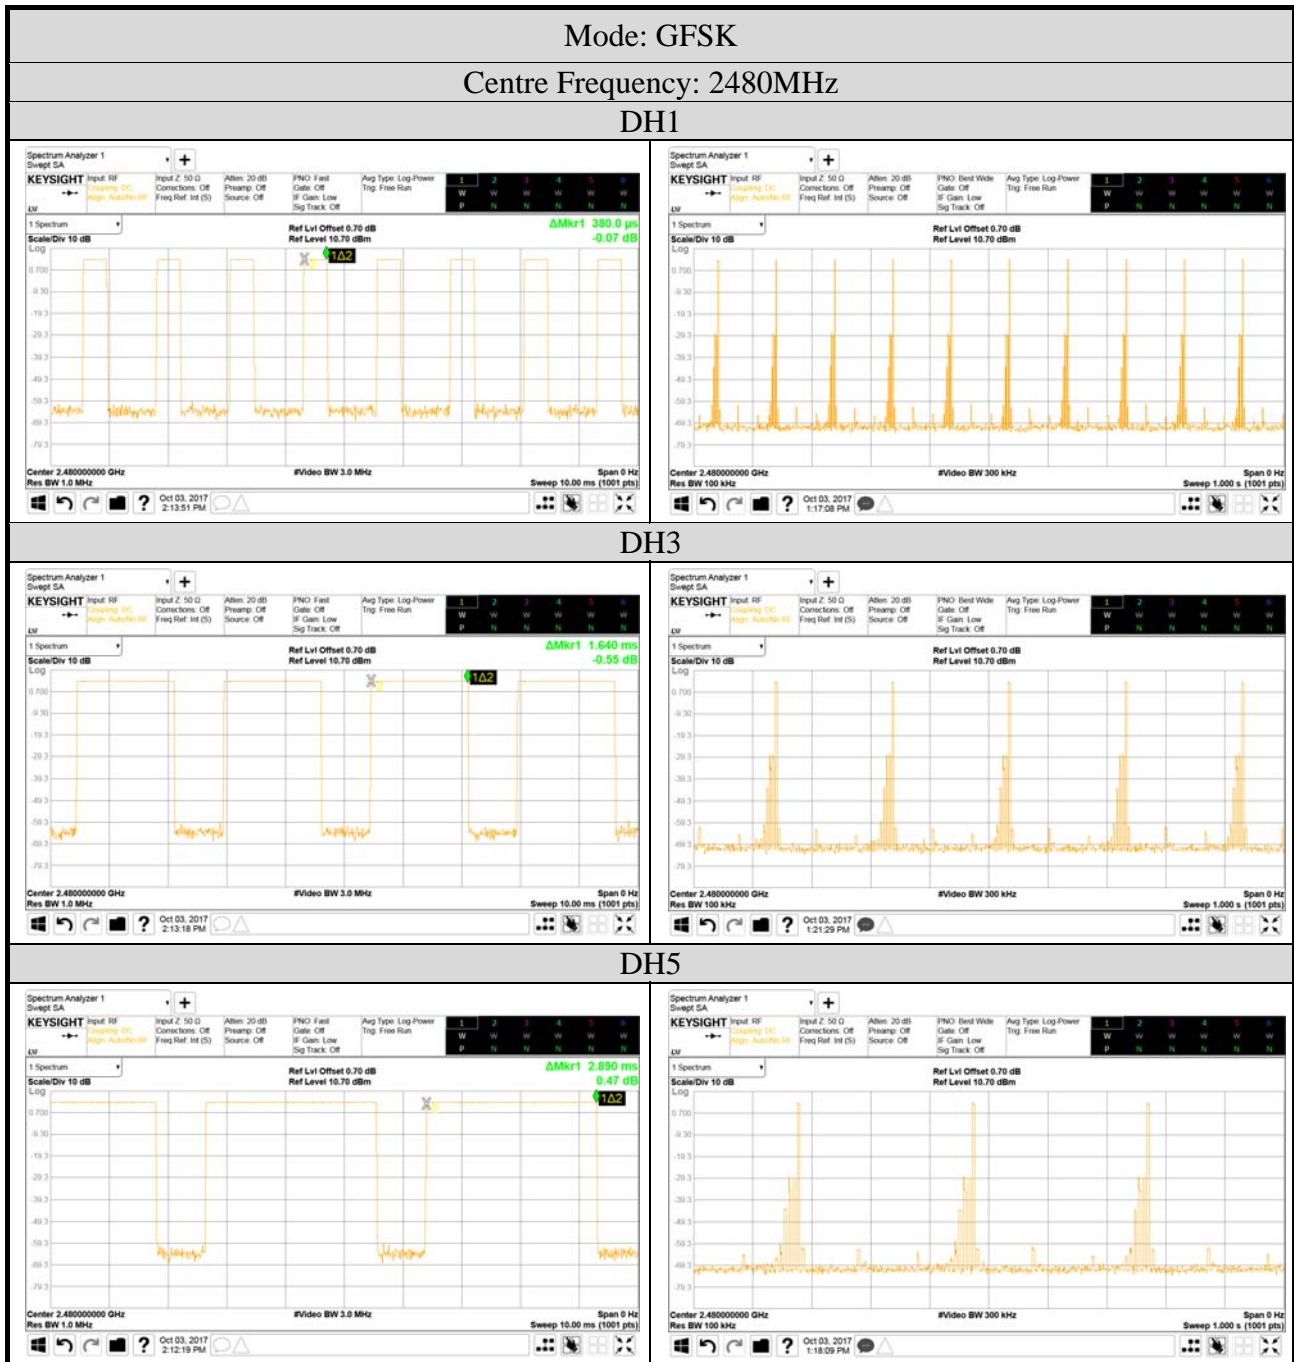

Mode	Centre Frequency (MHz)	Mode	Time of Occupancy (ms)	Maximum accumulated Time of Occupancy (ms)	Limit (ms)
8-DPSK	2402	DH1	0.380	120.080	<400
		DH3	1.630	257.540	
		DH5	2.900	274.920	
	2441	DH1	0.380	120.080	<400
		DH3	1.640	259.120	
		DH5	2.900	274.920	
	2480	DH1	0.380	120.080	<400
		DH3	1.640	259.120	
		DH5	2.900	274.920	

Observation Period: 79 channels*0.4 seconds = 31.6 seconds

Centre Frequency: 2402MHz

3DH1: For each second of 10 channel appearance, the longest time of occupancy for each of 31.6 seconds is:

$$10 \text{ channels} * 31.6 \text{ seconds} * 0.380 \text{ ms} = 120.080 \text{ ms}$$

3DH3: For each second of 5 channel appearance, the longest time of occupancy for each of 31.6 seconds is:

$$5 \text{ channels} * 31.6 \text{ seconds} * 1.630 \text{ ms} = 257.540 \text{ ms}$$

3DH5: For each second of 2 channel appearance, the longest time of occupancy for each of 31.6 seconds is:

$$3 \text{ channels} * 31.6 \text{ seconds} * 2.900 \text{ ms} = 274.920 \text{ ms}$$

Centre Frequency: 2441MHz

3DH1: For each second of 10 channel appearance, the longest time of occupancy for each of 31.6 seconds is:

$$10 \text{ channels} * 31.6 \text{ seconds} * 0.380 \text{ ms} = 120.080 \text{ ms}$$

3DH3: For each second of 5 channel appearance, the longest time of occupancy for each of 31.6 seconds is:

$$5 \text{ channels} * 31.6 \text{ seconds} * 1.640 \text{ ms} = 259.120 \text{ ms}$$

3DH5: For each second of 2 channel appearance, the longest time of occupancy for each of 31.6 seconds is:

$$3 \text{ channels} * 31.6 \text{ seconds} * 2.900 \text{ ms} = 274.920 \text{ ms}$$

Centre Frequency: 2480MHz

3DH1: For each second of 10 channel appearance, the longest time of occupancy for each of 31.6 seconds is:

$$10 \text{ channels} * 31.6 \text{ seconds} * 0.380 \text{ ms} = 120.080 \text{ ms}$$


3DH3: For each second of 5 channel appearance, the longest time of occupancy for each of 31.6 seconds is:


$$5 \text{ channels} * 31.6 \text{ seconds} * 1.640 \text{ ms} = 259.120 \text{ ms}$$


3DH5: For each second of 2 channel appearance, the longest time of occupancy for each of 31.6 seconds is:

$$3 \text{ channels} * 31.6 \text{ seconds} * 2.900 \text{ ms} = 274.920 \text{ ms}$$

● Measurement Plots

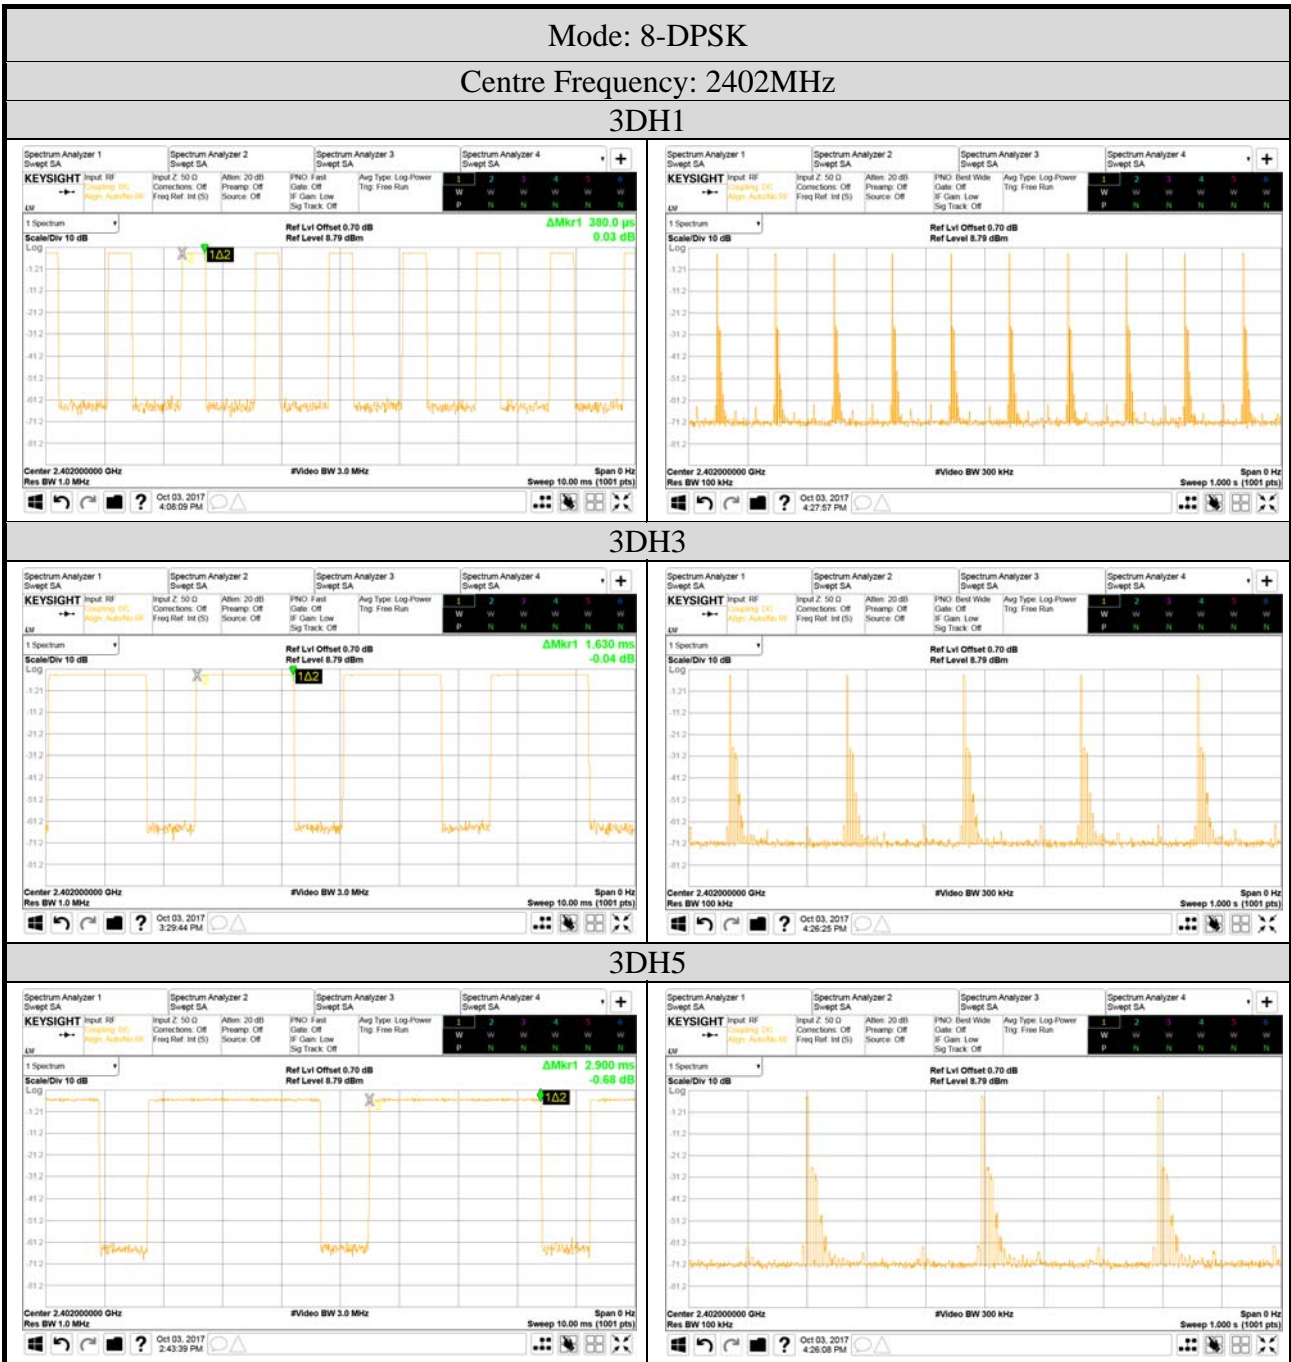

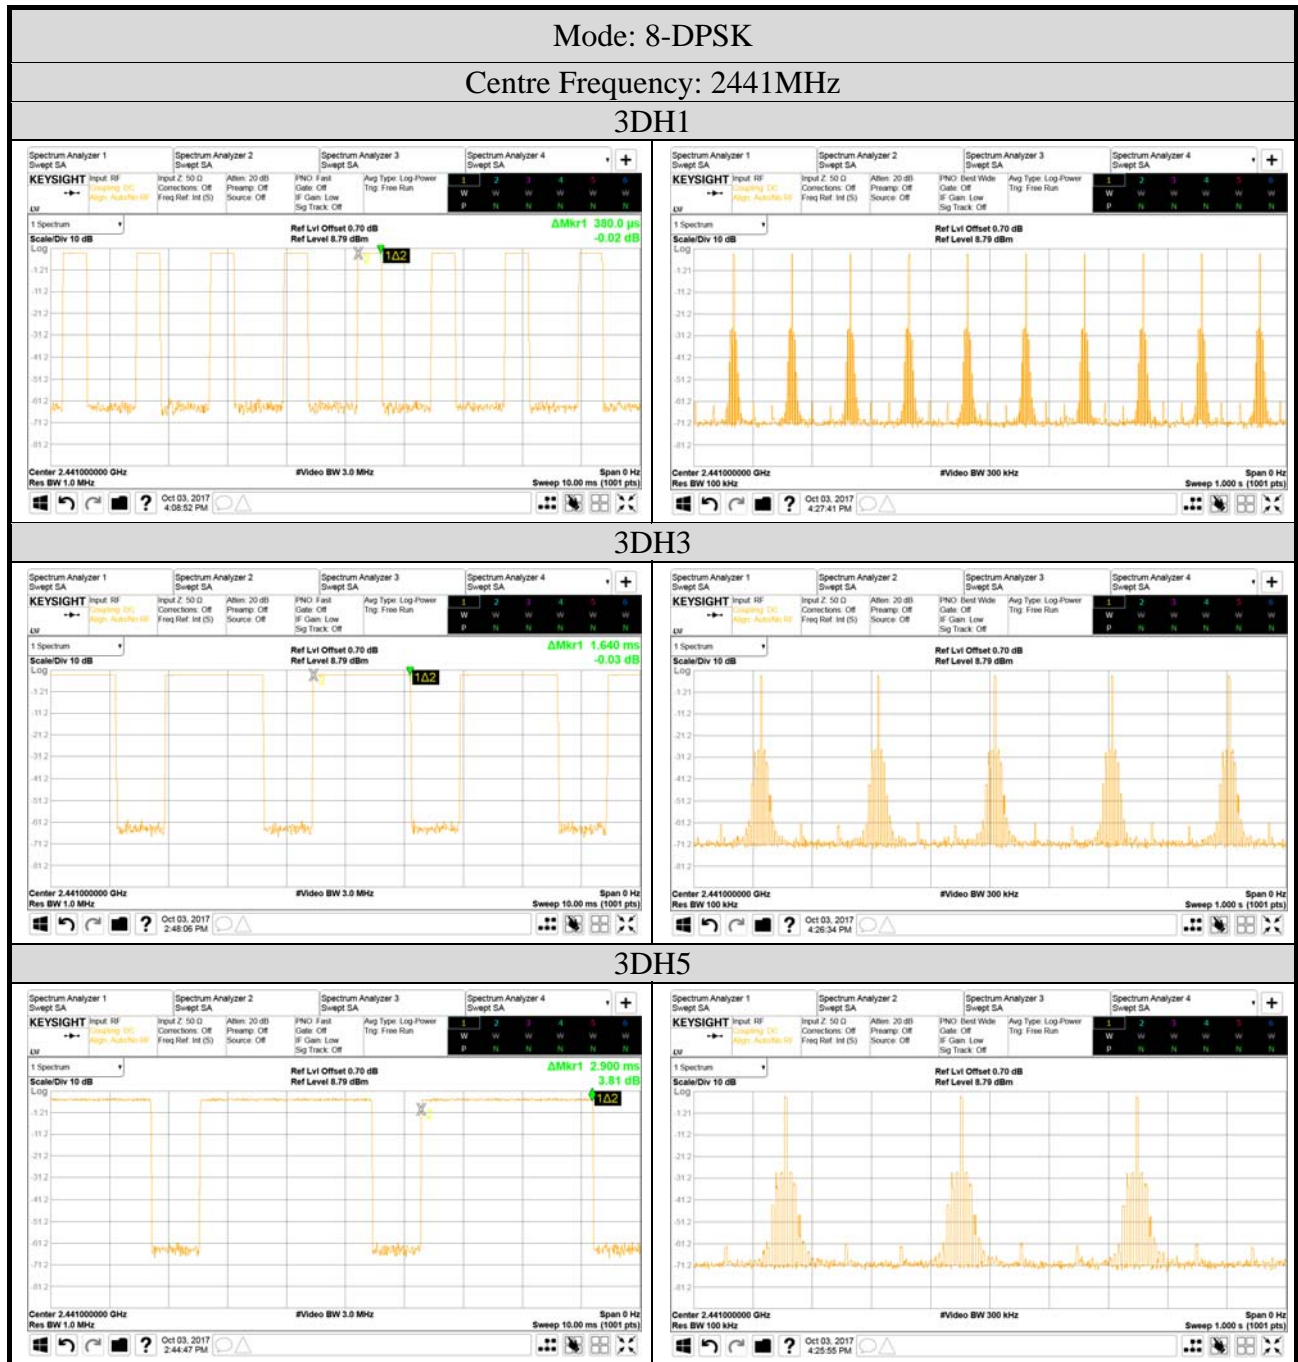

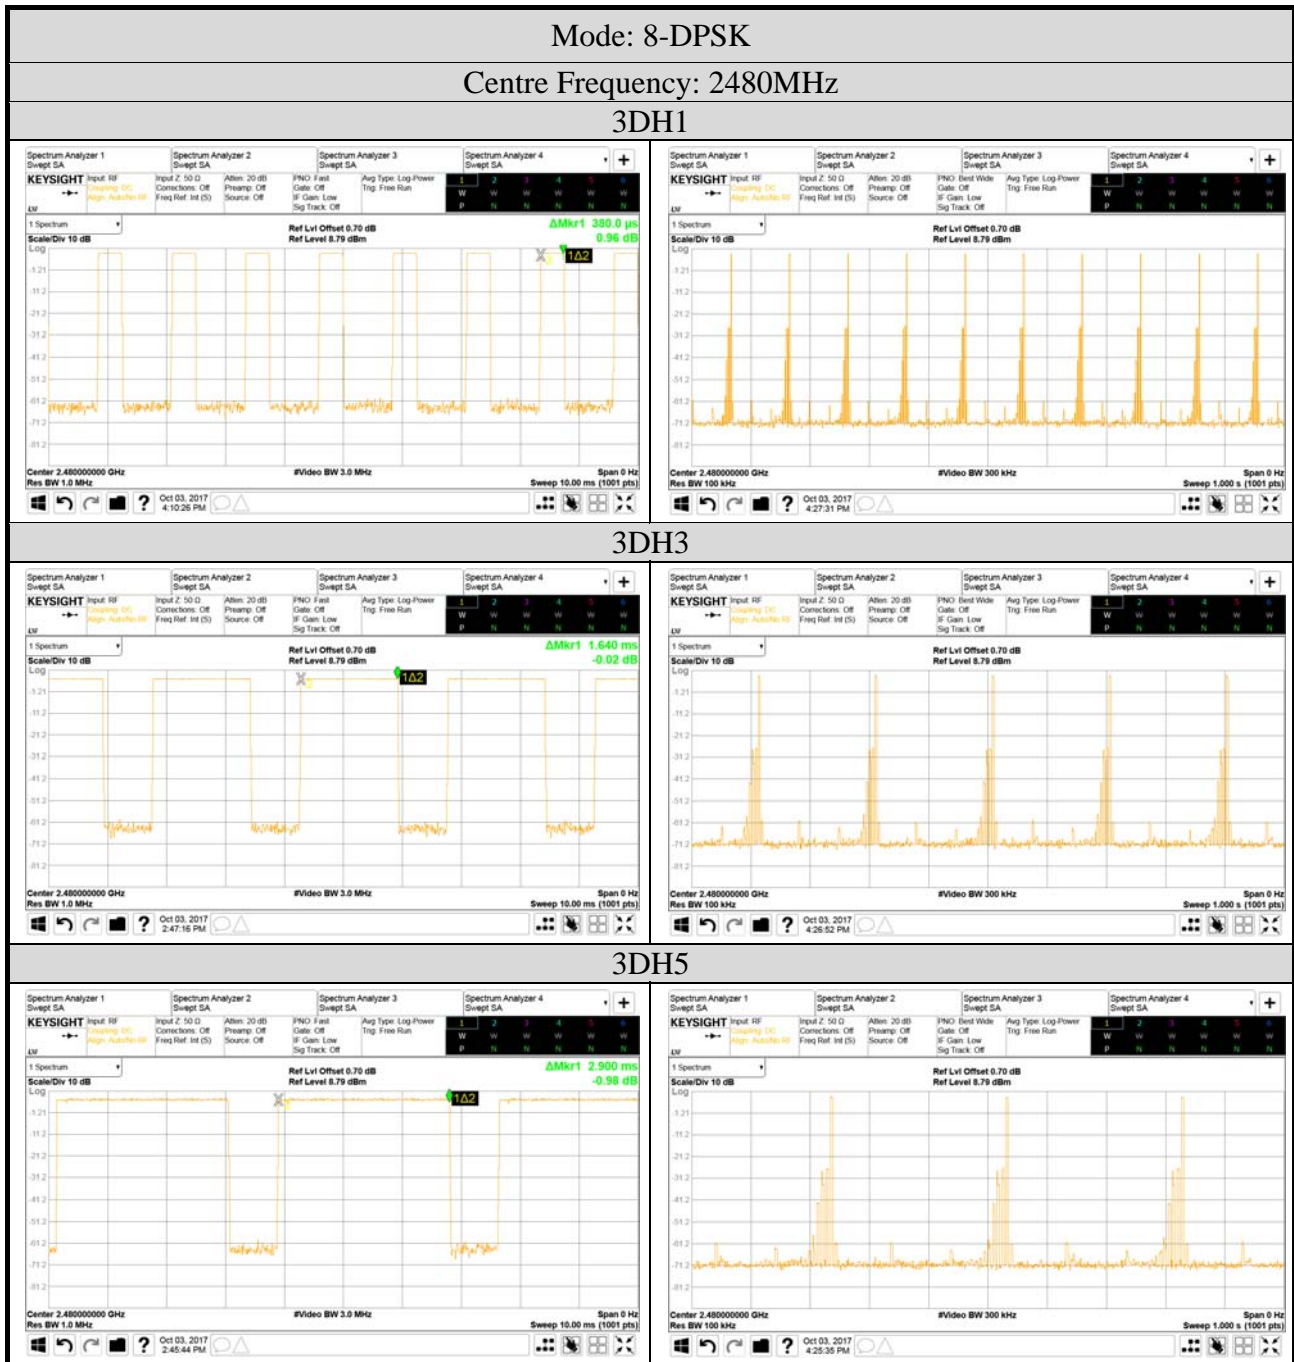

A.6 NUMBER OF HOPPING CHANNELS

Test Date	2017/10/03	Temp./Hum.	24°C/55%
Cable Loss	0.7dB	Test Voltage	DC 3.3V (though Jig via Notebook PC)

Mode: GFSK	Mode: 8-DPSK
The number hopping channel is 79.	The number hopping channel is 79.


A.7 MAXIMUM PEAK OUTPUT POWER

Test Date	2017/10/03	Temp./Hum.	24°C/55%
Cable Loss	0.7dB	Test Voltage	DC 3.3V (though Jig via Notebook PC)

A.7.1 Maximum Peak Output Power

Modulation	Centre Frequency (MHz)	Maximum Peak Output Power		Limit
		dBm	W	
GFSK	2402	5.34	0.003420	21dBm (0.125W)
	2441	5.90	0.003890	
	2480	5.89	0.003882	
8-DPSK	2402	5.31	0.003396	21dBm (0.125W)
	2441	5.83	0.003828	
	2480	5.78	0.003784	

A.7.2 Measurement Plots

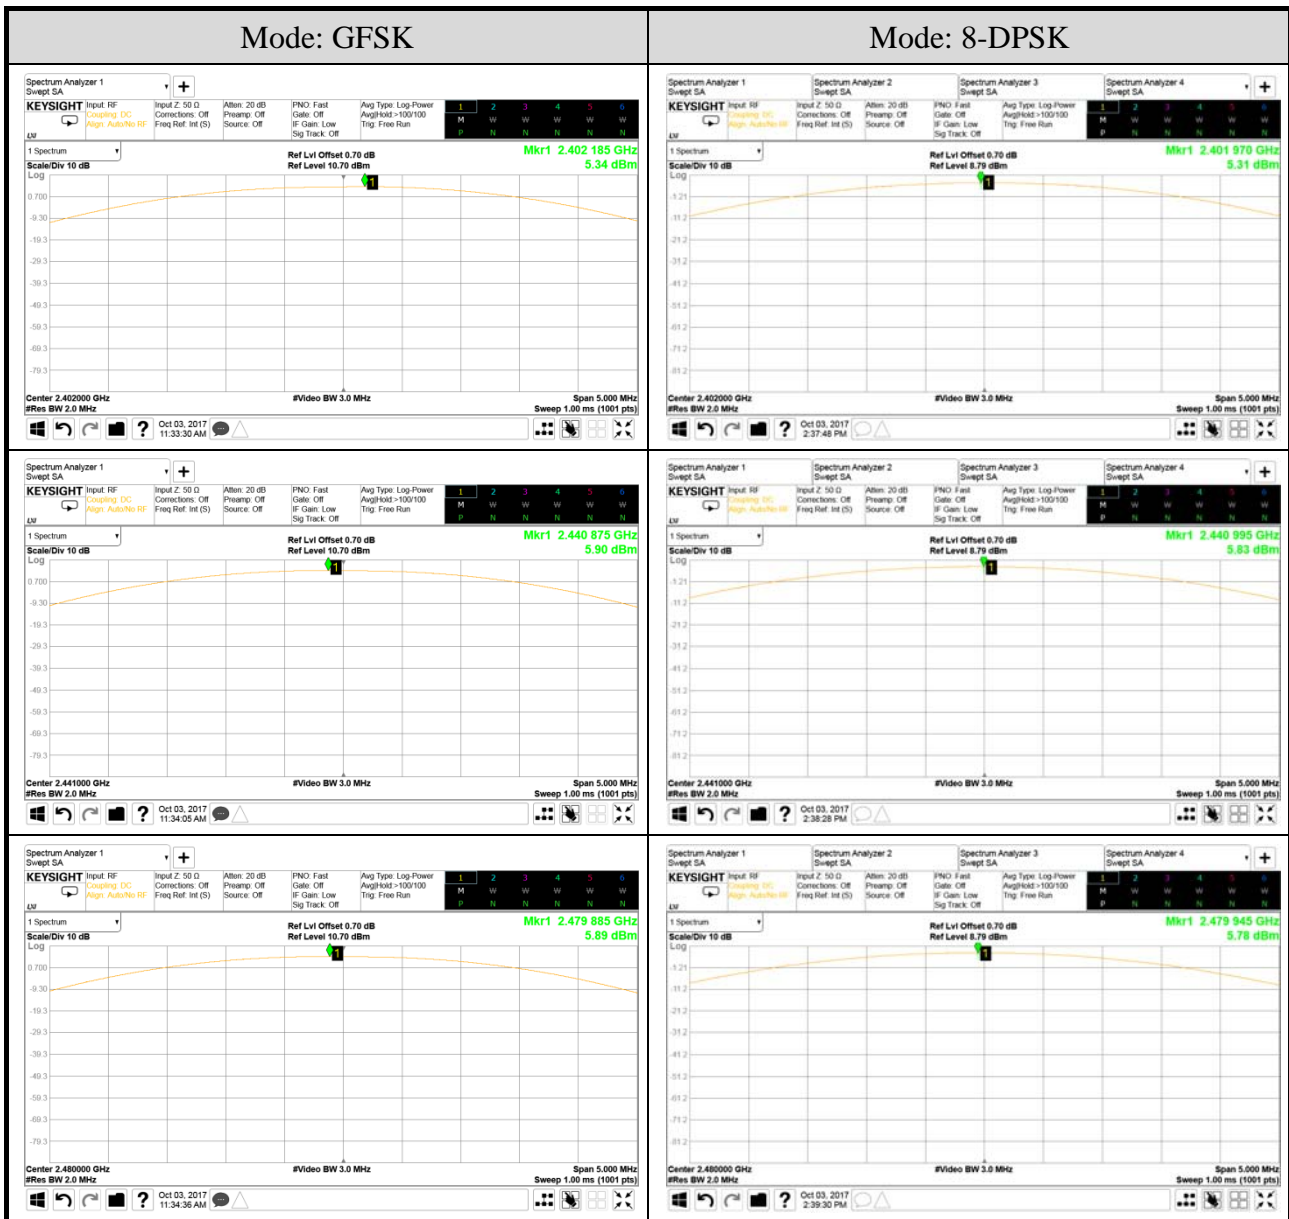

A.8 EMISSION LIMITATIONS MEASUREMENT

Test Date	2017/10/03	Temp./Hum.	24°C/55%
Cable Loss	0.7dB	Test Voltage	DC 3.3V (though Jig via Notebook PC)


A.8.1 Band Edge






A.8.2 Spurious Emission

Test Date	2017/10/03	Temp./Hum.	24°C/55%
Mode	GFSK	Frequency	2402MHz
Cable Loss	0.7dB	Test Voltage	DC 3.3V (though Jig via Notebook PC)

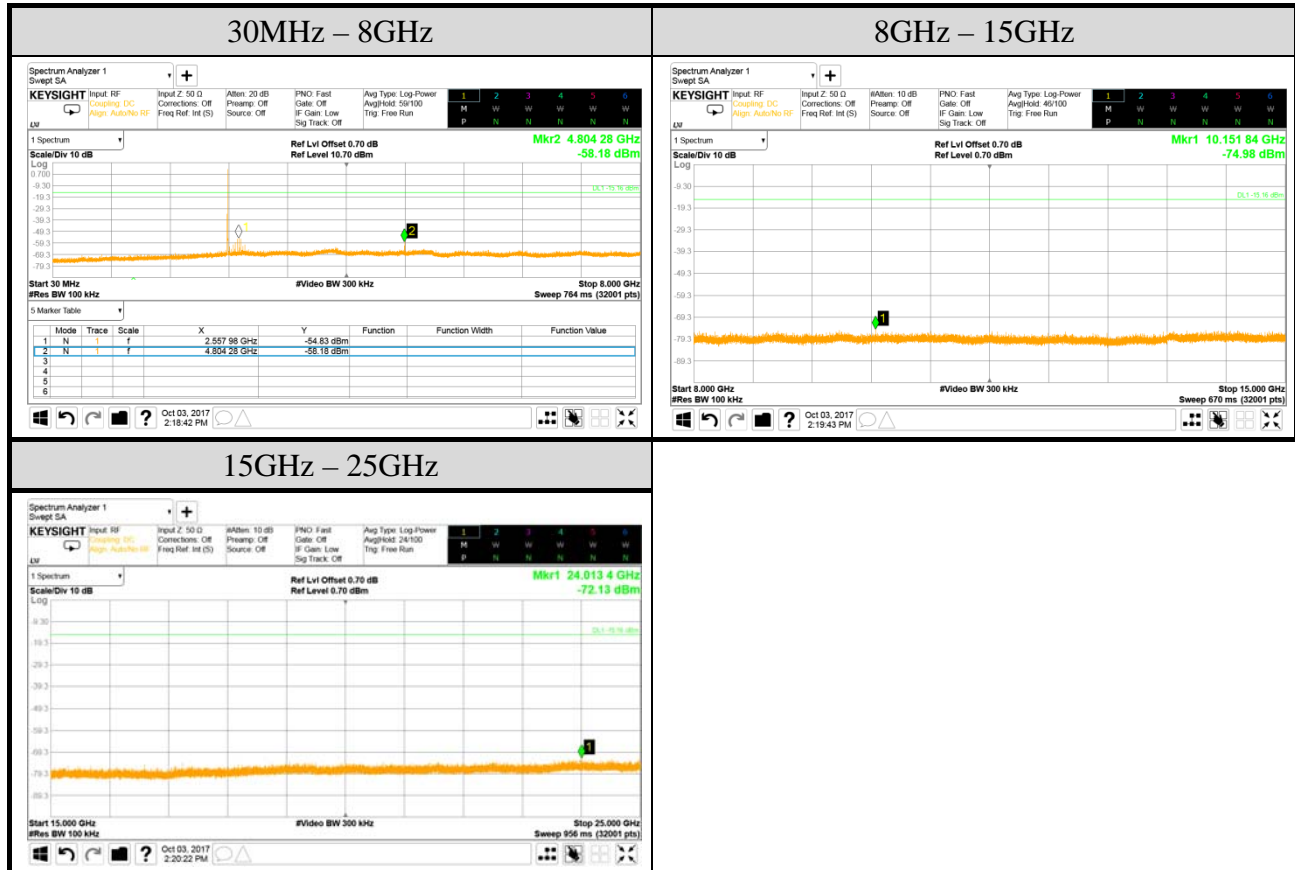


Note: All results have been included cable loss.

Test Date	2017/10/03	Temp./Hum.	24°C/55%
Mode	GFSK	Frequency	2441MHz
Cable Loss	0.7dB	Test Voltage	DC 3.3V (though Jig via Notebook PC)

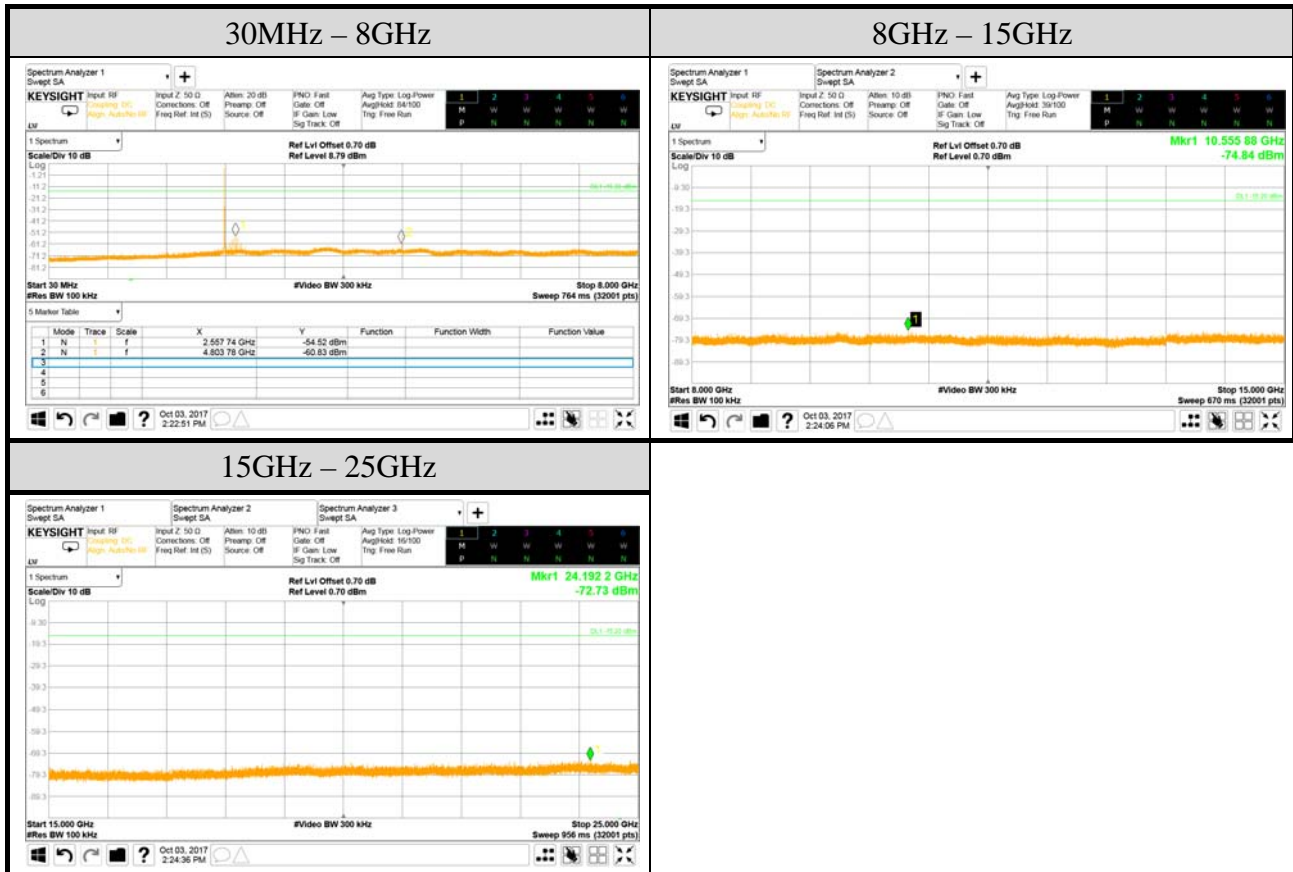

Note: All results have been included cable loss.

Test Date	2017/10/03	Temp./Hum.	24°C/55%
Mode	GFSK	Frequency	2480MHz
Cable Loss	0.7dB	Test Voltage	DC 3.3V (though Jig via Notebook PC)

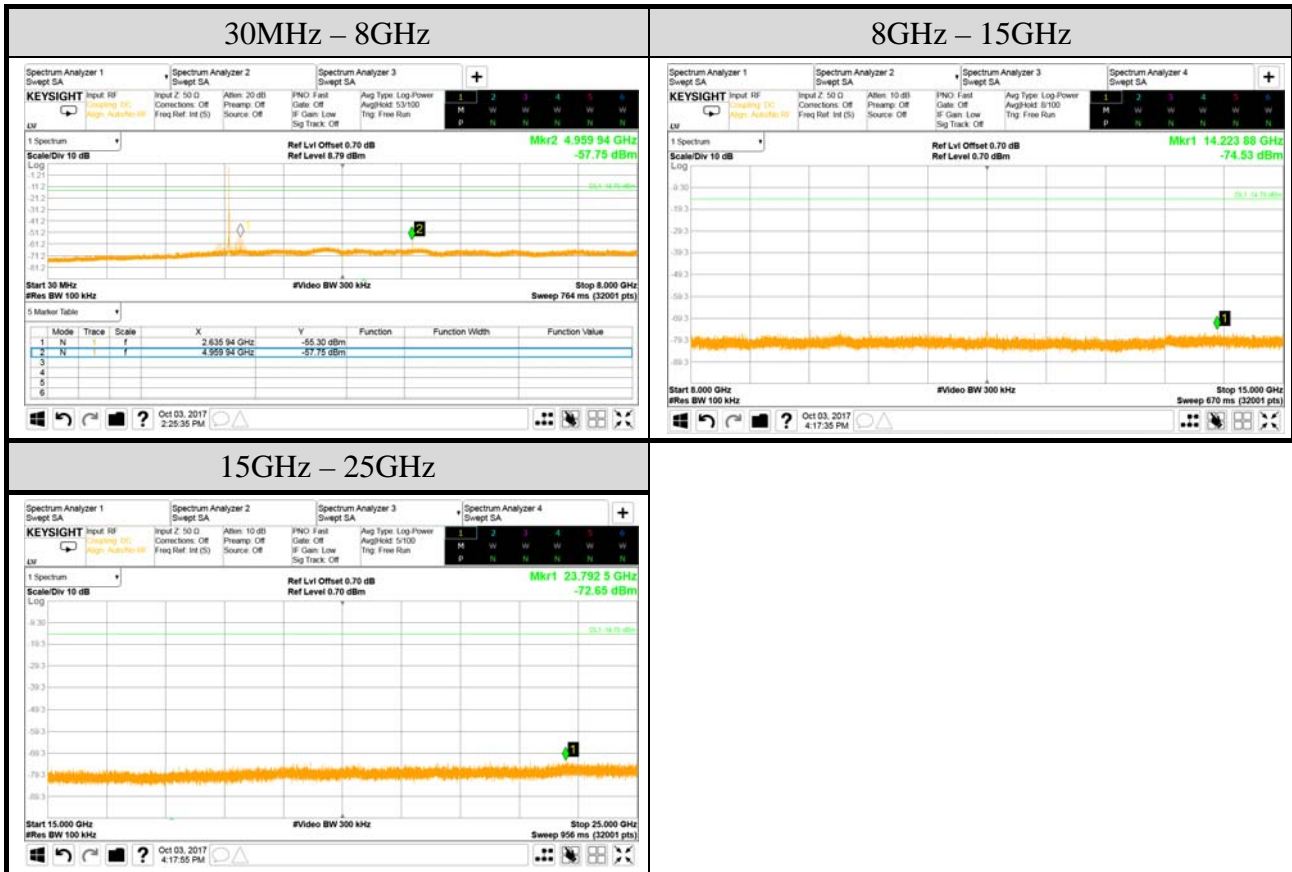

Note: All results have been included cable loss.

Test Date	2017/10/03	Temp./Hum.	24°C/55%
Mode	8-DPSK	Frequency	2402MHz
Cable Loss	0.7dB	Test Voltage	DC 3.3V (though Jig via Notebook PC)



Note: All results have been included cable loss.

Test Date	2017/10/03	Temp./Hum.	24°C/55%
Mode	8-DPSK	Frequency	2441MHz
Cable Loss	0.7dB	Test Voltage	DC 3.3V (though Jig via Notebook PC)



Note: All results have been included cable loss.

Test Date	2017/10/03	Temp./Hum.	24°C/55%
Mode	8-DPSK	Frequency	2480MHz
Cable Loss	0.7dB	Test Voltage	DC 3.3V (though Jig via Notebook PC)



Note: All results have been included cable loss.



Audix Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City 244, Taiwan

APPENDIX B

Tel: +886 2 26099301
Fax: +886 2 26099303

APPDNDIX B

TEST PHOTOGRAPHS

(Model: M2SD50NBT)