



Test report No:
2250163R-RF-US-P20V01

FCC Exposure TEST REPORT

Product Name	Docking Station (Single)
Trademark	DATALOGIC
Model and /or type reference	DL36SSD
FCC ID	U4GDL36SSD
Applicant's name / address	Datalogic S.r.l. Via San Vitalino no.13,Calderara di Reno -40012(BO)-Italy
Test method requested, standard	KDB 680106 D01 RF Exposure Wireless Charging App v03r01
Verdict Summary	IN COMPLIANCE
Documented by (name / position & signature)	Tim Cao/Project Engineer 
Approved by (name / position & signature)	Jack Zhang/ Supervisor 
Date of issue	2022-07-21
Report Version	V1.1
Report template No	Template_FCC MPE-RF-V1.0

INDEX

	page
Competences and Guarantees.....	3
General conditions.....	3
Environmental conditions.....	3
Possible test case verdicts.....	4
Abbreviations.....	4
Document History.....	5
Remarks and Comments.....	5
1. General Information.....	6
1.1. EUT Description.....	6
1.2. Antenna information.....	7
1.3. Mode of Operation.....	8
1.4. Tested System Details.....	9
1.5. Configuration of Tested System.....	10
1.6. EUT Exercise Software.....	11
2. Technical Test.....	12
2.1. Test Environment.....	12
3. Electric Field Strength / Magnetic Field Strength.....	13
3.1. Test Equipment.....	13
3.2. Test Setup.....	14
3.3. Limit.....	15
3.4. Test Procedure.....	15
3.5. Uncertainty.....	15
3.6. Test Result.....	16
4. RF Exposure Evaluation.....	17

COMPETENCES AND GUARANTEES

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

GENERAL CONDITIONS

Test Location	No. 99, Hongye Road, Suzhou Industrial Park Suzhou, 215006, P.R. China
Date(receive sample)	May. 09, 2022
Date (start test)	May 10, 2022
Date (finish test)	May. 23, 2022

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or Competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA.

ENVIRONMENTAL CONDITIONS

The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. The climatic conditions during the tests were within the following limits:

Ambient temperature	15 °C - 35 °C
Relative Humidity air	30% - 60%

If explicitly required in the basic standard or applied product / product family standard the climatic values are recorded and documented separately in this test report.

POSSIBLE TEST CASE VERDICTS

Test case does not apply to test object	N/A
Test object does meet requirement	P (Pass) / PASS
Test object does not meet requirement	F (Fail) / FAIL
Not measured	N/M

ABBREVIATIONS

For the purposes of the present document, the following abbreviations apply:

EUT	: Equipment Under Test
QP	: Quasi-Peak
CAV	: CISPR Average
AV	: Average
CDN	: Coupling Decoupling Network
SAC	: Semi-Anechoic Chamber
OATS	: Open Area Test Site
BW	: Bandwidth
AM	: Amplitude Modulation
PM	: Pulse Modulation
HCP	: Horizontal Coupling Plane
VCP	: Vertical Coupling Plane
U_N	: Nominal voltage
Tx	: Transmitter
Rx	: Receiver
N/A	: Not Applicable
N/M	: Not Measured

DOCUMENT HISTORY

Report No.	Version	Description	Issued Date
2250163R-RF-US-P20V01	V1.0	Initial issue of report.	2022-07-06
2250163R-RF-US-P20V01	V1.1	P6 Add client device and power adaptor information. P11 Add note. P13 Add E and H field probe information. P14 Add test distance description. P16 Modify limit.	2022-07-21

REMARKS AND COMMENTS

1. The equipment under test (EUT) does meet the essential requirements of the stated standard(s)/test(s).
2. These test results on a sample of the device are for the purpose of demonstrating Compliance with KDB 680106.
3. The measurement result is considered in conformance with the requirement if it is within the prescribed limit, It is not necessary to account the uncertainty associated with the measurement result.
4. The test results presented in this report relate only to the object tested.
5. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification (Suzhou) Co., Ltd.
6. This report will not be used for social proof function in China market.

1. General Information

1.1. EUT Description

Product Name..... :	Docking Station (Single)
Model No. :	DL36SSD
Trademark..... :	Datalogic
FCC ID	U4GDL36SSD
Manufacturer	Datalogic S.r.l.
Manufacturer address	Via San Vitalino no.13,Calderara di Reno -40012(BO)-Italy

Operating Frequency Range	119-140KHz
Type of Modulation	ASK
Number of Channel..... :	1
Operating Temperature Range..... :	-30°C ~ 70 °C

Rated power supply	Voltage and Frequency	
	<input type="checkbox"/>	AC: 220 – 240 V, 50/60 Hz
	<input type="checkbox"/>	AC: 110 – 130 V, 50/60 Hz
	<input checked="" type="checkbox"/>	DC: 12 V
	<input type="checkbox"/>	Battery: 12 Vdc
Mounting position..... :	<input checked="" type="checkbox"/>	Table top equipment
	<input type="checkbox"/>	Wall/Ceiling mounted equipment
	<input type="checkbox"/>	Floor standing equipment
	<input type="checkbox"/>	Hand-held equipment
	<input type="checkbox"/>	Other: vehicle-mounted equipment
Test perimeter	Product Name: MOBILE COMPITER Model: MEMOR 10 FCC ID: U4GDL35US IC:3862E-DL35US	
Adapter..... :	Model: EA10681N-120 AC INPUT:100-240V,2.0A,50-60Hz DC OUTPUT:12.0V,5.0A 60.0W	

1.2. Antenna information

Antenna model / type number	N/A		
Antenna serial number	N/A		
Antenna Delivery	<input checked="" type="checkbox"/>	1TX + 1RX	
	<input type="checkbox"/>	2TX + 2RX	
	<input type="checkbox"/>	Others:.....	
Antenna technology	<input checked="" type="checkbox"/>	SISO	
	<input type="checkbox"/>	MIMO	<input type="checkbox"/> CDD
			<input type="checkbox"/> Beam-forming
Antenna Type	<input type="checkbox"/>	External	<input type="checkbox"/> Dipole
			<input type="checkbox"/> Sectorized
			<input type="checkbox"/> Ceramic Chip
	<input checked="" type="checkbox"/>	Internal	<input type="checkbox"/> PIFA
			<input type="checkbox"/> PCB
			<input checked="" type="checkbox"/> Others: Coil antenna
Antenna Gain.....	N/A		

1.3. Mode of Operation

DEKRA has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Transmit

Note:


1. Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.
2. For portable device, radiated spurious emission was verified over X, Y, Z Axis, and shown the worst case on this report.

1.4. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1 N/A	N/A	N/A	N/A	N/A

1.5. Configuration of Tested System

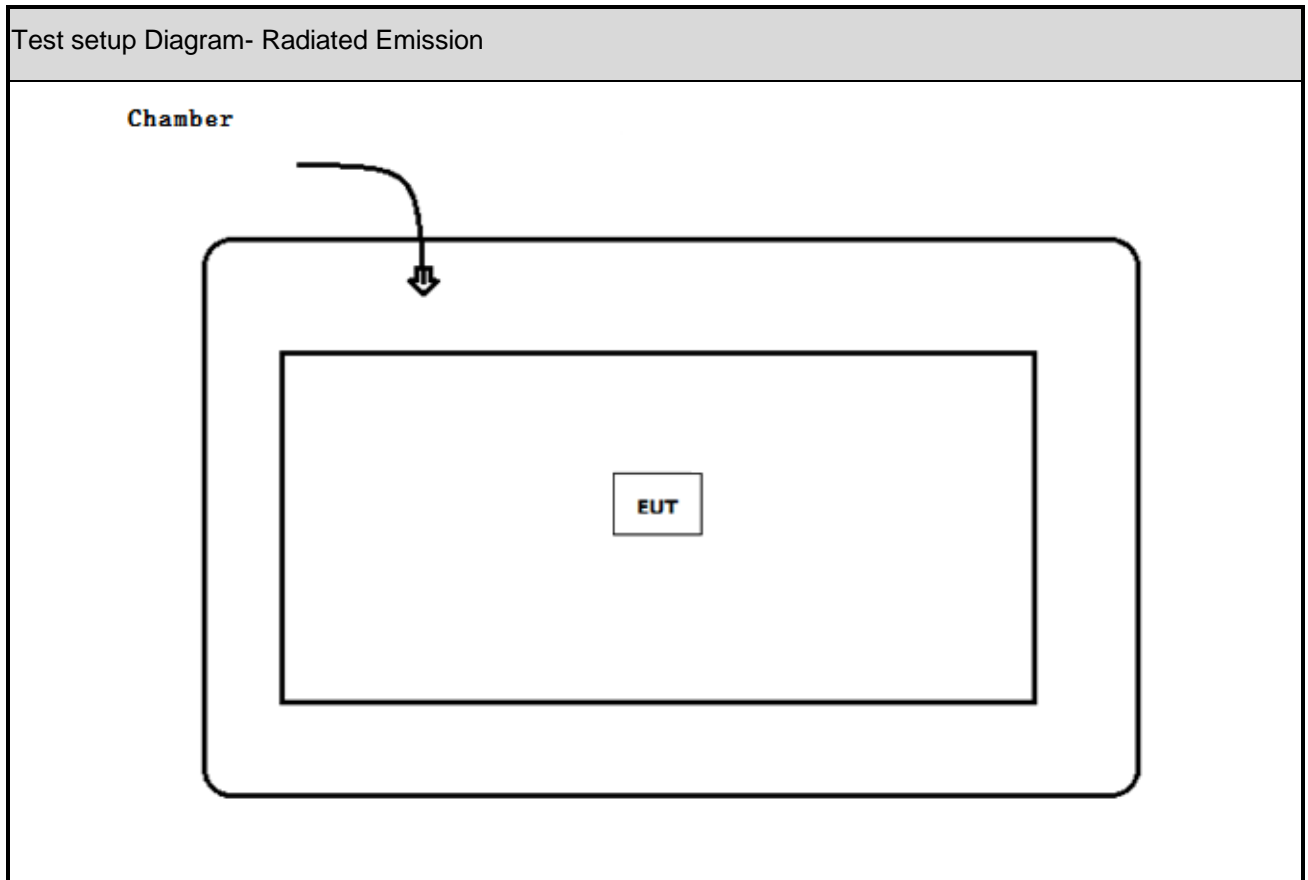

1.6. EUT Exercise Software

1	Setup the EUT and simulators as shown on above.
2	Turn on the power of equipment.
3	Start to continue transmit.

Note: We use the mobile phone provided by the customer as the load, we have verified the charging test under each power, and the worst state is placed in the report.

2. Technical Test

2.1. Test Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	21
Humidity (%RH)	25-75	50
Barometric pressure (mbar)	860-1060	950-1000

3. Electric Field Strength / Magnetic Field Strength


3.1. Test Equipment

Electric Field Strength / Magnetic Field Strength / AC-6					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Field Meter	WAVECONTROL	SMP2	20SN1286	2021.07.22	2022.07.21
E&H Field Probe	WAVECONTROL	WP400	20WP100630	2021.07.22	2022.07.21
E Field Probe	WAVECONTROL	WPF3	20WP030374	2021.07.22	2022.07.21
Temperature/Humidity Meter	RTS	RTS-8S	RF06	2021.07.09	2022.07.08

Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

3.2. Test Setup

3kHz~10MHz Test Setup:

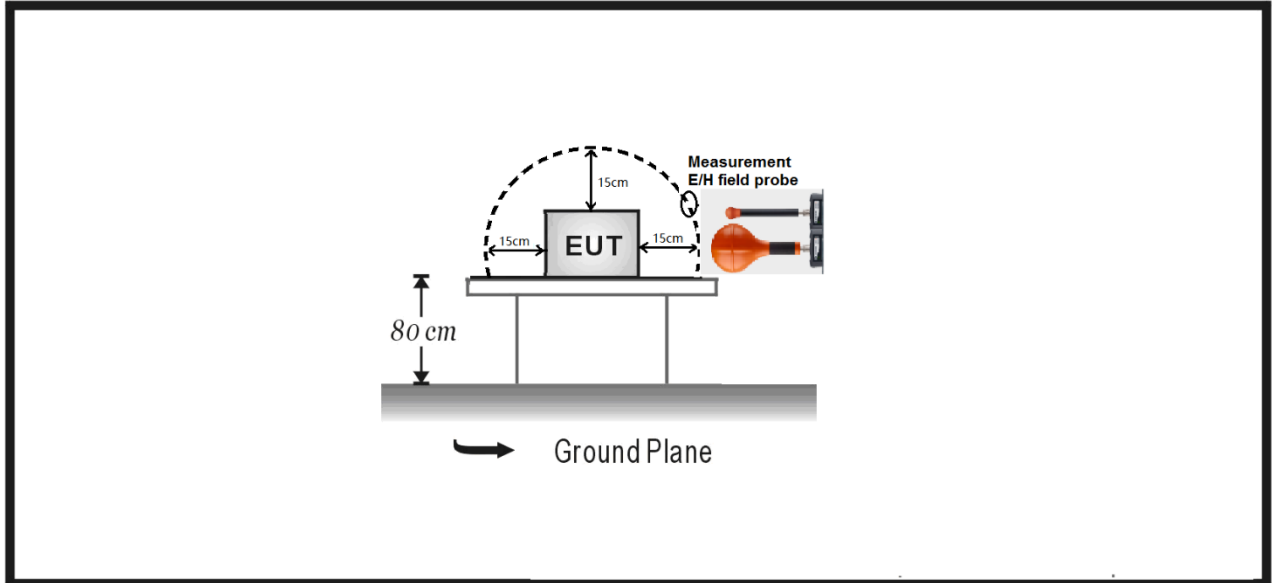

Note: The measured distance is the distance from the edge of the device to the center of the probe.

3.3. Limit

According to KDB 680106 D01v03r01 Clause 3.c: For devices designed for typical desktop applications, such a wireless charging pads, RF exposure evaluation should be conducted assuming a user separation distance of 15 cm. E and H field strength measurements or numerical modeling may be used to demonstrate compliance. Measurements should be made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device. Emissions between 100 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 614 V/m and 1.63 A/m.

3.4. Test Procedure

- a. Set the measurement frequency of the measurement probe to the fundamental frequency of the device under test.
- b. Set the span to encompass the entire emission bandwidth.
- c. Set the RBW greater than the 99% OBW of the fundamental emission.

Note: This step is not required for a broadband measurement probe that integrates the entire frequency range.

- d. Set the detector to Peak and trace display to Max-Hold.
- e. Allow the spectrum to fill; for pulsing devices this may require an increased monitoring period.
- f. Using a marker, set it to the maximum level of the spectral envelope.
- g. Repeat steps (b) to (f) while scanning a parallel plane at the measurement distance of 10cm on each side of the device to find the peak level.
- h. Repeat steps (b) to (g) for any frequencies where the field value is greater than -20 dBc below the maximum level identified.
- i. If there are multiple frequencies transmitted by the device under test, use equations (2) and (3) to determine compliance.

Note: When scanning around the entire device, the location found to be the maximum for the E- or H-field may not be the same location as the opposite field.

3.5. Uncertainty

The measurement uncertainty is defined as ± 3.10 dB

3.6. Test Result

Test Location	Test Separation Distance (cm)	Maximum Electric Field Level (V/m)	Maximum Magnetic Field Level (A/m)	Electric Field Limit (V/m)	Magnetic Field Limit (A/m)	Result
Top	15	4.688	0.494	614	1.63	Pass
Front	15	1.605	0.337	614	1.63	Pass
Back	15	0.995	0.264	614	1.63	Pass
Left	15	0.711	0.226	614	1.63	Pass
Right	15	0.656	0.223	614	1.63	Pass

4. RF Exposure Evaluation

WPT Device requirement	
<input checked="" type="checkbox"/>	Wireless power transfer frequency is below 1 MHz.
<input checked="" type="checkbox"/>	Output power from each primary coil is less than or equal to 15 watts.
<input checked="" type="checkbox"/>	The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.
<input checked="" type="checkbox"/>	Client device is placed directly in contact with the transmitter.
<input checked="" type="checkbox"/>	Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).
<input checked="" type="checkbox"/>	The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

Note: The WPT device can meet all the six requirements above.

_____ The End _____