

TEST REPORT  
No.: 2-20842790-15-11a

According to:  
**FCC Regulations**

Part 15.225  
Part 15.207  
Part 15.209







**IC Regulations**

RSS-210, Issue 9  
RSS-Gen Issue 4

for

Datalogic ADC S.r.l.  
JOYA TOUCH 3-SLOT CRADLE

FCC-ID: U4GJNG3SD  
IC: 3862E-JNG3SD  
PMN: JOYA TOUCH 3-SLOT CRADLE  
HVIN: 3SD WPT

| Laboratory Accreditation and Listings  |  |   |  |
|--|--|---|--|
|  <p><b>DAkks</b><br/>Deutsche<br/>Akkreditierungsstelle<br/>D-PL-12047-01-01</p>  |  <p>FEDERAL COMMUNICATIONS COMMISSION<br/><b>FCC</b><br/>USA<br/>MRA US-EU 0003</p> |  <p>Industry Canada<br/>Reg. No.: 3462D-2<br/>Reg. No.: 3462D-3</p> |  <p>Voluntary Controls for<br/>Electromagnetic Emissions<br/>Reg. No.:<br/>R-2666 C-2914,<br/>T-1967, G-301</p> |
|  <p><b>WiFi</b><br/>ALLIANCE<br/>AUTHORIZED<br/>RF LABORATORY</p>   |  <p><b>ctia</b> Authorized<sup>TM</sup><br/>Test Lab<br/>Lab Code: 20011130-00</p> |   |  |
| accredited according to DIN EN ISO/IEC 17025   |  |   |  |
| <p><b>CETECOM GmbH</b><br/>Laboratory Radio Communications &amp; Electromagnetic Compatibility<br/>Im Teelbruch 116 • 45219 Essen • Germany<br/>Registered in Essen, Germany, Reg. No.: HRB Essen 8984<br/>Tel.: + 49 (0) 20 54 / 95 19-954 • Fax: + 49 (0) 20 54 / 95 19-964<br/>E-mail: info@cetecom.com • Internet: www.cetecom.com</p> |  |   |  |

## TABLE OF CONTENTS

|   |           |
|---|-----------|
| <b>1. SUMMARY OF TEST RESULTS</b> .....   | <b>3</b>  |
| 1.1. Tests overview according CFR47, Part 15, Subpart C .....                         | 3         |
| <b>2. ADMINISTRATIVE DATA</b> .....   | <b>4</b>  |
| 2.1. Identification of the testing laboratory .....                                   | 4         |
| 2.2. Test location .....  | 4         |
| 2.3. Organizational items .....   | 4         |
| 2.4. Applicant’s details .....  | 4         |
| 2.5. Manufacturer’s details .....   | 4         |
| <b>3. EQUIPMENT UNDER TEST (EUT)</b> .....  | <b>5</b>  |
| 3.1. Technical data of main EUT declared by applicant .....                           | 5         |
| 3.2. EUT: Type, S/N etc. and short descriptions used in this test report .....        | 5         |
| 3.3. Auxiliary Equipment (AE): Type, S/N etc. and short descriptions .....            | 6         |
| 3.4. EUT set-ups .....  | 6         |
| 3.5. EUT operating modes .....  | 6         |
| <b>4. DESCRIPTION OF TEST SYSTEM SET-UP’S</b> .....                                   | <b>7</b>  |
| 4.1. Test system set-up for AC power-line conducted emission measurements .....       | 7         |
| 4.2. Test system set-up for conducted measurements on antenna port .....              | 8         |
| 4.3. Test system set-up for radiated magnetic field measurements below 30 MHz .....   | 9         |
| 4.4. Test system set-up for radiated electric field measurement 30 MHz to 1 GHz ..... | 10        |
| <b>5. MEASUREMENTS</b> .....  | <b>11</b> |
| 5.1. General Limit - Conducted emissions on AC-Power lines .....                      | 11        |
| 5.2. Radiated field strength emission mask at 13.110-14.010MHz .....                  | 12        |
| 5.3. General Limit - Radiated field strength emissions below 30 MHz .....             | 13        |
| 5.4. General Limit - Radiated field strength emissions, 30 MHz - 1 GHz .....          | 15        |
| 5.5. Frequency error (tolerance) .....  | 17        |
| 5.6. Measurement uncertainties .....  | 20        |
| <b>6. ACCREDITATION DETAILS OF CETECOM’S LABORATORIES AND TEST SITES</b> .....        | <b>21</b> |
| <b>7. INSTRUMENTS AND ANCILLARY</b> .....   | <b>22</b> |
| 7.1. Used equipment “CTC” .....   | 22        |
| <b>8. VERSIONS OF TEST REPORTS (CHANGE HISTORY)</b> .....                             | <b>25</b> |

| <b>Table of annex</b>   | The listed attachments are an integral part of this report | <b>Total pages</b> |
|---|--|--------------------|
| <b>Annex 1: Test result diagrams</b> (separate document) <b>TR2-20842790-15-11a-A1</b>        |  | 32                 |
| <b>Annex 2: External photographs of EUT</b> (separate document) <b>TR2-20842790-15-11a-A2</b> |  | 5                  |
| <b>Annex 3: Internal photographs of EUT</b> (separate document) <b>TR2-20842790-15-11a-A3</b> |  | 12                 |
| <b>Annex 4: Test set-up photographs</b> (separate document) <b>TR2-20842790-15-11a-A4</b>     |  | 9                  |
| Operational Description_JOYA TOUCH 3-SLOT CRADLE_20160530_rev03 (supplied by applicant)       |  | 7                  |
| JOYANG_TEST-TOOLS_QUICK_START_INSTRUCTIONS_REV20160530 (supplied by applicant)                |  | 41                 |
| Operational Description_JOYA TOUCH_20160530_rev05 (supplied by applicant)                     |  | 10                 |

## 1. Summary of test results

The test results apply exclusively to the test samples as presented in this Report. The CETECOM GmbH does not assume responsibility for any conclusions and generalizations taken in conjunction with other specimens or samples of the type of the item presented to tests.

The Equipment Under Test (in this report, hereinafter referred as EUT) is a radio transmitting device with a integrated RFID Transmitter at nominal 13.56MHz.

### 1.1. Tests overview according CFR47, Part 15, Subpart C

| TEST CASES  | PORT  | REFERENCES & LIMITS  |  | EUT set-up | EUT operating mode | Result               |
|---|---|--|--|------------|--------------------|----------------------|
|   |   | FCC Standard<br>RSS Standard                                   | TEST LIMIT   |            |                    |                      |
| FIELD STRENGTH (radiated in 30m measurement distance) & EMISSION MASK | Cabinet                                     | §2.1046<br>§15.225<br>(a)(b)<br>(c)(d)<br><br>RSS-210 , Issue9 | FCC Part 15.225 limits<br><br>IC: Annex B.6  | 1          | 1                  | Pass                 |
| 99% OCCUPIED BANDWIDTH  | Antenna coupling (radiated)                 | §2.202<br>§2.1049<br><br>RSS-Gen Issue 4                       | 99% Power<br><br>IC: Chapter 6.6   | 2          | 1                  | For information only |
| SPURIOUS EMISSIONS (radiated)   | Cabinet + Interconnecting cables (radiated) | § 15.209(a)<br><br>RSS-Gen Issue 4                             | FCC:2400/F(kHz) $\mu$ V/m<br>24000/F(kHz) $\mu$ V/m<br>30 $\mu$ V/m<br><br>IC: Chapter 8.9 | 1          | 1                  | Pass                 |
| FREQUENCY STABILITY   | Antenna coupling (radiated)                 | §2.1055<br>§15.225(e)<br><br>RSS-210 , Issue 9                 | FCC: $\pm$ 100ppm<br><br>IC: $\pm$ 0.01% ( $\pm$ 100 ppm).                                 | 2          | 2                  | Pass                 |
| AC-Power Lines Conducted Emissions                                    | AC-Power lines                              | §15.207<br><br>RSS-Gen Issue 4                                 | FCC §15.207 limits<br><br>IC: Table 4, Chapter 7.2.4                                       | 3          | 1                  | Pass                 |

.....  
Dipl.-Ing. Ch. Lorenz  
Responsible for test section

.....  
MSc. Ajit Phadtare  
Responsible for test report

## 2. Administrative Data

### 2.1. Identification of the testing laboratory

|                                     |  |
|-------------------------------------|--|
| Company name:                       | CETECOM GmbH   |
| Address:                            | Im Teelbruch 116<br>45219 Essen - Kettwig<br>Germany |
| Responsible for testing laboratory: | Dipl.-Ing. Rachid Acharkaoui                         |
| Deputy:                             | Dipl.-Ing. Niels Jeß                                 |

### 2.2. Test location

#### 2.2.1. Test laboratory "CTC"

|               |   |
|---------------|---|
| Company name: | see chapter 2.1. Identification of the testing laboratory |
|---------------|---|

### 2.3. Organizational items

|                               |                          |
|-------------------------------|--------------------------|
| Responsible for test report : | MSc. Ajit Phadtare       |
| Project leader:               | Dipl.-Ing. V. Krueger    |
| Receipt of EUT:               | 2016-02-29               |
| Date(s) of test:              | 2016-04-21 to 2016-06-28 |
| Date of report:               | 2016-12-05               |
| -----                         |                          |
| Version of template:          | 13.02                    |

### 2.4. Applicant's details

|                   |  |
|-------------------|--|
| Applicant's name: | Datalogic ADC S.r.l.   |
| Address:          | Via S. Vitalino, 13<br>40012, Lippo di Calderara di Reno (BO)<br><br>ITALY |
| Contact person:   | Mr.Eucarpio Guarisco   |

### 2.5. Manufacturer's details

|                      |                                |
|----------------------|--------------------------------|
| Manufacturer's name: | please see Applicant's details |
| Address:             | please see Applicant's details |

### 3. Equipment under test (EUT)

#### 3.1. Technical data of main EUT declared by applicant

|   |   |  |  |
|---|---|--|--|
| Main function                                   | Wireless charger for JOYA TOCUH Terminals   |  |  |
| Type  | JOYA TOUCH 3-SLOT CRADLE  |  |  |
| Frequency range and channels (US/Canada -bands) | 13.553 -13.567 MHz  |  |  |
| Type of modulation (packet types)               | ASK (Amplitude Shift Keying)  |  |  |
| Occupied bandwidth                              | 38.94 kHz   |  |  |
| Number of channels (USA/Canada -bands)          | 1 nominal channel at 13.56MHz   |  |  |
| Antenna Type                                    | <input checked="" type="checkbox"/> Integrated<br><input type="checkbox"/> External, no RF- connector<br><input type="checkbox"/> External, separate RF-connector |  |  |
| Antenna Gain                                    | No information from applicant   |  |  |
| MAX Field strength (radiated):                  | 26.73 dBµV/m Peak@30m distance  |  |  |
| Installed options                               | <input checked="" type="checkbox"/> battery charging option (WPC) (not tested within this test report)  |  |  |
| Power supply                                    | <input checked="" type="checkbox"/> 12 V DC using AC/DC adapter: 120V/60 Hz   |  |  |
| Special EMI components                          | --  |  |  |
| EUT sample type                                 | <input type="checkbox"/> Production   | <input checked="" type="checkbox"/> Pre-Production | <input type="checkbox"/> Engineering                                   |
| Firmware  |   | <input type="checkbox"/> for normal use            | <input checked="" type="checkbox"/> Special version for test execution |
| FCC label attached                              | <input type="checkbox"/> yes  | <input checked="" type="checkbox"/> no             |  |

#### 3.2. EUT: Type, S/N etc. and short descriptions used in this test report

| Short description*) | EUT                       | Type | S/N serial number | HW hardware status                 | SW software status            |
|---------------------|---------------------------|------|-------------------|------------------------------------|-------------------------------|
| EUT A               | JOYA TOUCH 3- SLOT CRADLE | N/A  | Z15P00993         | Beta 2 HW Version<br>P/N:91ACC0043 | Firmware Version:<br>99.99.99 |

\*) EUT short description is used to simplify the identification of the EUT in this test report.

### 3.3. Auxiliary Equipment (AE): Type, S/N etc. and short descriptions

| AE short description *) | Auxiliary Equipment                | Type                    | S/N serial number | HW hardware status                   | SW software status                              |
|-------------------------|------------------------------------|-------------------------|-------------------|--------------------------------------|---|
| AE 1                    | JOYA TOUCH                         | P00AN04HL0H<br>T0W7-GR0 | Z16P00044         | Beta HW<br>Version<br>P/N:911350015  | SW<br>Version:WEC7<br>Firmware<br>Version: 2.16 |
| AE 2                    | JOYA TOUCH                         | P00AN04HL0G<br>T0W7-GRR | Z16P00014         | Beta HW<br>Version<br>P/N:9113500013 | SW<br>Version:WEC7<br>Firmware<br>Version: 2.16 |
| AE 3                    | AC/DC Adapter<br>EDACPOWER<br>ELEC | EA10681U-120            | 331210680014C3    | 120 V AC 60 Hz<br>to 12VDC 6 A       | --  |

\*) AE short description is used to simplify the identification of the auxiliary equipment in this test report.

### 3.4. EUT set-ups

| EUT set-up no. *) | Combination of EUT and AE | Remarks  |
|-------------------|---------------------------|--|
| set. 1            | EUT A + AE 1+AE 3         | Radiated Measurements table top set up         |
| set. 2            | EUT A + AE 2+AE 3         | Conducted Measurements Antenna coupling set up |
| set. 3            | EUT A + AE 1+AE 3         | AC-Power Lines Conducted Emissions set up      |

\*) EUT set-up no. is used to simplify the identification of the EUT set-up in this test report.

### 3.5. EUT operating modes

| EUT operating mode no. *) | Description of operating modes | Additional information   |
|---------------------------|--------------------------------|--|
| op. 1                     | TX-Mode<br>Modulated           | Continuous NFC (13.56 MHz) Tx mode activated between EUT A & AE 1 using Cradle Test application. <ul style="list-style-type: none"> <li>- modulated signal with maximum output power</li> <li>- Duty-Cycle greater than 98%.</li> <li>- AE1 used for exchanging the RF information.</li> </ul> |
| op. 2                     | TX-Mode<br>Unmodulated         | Continuous NFC (13.56 MHz) Tx mode activated in only EUT A <ul style="list-style-type: none"> <li>- unmodulated signal with maximum output power</li> <li>- Duty-Cycle greater than 98%.</li> <li>- AE1 used only to maintain unmodulated NFC signal</li> </ul>                                |

\*) EUT operating mode no. is used to simplify the test report.

## 4. Description of test system set-up's


### 4.1. Test system set-up for AC power-line conducted emission measurements

**Specification:** ANSI C63.4-2009 chapter 7, ANSI C63.10-2013 chapter 6.2

**General Description:** The radio frequency voltage conducted back into the AC power line in the frequency range 150 kHz to 30 MHz has to be investigated. Compliance should be tested by measuring the radio frequency voltage between each power line and ground at the power terminals in the stated frequency range. A 50 Ohm / 50 μH line impedance stabilization network (LISN) is used coupling the interface to the measurement equipment. The EUT power input leads are connected through the LISN to the AC-power source. The LISN enclosure is electrically connected to the ground plane. The measuring instrument is connected to the coaxial output of the LISN.

Tabletop devices were set-up on a 80 cm height above reference ground plane, floor standing equipment 10 cm raised above ground plane. Measurements have been performed on each phase line and neutral line of the devices AC-power lines. The EUT was power supplied with 110 V/60 Hz. The EUT was tested in the defined operating mode and installed (connected) to accessory equipment according the general description of use given by the applicant.

**Schematic:**

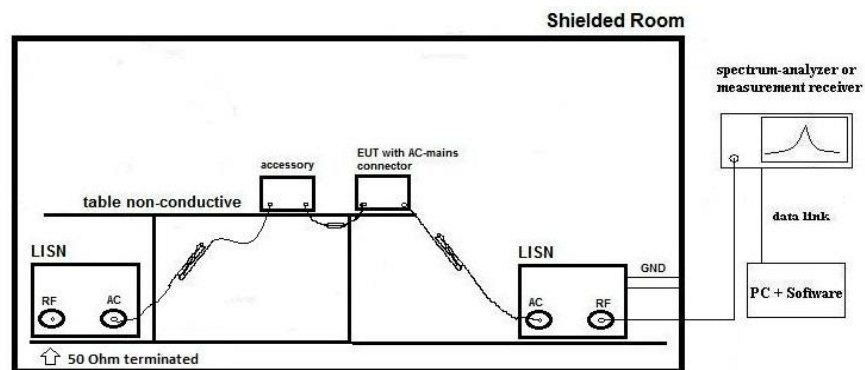

Only schematic view, we refer to figure 6, 7 and 8 of ANSI C63.4-2009 for more details.

**Testing method:**

**Exploratory, preliminary measurements** as a first step, determines the worst-case phase line (neutral or phase) as well as the most critical operating mode of the equipment. A complete frequency-sweep with PK-Detector is performed on each current-carrying conductor.

**Final testing** for power phases and critical frequencies (Margin to AV- or QP limit lower than 3 dB) as a second step includes measurements with receivers detector set to Quasi-Peak and Average.

**Formula:**

$$V_C = V_R + C_L \quad (1)$$

$$M = L_T - V_C \quad (2)$$

$V_C$  = measured Voltage –corrected value

$V_R$  = Receiver reading

$C_L$  = Cable loss

$M$  = Margin


$L_T$  = Limit

Values are in dB, positive margin means value is below limit.

## 4.2. Test system set-up for conducted measurements on antenna port

**Specification:** ANSI 63.10:2013

**Schematic:** In case **an external connector is not available**, the coupling unit consists of a near-field antenna which is directly connected to the spectrum analyzer.

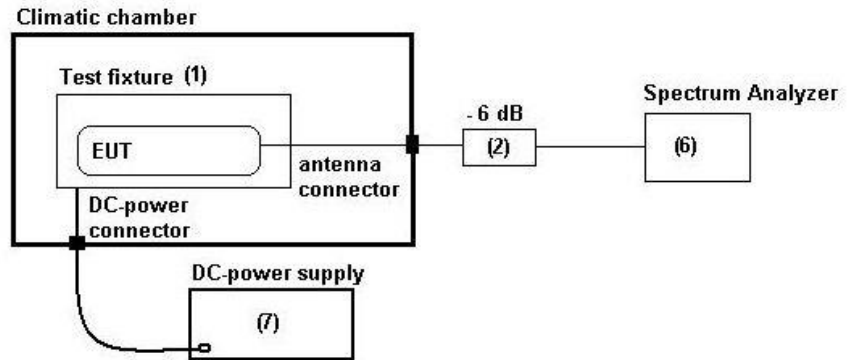

**Testing method:** ANSI 63.10:2013, Chapter 6.7




### 4.3. Test system set-up for radiated magnetic field measurements below 30 MHz

**Specification:** ANSI C63.4-2009 chapter 8.2.1, ANSI C63.10-2013 chapter 6.4

**General Description:** Evaluating the radiated field emissions are done first by an exploratory emission measurement and a final measurement for most critical frequencies determined.

The loop antenna was placed at 1 m height above ground plane and 3 m measurement distance from set-up for investigations. Because of reduced measurement distance, correction data were applied, as stated in chapter “General Limit - Radiated field strength emissions below 30 MHz“. The tests are performed in the semi anechoic room recognized by the regulatory commission.

**Schematic:**

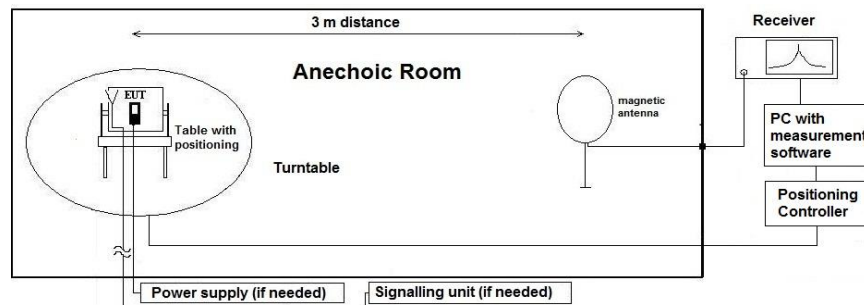

**Testing method:**

**Exploratory, preliminary measurement**

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 0.8 m height which is placed on the turntable. By rotating the turntable (step 90°, range 0° to 360°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT), the emission spectrum was recorded. The loop antenna was moved at least to 2-perpendicular axes (antenna vector in direction of EUT and parallel to EUT) in order to maximize the emissions. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a data reduction table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

**Final measurement on critical frequencies**

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT’s worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself either over 3-orthogonal axis (not defined usage position) or 2-orthogonal axis (defined usage position).

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

**Formula:**

$$E_C = E_R + AF + C_L + D_F - G_A$$

$$M = L_T - E_C$$

- AF = Antenna factor
- C<sub>L</sub> = Cable loss
- D<sub>F</sub> = Distance correction factor
- E<sub>C</sub> = Electrical field – corrected value
- E<sub>R</sub> = Receiver reading
- G<sub>A</sub> = Gain of pre-amplifier (if used)
- L<sub>T</sub> = Limit
- M = Margin

All units are dB-units, positive margin means value is below limit.

**Distance correction:**


Reference for applied correction (extrapolating) factors:  
 IEEC Transaction EMC, Vol. 47, No. 3, Aug. 2005, Journal Paper  
 “Extrapolating Near-field emissions of low frequency loop transmitters”.

#### 4.4. Test system set-up for radiated electric field measurement 30 MHz to 1 GHz

**Specification:** ANSI C63.4-2009 chapter 8, ANSI C63.10-2013 chapter 6.5

**General Description:** Evaluating the field emissions have to be done first by an exploratory emissions measurement and a final measurement for most critical frequencies. The tests are performed in a NSA-compliant semi anechoic room (SAR) recognized by the regulatory commissions.

**Schematic:**

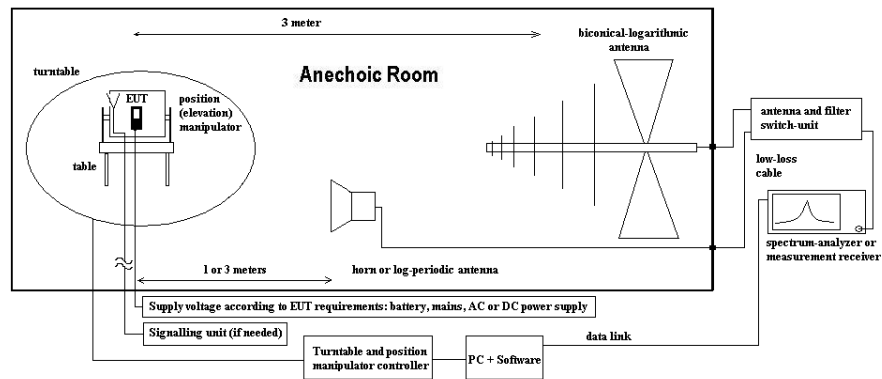

**Testing method:**

**Exploratory, preliminary measurements**

The EUT and its associated accessories are placed on a non-conductive position manipulator (tipping device) of 0.8 m height which is placed on the turntable. By rotating the turntable (range 0° to 360°, step 90°) and the EUT itself either on 3-orthogonal axis (portable equipment) or 2-orthogonal axis (defined operational position of EUT) the emission spectrum and its characteristics was recorded with an EMI-receiver, broadband antenna and software.

Measurement antenna: horizontal and vertical, heights: 1,0 m and 1,82 m as worst-case determined by an exploratory emission measurements. The results are documented in a diagram. Critical frequencies (low margin to limit) are saved within a table for further investigations. If various operating modes are supported, further investigations are made to find the worst-case of them. Also the interconnection cables and equipment position were varied in order to maximize the emissions.

**Final measurement on critical frequencies**

Based on the exploratory measurements, the most critical frequencies are re-measured by maintaining the EUT's worst-case operation mode, cable position, etc.

First a frequency zoom around the critical frequency is done to locate the frequency more precisely. After this step, for all identified critical frequencies, the maximum peak was determined.

Following parameters were varied: the turntable angle continuously in the range 0 to 360 degree, the EUT itself either over 3-orthogonal axis (not defined usage position) or 2-orthogonal axis (defined usage position). The measurement antenna height between 1 m and 4 m.

On the determined worst-case position, a final measurement with necessary bandwidth and detector according standard has been carried out.

**Formula:**

$$E_C = E_R + AF + C_L + D_F - G_A \quad (1)$$

$$M = L_T - E_C \quad (2)$$

- AF = Antenna factor
- C<sub>L</sub> = Cable loss
- D<sub>F</sub> = Distance correction factor (if used)
- E<sub>C</sub> = Electrical field – corrected value
- E<sub>R</sub> = Receiver reading
- G<sub>A</sub> = Gain of pre-amplifier (if used)
- L<sub>T</sub> = Limit
- M = Margin

All units are dB-units, positive margin means value is below limit.

## 5. Measurements

### 5.1. General Limit - Conducted emissions on AC-Power lines

#### 5.1.1. Test location and equipment

|               |  |  |  |
|---------------|--|--|--|
| test location | <input checked="" type="checkbox"/> CETECOM Essen (Chapter 2.2.1)        | <input type="checkbox"/> Please see Chapter 2.2.2                          | <input type="checkbox"/> Please see Chapter 2.2.3  |
| test site     | <input type="checkbox"/> 333 EMI field                                   | <input checked="" type="checkbox"/> 348 EMI cond.                          |  |
| receiver      | <input type="checkbox"/> 001 ESS   | <input checked="" type="checkbox"/> 377 ESCS 30                            | <input type="checkbox"/> 489 ESU 40 <input type="checkbox"/> 620 ESU 26                        |
| LISN          | <input checked="" type="checkbox"/> 005 ESH2-Z5                          | <input type="checkbox"/> 007 ESH3-Z6                                       | <input type="checkbox"/> 300 ESH3-Z5 & 50Ω used for AE <input type="checkbox"/> no LISN for AE |
| signaling     | <input type="checkbox"/> 392 MT8820A                                     | <input type="checkbox"/> 436 CMU   | <input type="checkbox"/> 547 CMU <input type="checkbox"/> 594 CMW                              |
| line voltage  | <input checked="" type="checkbox"/> 12 VDC (for EUT A supplied from AE3) | <input checked="" type="checkbox"/> 060 120 V 60 Hz via PAS 5000 (for AE3) |  |

#### 5.1.2. Requirements

|   |                                       |                   |                |
|---|---------------------------------------|-------------------|----------------|
| <b>FCC</b>  | Part 15, Subpart B, §15.207           |                   |                |
| <b>IC</b>   | RSS-Gen Issue 4, Chapter 8.8, Table 3 |                   |                |
| <b>ANSI</b>   | C63.10-2013                           |                   |                |
| <b>Limit</b>  | Frequency [MHz]                       | QUASI-Peak [dBμV] | AVERAGE [dBμV] |
| <b>Class B</b>  | 0.15 – 0.5                            | 66 to 56*         | 56 to 46*      |
|   | 0.5 – 5                               | 56                | 46             |
|   | 5 – 30                                | 60                | 50             |
| Remark: * decreases with the logarithm of the frequency |                                       |                   |                |

#### 5.1.3. Test condition and test set-up

|                                       |  |   |  |
|---------------------------------------|--|---|--|
| Signal link to test system (if used): | <input checked="" type="checkbox"/> air link   | <input type="checkbox"/> cable connection   | <input type="checkbox"/> none                  |
| EUT-grounding                         | <input type="checkbox"/> none  | <input checked="" type="checkbox"/> with power supply   | <input type="checkbox"/> additional connection |
| Equipment set up                      | <input checked="" type="checkbox"/> table top<br>(40 cm distance to reference ground plane (wall)) | <input type="checkbox"/> floor standing<br>EUT stands isolated on reference ground plane (floor)  |  |
| Climatic conditions                   | Temperature: (22±3°C)  | Rel. humidity: (40±20)%   |  |
| EMI-Receiver or Analyzer settings     | Scan data  | <input type="checkbox"/> 9 – 150 kHz, RBW = 200 Hz, Step = 61 Hz<br><input checked="" type="checkbox"/> 150 kHz – 30 MHz RBW = 9 kHz, Step = 4 kHz<br><input type="checkbox"/> other: |  |
|                                       | Scan-Mode  | 6 dB EMI-Receiver Mode  |  |
|                                       | Pre-measurement<br>Final measurement   | Peak detector, Repetitive-Scan, max-hold, sweep-time 50 μs per frequency point<br>Average & Quasi-peak detector at critical frequencies   |  |
| General measurement procedures        | Please see chapter “Test system set-up for AC power line conducted emissions measurements”         |   |  |

#### 5.1.4. Measurement results

The results are presented below in summary form only. For more information please see the diagrams

| Set-up no.:3 |   |            | EUT OP-mode no.: 1  |                        |              |
|--------------|---|------------|---|------------------------|--------------|
| Diagram-No.  | Used Detector   | Power line | Additional (scan-) information  | Remarks                | Result       |
| 1.01         | <input checked="" type="checkbox"/> Peak (pre-scan)<br><input type="checkbox"/> CAV (final)<br><input checked="" type="checkbox"/> QP (final) | L1/ N      | Measurement performed with NFC antenna in normal operating mode. For compliance further investigations are necessary. | Remark 1)<br>Remark 2) | Inconclusive |
| 1.01b        | <input checked="" type="checkbox"/> Peak (pre-scan)<br><input type="checkbox"/> CAV (final)<br><input checked="" type="checkbox"/> QP (final) | L1/ N      | Measurement performed without NFC antenna & NFC output port terminated with 50 Ohm impedance.                         | Remark 1)              | Pass         |

**Remark:** 1.) For further details please refer diagrams in separate annex A1

2.) Reference Measurement diagram No .1.01 is valid only in combination with Measurement diagram No .1.01b

## 5.2. Radiated field strength emission mask at 13.110-14.010MHz

### 5.2.1. TEST LOCATION AND EQUIPMENT (for reference numbers please see chapter 'List of test equipment')

|                 |  |  |   |  |  |
|-----------------|--|--|---|--|--|
| test location   | <input checked="" type="checkbox"/> CETECOM Essen (Chapter. 2.2.1)       | <input type="checkbox"/> Please see Chapter. 2.2.2 |   | <input type="checkbox"/> Please see Chapter. 2.2.3                         |  |
| test site       | <input checked="" type="checkbox"/> 441 EMI SAR                          | <input type="checkbox"/> 487 SAR NSA               | <input type="checkbox"/> 337 OATS       | <input type="checkbox"/> 347 Radio.lab.                                    | <input type="checkbox"/>                       |
| receiver        | <input type="checkbox"/> 377 ESCS30                                      | <input checked="" type="checkbox"/> 001 ESS        | <input type="checkbox"/>                | <input type="checkbox"/>   | <input type="checkbox"/>                       |
| spectr. analys. | <input type="checkbox"/> 120 FSEM  | <input type="checkbox"/> 264 FSEK                  | <input type="checkbox"/>                | <input type="checkbox"/>   | <input type="checkbox"/>                       |
| antenna         | <input type="checkbox"/> 048 EMCO3143                                    | <input type="checkbox"/> 133 EMCO3115              | <input type="checkbox"/> 302 BBHA9170   | <input type="checkbox"/> 289 CBL 6141                                      | <input checked="" type="checkbox"/> 030 HFH-Z2 |
| power supply    | <input type="checkbox"/> 087 EA 3013 S                                   | <input type="checkbox"/> 457 EA 3013A              | <input type="checkbox"/> 459 EA 2032-50 | <input type="checkbox"/> 268 EA- 3050                                      | <input type="checkbox"/> 494 AG6632A           |
| otherwise       | <input type="checkbox"/> 400 FTC40x15E                                   | <input type="checkbox"/> 401 FTC40x15E             | <input type="checkbox"/> 110 USB LWL    | <input type="checkbox"/> 482 Filter Matrix                                 | <input type="checkbox"/> 477 GPS               |
| line voltage    | <input checked="" type="checkbox"/> 12 VDC (for EUT A supplied from AE3) |  |   | <input checked="" type="checkbox"/> 060 120 V 60 Hz via PAS 5000 (for AE3) |  |

### 5.2.2. STANDARDS AND LIMITS: CFR 47, §15.225(a)(b)(c)(d) & RSS-210, Issue 9 Annex B.6

| Frequency [MHz]                 | Field strength |          | Measurement distance [meters] | Remarks  |
|---------------------------------|----------------|----------|-------------------------------|--|
|                                 | [µV/m]         | [dBuV/m] |                               |  |
| 13.553 -13.567 (allocated band) | 15.848         | 84.00    | 30                            | Correction factor used due to measurement distance of 3m |
| 13.410-13.710                   | 334            | 50.47    | 30                            |  |
| 13.110-14.010                   | 106            | 40.50    | 30                            |  |
| Outside band 13.110-14.010      | 30             | 29.5     | 30                            |  |

### 5.2.3. TEST CONDITION AND MEASUREMENT TEST SET-UP

|                                  |  |   |  |
|----------------------------------|--|---|--|
| link to test system (if used):   | <input type="checkbox"/> air link  | <input type="checkbox"/> cable connection             | <input type="checkbox"/>                       |
| EUT-grounding                    | <input checked="" type="checkbox"/> none   | <input checked="" type="checkbox"/> with power supply | <input type="checkbox"/> additional connection |
| Equipment set up                 | <input checked="" type="checkbox"/> table top  |   | <input type="checkbox"/> floor standing        |
| Climatic conditions              | Temperature: (22±3°C)  |   | Rel. humidity: (40±20)%                        |
| EMI-Receiver (Analyzer) Settings | Span/Range: 9kHz to 150kHz; 150 kHz to 30 MHz<br>RBW/VBW: 200Hz/auto; 10 kHz/ auto (ANSI63.10/CISPR#16)<br>Detector/ Mode: PEAK, TRACE max-hold mode, repetitive scan for exploratory measurements<br>Quasi-Peak, for final measurement on critical frequencies (f<1GHz) |   |  |

### 5.2.4. GENERAL MEASUREMENT PROCEDURES:

The measurement test set-up and test procedure are in accordance with the provisions described in ANSI 63.10: 2013

The **Equipment under Test (EUT)** was set-up to defined operating mode and installed (connected) to accessory equipment according the general description of use given by the applicant.

The measurement loop antenna was situated in 3m distance to the EUT. Between EUT and measurement antenna absorbers are covering the GND-Plane. Radiated magnetic emission measurements were made with the antenna situated in 1 meter height. The loop antenna was moved at least to 2-perpendicular axes (antenna vector in direction of EUT and parallel to EUT) in order to maximize the emissions, the EUT itself either over 3-orthogonal axes (no defined usage position) or 2-orthogonal axis (defined usage position).

According the standard the compliance should be checked in 30m measurement distance. Therefore an additional extrapolation factor was used in order to normalize the measurement data. The frequency dependent extrapolation factor used for this reduced measurement distance, can be found in the chapter 5.3.4.1

### 5.2.5. MEASUREMENT RESULTS: CARRIER FIELD STRENGTH (EMISSION MASK)

| Diagram No. | Carrier Channel |     | Frequency range | Set-up no. | OP-mode no. | Remark                              | Used detector                       |                          |                                     | Result |
|-------------|-----------------|-----|-----------------|------------|-------------|-------------------------------------|-------------------------------------|--------------------------|-------------------------------------|--------|
|             | Range           | No. |                 |            |             |                                     | PK                                  | AV                       | QP                                  |        |
| 2.05        | nominal         | 1   | 12 - 15 MHz     | 1          | 1           | Carrier field strength:26.73 dBuV/m | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | Pass   |

**Remark:** 1.) For further details please refer diagrams in separate annex A1

### 5.2.6. VERDICT: Pass

### 5.3. General Limit - Radiated field strength emissions below 30 MHz

#### 5.3.1. Test location and equipment

|                 |  |  |  |
|-----------------|--|--|--|
| test location   | <input checked="" type="checkbox"/> CETECOM Essen (Chapter. 2.2.1)       | <input type="checkbox"/> Please see Chapter. 2.2.2                         | <input type="checkbox"/> Please see Chapter. 2.2.3 |
| test site       | <input checked="" type="checkbox"/> 441 EMI SAR                          | <input type="checkbox"/> 487 SAR NSA                                       | <input type="checkbox"/> 347 Radio.lab.            |
| receiver        | <input type="checkbox"/> 377 ESCS30                                      | <input checked="" type="checkbox"/> 001 ESS                                | <input type="checkbox"/>                           |
| spectr. analys. | <input type="checkbox"/> 584 FSU   | <input type="checkbox"/> 120 FSEM  | <input type="checkbox"/> 264 FSEK                  |
| antenna         | <input type="checkbox"/> 574 BTA-L                                       | <input type="checkbox"/> 133 EMCO3115                                      | <input type="checkbox"/> 302 BBHA9170              |
| signaling       | <input type="checkbox"/> 392 MT8820A                                     | <input type="checkbox"/> 371 CBT32   | <input type="checkbox"/> 547 CMU                   |
| otherwise       | <input type="checkbox"/> 400 FTC40x15E                                   | <input type="checkbox"/> 401 FTC40x15E                                     | <input type="checkbox"/> 110 USB LWL               |
| DC power        | <input type="checkbox"/> 087 EA 3013S                                    | <input type="checkbox"/> 457 EA 3013A                                      | <input type="checkbox"/> 459 EA 2032-50            |
| line voltage    | <input checked="" type="checkbox"/> 12 VDC (for EUT A supplied from AE3) | <input checked="" type="checkbox"/> 060 120 V 60 Hz via PAS 5000 (for AE3) |  |

#### 5.3.2. Requirements

|                 |   |                       |   |
|-----------------|---|-----------------------|---|
| <b>FCC</b>      | Part 15, Subpart C, §15.205 & §15.209   |                       |   |
| <b>IC</b>       | RSS-Gen., Issue 4: Chapter 8.9, Table 5 |                       |   |
| <b>ANSI</b>     | C63.10-2013                             |                       |   |
| Frequency [MHz] | Field strength limit                    |                       | Distance  |
|                 | [µV/m]                                  | [dBµV/m]              | [m]   |
| 0.009 – 0.490   | 2400/f (kHz)                            | 67.6 – 20Log(f) (kHz) | 300   |
| 0.490 – 1.705   | 24000/f (kHz)                           | 87.6 – 20Log(f) (kHz) | 30  |
| 1.705 – 30      | 30                                      | 29.5                  | 30  |
|                 |   |                       | Remarks   |
|                 |   |                       | Correction factor used due to measurement distance of 3 m |
|                 |   |                       | Correction factor used due to measurement distance of 3 m |
|                 |   |                       | Correction factor used due to measurement distance of 3 m |

#### 5.3.3. Test condition and test set-up

|                                       |   |   |  |
|---------------------------------------|---|---|--|
| Signal link to test system (if used): | <input type="checkbox"/> air link   | <input type="checkbox"/> cable connection   | <input checked="" type="checkbox"/> none       |
| EUT-grounding                         | <input checked="" type="checkbox"/> none  | <input checked="" type="checkbox"/> with power supply   | <input type="checkbox"/> additional connection |
| Equipment set up                      | <input checked="" type="checkbox"/> table top   |   |  |
| Climatic conditions                   | Temperature: (22±3°C)   |   | Rel. humidity: (40±20)%                        |
| EMI-Receiver or Analyzer Settings     | Scan data   | <input checked="" type="checkbox"/> 9 – 150 kHz RBW/VBW = 200 Hz Scan step = 80 Hz<br><input checked="" type="checkbox"/> 150 kHz – 30 MHz RBW/VBW = 9 kHz Scan step = 4 kHz<br><input type="checkbox"/> other:   |  |
|                                       | Scan-Mode<br>Detector<br>Mode:<br>Sweep-Time  | <input checked="" type="checkbox"/> 6 dB EMI-Receiver Mode <input type="checkbox"/> 3dB Spectrum analyser Mode<br>Peak (pre-measurement) and Quasi-PK/Average (final if applicable)<br>Repetitive-Scan, max-hold<br>Coupled – calibrated display if continuous signal otherwise adapted to EUT’s individual transmission duty-cycle |  |
| General measurement procedures        | Please see chapter “Test system set-up radiated magnetic field measurements below 30 MHz” |   |  |

#### 5.3.4. Measurement Results

The results are presented below in summary form only. The EUT is put on operation on nominal channel.

Table of measurement results:

| Diagram No. | Carrier Channel Range | Frequency range | Set-up no. | OP-mode no. | Remark   | Used detector                       |                                     |                                     | Result |
|-------------|-----------------------|-----------------|------------|-------------|--|-------------------------------------|-------------------------------------|-------------------------------------|--------|
|             |                       |                 |            |             |  | PK                                  | AV                                  | QP                                  |        |
| 2.06        | Nominal               | 9 kHz-30 MHz    | 1          | 1           | 13.56 MHz NFC Carrier on diagram: Not relevant for verdict | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | Pass   |

**Remark:** 1.) For further details please refer diagrams in separate annex A1

**5.3.4.1. Correction factors due to reduced meas. distance (f < 30 MHz)**

The used correction factors when the measurement distance is reduced compared to regulatory measurement distance, are calculated according Extrapolation formulas valid for EUT's with maximum dimension of 0.625xLambda. Formula 2+3+4 as presented in ANSI C63.10, Chapter 6.4.4 are used for the calculations of proper extrapolation factors.

| Frequency -Range | f [kHz/MHz] | Lambda [m] | Far-Field Point [m] | Distance Limit accord. 15.209 [m] | 1st Condition (dmeas < D <sub>near-field</sub> ) | 2te Condition (Limit distance bigger d <sub>near-field</sub> ) | Distance Correction accord. Formula |
|------------------|-------------|------------|---------------------|-----------------------------------|--|--|-------------------------------------|
| kHz              | 9,00E+03    | 33333,33   | 5305,17             | 300                               | fulfilled  | not fulfilled  | -80,00                              |
|                  | 1,00E+04    | 30000,00   | 4774,65             |                                   | fulfilled  | not fulfilled  | -80,00                              |
|                  | 2,00E+04    | 15000,00   | 2387,33             |                                   | fulfilled  | not fulfilled  | -80,00                              |
|                  | 3,00E+04    | 10000,00   | 1591,55             |                                   | fulfilled  | not fulfilled  | -80,00                              |
|                  | 4,00E+04    | 7500,00    | 1193,66             |                                   | fulfilled  | not fulfilled  | -80,00                              |
|                  | 5,00E+04    | 6000,00    | 954,93              |                                   | fulfilled  | not fulfilled  | -80,00                              |
|                  | 6,00E+04    | 5000,00    | 795,78              |                                   | fulfilled  | not fulfilled  | -80,00                              |
|                  | 7,00E+04    | 4285,71    | 682,09              |                                   | fulfilled  | not fulfilled  | -80,00                              |
|                  | 8,00E+04    | 3750,00    | 596,83              |                                   | fulfilled  | not fulfilled  | -80,00                              |
|                  | 9,00E+04    | 3333,33    | 530,52              |                                   | fulfilled  | not fulfilled  | -80,00                              |
|                  | 1,00E+05    | 3000,00    | 477,47              |                                   | fulfilled  | not fulfilled  | -80,00                              |
|                  | 1,25E+05    | 2400,00    | 381,97              |                                   | fulfilled  | not fulfilled  | -80,00                              |
|                  | 2,00E+05    | 1500,00    | 238,73              |                                   | fulfilled  | fulfilled  | -78,02                              |
|                  | 3,00E+05    | 1000,00    | 159,16              |                                   | fulfilled  | fulfilled  | -74,49                              |
|                  | 4,00E+05    | 750,00     | 119,37              |                                   | fulfilled  | fulfilled  | -72,00                              |
|                  | 4,90E+05    | 612,24     | 97,44               |                                   | fulfilled  | fulfilled  | -70,23                              |
|                  | 5,00E+05    | 600,00     | 95,49               |                                   | fulfilled  | not fulfilled  | -40,00                              |
|                  | 6,00E+05    | 500,00     | 79,58               |                                   | fulfilled  | not fulfilled  | -40,00                              |
|                  | 7,00E+05    | 428,57     | 68,21               |                                   | fulfilled  | not fulfilled  | -40,00                              |
|                  | 8,00E+05    | 375,00     | 59,68               |                                   | fulfilled  | not fulfilled  | -40,00                              |
| 9,00E+05         | 333,33      | 53,05      | fulfilled           | not fulfilled                     | -40,00   |  |                                     |
| MHz              | 1,00        | 300,00     | 47,75               | 30                                | fulfilled  | not fulfilled  | -40,00                              |
|                  | 1,59        | 188,50     | 30,00               |                                   | fulfilled  | not fulfilled  | -40,00                              |
|                  | 2,00        | 150,00     | 23,87               |                                   | fulfilled  | fulfilled  | -38,02                              |
|                  | 3,00        | 100,00     | 15,92               |                                   | fulfilled  | fulfilled  | -34,49                              |
|                  | 4,00        | 75,00      | 11,94               |                                   | fulfilled  | fulfilled  | -32,00                              |
|                  | 5,00        | 60,00      | 9,55                |                                   | fulfilled  | fulfilled  | -30,06                              |
|                  | 6,00        | 50,00      | 7,96                |                                   | fulfilled  | fulfilled  | -28,47                              |
|                  | 7,00        | 42,86      | 6,82                |                                   | fulfilled  | fulfilled  | -27,13                              |
|                  | 8,00        | 37,50      | 5,97                |                                   | fulfilled  | fulfilled  | -25,97                              |
|                  | 9,00        | 33,33      | 5,31                |                                   | fulfilled  | fulfilled  | -24,95                              |
|                  | 10,00       | 30,00      | 4,77                |                                   | fulfilled  | fulfilled  | -24,04                              |
|                  | 10,60       | 28,30      | 4,50                |                                   | fulfilled  | fulfilled  | -23,53                              |
|                  | 11,00       | 27,27      | 4,34                |                                   | fulfilled  | fulfilled  | -23,21                              |
|                  | 12,00       | 25,00      | 3,98                |                                   | fulfilled  | fulfilled  | -22,45                              |
|                  | 13,56       | 22,12      | 3,52                |                                   | fulfilled  | fulfilled  | -21,39                              |
|                  | 15,00       | 20,00      | 3,18                |                                   | fulfilled  | fulfilled  | -20,51                              |
|                  | 15,92       | 18,85      | 3,00                |                                   | fulfilled  | fulfilled  | -20,00                              |
|                  | 17,00       | 17,65      | 2,81                |                                   | not fulfilled                                    | fulfilled  | -20,00                              |
|                  | 18,00       | 16,67      | 2,65                |                                   | not fulfilled                                    | fulfilled  | -20,00                              |
|                  | 20,00       | 15,00      | 2,39                |                                   | not fulfilled                                    | fulfilled  | -20,00                              |
| 21,00            | 14,29       | 2,27       | not fulfilled       | fulfilled                         | -20,00   |  |                                     |
| 23,00            | 13,04       | 2,08       | not fulfilled       | fulfilled                         | -20,00   |  |                                     |
| 25,00            | 12,00       | 1,91       | not fulfilled       | fulfilled                         | -20,00   |  |                                     |
| 27,00            | 11,11       | 1,77       | not fulfilled       | fulfilled                         | -20,00   |  |                                     |
| 29,00            | 10,34       | 1,65       | not fulfilled       | fulfilled                         | -20,00   |  |                                     |
| 30,00            | 10,00       | 1,59       | not fulfilled       | fulfilled                         | -20,00   |  |                                     |

### 5.4. General Limit - Radiated field strength emissions, 30 MHz - 1 GHz

#### 5.4.1. Test location and equipment

|                 |   |  |  |
|-----------------|---|--|--|
| test location   | <input checked="" type="checkbox"/> CETECOM Essen (Chapter. 2.2.1)                              | <input type="checkbox"/> Please see Chapter. 2.2.2   | <input type="checkbox"/> Please see Chapter. 2.2.3                         |
| test site       | <input checked="" type="checkbox"/> 441 EMI SAR <input checked="" type="checkbox"/> 487 SAR NSA |  |  |
| receiver        | <input type="checkbox"/> 377 ESCS30 <input checked="" type="checkbox"/> 001 ESS                 | <input type="checkbox"/> 489 ESU 40 <input type="checkbox"/> 620 ESU 26                    |  |
| spectr. analys. | <input type="checkbox"/> 584 FSU <input type="checkbox"/> 120 FSEM                              | <input type="checkbox"/> 264 FSEK  |  |
| antenna         | <input checked="" type="checkbox"/> 574 BTA-L <input type="checkbox"/> 133 EMCO3115             | <input type="checkbox"/> 302 BBHA9170 <input type="checkbox"/> 289 CBL 6141                | <input type="checkbox"/> 030 HFH-Z2 <input type="checkbox"/> 477 GPS       |
| signaling       | <input type="checkbox"/> 392 MT8820A <input type="checkbox"/> 371 CBT32                         | <input type="checkbox"/> 547 CMU <input type="checkbox"/> 594 CMW                          |  |
| otherwise       | <input type="checkbox"/> 400 FTC40x15E <input type="checkbox"/> 401 FTC40x15E                   | <input type="checkbox"/> 110 USB LWL <input checked="" type="checkbox"/> 482 Filter Matrix |  |
| DC power        | <input checked="" type="checkbox"/> 087 EA 3013S <input type="checkbox"/> 457 EA 3013A          | <input type="checkbox"/> 459 EA 2032-50 <input type="checkbox"/> 268 EA- 3050              | <input type="checkbox"/> 494 AG6632A <input type="checkbox"/> 498 NGPE     |
| line voltage    | <input checked="" type="checkbox"/> 12 VDC (for EUT A supplied from AE3)                        |  | <input checked="" type="checkbox"/> 060 120 V 60 Hz via PAS 5000 (for AE3) |

#### 5.4.2. Requirements/Limits

|       |                 |   |                           |
|-------|-----------------|---|---------------------------|
| FCC   |                 | <input type="checkbox"/> Part 15 Subpart B, §15.109, class B<br><input checked="" type="checkbox"/> Part 15 Subpart C, §15.209 @ frequencies defined in §15.205 |                           |
| IC    |                 | <input checked="" type="checkbox"/> RSS-Gen., Issue 4, Chapter 8.9, Table 4   |                           |
| ANSI  |                 | <input type="checkbox"/> C63.4-2009<br><input checked="" type="checkbox"/> C63.10-2013  |                           |
| Limit | Frequency [MHz] | Radiated emissions limits, 3 meters   |                           |
|       |                 | QUASI Peak [ $\mu$ V/m]   | QUASI-Peak [dB $\mu$ V/m] |
|       | 30 - 88         | 100   | 40.0                      |
|       | 88 - 216        | 150   | 43.5                      |
|       | 216 - 960       | 200   | 46.0                      |
|       | above 960       | 500   | 49.0                      |

#### 5.4.3. Restricted bands of operation, §15.205

| MHz               | MHz                 | MHz           | GHz         |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110       | 16.42-16.423        | 399.9-410     | 4.5-5.15    |
| 0.495-0.505       | 16.69475-16.69525   | 608-614       | 5.35-5.46   |
| 2.1735-2.1905     | 16.80425-16.80475   | 960-1240      | 7.25-7.75   |
| 4.125-4.128       | 25.5-25.67          | 1300-1427     | 8.025-8.5   |
| 4.20725-4.20775   | 37.5-38.25          | 1645.5-1646.5 | 9.3-9.5     |
| 6.215-6.218       | 73-74.6             | 1660-1710     | 10.6-12.7   |
| 6.26775-6.26825   | 74.8-75.2           | 1718.8-1722.2 | 13.25-13.4  |
| 6.31175-6.31225   | 108-121.94          | 2200-2300     | 14.47-14.5  |
| 8.291-8.294       | 123-138             | 2310-2390     | 15.35-16.2  |
| 8.362-8.366       | 149.9-150.05        | 2483.5-2500   | 17.7-21.4   |
| 8.37625-8.38675   | 156.52475-156.52525 | 2690-2900     | 22.01-23.12 |
| 8.41425-8.41475   | 156.7-156.9         | 3260-3267     | 23.6-24.0   |
| 12.29-12.293      | 162.0125-167.17     | 3332-3339     | 31.2-31.8   |
| 12.51975-12.52025 | 167.72-173.2        | 3345.8-3358   | 36.43-36.5  |
| 12.57675-12.57725 | 240-285             | 3600-4400     | --          |
| 13.36-13.41       | 322-335.4           | --            | --          |

Remark: only spurious emissions are allowed within these frequency bands not exceeding the limits per §15.209

**5.4.4. Test condition and measurement test set-up**

|                                       |   |   |   |  |
|---------------------------------------|---|---|---|--|
| Signal link to test system (if used): |   | <input type="checkbox"/> air link   | <input type="checkbox"/> cable connection             | <input checked="" type="checkbox"/> none       |
| EUT-grounding                         |   | <input checked="" type="checkbox"/> none  | <input checked="" type="checkbox"/> with power supply | <input type="checkbox"/> additional connection |
| Equipment set up                      |   | <input checked="" type="checkbox"/> table top 0.8m height <input type="checkbox"/> floor standing               |   |  |
| Climatic conditions                   |   | Temperature: (22±3°C)   |   | Rel. humidity: (40±20)%                        |
| EMI-Receiver (Analyzer) Settings      | Scan frequency range:   | <input checked="" type="checkbox"/> 30 – 1000 MHz <input type="checkbox"/> other:                               |   |  |
|                                       | Scan-Mode   | <input checked="" type="checkbox"/> 6 dB EMI-Receiver Mode <input type="checkbox"/> 3 dB spectrum analyser mode |   |  |
|                                       | Detector  | Peak / Quasi-peak   |   |  |
|                                       | RBW/VBW   | 100 kHz/300 kHz   |   |  |
|                                       | Mode:   | Repetitive-Scan, max-hold   |   |  |
| Scan step                             | 80 kHz  |   |   |  |
| Sweep-Time                            | Coupled – calibrated display if continuous tx-signal otherwise adapted to EUT’s individual duty-cycle |   |   |  |
| General measurement procedures        |   | Please see chapter “Test system set-up for electric field measurement in the range 30 MHz to 1 GHz”             |   |  |

**5.4.5. MEASUREMENT RESULTS**

The results are presented below in summary form only. For more information please see diagrams.

Table of measurement results:

| Dia-gram no. | Carrier Channel Range | Frequency range | Set-up no. | OP-mode no. | Remark | Used detector                       |                          |                                     | Result |
|--------------|-----------------------|-----------------|------------|-------------|--------|-------------------------------------|--------------------------|-------------------------------------|--------|
|              |                       |                 |            |             |        | PK                                  | AV                       | QP                                  |        |
| 3.06         | Nominal               | 30 MHz – 1 GHz  | 1          | 1           | --     | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | Pass   |

**Remark:** 1.) For further details please refer diagrams in separate annex A1



## 5.5. Frequency error (tolerance)

### 5.5.1. Test location and equipment (for reference numbers please see chapter 'List of test equipment')

|                 |  |  |  |  |  |  |
|-----------------|--|--|--|--|--|--|
| test location   | <input checked="" type="checkbox"/> CETECOM Essen (Chapter. 2.2.1) |  | <input type="checkbox"/> Please see Chapter. 2.2.2               |  | <input type="checkbox"/> Please see Chapter. 2.2.3 |  |
| test site       | <input type="checkbox"/> 441 EMI SAR                               | <input type="checkbox"/> 487 SAR NSA   | <input type="checkbox"/> 337 OATS                                | <input checked="" type="checkbox"/> 347 Radio.lab. | <input type="checkbox"/>                           | <input type="checkbox"/>                           |
| receiver        | <input type="checkbox"/> 377 ESCS30                                | <input type="checkbox"/> 001 ESS       | <input type="checkbox"/>   | <input type="checkbox"/>                           | <input type="checkbox"/>                           | <input type="checkbox"/>                           |
| spectr. analys. | <input checked="" type="checkbox"/> 489 ESU40                      | <input type="checkbox"/> 584 FSU8      | <input type="checkbox"/>   | <input type="checkbox"/>                           | <input type="checkbox"/>                           | <input type="checkbox"/>                           |
| antenna         | <input type="checkbox"/> 048 EMCO3143                              | <input type="checkbox"/> 133 EMCO3115  | <input type="checkbox"/> 302 BBHA9170                            | <input type="checkbox"/> 289 CBL 6141              | <input checked="" type="checkbox"/> 030 HFH-Z2     | <input checked="" type="checkbox"/> 431 Model 7405 |
| signaling       | <input type="checkbox"/> 298 CMU                                   | <input type="checkbox"/> 460 CMU       | <input type="checkbox"/> 295 RACAL                               | <input type="checkbox"/> 392 MT8820A               | <input type="checkbox"/>                           | <input type="checkbox"/>                           |
| power supply    | <input type="checkbox"/> 456 EA 3013A                              | <input type="checkbox"/> 457 EA 3013A  | <input type="checkbox"/> 459 EA 2032-50                          | <input type="checkbox"/> 268 EA- 3050              | <input type="checkbox"/> 494 AG6632A               | <input type="checkbox"/> 498 NGPE 40               |
| otherwise       | <input type="checkbox"/> 331 HC4055                                | <input type="checkbox"/> 401 FTC40x15E | <input type="checkbox"/> 627 OPUS1                               | <input type="checkbox"/>                           | <input type="checkbox"/> 477 GPS                   | <input type="checkbox"/>                           |
| line voltage    | <input type="checkbox"/> 230 V 50 Hz via public mains              |  | <input checked="" type="checkbox"/> 060 120 V 60 Hz via PAS 5000 |  |  |  |

### 5.5.2. Standards and Limits: CFR 47, §15.225, ANSI 63.10: 2009 & RSS-210, Issue 9 Annex B.6

| Frequency<br>[MHz] | Frequency tolerance |       |         | Remarks |
|--------------------|---------------------|-------|---------|---------|
|                    | [%]                 | [ppm] | [Hz]    |         |
| 13.553 -13.567     | ±0.01               | ±100  | ±1356.7 | --      |

### 5.5.3. TEST SET-UP

A sniffer antenna acts like a coupling antenna for measuring the fundamental frequency. This is placed closed the equipment which is situated inside an climatic chamber. Also connecting cables at the equipment are avoided on the extent possible in order not to degrade the resonance frequency of the equipment and integral antenna.

### 5.5.4. EQUIPMENT SETTINGS

The measurements is made on nominal carrier frequency within operational band. Further settings on the Spectrum-analyser can be checked on the screenshots attached.

### 5.5.5. TEST METHOD

A trace with low RBW function was recorded. The maximum peak within the span was found, then the frequency deviation was recorded with the build-in frequency counter within the spectrum-analyser ESU40 to minimize the measurement uncertainty.

The frequency deviation was recorded at switching on point of the equipment and on 2 minutes, 5 minutes and 10 minutes after at in accordance with ANSI 63.10: 2013, Chapter 6.8  
All measurements data in graphical format are enclosed in annex 1.

**5.5.5.1. Frequency shift of carrier against temperature at constant power supply voltage**

- 1.) Use a full loaded battery for tests according this chapter
- 2.) determine the carrier frequency at room temperature and nominal voltage [20°C] after a long run of the device equipment (EUT). This frequency is taken as reference for all other measured frequencies.
- 3.) Perform the carrier frequencies measurements in 10°C increments from 50°C down to -20°C as required by the standards. The stabilization period was about 1 hour after thermal reach of the required temperature.

**5.5.5.1.1. Results**

**Temperature Variation at Nominal Primary Supply Voltage**

| Frequency error (tolerance) §15.225 & RSS 210                |   | Set- up no.2       |                 | EUT OP-mode no. 2 |       |
|--|---|--------------------|-----------------|-------------------|-------|
| Nominal Conditions   |   |                    |                 |                   |       |
| Vnom = 12.V DC<br>(from AE3 120 V AC / 60 Hz)<br>Tnom = 21°C | Reference frequency                       | 13.5599346 MHz     | Limit-> 100ppm: | 1355.99346        | Hz    |
| Extreme Temperature Conditions                               |   |                    |                 |                   |       |
| Temperature  | Measurement period after power-up the EUT | Frequency measured | Frequency Error |                   |       |
|  |   |                    | [MHz]           | [Hz]              | [%]   |
| Tmax=50°C  | on StartUp                                | 13.5599127         | 21.9000000      | 0.000162          | 1.62  |
|  | 2 Minutes                                 | 13.5599041         | 30.5000000      | 0.000225          | 2.25  |
|  | 5 Minutes                                 | 13.5599016         | 33.0000000      | 0.000243          | 2.43  |
|  | 10 Minutes                                | 13.5598999         | 34.7000000      | 0.000256          | 2.56  |
| T=40°C   | on StartUp                                | 13.5599277         | 6.9000000       | 0.000051          | 0.51  |
|  | 2 Minutes                                 | 13.5599160         | 18.6000000      | 0.000137          | 1.37  |
|  | 5 Minutes                                 | 13.5599129         | 21.7000000      | 0.000160          | 1.60  |
|  | 10 Minutes                                | 13.5599117         | 22.9000000      | 0.000169          | 1.69  |
| T=30°C   | on StartUp                                | 13.5599256         | 9.0000000       | 0.000066          | 0.66  |
|  | 2 Minutes                                 | 13.5599252         | 9.4000000       | 0.000134          | 0.69  |
|  | 5 Minutes                                 | 13.5599249         | 9.7000000       | 0.000072          | 0.72  |
|  | 10 Minutes                                | 13.5599249         | 9.7000000       | 0.000072          | 0.72  |
| T=10°C   | on StartUp                                | 13.5599159         | 18.7000000      | 0.000138          | 1.38  |
|  | 2 Minutes                                 | 13.5599742         | -39.6000000     | -0.000292         | -2.92 |
|  | 5 Minutes                                 | 13.5599780         | -43.4000000     | -0.000320         | -3.20 |
|  | 10 Minutes                                | 13.5599716         | -37.0000000     | -0.000273         | -2.73 |
| T=0°C  | StartUp                                   | 13.5599663         | -31.7000000     | -0.000234         | -2.34 |
|  | 2 Minutes                                 | 13.5600051         | -70.5000000     | -0.000520         | -5.20 |
|  | 5 Minutes                                 | 13.5600036         | -69.0000000     | -0.000509         | -5.09 |
|  | 10 Minutes                                | 13.5600029         | -68.3000000     | -0.000504         | -5.04 |
| T=-10°C  | StartUp                                   | 13.5600037         | -69.1000000     | -0.000510         | -5.10 |
|  | 2 Minutes                                 | 13.5600114         | -76.8000000     | -0.000566         | -5.66 |
|  | 5 Minutes                                 | 13.5600120         | -77.4000000     | -0.000571         | -5.71 |
|  | 10 Minutes                                | 13.5600122         | -77.6000000     | -0.000572         | -5.72 |
| T=-20°C  | StartUp                                   | 13.5599891         | -54.5000000     | -0.000402         | -4.02 |
|  | 2 Minutes                                 | 13.5599936         | -59.0000000     | -0.000435         | -4.35 |
|  | 5 Minutes                                 | 13.5599979         | -63.3000000     | -0.000467         | -4.67 |
|  | 10 Minutes                                | 13.5600001         | -66.4000000     | -0.000490         | -4.90 |

**Remark:** 1.) For further details please refer diagrams in separate annex A1

**VERDICT:** Pass

Variation in the Supply Voltage at Temperature of 20°C

| Frequency error (tolerance) §15.225 & RSS 210                           |   | Set- up no.2       |                 | EUT OP-mode no. 2 |       |
|---|---|--------------------|-----------------|-------------------|-------|
| <b>Nominal Conditions</b>   |   |                    |                 |                   |       |
| Vnom = 12.V DC<br>(from AE3)<br>Tnom = 20°C                             | Reference frequency                       | 13.5599346 MHz     | Limit-> 100ppm: | 1355.99346        | Hz    |
| <b>Extreme Voltage Conditions of Rated Primary Supply Voltage</b>       |   |                    |                 |                   |       |
| Supply Voltage  | Measurement period after power-up the EUT | Frequency measured | Frequency Error |                   |       |
|   |   | [MHz]              | [Hz]            | [%]               | [ppm] |
| <b>85% of Rated Primary Supply Voltage</b><br>(AE3: 108 V AC / 60 Hz)   | on StartUp                                | 13.5599253         | 9.3000000       | 0.000069          | 0.69  |
|   | 2 Minutes                                 | 13.5599250         | 9.6000000       | 0.000071          | 0.71  |
|   | 5 Minutes                                 | 13.5599246         | 10.0000000      | 0.000074          | 0.74  |
|   | 10 Minutes                                | 13.5599247         | 9.9000000       | 0.000073          | 0.73  |
| <b>115% of Rated Primary Supply Voltages</b><br>(AE3: 138 V AC / 60 Hz) | on StartUp                                | 13.5599269         | 7.7000000       | 0.000057          | 0.57  |
|   | 2 Minutes                                 | 13.5599252         | 9.4000000       | 0.000069          | 0.69  |
|   | 5 Minutes                                 | 13.5599241         | 10.5000000      | 0.000077          | 0.77  |
|   | 10 Minutes                                | 13.5599238         | 10.8000000      | 0.000080          | 0.80  |

**Remark:** 1.) For further details please refer diagrams in separate annex A1

**VERDICT:** Pass

## 5.6. Measurement uncertainties

The reported uncertainties are calculated based on the standard uncertainty multiplied with the appropriate coverage factor **k**, such that a confidence level of approximately 95% is achieved. For uncertainty determination, each component used in the concrete measurement set-up was taken in account and its contribution to the overall uncertainty according to its statistical distribution calculated.

| RF-Measurement                          | Reference    | Frequency range  | Calculated uncertainty based on a confidence level of 95% | Remarks                                   |
|---|--------------|------------------|---|---|
| Conducted emissions<br>( $U_{CISPR}$ )  | CISPR 16-2-1 | 9 kHz - 150 kHz  | 4.0 dB  | -   |
|   |              | 150 kHz - 30 MHz | 3.6 dB  |   |
| Radiated emissions<br>Enclosure         | CISPR 16-2-3 | 30 MHz - 1 GHz   | 4.2 dB  | E-Field                                   |
|   |              | 1 GHz - 18 GHz   | 5.1 dB  |   |
| Disturbance power                       | CISPR 16-2-2 | 30 MHz - 300 MHz | -   | -   |
| Power Output radiated                   | -            | 30 MHz - 4 GHz   | 3.17 dB   | Substitution                              |
| Power Output conducted                  | -            | 9 kHz - 20 GHz   | 1.0 dB  | -   |
| Conducted emissions<br>on antenna ports | -            | 9 kHz - 20 GHz   | 1.0 dB  | -   |
|   |              | 20 GHz - 40 GHz  |   |   |
| Occupied bandwidth                      | -            | 9 kHz - 4 GHz    | 0.1272 ppm (Delta Marker)                                 | Frequency error                           |
|   |              |                  | 1.0 dB  | Power                                     |
| Emission bandwidth                      | -            | 9 kHz - 4 GHz    | 0.1272 ppm (Delta Marker)                                 | Frequency error                           |
|   |              |                  | 1.0 dB  | Power                                     |
| Frequency stability                     | -            | 9 kHz - 20 GHz   | 0.0636 ppm  | -   |
| Radiated emissions<br>Enclosure         | -            | 150 kHz - 30 MHz | 5.0 dB  | Magnetic field<br>E-field<br>Substitution |
|   |              | 30 MHz - 1 GHz   | 4.2 dB  |   |
|   |              | 1 GHz - 20 GHz   | 3.17 dB   |   |

**Table: measurement uncertainties, valid for conducted/radiated measurements**

## 6. Accreditation details of CETECOM's laboratories and test sites

| Ref.-No.  | Accreditation Certificate                | Valid for laboratory area or test site  | Accreditation Body  |
|---|--|---|---|
| -   | D-PL-12047-01-01                         | All laboratories and test sites of CETECOM GmbH, Essen  | DAkkS, Deutsche Akkreditierungsstelle GmbH  |
| 337<br>487<br>558<br>348<br>348   | MRA US-EU 0003                           | Radiated Measurements 30 MHz to 1 GHz, 3 m / 10 m (OATS)<br>Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR)<br>Radiated Measurements above 1 GHz, 3 m (FAR)<br>Mains Ports Conducted Interference Measurements<br>Telecommunication Ports Conducted Interference Measur. | FCC, Federal Communications Commission<br>Laboratory Division, USA                          |
| 337<br>487<br>550<br>558  | 3462D-1<br>3462D-2<br>3462D-2<br>3462D-3 | Radiated Measurements 30 MHz to 1 GHz, 3 m / 10 m (OATS)<br>Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR)<br>Radiated Measurements 1 GHz to 6 GHz, 3 m (SAR)<br>Radiated Measurements above 1 GHz, 3 m (FAR)   | IC, Industry Canada Certification and Engineering Bureau                                    |
| 487<br>550<br>348<br>348  | R-2666<br>G-301<br>C-2914<br>T-1967      | Radiated Measurements 30 MHz to 1 GHz, 3 m (SAR)<br>Radiated Measurements 1 GHz to 6 GHz, 3 m (SAR)<br>Mains Ports Conducted Interference Measurements<br>Telecommunication Ports Conducted Interference Measur.  | VCCI, Voluntary Control Council for Interference by Information Technology Equipment, Japan |
| OATS = Open Area Test Site, SAR = Semi Anechoic Room, FAR = Fully Anechoic Room |  |   |   |

## 7. Instruments and Ancillary

### 7.1. Used equipment “CTC”

The “Ref.-No” in the left column of the following tables allows the clear identification of the laboratory equipment.

#### 7.1.1. Test software and firmware of equipment

| Ref.-No. | Equipment                               | Type                   | Serial-No.     | Version of Firmware or Software during the test   |
|----------|---|------------------------|----------------|---|
| 001      | EMI Test Receiver                       | ESS                    | 825132/017     | Firm.= 1.21 , OTP=2.0, GRA=2.0  |
| 012      | Signal Generator (EMS-cond.)            | SMY 01                 | 839069/027     | Firm.= V 2.02   |
| 013      | Power Meter (EMS cond.)                 | NRVD                   | 839111/003     | Firm.= V 1.51   |
| 017      | Digital Radiocommunication Tester       | CMD 60 M               | 844365/014     | Firmware = V 3.52 .22.01.99, DECT = D2.87 13.01.99  |
| 053      | Audio Analyzer                          | UPA3                   | 860612/022     | Firm. V 4.3   |
| 119      | RT Harmonics Analyzer dig. Flickermeter | B10                    | G60547         | Firm.= V 3.1DHG   |
| 140      | Signal Generator                        | SMHU                   | 831314/006     | Firm.= 3.21   |
| 261      | Thermal Power Sensor                    | NRV-Z55                | 825083/0008    | EPROM-Datum 02.12.04, SE EE 1 B   |
| 262      | Power Meter                             | NRV-S                  | 825770/0010    | Firm.= 2.6  |
| 263      | Signal Generator                        | SMP 04                 | 826190/0007    | Firm.=3.21  |
| 295      | Racal Digital Radio Test Set            | 6103                   | 1572           | UNIT Firmware= 4.04, SW-Main=4.04, SW-BBP=1.04, SW-DSP=1.02, Hardboot=1.02, Softboot=2.02       |
| 298      | Univ. Radio Communication Tester        | CMU 200                | 832221/091     | R&S Test Firmware =3.53 /3.54 (current Testsoftw. f. all band used                              |
| 323      | Digital Radiocommunication Tester       | CMD 55                 | 825878/0034    | Firm.= 3.52 .22.01.99   |
| 335      | CTC-EMS-Conducted                       | System EMS Conducted   | -              | EMC 32 V 8.52   |
| 340      | Digital Radiocommunication Tester       | CMD 55                 | 849709/037     | Firm.= 3.52 .22.01.99   |
| 355      | Power Meter                             | URV 5                  | 891310/027     | Firm.= 1.31   |
| 365      | 10V Insertion Unit 50 Ohm               | URV5-Z2                | 100880         | Eprom Data = 31.03.08   |
| 366      | Ultra Compact Simulator                 | UCS 500 M4             | V0531100594    | Firm. UCS 500=001925/3.06a02, rc=ISMIEC 4.10  |
| 371      | Bluetooth Tester                        | CBT32                  | 100153         | CBT V5.30+ SW-Option K55, K57   |
| 377      | EMI Test Receiver                       | ESCS 30                | 100160         | Firm.= 2.30, OTP= 02.01, GRA= 02.36   |
| 378      | Broadband RF Field Monitor              | RadiSense III          | 03D00013SNO-08 | Firm.= V.03D13  |
| 389      | Digital Multimeter                      | Keithley 2000          | 0583926        | Firm. = A13 (Mainboard) A02 (Display)   |
| 392      | Radio Communication Tester              | MT8820A                | 6K00000788     | Firm.= 4.50 #005, IPL=4.01#001,OS=4.02#001, GSM=4.41#013, W-CDMA= 4.54#004, scenario= 4.52#002  |
| 436      | Univ. Radio Communication Tester        | CMU 200                | 103083         | R&S Test Firmware Base=5.14, Mess-Software= GSM:5.14 WCDMA:5.14 (current Testsoftw. F. all band |
| 441      | CTC-SAR-EMI Cable Loss                  | System EMI field (SAR) | -              | EMC 32 Version 8.52   |
| 442      | CTC-SAR-EMS                             | System EMS field (SAR) | -              | EMC 32 Version 8.40   |
| 443      | CTC-FAR-EMI-RSE                         | System CTC-FAR-EMI-RSE | -              | Spuri 7.2.5 or EMC 32 Ver. 9.15.00  |
| 444      | CTC-FAR-EMS field                       | System-EMS-Field (FAR) | -              | EMC 32 Version 9.15.00  |
| 460      | Univ. Radio Communication Tester        | CMU 200                | 108901         | R&S Test Firmware Base=5.14, GSM=5.14 WCDMA=5.14 (current Testsoftw.,f. all band to be used,    |
| 489      | EMI Test Receiver                       | ESU40                  | 1000-30        | Firmware=4.43 SP3, Bios=V5.1-16-3, Spec. =01.00   |
| 491      | ESD Simulator dito                      | ESD dito               | dito307022     | V 2.30  |
| 524      | Voltage Drop Simulator                  | VDS 200                | 0196-16        | Software Nr: 000037 Version V4.20a01  |
| 526      | Burst Generator                         | EFT 200 A              | 0496-06        | Software Nr. 000034 Version V2.32   |
| 527      | Micro Pulse Generator                   | MPG 200 B              | 0496-05        | Software-Nr. 000030 Version V2.43   |
| 528      | Load Dump Simulator                     | LD 200B                | 0496-06        | Software-Nr. 000031 Version V2.35a01  |
| 546      | Univ. Radio Communication Tester        | CMU 200                | 106436         | R&S Test Firmware Base=5.14, GSM=5.14 WCDMA=5.14 (current Testsoftw.,f. all band to be used     |
| 547      | Univ. Radio Communication Tester        | CMU 200                | 835390/014     | R&S Test Firmware Base=V5.1403 (current Testsoftw., f. all band used, GSM = 5.14 WCDMA: = 5.14  |
| 584      | Spectrum Analyzer                       | FSU 8                  | 100248         | 2.82_SP3  |
| 597      | Univ. Radio Communication Tester        | CMU 200                | 100347         | R&S Test Firmware Base=5.01, GSM=5.02 WCDMA= not installed, Mainboard= µP1=V.850                |
| 598      | Spectrum Analyzer                       | FSEM 30 (Reserve)      | 831259/013     | Firmware Bios 3.40 , Analyzer 3.40 Sp 2   |
| 620      | EMI Test Receiver                       | ESU 26                 | 100362         | 4.43_SP3  |
| 642      | Wideband Radio Communication Tester     | CMW 500                | 126089         | Setup V03.26, Test programm component V03.02.20   |
| 670      | Univ. Radio Communication Tester        | CMU 200                | 106833         | µP1 =V8.50, Firmware = V.20   |
| 689      | Vector Signal Generator                 | SMU200                 | 100970         | 02.20.360.142   |
| 692      | Bluetooth Tester                        | CBT 32                 | 100236         | CBT V 5.40, FW: V.2.41 (FPGA Digital, V. 3.09 FPGA RF)  |

7.1.2. Single instruments and test systems

| Ref.-No. | Equipment                               | Type                       | Serial-No.  | Manufacturer                | Interval of calibration | Remark | Cal due    |
|----------|---|----------------------------|-------------|-----------------------------|-------------------------|--------|------------|
| 001      | EMI Test Receiver                       | ESS                        | 825132/017  | Rohde & Schwarz             | 12 M                    | -      | 30.05.2017 |
| 005      | AC - LISN (50 Ohm/50µH, test site 1)    | ESH2-Z5                    | 861741/005  | Rohde & Schwarz             | 12 M                    | -      | 30.05.2017 |
| 007      | Single-Line V-Network (50 Ohm/5µH)      | ESH3-Z6                    | 892563/002  | Rohde & Schwarz             | 12 M                    | -      | 30.05.2017 |
| 009      | Power Meter (EMS-radiated)              | NRV                        | 863056/017  | Rohde & Schwarz             | 24 M                    | -      | 30.04.2017 |
| 016      | Line Impedance Simulating Network       | Op. 24-D                   | B6366       | Spitzenberger+Spies         | 36 M                    | -      | 30.05.2019 |
| 020      | Horn Antenna 18 GHz (Subst 1)           | 3115                       | 9107-3699   | EMCO                        | 36/12 M                 | -      | 31.03.2017 |
| 021      | Loop Antenna (H-Field)                  | 6502                       | 9206-2770   | EMCO                        | 36 M                    | -      | 30.04.2018 |
| 030      | Loop Antenna (H-Field)                  | HFH-Z2                     | 879604/026  | Rohde & Schwarz             | 36 M                    | -      | 30.04.2018 |
| 033      | RF-current probe (100kHz-30MHz)         | ESH2-Z1                    | 879581/18   | Rohde & Schwarz             | 24 M                    | -      | 30.04.2017 |
| 057      | relay-switch-unit (EMS system)          | RSU                        | 494440/002  | Rohde & Schwarz             | pre-m                   | 1a     |            |
| 060      | power amplifier (DC-2kHz)               | PAS 5000                   | B6363       | Spitzenberger+Spies         | -                       | 3      |            |
| 066      | notch filter (WCDMA; FDD1)              | WRCT 1900/2200-5/40-10EEK  | 5           | Wainwright GmbH             | 12 M                    | 1g     | 30.06.2016 |
| 086      | DC - power supply, 0 -10 A              | LNG 50-10                  | -           | Heinzinger Electronic       | pre-m                   | 2      |            |
| 087      | DC - power supply, 0 -5 A               | EA-3013 S                  | -           | Elektro Automatik           | pre-m                   | 2      |            |
| 091      | USB-LWL-Converter                       | OLS-1                      | 007/2006    | Ing. Büro Scheiba           | -                       | 4      |            |
| 099      | passive voltage probe                   | ESH2-Z3                    | 299.7810.52 | Rohde & Schwarz             | 36 M                    | -      | 30.04.2018 |
| 100      | passive voltage probe                   | Probe TK 9416              | without     | Schwarzbeck                 | 36 M                    | -      | 30.04.2018 |
| 110      | USB-LWL-Converter                       | OLS-1                      | -           | Ing. Büro Scheiba           | -                       | 4      |            |
| 119      | RT Harmonics Analyzer dig. Flickermeter | B10                        | G60547      | BOCONSULT                   | 36 M                    | -      | 30.05.2019 |
| 136      | adjustable dipole antenna (Dipole 1)    | 3121C-DB4                  | 9105-0697   | EMCO                        | 36 M                    | -      | 30.04.2018 |
| 140      | Signal Generator                        | SMHU                       | 831314/006  | Rohde & Schwarz             | 24 M                    | -      | 30.05.2018 |
| 248      | attenuator                              | SMA 6dB 2W                 | -           | Radiall                     | pre-m                   | 2      |            |
| 249      | attenuator                              | SMA 10dB 10W               | -           | Radiall                     | pre-m                   | 2      |            |
| 252      | attenuator                              | N 6dB 12W                  | -           | Radiall                     | pre-m                   | 2      |            |
| 256      | attenuator                              | SMA 3dB 2W                 | -           | Radiall                     | pre-m                   | 2      |            |
| 257      | hybrid                                  | 4031C                      | 04491       | Narda                       | pre-m                   | 2      |            |
| 260      | hybrid coupler                          | 4032C                      | 11342       | Narda                       | pre-m                   | 2      |            |
| 261      | Thermal Power Sensor                    | NRV-Z55                    | 825083/0008 | Rohde & Schwarz             | 24 M                    | -      | 30.05.2018 |
| 262      | Power Meter                             | NRV-S                      | 825770/0010 | Rohde & Schwarz             | 24 M                    | -      | 30.05.2018 |
| 263      | Signal Generator                        | SMP 04                     | 826190/0007 | Rohde & Schwarz             | 36 M                    | -      | 30.05.2019 |
| 265      | peak power sensor                       | NRV-Z33, Model 04          | 840414/009  | Rohde & Schwarz             | 24 M                    | -      | 30.05.2018 |
| 266      | Peak Power Sensor                       | NRV-Z31, Model 04          | 843383/016  | Rohde & Schwarz             | 24 M                    | -      | 30.05.2018 |
| 267      | notch filter GSM 850                    | WRCA 800/960-6EEK          | 9           | Wainwright GmbH             | pre-m                   | 2      |            |
| 270      | termination                             | 1418 N                     | BB6935      | Weinschel                   | pre-m                   | 2      |            |
| 271      | termination                             | 1418 N                     | BE6384      | Weinschel                   | pre-m                   | 2      |            |
| 272      | attenuator (20 dB) 50 W                 | Model 47                   | BF6239      | Weinschel                   | pre-m                   | 2      |            |
| 273      | attenuator (10 dB) 100 W                | Model 48                   | BF9229      | Weinschel                   | pre-m                   | 2      |            |
| 274      | attenuator (10 dB) 50 W                 | Model 47 (10 dB) 50 W      | BG0321      | Weinschel                   | pre-m                   | 2      |            |
| 275      | DC-Block                                | Model 7003 (N)             | C5129       | Weinschel                   | pre-m                   | 2      |            |
| 276      | DC-Block                                | Model 7006 (SMA)           | C7061       | Weinschel                   | pre-m                   | 2      |            |
| 279      | power divider                           | 1515 (SMA)                 | LH855       | Weinschel                   | pre-m                   | 2      |            |
| 287      | pre-amplifier 25MHz - 4GHz              | AMF-2D-100M4G-35-10P       | 379418      | Miteq                       | 12 M                    | 1c     | 30.06.2017 |
| 291      | high pass filter GSM 850/900            | WHJ 2200-4EE               | 14          | Wainwright GmbH             | 12 M                    | 1c     | 30.06.2017 |
| 298      | Univ. Radio Communication Tester        | CMU 200                    | 832221/091  | Rohde & Schwarz             | pre-m                   | 3      |            |
| 300      | AC LISN (50 Ohm/50µH, 1-phase)          | ESH3-Z5                    | 892 239/020 | Rohde & Schwarz             | 12 M                    | -      | 30.05.2017 |
| 301      | attenuator (20 dB) 50W, 18GHz           | 47-20-33                   | AW0272      | Lucas Weinschel             | pre-m                   | 2      |            |
| 302      | horn antenna 40 GHz (Meas 1)            | BBHA9170                   | 155         | Schwarzbeck                 | 36 M                    | -      | 31.03.2017 |
| 303      | horn antenna 40 GHz (Subst 1)           | BBHA9170                   | 156         | Schwarzbeck                 | 36 M                    | -      | 31.03.2017 |
| 331      | Climatic Test Chamber -40/+80 Grad      | HC 4055                    | 43146       | Heraeus Vötsch              | Pre-m                   | 2      |            |
| 341      | Digital Multimeter                      | Fluke 112                  | 81650455    | Fluke                       | 24 M                    | -      | 30.05.2018 |
| 342      | Digital Multimeter                      | Voltcraft M-4660A          | IB 255466   | Voltcraft                   | 24 M                    | -      | 30.04.2017 |
| 347      | laboratory site                         | radio lab.                 | -           | -                           | -                       | 5      |            |
| 348      | laboratory site                         | EMI conducted              | -           | -                           | -                       | 5      |            |
| 354      | DC - Power Supply 40A                   | NGPE 40/40                 | 448         | Rohde & Schwarz             | pre-m                   | 2      |            |
| 355      | Power Meter                             | URV 5                      | 891310/027  | Rohde & Schwarz             | 24 M                    | -      | 30.05.2018 |
| 357      | power sensor                            | NRV-Z1                     | 861761/002  | Rohde & Schwarz             | 24 M                    | -      | 30.04.2017 |
| 371      | Bluetooth Tester                        | CBT32                      | 100153      | R&S                         | 36 M                    | -      | 30.05.2019 |
| 373      | Single-Line V-Network (50 Ohm/5µH)      | ESH3-Z6                    | 100535      | Rohde & Schwarz             | 12 M                    | -      | 30.05.2017 |
| 377      | EMI Test Receiver                       | ESCS 30                    | 100160      | Rohde & Schwarz             | 12 M                    | -      | 30.05.2017 |
| 389      | Digital Multimeter                      | Keithley 2000              | 0583926     | Keithley                    | 24 M                    | -      | 30.04.2017 |
| 392      | Radio Communication Tester              | MT8820A                    | 6K0000788   | Anritsu                     | 12 M                    | -      | 30.05.2017 |
| 431      | Model 7405                              | Near-Field Probe Set       | 9305-2457   | EMCO                        | -                       | 4      |            |
| 436      | Univ. Radio Communication Tester        | CMU 200                    | 103083      | Rohde & Schwarz             | 12 M                    | -      | 30.04.2017 |
| 439      | UltraLog-Antenna                        | HL 562                     | 100248      | Rohde & Schwarz             | 36 M                    | -      | 31.03.2017 |
| 443      | CTC-FAR-EMI-RSE                         | System CTC-FAR-EMI-RSE     | -           | ETS-Lindgren / CETECOM      | 12 M                    | 5      | 30.06.2017 |
| 448      | notch filter WCDMA_FDD II               | WRCT 1850.0/2170.0-5/40-   | 5           | Wainwright Instruments GmbH | 12 M                    | 1c     | 30.06.2017 |
| 449      | notch filter WCDMA FDD V                | WRCT 824.0/894.0-5/40-8SSK | 1           | Wainwright                  | 12 M                    | 1c     | 30.06.2017 |

| Ref.-No. | Equipment                               | Type                        | Serial-No.                 | Manufacturer                | Interval of calibration | Remark | Cal due    |
|----------|---|-----------------------------|----------------------------|-----------------------------|-------------------------|--------|------------|
| 454      | Oscilloscope                            | HM 205-3                    | 9210 P 29661               | Hameg                       | -                       | 4      |            |
| 456      | DC-Power supply 0-5 A                   | EA 3013 S                   | 207810                     | Elektro Automatik           | pre-m                   | 2      |            |
| 459      | DC -Power supply 0-5 A , 0-32 V         | EA-PS 2032-50               | 910722                     | Elektro Automatik           | pre-m                   | 2      |            |
| 460      | Univ. Radio Communication Tester        | CMU 200                     | 108901                     | Rohde & Schwarz             | 12 M                    | -      | 30.04.2017 |
| 463      | Universal source                        | HP3245A                     | 2831A03472                 | Agilent                     | -                       | 4      |            |
| 466      | Digital Multimeter                      | Fluke 112                   | 89210157                   | Fluke USA                   | 24 M                    | -      | 30.05.2018 |
| 467      | Digital Multimeter                      | Fluke 112                   | 89680306                   | Fluke USA                   | 36 M                    | -      | 30.04.2018 |
| 468      | Digital Multimeter                      | Fluke 112                   | 90090455                   | Fluke USA                   | 36 M                    | -      | 30.04.2018 |
| 477      | ReRadiating GPS-System                  | AS-47                       | -                          | Automotive Cons. Fink       | -                       | 3      |            |
| 480      | power meter (Fula)                      | NRVS                        | 838392/031                 | Rohde & Schwarz             | 24 M                    | -      | 30.04.2017 |
| 482      | filter matrix                           | Filter matrix SAR 1         | -                          | CETECOM (Brl)               | -                       | 1d     |            |
| 484      | pre-amplifier 2,5 - 18 GHz              | AMF-5D-02501800-25-10P      | 1244554                    | Miteq                       | 12 M                    | -      | 30.06.2017 |
| 487      | System CTC NSA-Verification SAR-EMI     | System EMI field (SAR) NSA  | -                          | ETS Lindgren / CETECOM      | 24 M                    | -      | 31.07.2017 |
| 489      | EMI Test Receiver                       | ESU40                       | 1000-30                    | Rohde & Schwarz             | 12 M                    | -      | 30.05.2017 |
| 502      | band reject filter                      | WRCG 1709/1786-1699/1796-   | SN 9                       | Wainwright                  | pre-m                   | 2      |            |
| 503      | band reject filter                      | WRCG 824/849-814/859-       | SN 5                       | Wainwright                  | pre-m                   | 2      |            |
| 512      | notch filter GSM 850                    | WRCA 800/960-02/40-6EEK     | SN 24                      | Wainwright                  | 12 M                    | 1c     | 30.06.2017 |
| 517      | relais switch matrix                    | HF Relais Box Keithley      | SE 04                      | Keithley                    | pre-m                   | 2      |            |
| 523      | Digital Multimeter                      | L4411A                      | MY46000154                 | Agilent                     | 24 M                    | -      | 30.04.2017 |
| 529      | 6 dB Broadband resistive power divider  | Model 1515                  | LH 855                     | Weinschel                   | pre-m                   | 2      |            |
| 530      | 10 dB Broadband resistive power divider | R 416110000                 | LOT 9828                   | -                           | pre-m                   | 2      |            |
| 546      | Univ. Radio Communication Tester        | CMU 200                     | 106436                     | R&S                         | 12 M                    | -      | 30.05.2017 |
| 547      | Univ. Radio Communication Tester        | CMU 200                     | 835390/014                 | Rohde & Schwarz             | 12 M                    | -      | 30.04.2017 |
| 549      | Log.Per-Antenna                         | HL025                       | 1000060                    | Rohde & Schwarz             | 36/12 M                 | -      | 31.07.2018 |
| 550      | System CTC S-VSWR Verification SAR-EMI  | System EMI Field SAR S-VSWR | -                          | ETS Lindgren/CETECOM        | 24 M                    | -      | 31.07.2017 |
| 552      | high pass filter 2,8-18GHz              | WHKX 2,8/18G-10SS           | 4                          | Wainwright                  | 12 M                    | 1c     | 30.06.2017 |
| 557      | System CTC-OTA-2                        | R&S TS8991                  | -                          | Rohde & Schwarz             | 12 M                    | 5      | 30.09.2016 |
| 558      | System CTC FAR S-VSWR                   | System CTC FAR S-VSWR       | -                          | CTC                         | 24 M                    | -      | 19.04.2017 |
| 574      | Biconilog Hybrid Antenna                | BTA-L                       | 980026L                    | Frankonia                   | 36/12 M                 | -      | 31.03.2019 |
| 584      | Spectrum Analyzer                       | FSU 8                       | 100248                     | Rohde & Schwarz             | pre-m                   | -      |            |
| 594      | Wideband Radio Communication Tester     | CMW 500                     | 101757                     | Rohde & Schwarz             | 12 M                    | -      | 30.04.2017 |
| 597      | Univ. Radio Communication Tester        | CMU 200                     | 100347                     | Rohde & Schwarz             | pre-m                   | -      |            |
| 598      | Spectrum Analyzer                       | FSEM 30 (Reserve)           | 831259/013                 | Rohde & Schwarz             | 24 M                    | -      | 30.04.2017 |
| 600      | power meter                             | NRVD (Reserve)              | 834501/018                 | Rohde & Schwarz             | 24 M                    | -      | 30.04.2017 |
| 601      | medium-sensitivity diode sensor         | NRV-Z5 (Reserve)            | 8435323/003                | Rohde & Schwarz             | 24 M                    | -      | 30.04.2017 |
| 602      | peak power sensor                       | NRV-Z32 (Reserve)           | 835080                     | Rohde & Schwarz             | 24 M                    | -      |            |
| 611      | DC power supply                         | E3632A                      | KR 75305854                | Agilent                     | pre-m                   | 2      |            |
| 612      | DC power supply                         | E3632A                      | MY 40001321                | Agilent                     | pre-m                   | 2      |            |
| 613      | Attenuator                              | R416120000 20dB 10W         | Lot. 9828                  | Radiall                     | pre-m                   | 2      |            |
| 616      | Digitalmultimeter                       | Fluke 177                   | 88900339                   | Fluke                       | 24 M                    | -      | 30.05.2018 |
| 617      | Power Splitter/Combiner                 | ZFSC-2-2-S+                 | S F987001108               | Mini Circuits               | -                       | 2      |            |
| 618      | Power Splitter/Combiner                 | 50PD-634                    | 600994                     | JFW Industries USA          | -                       | 2      |            |
| 619      | Power Splitter/Combiner                 | 50PD-634                    | 600995                     | JFW Industries, USA         | -                       | 3      |            |
| 620      | EMI Test Receiver                       | ESU 26                      | 100362                     | Rohde-Schwarz               | 12 M                    | -      | 30.05.2017 |
| 621      | Step Attenuator 0-139 dB                | RSP                         | 100017                     | Rohde & Schwarz             | pre-m                   | 2      |            |
| 625      | Generic Test Load USB                   | Generic Test Load USB       | -                          | CETECOM                     | -                       | 2      |            |
| 627      | data logger                             | OPUS 1                      | 201.0999.9302.6.4.1.4<br>3 | G. Luft GmbH                | 24 M                    | -      | 30.04.2017 |
| 634      | Spectrum Analyzer                       | FSM (HF-Unit)               | 826188/010                 | Rohde & Schwarz             | pre-m                   | 2      |            |
| 637      | High Speed HDMI with Ethernet 1m        | HDMI cable with Ethernet 1m | -                          | KogiLink                    | -                       | 2      |            |
| 638      | HDMI Kabel with Ethernet 1,5 m flach    | HDMI cable with Ethernet    | -                          | Reichelt                    | -                       | 2      |            |
| 640      | HDMI cable 2m rund                      | HDMI cable 2m rund          | -                          | Reichelt                    | -                       | 2      |            |
| 641      | HDMI cable with Ethernet                | Certified HDMI cable with   | -                          | PureLink                    | -                       | 2      |            |
| 644      | Amplifier                               | ZX60-2534M+                 | SN865701299                | Mini-Circuits               | -                       | -      |            |
| 670      | Univ. Radio Communication Tester        | CMU 200                     | 106833                     | Rohde & Schwarz             | 24 M                    | -      | 30.05.2018 |
| 671      | DC-power supply 0-5 A                   | EA-3013S                    | -                          | Elektro Automatik           | pre-m                   | 2      |            |
| 678      | Power Meter                             | NRP                         | 101638                     | Rohde&Schwarz               | pre-m                   | -      |            |
| 683      | Spectrum Analyzer                       | FSU 26                      | 200571                     | Rohde & Schwarz             | 12 M                    | -      | 30.05.2017 |
| 686      | Field Analyzer                          | EHP-200A                    | 160WX30702                 | Narda Safety Test Solutions | 24 M                    | -      | 30.04.2017 |
| 687      | Signal Generator                        | SMF 100A                    | 102073                     | Rohde&Schwarz               | 12 M                    | -      | 30.05.2017 |
| 688      | Pre Amp                                 | JS-18004000-40-8P           | 1750117                    | Miteq                       | pre-m                   | -      |            |
| 690      | Spectrum Analyzer                       | FSU                         | 100302/026                 | Rohde&Schwarz               | 12 M                    | -      | 30.05.2017 |
| 692      | Bluetooth Tester                        | CBT 32                      | 100236                     | Rohde & Schwarz             | 36 M                    | -      | 31.03.2017 |
| 697      | Power Splitter                          | ZN4PD-642W-S+               | 165001445                  | Mini-Circuits               | -                       | 2      |            |



### 7.1.3. Legend

| Note / remarks |     | Calibrated during system calibration:   |
|----------------|-----|---|
|                | 1a  | System CTC-SAR-EMS (Ref.-No. 442)   |
|                | 1b  | System-CTC-EMS-Conducted (Ref.-No. 335)   |
|                | 1c  | System CTC-FAR-EMI-RSE (Ref.-No . 443)  |
|                | 1d  | System CTC-SAR-EMI (Ref.-No . 441)  |
|                | 1e  | System CTC-OATS (EMI radiated) (Ref.-No. 337)   |
|                | 1 f | System CTC-CTIA-OTA (Ref.-No . 420)   |
|                | 1 g | System CTC-FAR-EMS (Ref.-No . 444)  |
|                | 2   | Calibration or equipment check immediately before measurement                             |
|                | 3   | Regulatory maintained equipment for functional check or support purpose                   |
|                | 4   | Ancillary equipment without calibration e.g. mechanical equipment or monitoring equipment |
|                | 5   | Test System   |

|                         |         |   |
|-------------------------|---------|---|
| Interval of calibration | 12 M    | 12 month  |
|                         | 24 M    | 24 month  |
|                         | 36 M    | 36 month  |
|                         | 24/12 M | Calibration every 24 months, between this every 12 months internal validation |
|                         | 36/12 M | Calibration every 36 months, between this every 12 months internal validation |
|                         | Pre-m   | Check before starting the measurement   |
|                         | -       | Without calibration   |

## 8. Versions of test reports (change history)

| Version | Applied changes | Date of release |
|---------|-----------------|-----------------|
| --      | Initial release | 2016-12-05      |
| --      | --              | --              |