


Appendix C. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	21°C	Humidity	65%
Test Engineer	Lucke Hsieh	Configurations	2.4GHz + 5GHz

Horizontal

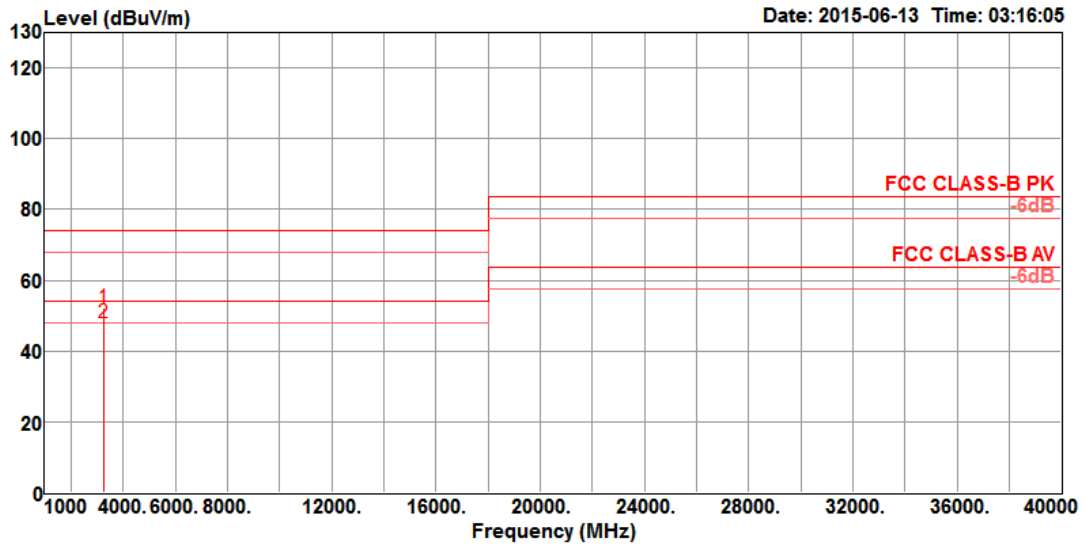

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	3239.35	52.27	74.00	-21.73	53.22	4.53	28.65	34.13	108	48 Peak	HORIZONTAL
2	3240.74	48.14	54.00	-5.86	49.07	4.54	28.65	34.12	108	48 Average	HORIZONTAL

Vertical

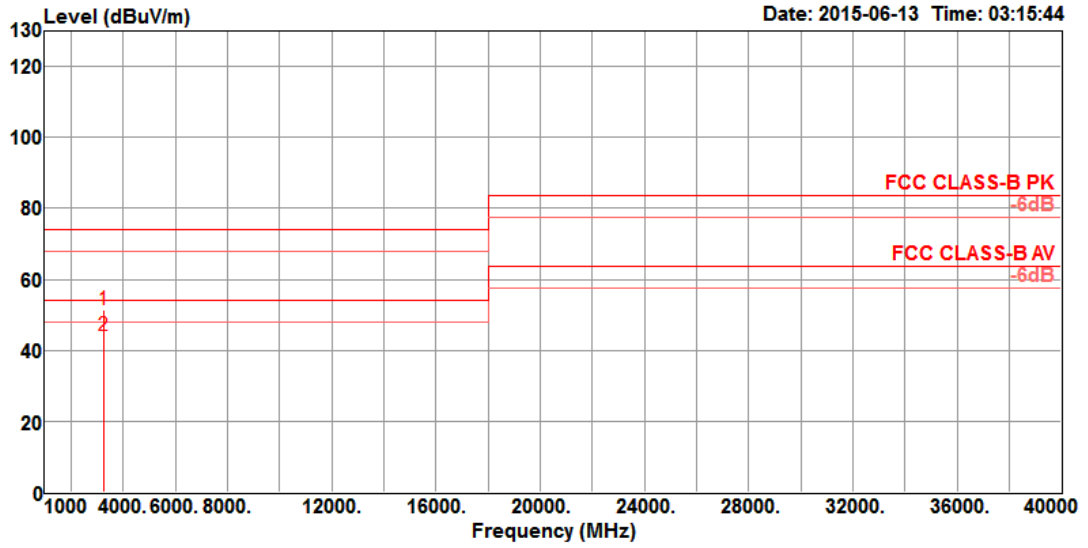

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	3240.62	51.58	74.00	-22.42	52.51	4.54	28.65	34.12	100	65 Peak	VERTICAL
2	3240.75	44.14	54.00	-9.86	45.07	4.54	28.65	34.12	100	65 Average	VERTICAL