



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

TEST REPORT

According to : FCC 47CFR part 15 subpart C

According to : RSS-247 Issue No. 1

Test Report No. : CTK-2016-01117-1

Date of Issue : 2016-11-22

FCC ID : U5MBPM500

IC : 7962A-BPM500

Model/Type No. : BPM500

Kind of Product : Bluetooth Module

Applicant : BIXOLON Co., Ltd.

Applicant Address : (Sampyeong-dong, 7th~8th FL, Miraeasset Venture Tower), 20,
Pangyoyeok-ro241beon-gil, Bundang-gu Seongnam-si,
Gyeonggi-do, Korea

Manufacturer : BIXOLON Co., Ltd.

Manufacturer Address : (Sampyeong-dong, 7th~8th FL, Miraeasset Venture Tower), 20,
Pangyoyeok-ro241beon-gil, Bundang-gu Seongnam-si,
Gyeonggi-do, Korea

Contact Person : Shin Ji Sung

Telephone : +82-31-218-5582

Received Date : 2016-08-11

Test period : Start : 2016-08-25 End : 2016-11-22

Test Results : ☒ In Compliance ☐ Not in Compliance

The test results presented in this report relate only to the object tested.

Tested by

Y. T. Lee

Young-taek Lee
Test Engineer
Date: 2016-11-22

Reviewed by

Y. J. Park

Young-Joon, Park
Technical Manager
Date: 2016-11-22



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

REPORT REVISION HISTORY

Date	Revision	Page No
2016-09-02	Issued (CTK-2016-01117)	All
2016-11-22	Issued (CTK-2016-01117-1) Re Test : Unwanted emission, AC Power Line Conducted Emissions	

This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

TABLE OF CONTENTS

1.0	General Product Description	4
1.1	Tested Frequency.....	4
1.2	Duty Cycle	5
1.3	Device Modifications.....	5
1.4	Peripheral Devices	5
1.5	Calibration Details of Equipment Used for Measurement	5
1.6	Test Facility.....	6
1.7	Laboratory Accreditations and Listings.....	6
2.0	Summary of tests	7
2.1	Technical Characteristic Test.....	8
2.1.1	6dB Bandwidth & 99% Bandwidth	8
2.1.2	Maximum peak Conducted Output Power	13
2.1.3	Power Spectral Density	16
2.1.4	Unwanted emission (Conducted).....	19
2.1.5	Unwanted emission (Radiated)	24
2.1.6	AC Power Line Conducted Emissions.....	34
2.1.7	RF Exposure evaluation	37
APPENDIX A – Test Equipment Used For Tests		39



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

1.0 General Product Description

Kind of product	Bluetooth Module
FCC ID	U5MBPM500
IC	7962A-BPM500
Equipment model name	BPM500
Variant Model	-
Firmware Version ID Number(FVIN)	V1.0.0
Serial number	N/A
Test SW Version	CSR BlueSuite 2.6.0
RF Power setting in Test SW	Initial value
Antenna type	PCB Pattern antenna
Antenna Gain	Peak 0.2 dBi
Frequency Range	2 402 MHz – 2 480 MHz
RF output power	-3.51 dBm (Peak Conducted)
Number of channels	40
Rated Channel spacing	2 MHz
Type of Modulation	GFSK
Power supply	DC 3.3 V
Test Site Registration Number	8737A-2

1.1 Tested Frequency

	Low	Middle	High
Frequency (MHz)	2 402	2 440	2 480



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification





CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

1.6 Test Facility

The measurement facility is located at 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

1.7 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Registration Number	Logo
USA	FCC	FCC Part 15 & 18 EMI (Electromagnetic Interference / Emission)	805871	
CANADA	IC	IC EMI (3/10m test site)	8737A-2	
JAPAN	VCCI	VCCI V-3 EMI (Electromagnetic Interference / Emission)	C-986 T-1843 R-3627 G-387	
KOREA	MSIP	EMI (Electromagnetic Interference / Emission) EMS (Electromagnetic Susceptibility / Immunity)	KR0025	



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

2.0 Summary of tests

Section in RSS-GEN, RSS-247	FCC Part Section(s)	Parameter	Result (note)
RSS-247 5.2(1)	15.247(a)	6 dB Bandwidth	C
RSS-247 5.2(2)	15.247(e)	Transmitter Power Spectral Density	C
RSS-247 5.4(4)	15.247(b)	Maximum peak conducted output power	C
RSS-247 5.5	15.247(d)	Unwanted Emission (Conducted)	C
RSS-247 6.13	15.209	Unwanted Emission (Radiated)	C
RSS-Gen 7	NA	Receiver Emission	C
RSS-Gen RSS-102	2.1091	RF exposure evaluation	C
RSS-Gen 8.8	15.207(a)	AC Power line Conducted Emission	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

The sample was tested according to the following specification:

- FCC Part 15.247, ANSI C63.10-2013
- RSS-247 Issue 1

The tests were performed according to the method of measurements prescribed in 558074 D01 DTS Meas Guidance v03r05.



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification

CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

2.1 Technical Characteristic Test

2.1.1 6dB Bandwidth & 99% Bandwidth

Procedure:

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz(6dB BW), 30 kHz(99% BW)

VBW $\geq 3 \times$ RBW

Trace = Max hold

Sweep = auto

Detector function = peak

Measurement Data:

Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Result
2 402	0.714	1.032	Complies
2 440	0.708	1.026	Complies
2 480	0.708	1.026	Complies

Minimum Standard:

6 dB Bandwidth > 500kHz

See next pages for actual measured spectrum plots.



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification


CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501


www.e-ctk.com

6dB Bandwidth Low channel (2 402 MHz)

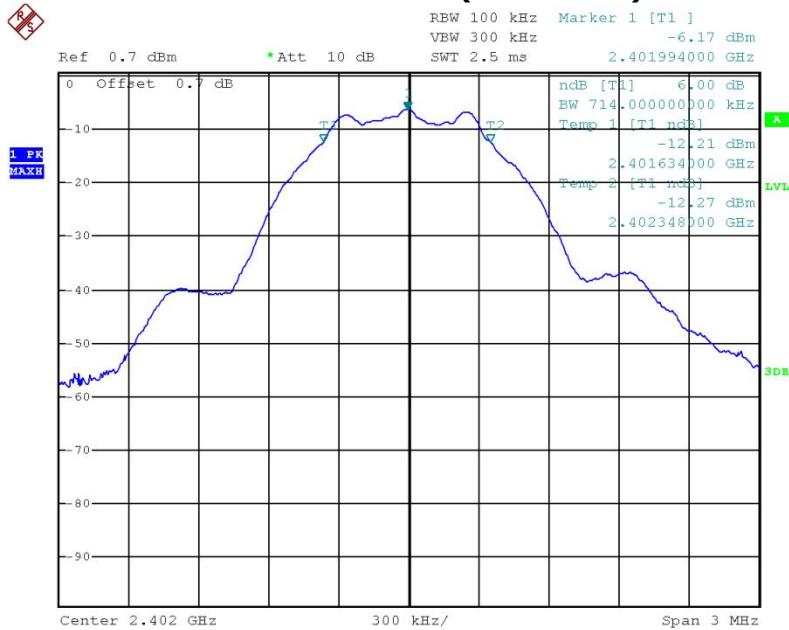

Date: 1.SEP.2016 16:01:38

Middle channel (2 440 MHz)

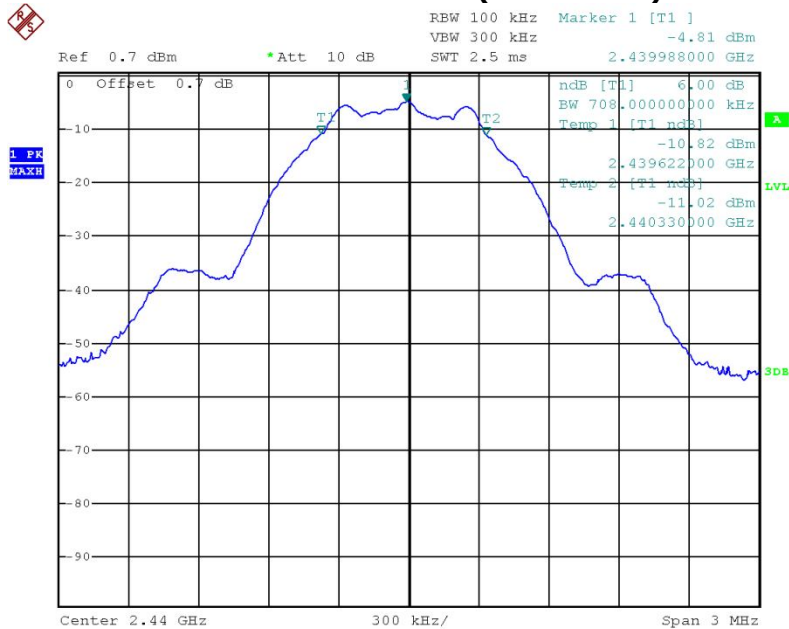

Date: 1.SEP.2016 16:00:50



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification


CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

High channel (2 480 MHz)

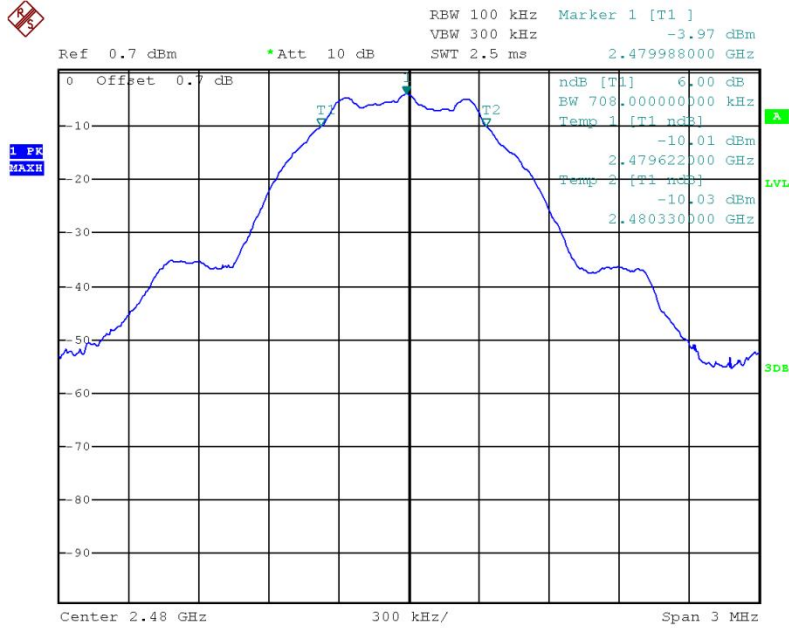

Date: 1.SEP.2016 16:00:16



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification


CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501


www.e-ctk.com

99% Bandwidth Low channel (2 402 MHz)

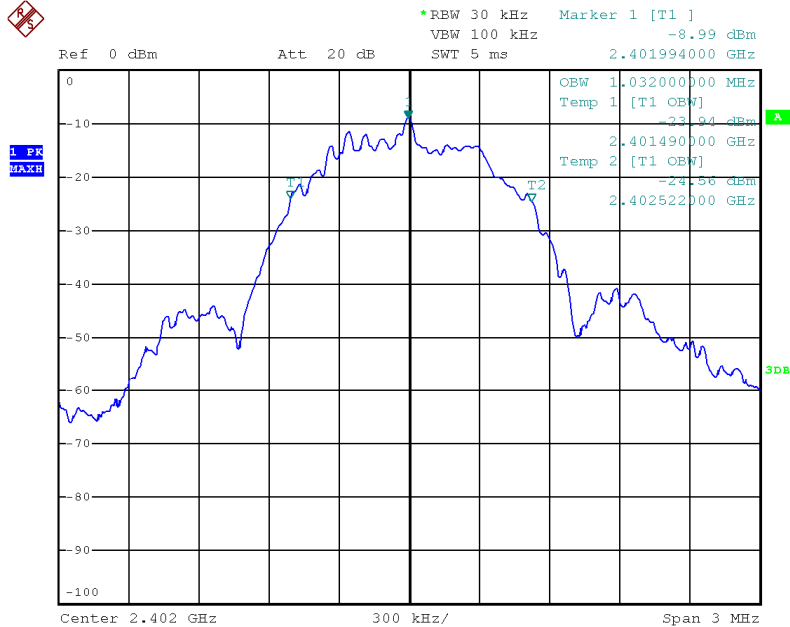

Date: 24.NOV.2016 14:32:13

Middle channel (2 440 MHz)

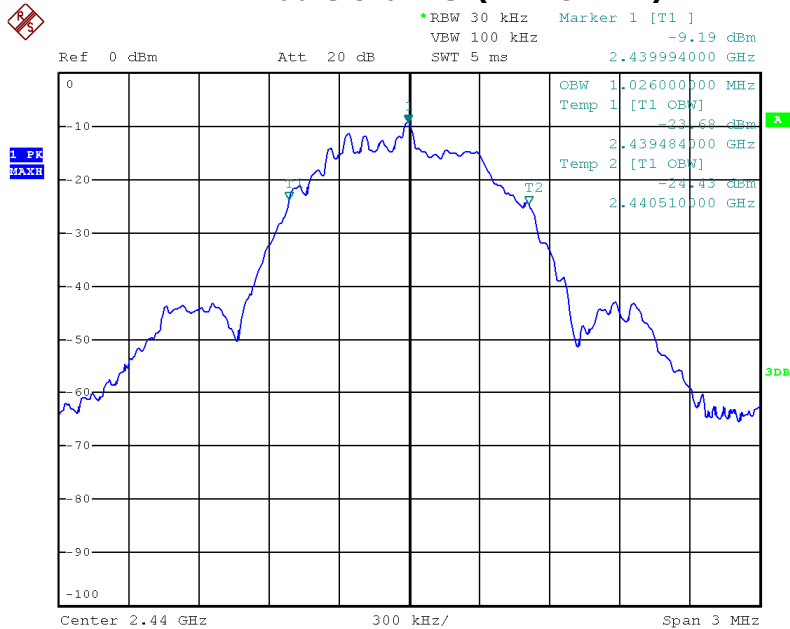

Date: 24.NOV.2016 14:32:34



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification


CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

High channel (2 480 MHz)

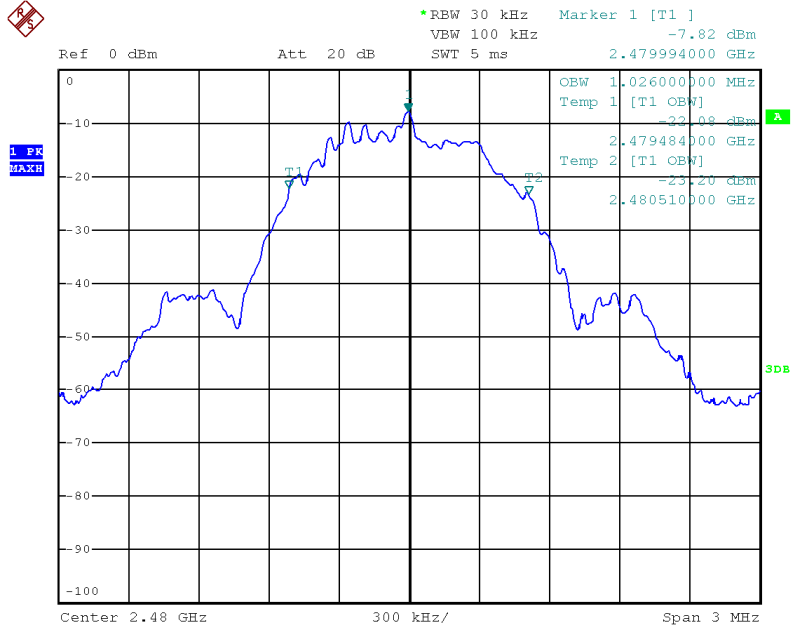

Date: 24.NOV.2016 14:31:01



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

2.1.2 Maximum peak Conducted Output Power

Test Procedures

Maximum Peak Output Power from the EUT were measured according to the dictates power measurement procedure in section 11.9.1.1 of ANSI C63.10-2013.

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the RBW \geq DTS bandwidth
- b) Set the VBW $\geq 3 \times$ RBW
- c) Set the span $\geq 3 \times$ RBW
- d) Sweep time = auto couple
- e) Detector = peak
- e) Trace mode= max hold
- f) Allow trace to fully stabilize.
- g) Use peak marker function to determine the peak amplitude level.

Limit

$< 1 \text{ W (30 dBm)}$

Test Results

Frequency (MHz)	Maximum peak Conducted Output Power		
	Output power (dBm)	Output power (mW)	Result
2 402	-5.77	0.264	Complies
2 440	-4.37	0.365	Complies
2 480	-3.51	0.445	Complies

See next pages for actual measured spectrum plots.



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification


CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501


www.e-ctk.com

Low channel (2 402 MHz)

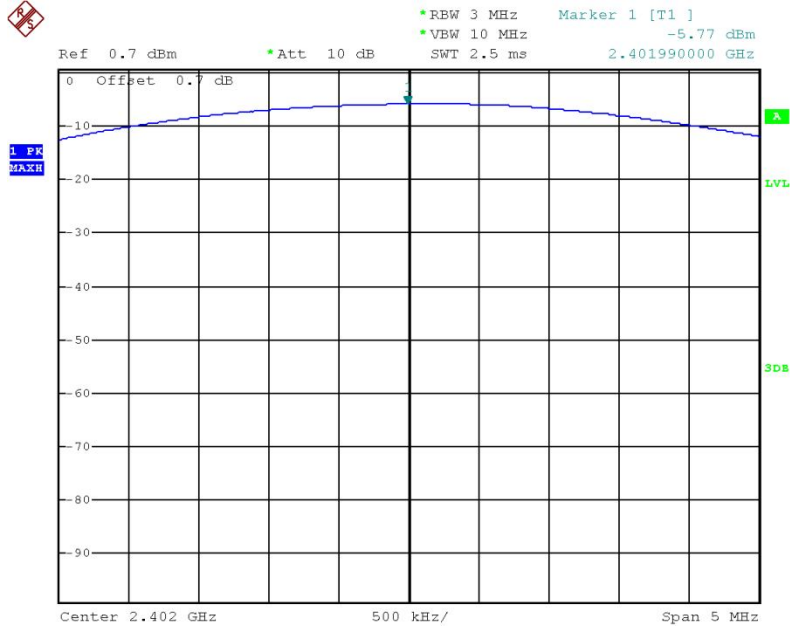

Date: 1.SEP.2016 16:03:01

Middle channel (2 440 MHz)

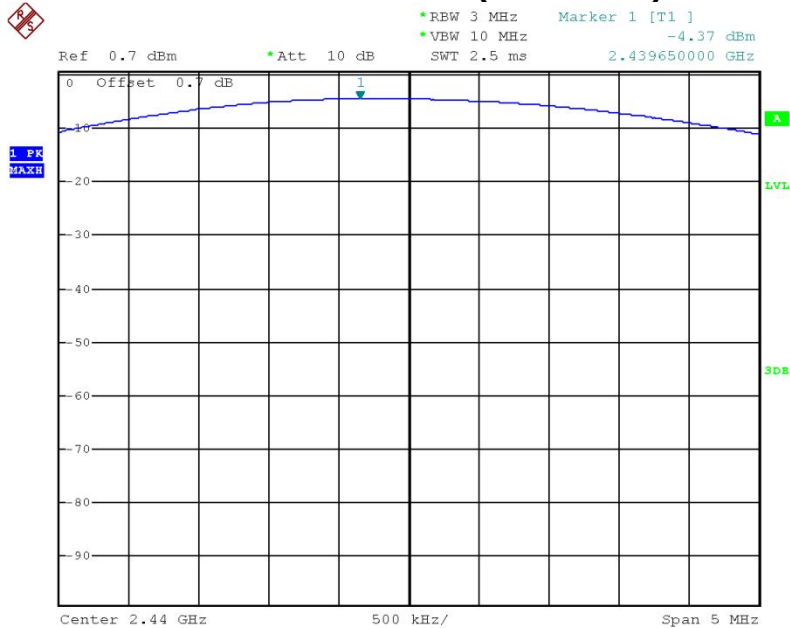

Date: 1.SEP.2016 16:03:35




CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

High channel (2 480 MHz)

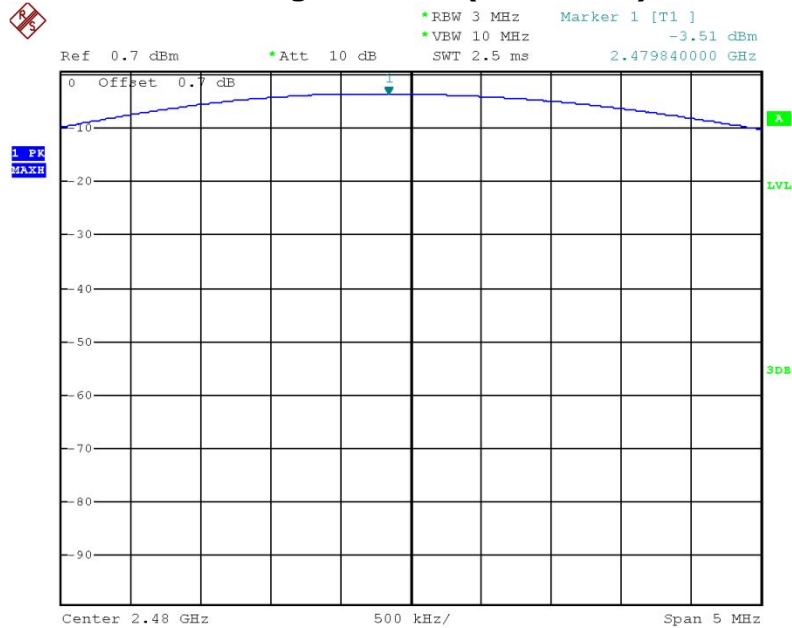

Date: 1.SEP.2016 16:04:22



CTK Co., Ltd.

The Prime Leader of Global Regulatory Certification

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

2.1.3 Power Spectral Density

Procedure:

Power Spectral Density from the EUT were measured according to the dictates PKPSD measurement procedure in section 11.10.2 of ANSI C63.10-2013.

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance.

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to : $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
- Set the VBW $\geq 3 \times \text{RBW}$
- Detector = peak
- Sweep time = auto couple
- Trace mode = max hold
- Allow trace to fully stabilize
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceed limit, reduce RBW(no less than 3 kHz) and repeat.

Test results:

Frequency (MHz)	Power Spectral Density	
	dBm	Result
2 402	-21.95	Complies
2 440	-20.56	Complies
2 480	-19.66	Complies

Minimum Standard:

Power Spectral Density	< 8dBm @ 3 kHz BW
------------------------	-------------------

See next pages for actual measured spectrum plots.



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification


CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501


www.e-ctk.com

Low channel (2 402 MHz)

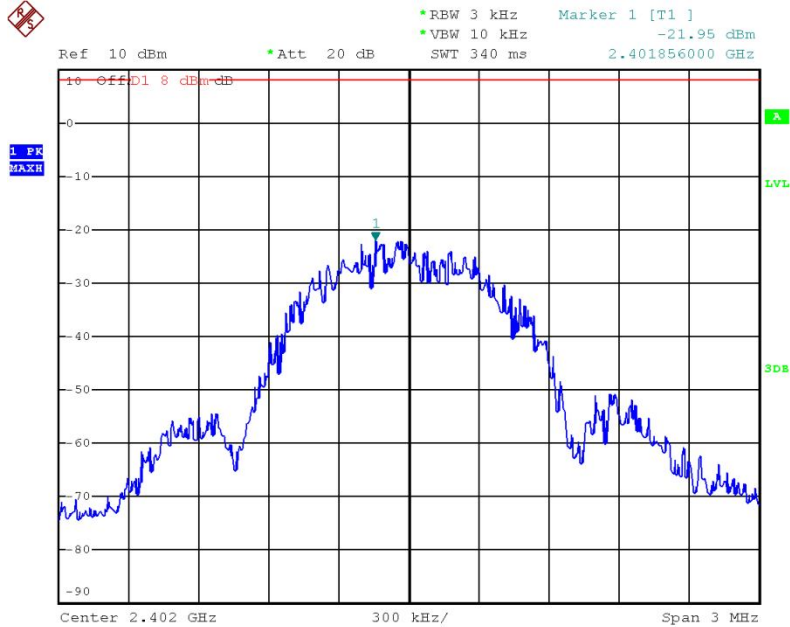

Date: 1.SEP.2016 16:07:28

Middle channel (2 440 MHz)

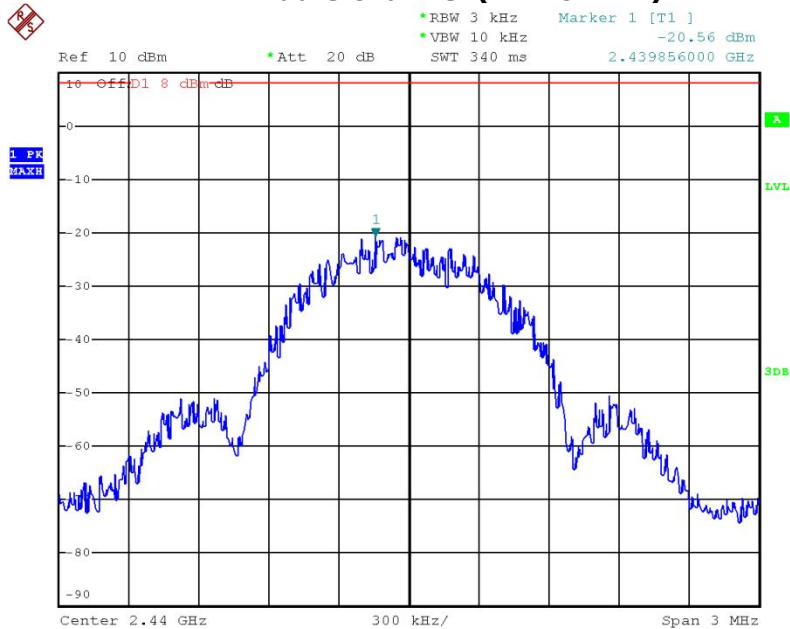

Date: 1.SEP.2016 16:06:36



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification


CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

High channel (2 480 MHz)

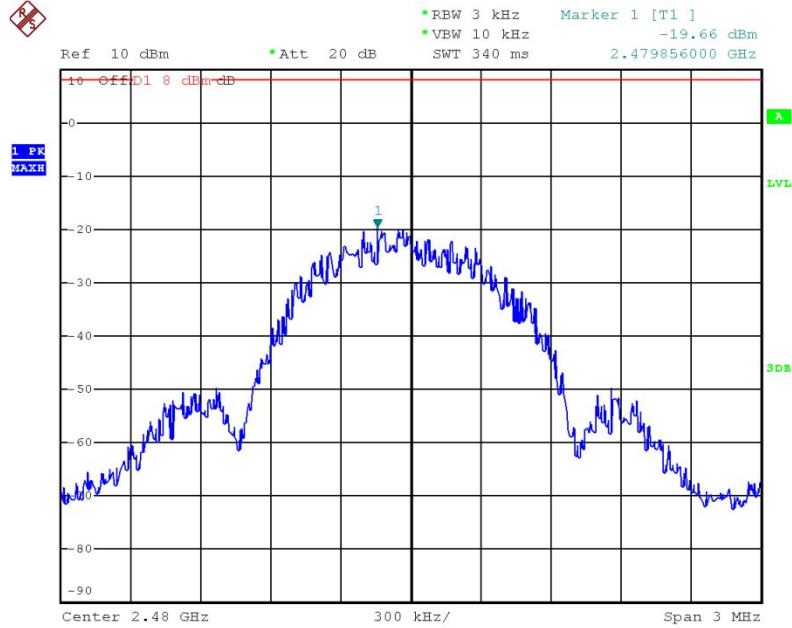

Date: 1.SEP.2016 16:05:56



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

2.1.4 Unwanted emission (Conducted)

Procedure:

The Unwanted emission from the EUT were measured according to the dictates PKPSD measurement procedure in section 11.11 of ANSI C63.10-2013.

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

VBW $\geq 3 \times$ RBW

Trace = Max hold

Detector function = peak

Sweep = auto

Test results: Complies

- All conducted emission in any 100kHz bandwidth outside of the spread spectrum band was at least 20dB lower than the highest in-band spectral density. Therefore the applying equipment meets the requirement.

Minimum Standard:	> 20 dBc
--------------------------	----------

See next pages for actual measured spectrum plots.



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification


CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea


Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

Band-edge

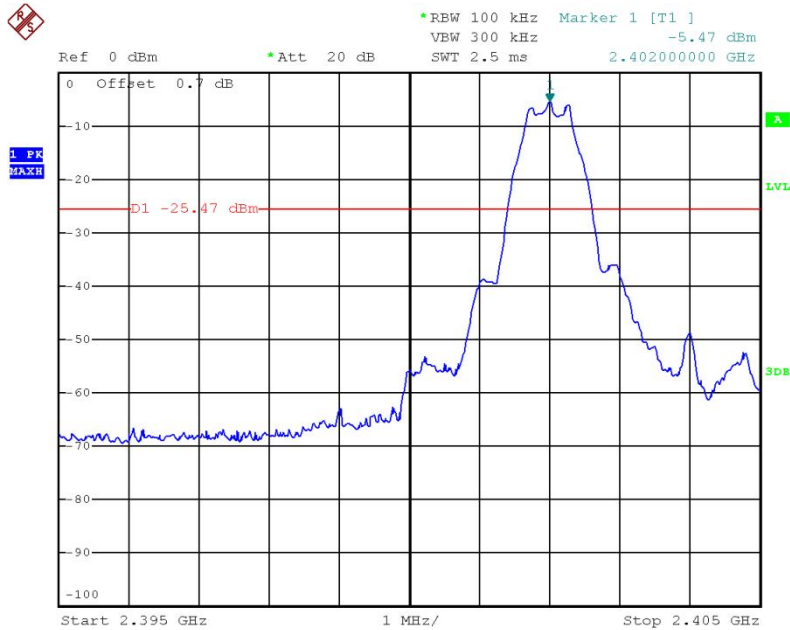

Date: 22.NOV.2016 11:23:58

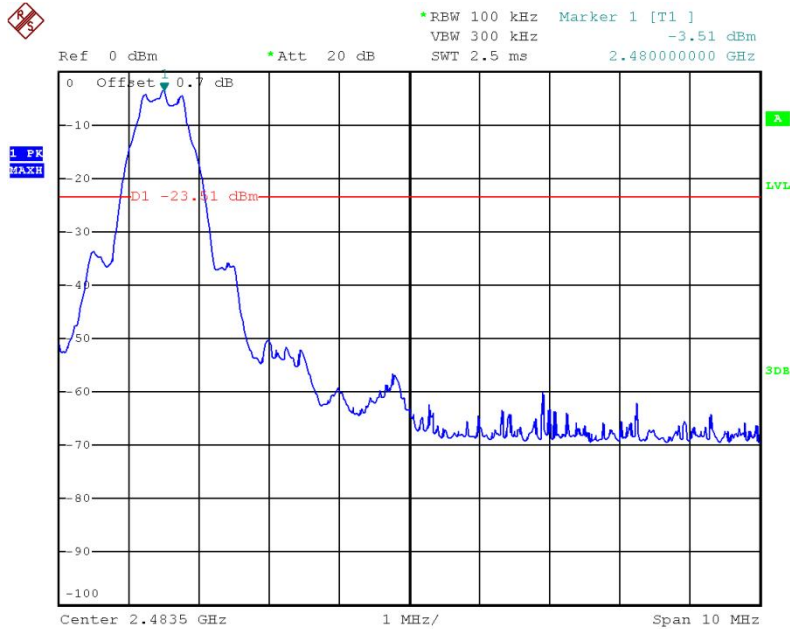

Date: 22.NOV.2016 11:21:48



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification

CTK Co., Ltd.


(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com


Low channel (2 402 MHz)

[Transmit mode]

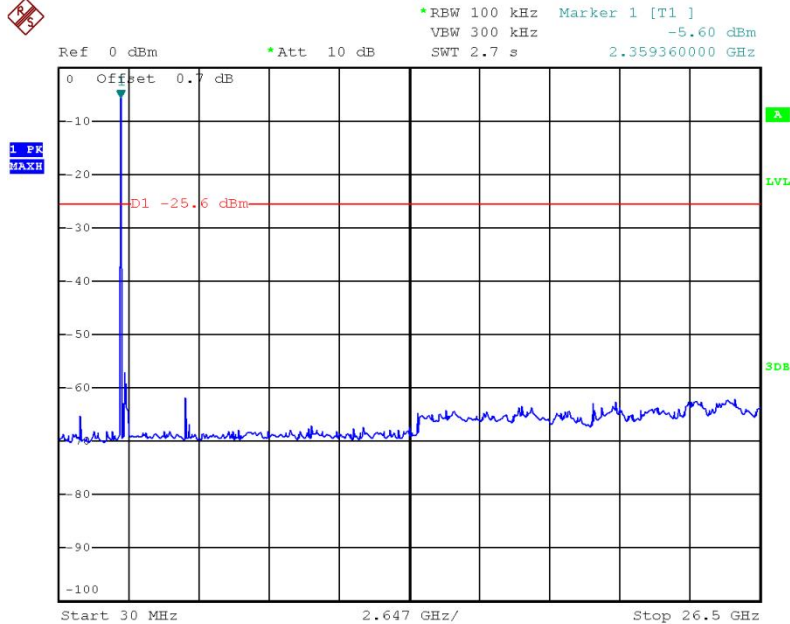

Date: 22.NOV.2016 11:25:56

[Receive mode]

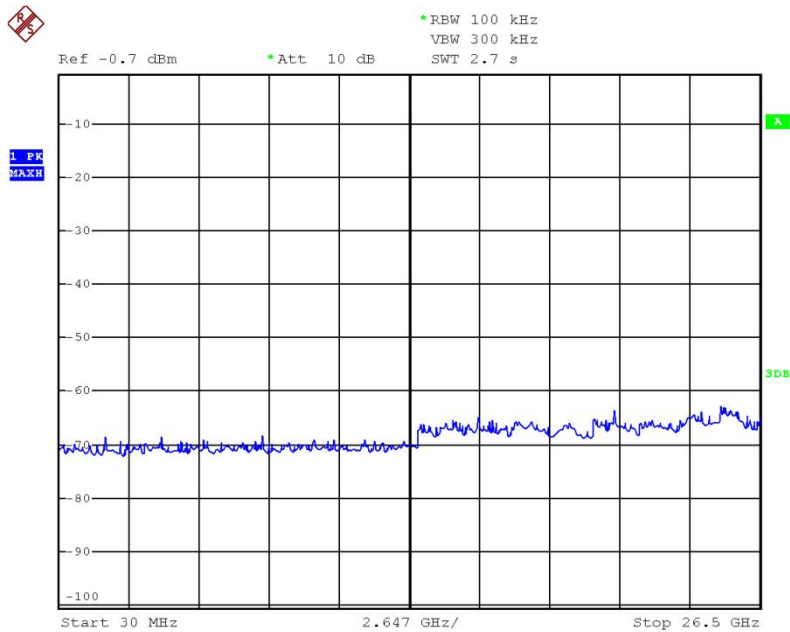

Date: 22.NOV.2016 11:30:37



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification

CTK Co., Ltd.


(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com


Middle channel (2 440 MHz)

[Transmit mode]

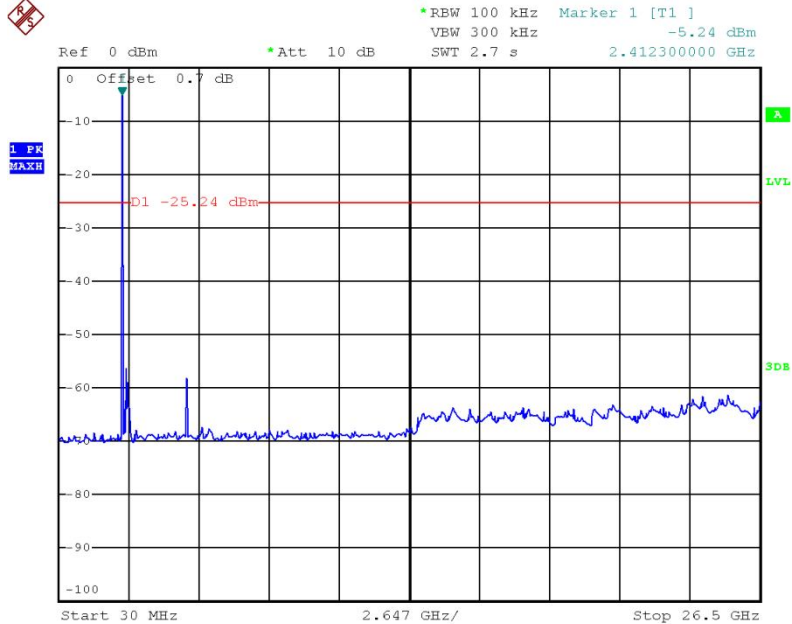

Date: 22.NOV.2016 11:27:58

[Receive mode]

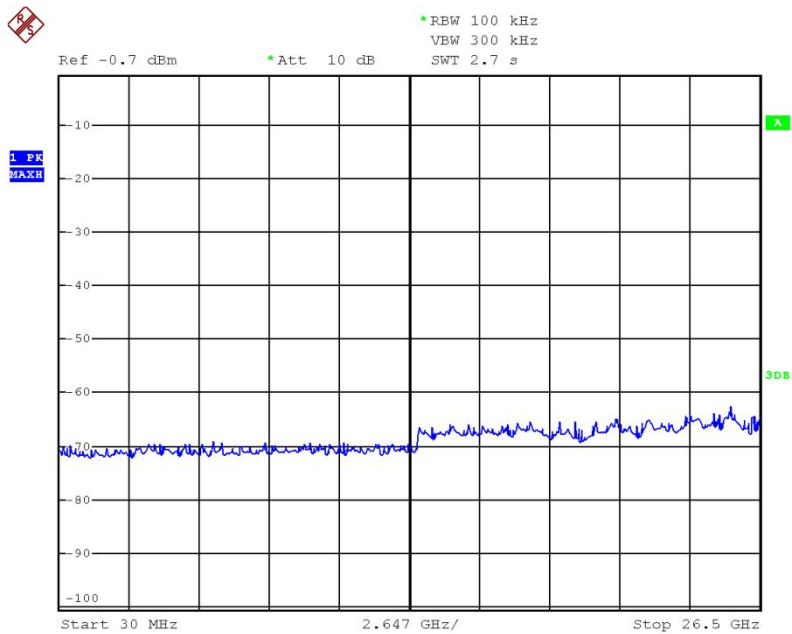

Date: 22.NOV.2016 11:30:56



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification

CTK Co., Ltd.


(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com


High channel (2 480 MHz)

[Transmit mode]

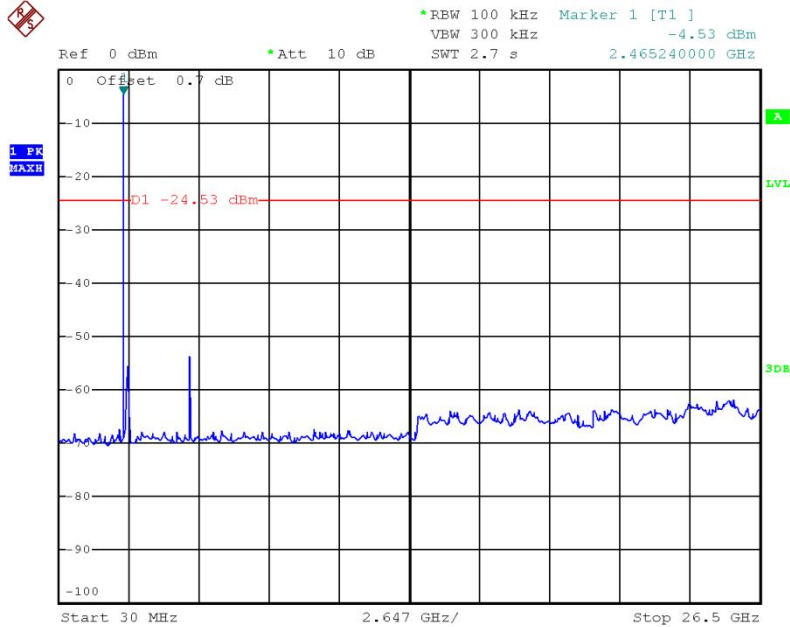

Date: 22.NOV.2016 11:29:57

[Receive mode]

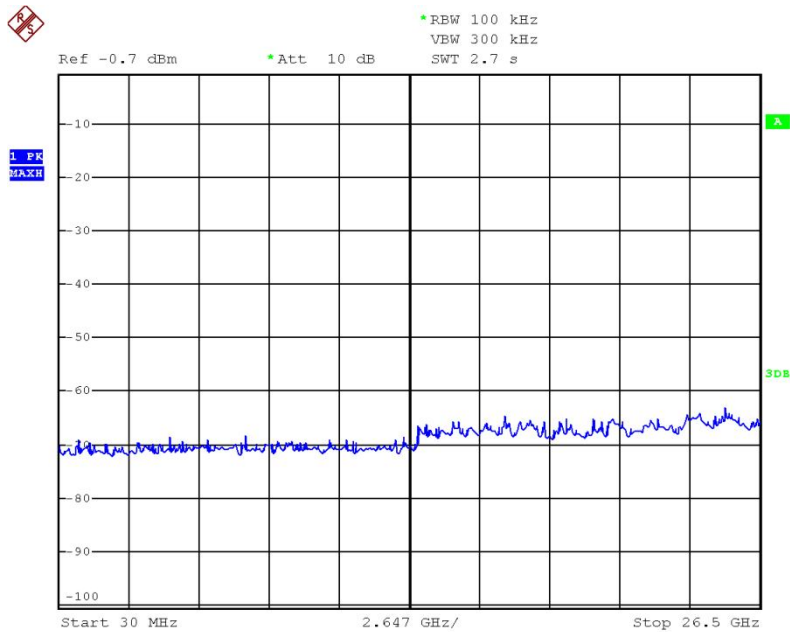

Date: 22.NOV.2016 11:31:15



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

2.1.5 Unwanted emission (Radiated)

Test Location

- ☒ 10 m SAC (test distance : ☐ 10 m, ☒ 3 m)
☒ 3 m SAC (test distance : 3 m)

Test Procedures

- 1) In the frequency range of 9 kHz to 30 MHz, magnetic field is measured with Loop Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- 2) In the frequency range above 30 MHz, Bi-Log Test Antenna(30 MHz to 1 GHz) and Horn Test Antenna(above 1 GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is carried from 1m to 4m above the ground to determine the maximum value of the field strength. The emissions levels at both horizontal and vertical polarizations should be tested.

The spectrum analyzer is set to:

Frequency Range = 9 kHz ~ 25 GHz (2.4 GHz 10th harmonic)

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz, 9 kHz for $f < 30$ MHz

VBW \geq RBW

Sweep = auto



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

Limit

FCC Part 15 § 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	MHz	MHz	GHz
0.09-0.11	8.37626-8.38675	73-74.6	399.9-410	2690-2900	10.6-12.7
¹ 0.495-0.505	8.41425-8.41475	74.8-75.2	608-614	3260-3267	13.25-13.4
2.1735-2.1905	12.29-12.293	108-121.94	960-1240	3332-3339	14.47-14.5
4.125-4.128	12.51975-12.52025	123-138	1300-1427	3345.8-3358	15.35-16.2
4.17725-4.17775	12.57675-12.57725	149.9-150.05	1435-1626.5	3600-4400	17.7-21.4
4.20725-4.20775	13.36-13.41	156.52475-156.52525	1645.5-1646.5	4500-5150	22.01-23.12
6.215-6.218	16.42-16.423	156.7-156.9	1660-1710	5350-5460	23.6-24
6.26775-6.26825	16.69475-16.69525	162.0125-167.17	1718.8-1722.2	7250-7750	31.2-31.8
6.31175-6.31225	16.80425-16.80475	167.72-173.2	2200-2300	8025-8500	36.43-36.5
8.291-8.294	25.5-25.67	240-285	2310-2390	9000-9200	² Above 38.6
8.362-8.366	37.5-38.25	322-335.4	2483.5-2500	9300-9500	

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§ 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

FCC Part 15 § 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency(MHz)	Field Strength uV/m@3m	Field Strength dBuV/m@3m	Deasurement Distance (meters)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705-30	30	-	30
30-88	100**	40	3
88-216	150**	43.5	3
216-960	200**	46	3
Above 960	500	54	3


** Except as provided in 15.209(g).fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz, 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g.15.231 and 15.241.

Note :


- 1) For above 1 GHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.
- 2) For above 1 GHz, limit field strength of harmonics : 54 dBuV/m@3m (AV) and 74 dBuV/m@3m (PK)
- 3) For measurement above 1GHz, the resolution bandwidth is set to 1 MHz and video bandwidth is set to 1 MHz for peak measurement and 10 Hz for average measurement.(Duty Cycle is > 98%,)
- 4) Duty Cycle is < 98%, VBW setting will need to > 1/T.
(**VBW : 3 kHz**) (T : minimum transmitter on time)

Test Setup:


- 1) For field strength of emissions from 9 kHz to 30 MHz

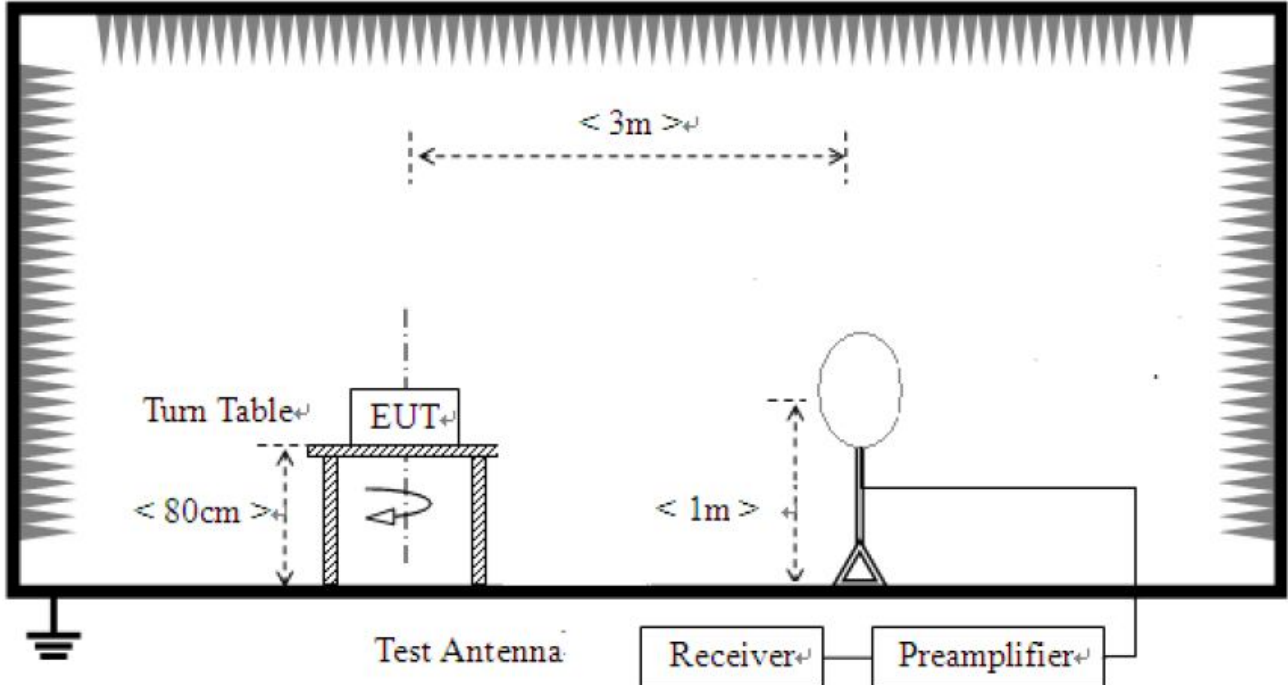

- 2) For field strength of emissions from 30 MHz to 1 GHz

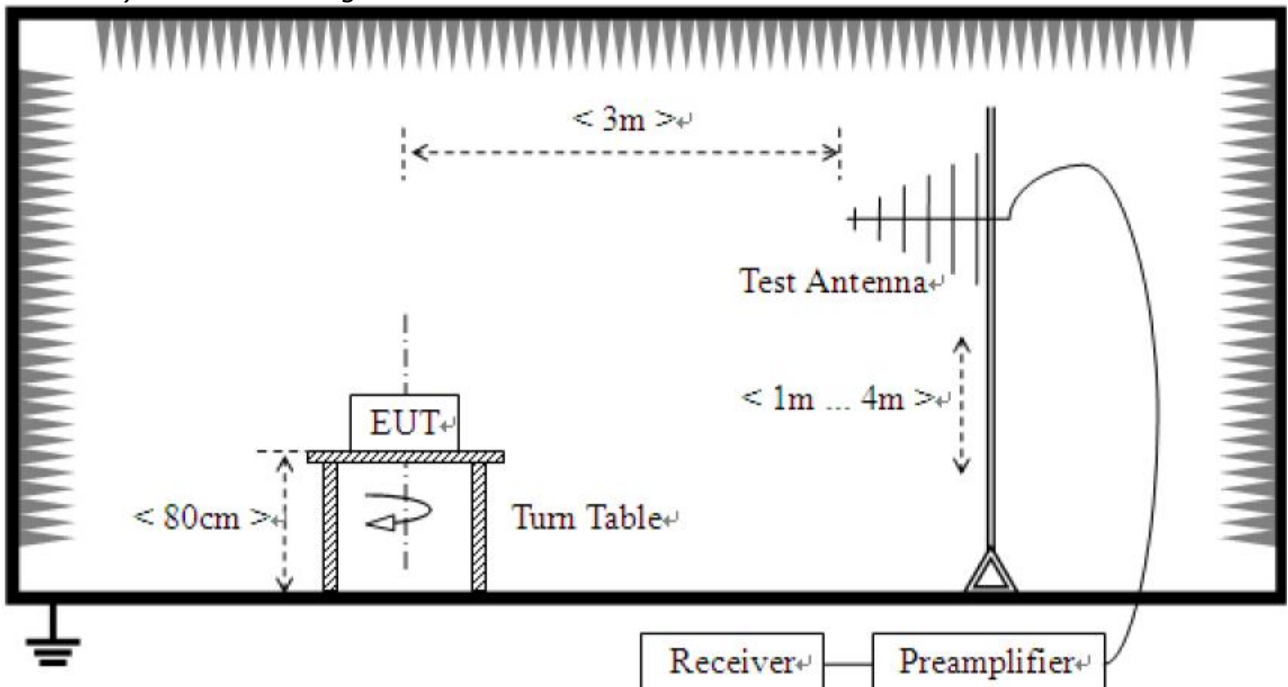

3) For field strength of emissions above 1 GHz

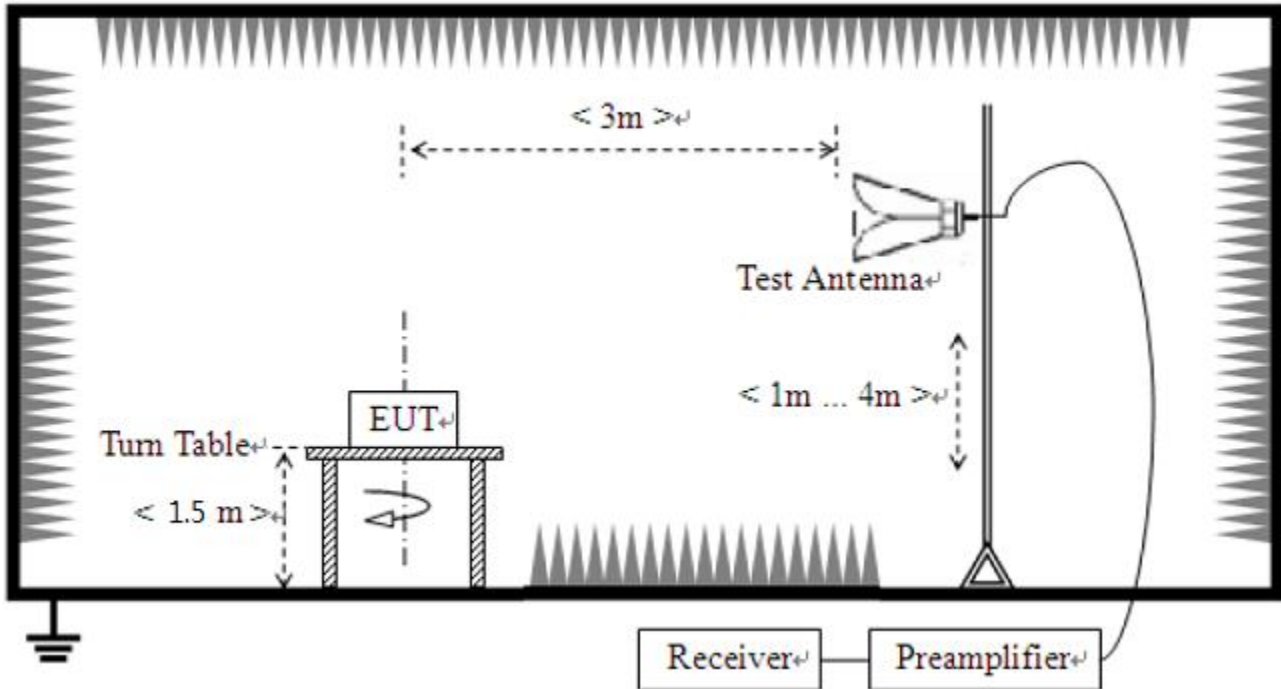

Test Results

1) 9 kHz to 30 MHz

EUT	Bluetooth Module	Measurement Detail	
Model	BPM500	Frequency Range	9 kHz – 30 MHz
Test mode	Continuous modulated carrier	Detector function	Quasi-Peak

The requirements are:

☒ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
-	-	-	See note

Note :

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB)



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

2) 30 MHz to 1 GHz

Test mode : Transmit, Low Channel(Worst Case)


EUT	Bluetooth Module	Measurement Detail	
Model	BPM500	Frequency Range	Below 1 000MHz
Mode	Transmit, Low Channel	Detector function	Quasi-Peak

The requirements are:

☒ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
450.98	36.2	9.8	Peak

Test Data

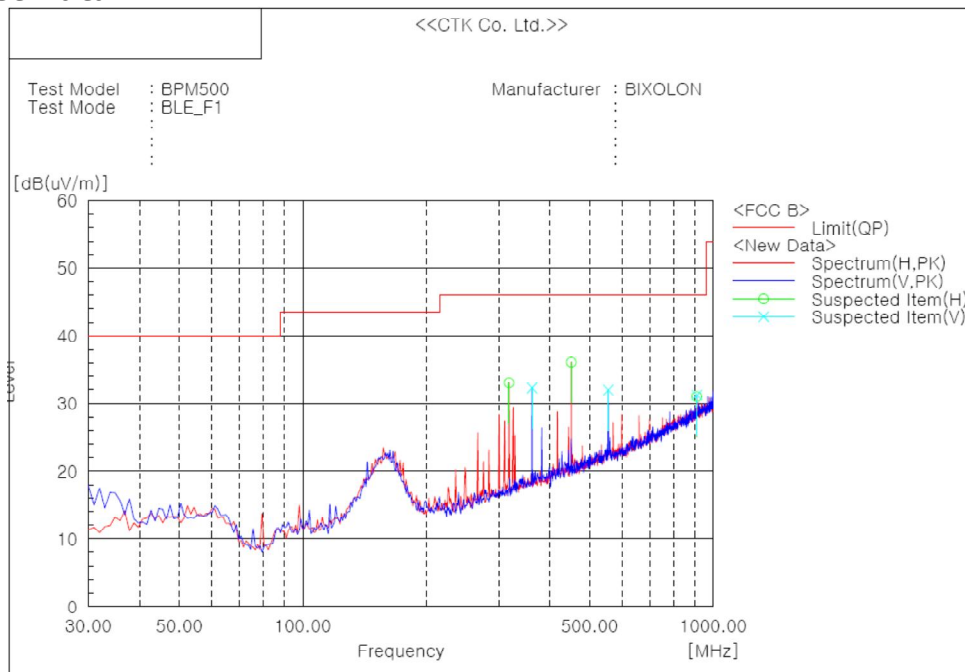

Spectrum Selection

No.	Frequency [MHz]	(P)	Reading [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Limit OP [dB(uV/m)]	Margin OP [dB]	Height [cm]	Angle [deg]
1	318.090	H	43.9	-10.9	33.0	46.0	13.0	182.6	66.3
2	361.740	V	42.3	-10.0	32.3	46.0	13.7	182.4	105.9
3	450.980	H	44.9	-8.7	36.2	46.0	9.8	182.6	66.3
4	554.770	V	38.9	-6.9	32.0	46.0	14.0	182.4	105.9
5	911.730	H	31.5	-0.5	31.0	46.0	15.0	182.6	66.3
6	912.700	V	31.8	-0.5	31.3	46.0	14.7	182.4	186.0

Remark :

1. The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie down position(X axis) and the worst case was recorded.
2. Result = Reading + Correction factor
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

Test mode : Receive


EUT	Bluetooth Module	Measurement Detail	
Model	BPM500	Frequency Range	Below 1 000MHz
Mode	Receive	Detector function	Quasi-Peak

The requirements are:

☒ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
192.96	26.1	17.4	Peak

Test Data

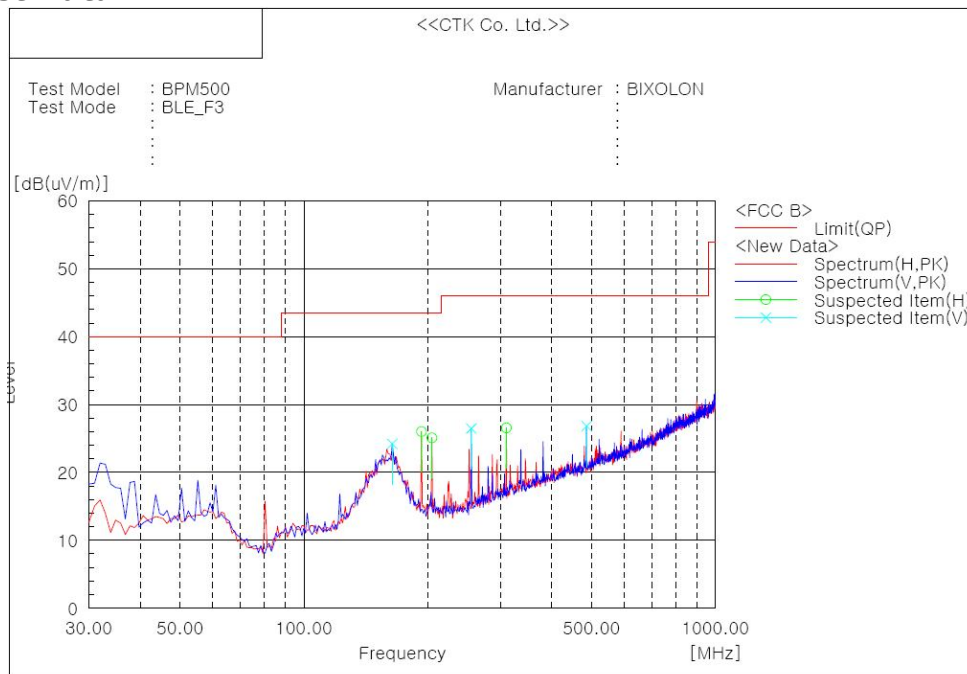

Spectrum Selection

No.	Frequency (P)	Reading	c.f	Result PK	Limit QP	Margin QP	Height	Angle
	[MHz]	[dB(uV)]	[dB(1/m)]	[dB(uV/m)]	[dB(uV/m)]	[dB]	[cm]	[deg]
1	163.860	V 30.7	-6.5	24.2	43.5	19.3	183.3	69.0
2	192.960	H 40.2	-14.1	26.1	43.5	17.4	182.9	214.4
3	204.600	H 39.5	-14.4	25.1	43.5	18.4	182.9	214.4
4	255.040	V 39.7	-13.2	26.5	46.0	19.5	183.3	344.1
5	310.330	H 37.7	-11.1	26.6	46.0	19.4	182.9	214.4
6	485.900	V 34.8	-8.0	26.8	46.0	19.2	183.3	344.1

Remark :

1. The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie down position(X axis) and the worst case was recorded.
2. Result = Reading + Correction factor
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

3) above 1 GHz

EUT	Bluetooth Module	Measurement Detail	
Model	BPM500	Frequency Range	1-25GHz
Channel	Low (2 402 MHz)	Detector function	Average / Peak

Remarks

We have tested three mode (X, Y, Z). The worst mode (X axis) for final test.

The requirements are:

☒ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
4804	51.4	2.6	Average

Test Data

[Transmit mode]

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
				Antenna + Amp. Gain + Cable			
4804.00	47.7 : 51.7	V	1.5	3.7	54.0 : 74.0	51.4 : 55.4	2.6 : 18.6

[Receive mode]

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
				Antenna + Amp. Gain + Cable			

No other emissions were detected at a level greater than 20dB below limit.

Restricted band edge test data

Measured frequency range : 2 310 - 2 390 MHz

[Transmit mode]

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
				Antenna + Amp. Gain + Cable			
2389.44	30.0 : 42.6	V	1.5	-2.6	54.0 : 74.0	27.4 : 40.0	26.6 : 34.0

[Receive mode]

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
				Antenna + Amp. Gain + Cable			

No other emissions were detected at a level greater than 20dB below limit.



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

EUT	Bluetooth Module	Measurement Detail	
Model	BPM500	Frequency Range	1-25GHz
Channel	Middle (2 440 MHz)	Detector function	Average / Peak

Remarks

We have tested three mode (X, Y, Z). The worst mode (X axis) for final test.

The requirements are:

☒ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
4880	50.8	3.2	Average

Test Data

[Transmit mode]

Frequency [MHz]	Reading [dBuV/m] AV / Peak		Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak		Result [dBuV/m] AV / Peak		Margin [dB] AV / Peak	
					Antenna + Amp. Gain + Cable						
4880.00	47.1	51.0	V	1.5	3.7	54.0	74.0	50.8	54.7	3.2	19.3

[Receive mode]

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
				Antenna + Amp. Gain + Cable			
No other emissions were detected at a level greater than 20dB below limit.							

Restricted band edge test data

Measured frequency range : 2 310 - 2 390 MHz

[Transmit mode]

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
				Antenna + Amp. Gain + Cable			
No other emissions were detected at a level greater than 20dB below limit.							

[Receive mode]

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
				Antenna + Amp. Gain + Cable			
No other emissions were detected at a level greater than 20dB below limit.							



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

EUT	Bluetooth Module	Measurement Detail	
Model	BPM500	Frequency Range	1-25GHz
Channel	High (2 480 MHz)	Detector function	Average / Peak

Remarks

We have tested three mode (X, Y, Z). The worst mode (X axis) for final test.

The requirements are:

☒ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
4960	49.8	4.2	Average

Test Data

[Transmit mode]

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
				Antenna + Amp. Gain + Cable			
4960.00	46.0 : 50.3	V	1.5	3.8	54.0 : 74.0	49.8 : 54.1	4.2 : 19.9

[Receive mode]

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
				Antenna + Amp. Gain + Cable			

No other emissions were detected at a level greater than 20dB below limit.

Restricted band edge test data

Measured frequency range : 2 483.5 - 2 500 MHz

[Transmit mode]

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
				Antenna + Amp. Gain + Cable			
2484.08	37.5 : 48.5	V	1.5	-2.5	54.0 : 74.0	35.0 : 46.0	19.0 : 28.0

[Receive mode]

Frequency [MHz]	Reading [dBuV/m] AV / Peak	Pol.	Height [m]	Correction Factor	Limits [dBuV/m] AV / Peak	Result [dBuV/m] AV / Peak	Margin [dB] AV / Peak
				Antenna + Amp. Gain + Cable			

No other emissions were detected at a level greater than 20dB below limit.



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

2.1.6 AC Power Line Conducted Emissions

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Procedures

Module has been tested by mounting the End product(Printer).
The EUT was placed on a non-metallic table 0.8m above the metallic, grounded floor and 0.4m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8m.
Amplitude measurements were performed with a quasi-peak detector and an average detector.

Limit

- 15.207(a)

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56*	56 to 46*
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency.

Test Results

The requirements are:

☒ Complies

Test mode : Transmit

Frequency (MHz)	Measured Data (dBuV)	Margin (dB)	Remark
3.6915	34.3	11.7	Average



CTK Co., Ltd.
The Prime Leader of Global Regulatory Compliance

CTK Co., Ltd.


(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

Test Data

[L1]

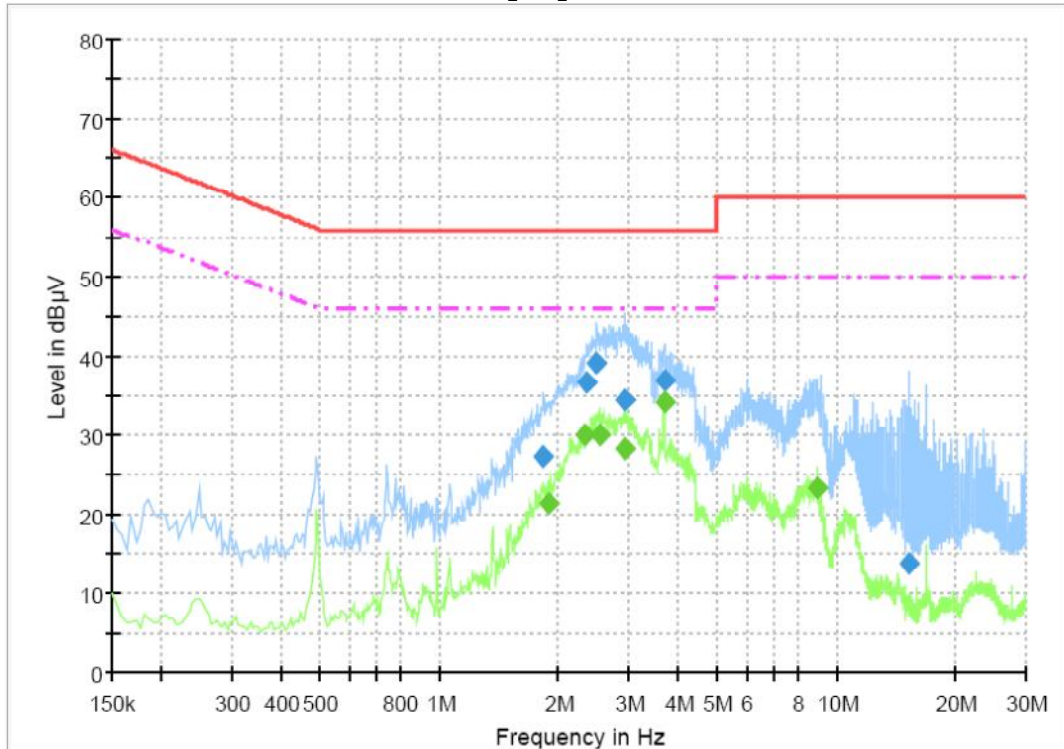

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
1.828500	27.2	1000.0	9.000	On	L1	9.7	28.8	56.0
2.355000	36.7	1000.0	9.000	On	L1	9.8	19.3	56.0
2.503500	39.3	1000.0	9.000	On	L1	9.8	16.7	56.0
2.931000	34.5	1000.0	9.000	On	L1	9.8	21.5	56.0
3.691500	36.9	1000.0	9.000	On	L1	9.8	19.1	56.0
15.229500	13.8	1000.0	9.000	On	L1	10.0	46.2	60.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
1.882500	21.5	1000.0	9.000	On	L1	9.7	24.5	46.0
2.341500	30.0	1000.0	9.000	On	L1	9.8	16.0	46.0
2.539500	30.1	1000.0	9.000	On	L1	9.8	15.9	46.0
2.953500	28.4	1000.0	9.000	On	L1	9.8	17.6	46.0
3.691500	34.3	1000.0	9.000	On	L1	9.8	11.7	46.0
8.992500	23.3	1000.0	9.000	On	L1	9.9	26.7	50.0



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification


CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

[NEUTRAL]

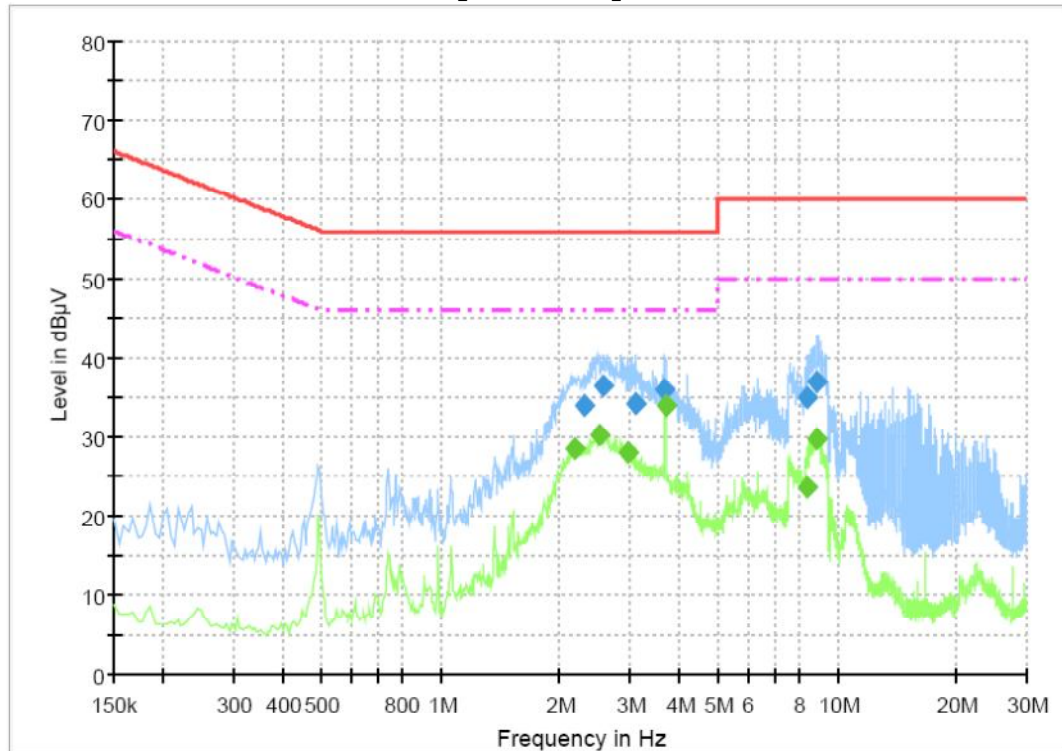

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
2.296500	34.1	1000.0	9.000	On	N	9.8	21.9	56.0
2.584500	36.5	1000.0	9.000	On	N	9.8	19.5	56.0
3.102000	34.2	1000.0	9.000	On	N	9.8	21.8	56.0
3.687000	35.9	1000.0	9.000	On	N	9.8	20.1	56.0
8.367000	35.1	1000.0	9.000	On	N	9.9	24.9	60.0
8.889000	36.9	1000.0	9.000	On	N	9.9	23.1	60.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
2.184000	28.5	1000.0	9.000	On	N	9.8	17.5	46.0
2.512500	30.2	1000.0	9.000	On	N	9.8	15.8	46.0
2.967000	28.0	1000.0	9.000	On	N	9.8	18.0	46.0
3.691500	34.1	1000.0	9.000	On	N	9.8	11.9	46.0
8.367000	23.6	1000.0	9.000	On	N	9.9	26.4	50.0
8.857500	29.7	1000.0	9.000	On	N	9.9	20.3	50.0

2.1.7 RF Exposure evaluation

Standard Requirement

The following FCC Rule Parts and procedures are applicable :

Part 1.1310 Radiofrequency radiation exposure limits

Part 2.1091 Radiofrequency radiation exposure evaluation : Mobile device

KDB447498 D01 v06 Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies

Table 1 below sets forth limits for Maximum Permissible Exposure (MPE) to radiofrequency electromagnetic fields.

Table 1—Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f ²	6
30-300	61.4	0.163	1.0	6
300-1,500			f/300	6
1,500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1,500			f/1500	30
1,500-100,000			<u>1.0</u>	30

*f = frequency in MHz * = Plane-wave equivalent power density*

RSS-102(Issue5) Exposure Limits

Table : RF Field Strength Limits for Devices Used by the General Public (Uncontrolled Environment)

Frequency range (MHz)	Electric field strength (V/m rms)	Magnetic field strength (A/m rms)	Power density (W/m ²)	Reference Period (minutes)
0.003-10 ²¹	83	90	-	Instantaneous*
0.1-10	-	0.73 / f	-	6**
1.1-10	87 / f ^{0.5}	-	-	6**
10-20	27.46	0.0728	2	6
20-48	58.07 / f ^{0.25}	0.1540 / f ^{0.25}	8.944 / f ^{0.5}	6
48-300	22.06	0.05852	1.291	6
300-6000	3.142 f ^{0.3417}	0.008335 f ^{0.3417}	<u>0.02619 f^{0.6834}</u>	6
6000-15000	61.4	0.163	10	6
15000-150000	61.4	0.163	10	616000 / f ^{1.2}
150000-300000	0.158 f ^{0.5}	4.21 x 10 ⁻⁴ f ^{0.5}	6.67 x 10 ⁻⁰⁵ f	616000 / f ^{1.2}

f is frequency in MHz,

**:Based on nerve stimulation(NS), **:Based on specific absorption rate(SAR)*



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

MPE calculation

$$S = \text{EIRP} / (4\pi R^2)$$

Where S : Power density
EIRP : $P \times G$
P : Maximum transmitter power
G : Antenna gain
R : distance to the centre of radiation of the antenna

EUT RF Exposure

P : 0 dBm (1 mW)
G : 0.2 dBi ($\times 1.05$)
R : 20 cm

$$S = 0.0002 \text{ mW/cm}^2$$

Conclusion

This confirms compliance to the required Radio frequency radiation exposure limit.



CTK Co., Ltd.
The Prime Leader of Global Regulatory Certification

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

APPENDIX A – Test Equipment Used For Tests

	Name of Equipment	Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date
1	SPECTRUM ANALYZER	Rohde & Schwarz	FSP-30	100994	2016-11-01	2017-11-01
2	EMI Test Receiver	Rohde & Schwarz	ESCI7	100814	2016-11-01	2017-11-01
3	EMI Test Receiver	Rohde & Schwarz	ESCI7	101088	2016-05-14	2017-05-14
4	EMI Test Receiver	Rohde & Schwarz	ESU40	100336	2016-05-14	2017-05-14
5	Bilog Antenna	Schaffner	CBL6111C	2551	2015-04-24	2017-04-24
6	Double Ridged Guide Antenna	ETS-Lindgren	3117	00154525	2015-09-02	2017-09-02
7	Double Ridged Guide Antenna	ETS-Lindgren	3116	00062916	2015-09-04	2017-09-04
8	Active Loop Antenna	SCHWARZBECK	FMZB 1513	1513-126	2016-05-25	2018-05-25
9	Attenuator	Rohde & Schwarz	DNF	272.4110.50-2	2016-11-01	2017-11-01
10	PREAMPLIFIER	Agilent	8449B	3008A02011	2015-12-08	2016-12-08
11	AMPLIFIER	Sonoma Instrument Co.	310	291721	2016-02-02	2017-02-02
12	Signal Generator	Rohde & Schwarz	SMB100A	175528	2016-01-20	2017-01-20
13	DC POWER SUPPLY	HP	E3632A	MY40011638	2016-11-01	2017-11-01
14	DC POWER SUPPLY	KEYSIGHT	E3645A	MY55136451	2016-11-02	2017-11-02
15	LISN	Rohde & Schwarz	ENV216	101151	2016-11-01	2017-11-01