


Exhibit C
RE114 Internal Photos





SINGLE STATION SMOKE ALARM WITH
SUPPLEMENTAL HEAT ALARM

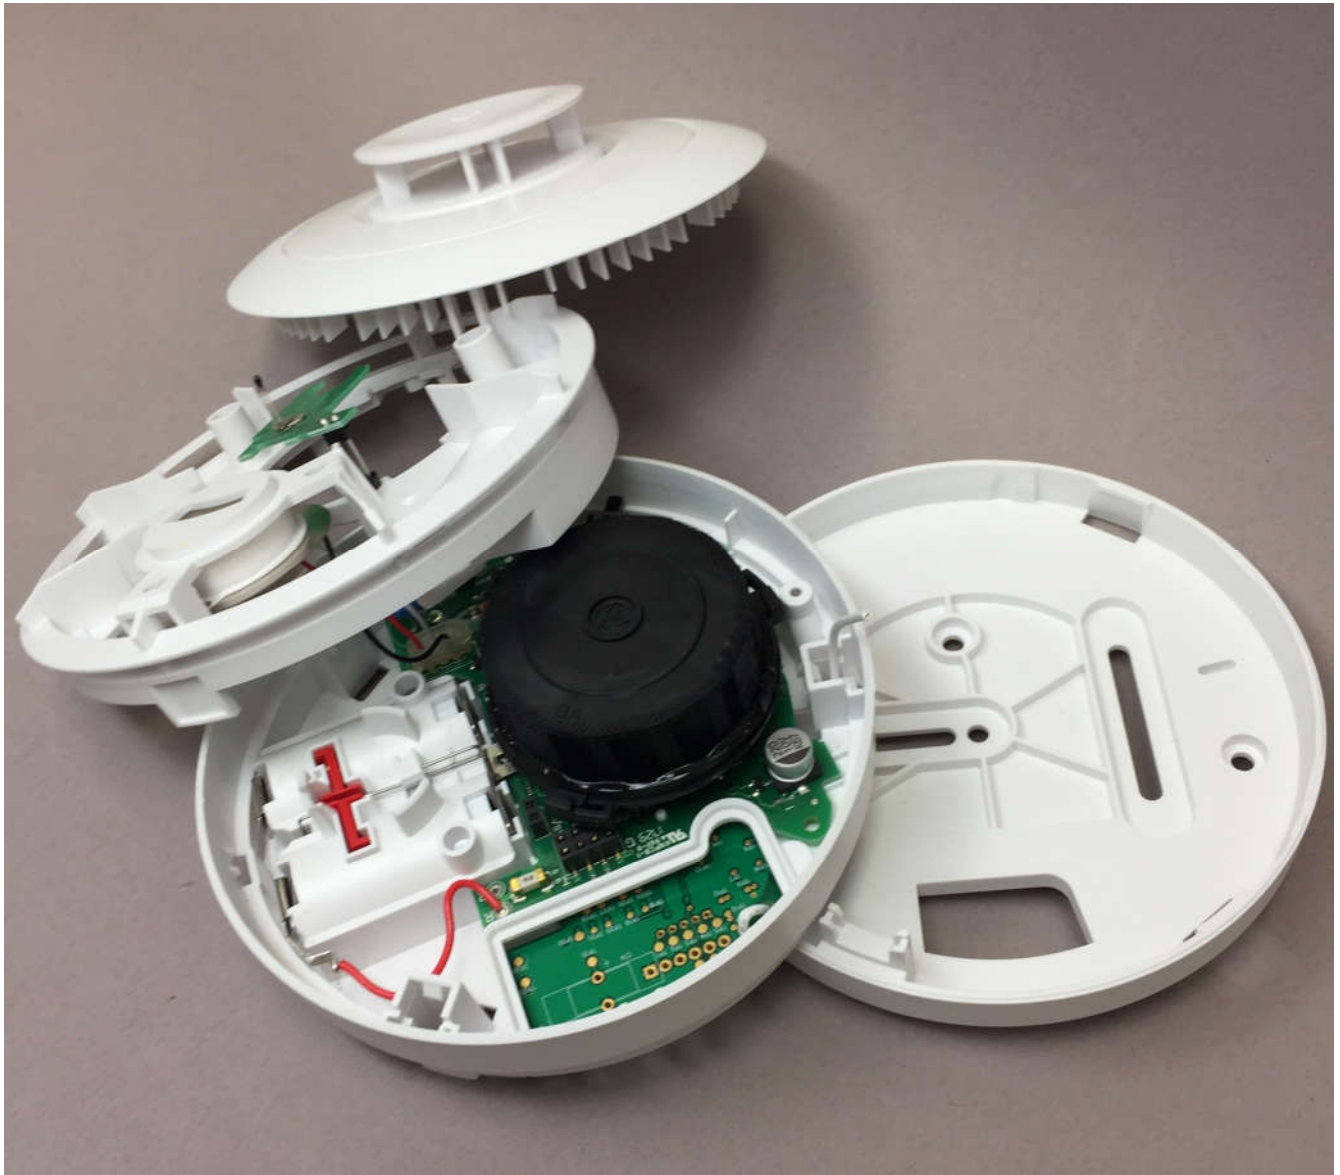

Intertek
4010831

WARNING

PLEASE SEE USER MANUAL FOR IMPORTANT INFORMATION ON MAINTENANCE AND BATTERY LIFE. CONSTANT USE AT HIGH OR LOW TEMPERATURE OR HIGH HUMIDITY MAY REDUCE BATTERY LIFE. USE ONLY BATTERIES SPECIFIED. THE USE OF OTHER BATTERIES MAY HAVE A DETRIMENTAL EFFECT ON ALARM OPERATION. MAINTENANCE: CLEAN ALARM MONTHLY BY GENTLY VACUUMING THE OPENINGS IN THE EXTERIOR OF THE ALARM.

STANDBY: NO BEEP OR FLASH

LOW BATTERY: 1 BEEP + 1 YELLOW FLASH EVERY 48 SEC

ALARM: 3 LONG BEEPS, REPEATING WITH FLASHING RED LED

END OF LIFE: 3 BEEPS WITH 3 YELLOW FLASHES

ALARM SILENCE: 1 RED FLASH EVERY 8 SECS

SENSITIVITY: =1.95%-4.0% OBSFT

48-0024-02_RevA

CONFORMS TO UL STD 217

CERTIFIED TO UL STD S531

FOR SERVICING, RETURN TO:

RESOLUTION PRODUCTS, INC.

1402 HEGGEN STREET

HUDSON, WI 54016

EN FRANÇAIS



Model RE114


Smoke and Heat Alarm, GE

FCC ID: USX-RE114


IC ID: 8310A-RE114

Manual: 47-0023-01_RevA

Date: 17303

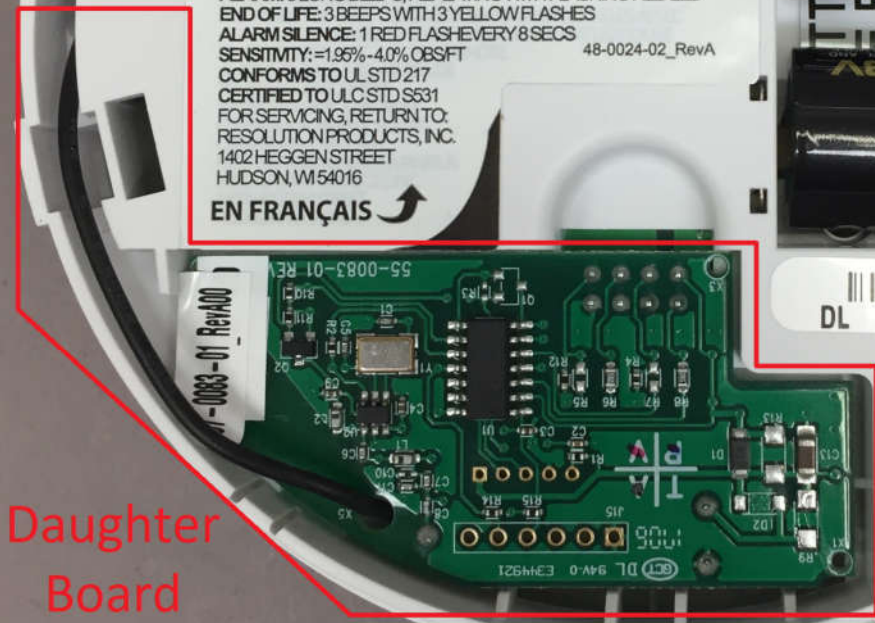

Daughter
Board

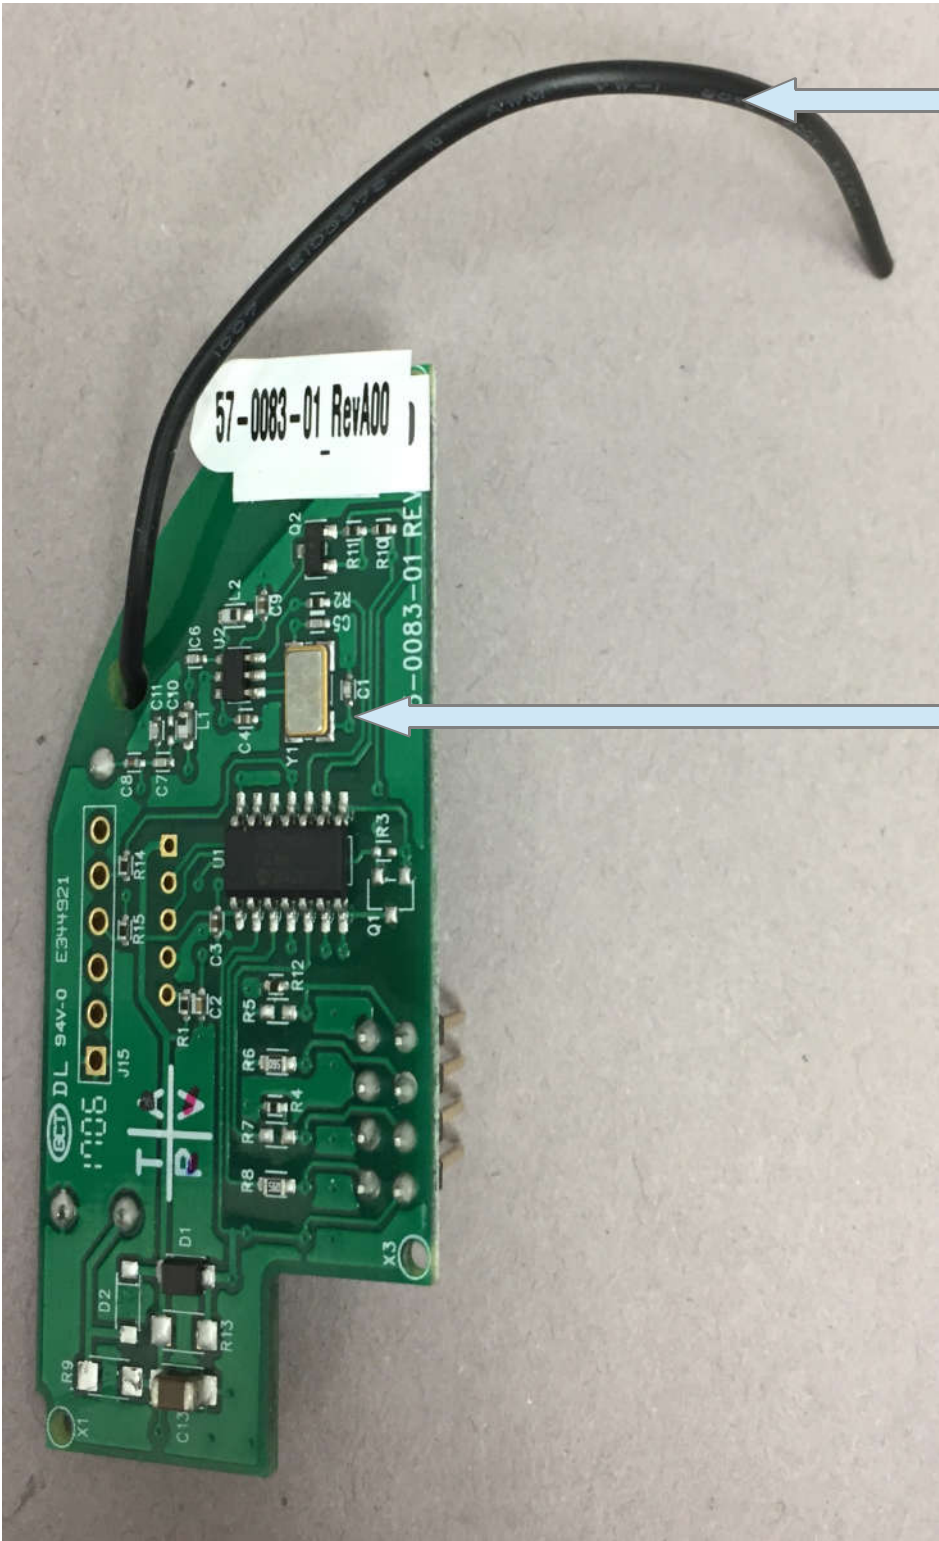

Antenna

Transmitter Ckt

