

**Resolution Products, Inc.**

**Wireless Siren Transceiver  
FCC ID: U5X-RE116**

**Certification Test Report**

**February 22, 2012**

# Contents

1. Introduction.....	4
2. Statement of Compliance.....	4
2.1. FCC Part 2 §2.907.....	4
2.2. FCC Part 2 §2.911.....	4
2.3. FCC Part 2 §2.913.....	4
2.4. FCC Part 2 §2.915.....	4
2.5. FCC Part 2 §2.925.....	4
2.6. FCC Part 2 §2.943, 2.945.....	5
2.7. FCC Part 2 §2.947.....	5
2.8. FCC Part 2 §2.948.....	5
2.9. FCC Part 2 §2.1033.....	5
3. Discussion of Laboratory Measurements and Rules Compliance.....	6
3.1. FCC Part 15 §15.231(a)(1).....	6
3.2. FCC Part 15 §15.231(a)(3).....	6
3.3. FCC Part 15 §15.231(a)(4).....	7
3.4. FCC Part 15 §15.231(a)(5).....	7
3.5. FCC Part 15 §15.231(b).....	7
3.5.1. Raw Field Strength Limits.....	7
3.5.2. Duty Cycle Correction Factor and Resulting Limits.....	7
3.5.3. Measured Radiated Field Strength Data.....	8
3.6. FCC Part 15 §15.231(c).....	8
3.7. FCC Part 15 §15.207.....	9



## 1. Introduction

The RE116 is a wireless siren transceiver for use in a wireless security system. The unit is powered by a US standard wall power socket of 120VAC and has a backup power supply consisting of a single CR123A 3V battery. The device enclosure measures 3.25 x 2.125 x 4.5” and weighs approximately 5.9 ounces.

The device contains a very loud piezoelectric siren for the purpose of increasing the volume of a security system alarm, and relaying the alarm sounder to farther reaches of a home where the alarm may not be otherwise heard. A wireless receiver controlled by a microprocessor inside the device, checks for alarm transmission packets from a transmitter connected to a security system. There is also a tamper switch on the unit. If an alarm packet is received, or the device is tampered with, the device will sound an alarm. In the absence of tamper switch activations and alarm transmissions, the device sends a set of three supervision transmissions packets, once per hour, to the security system.

Certification is requested under FCC Rules, Part 15, Subpart C, Paragraph 15.231.

## 2. Statement of Compliance

Specific sections of FCC Rules Part 2 that require information or listing are given below.

### 2.1. *FCC Part 2 §2.907*

This is an application for certification of original equipment

### 2.2. *FCC Part 2 §2.911*

- a) This application has been filed electronically using form 731.
- b) All required information has been supplied in this application and its attachments.
- c) This application has been electronically signed by an officer of Resolution Products, Inc.
- d) The technical test data has been signed by the agency performing the testing.
- e) Signature supplied in appropriate block on form 731.
- f) Processing fee has been paid.
- g) Signatures have been supplied electronically.

### 2.3. *FCC Part 2 §2.913*

- a) This application has been filed electronically.
- b) Appropriate fees have been filed electronically.
- c) Equipment samples shall be supplied as requested.

### 2.4. *FCC Part 2 §2.915*

We are requesting a grant of certification. This application shows compliance with the technical standards.

### 2.5. *FCC Part 2 §2.925*

A label shall be affixed to each piece of equipment, showing the FCC identifier. The label shall read “FCC ID: U5X-RE116”. See Exhibit B for a photograph showing the label and location on the device.

## **2.6. FCC Part 2 §2.943, 2.945**

Sample production equipment shall be submitted to the FCC upon request.

## **2.7. FCC Part 2 §2.947**

- a) Measurement procedure follows ANSI C63.4: 2009.
- b) A description of utilized test equipment is contained in the report.

## **2.8. FCC Part 2 §2.948**

Radiated measurements were taken at the following FCC-approved facility:

**Rhein Tech Laboratories, Inc.**  
**360 Herndon Parkway, Suite 1400**  
**Herndon, VA 20170 USA**  
**Contact: Rick McMurray**  
**703-689-0368**

Photographs of the test site are shown in Exhibit J.

## **2.9. FCC Part 2 §2.1033**


- a) Form 731 has been filed electronically.
- b) The technical report, along with its exhibits, contains the information as follows:
  - (1) full name and mailing address of the manufacturer of the device and the applicant for certification:  
Resolution Products, Inc.  
226 Locust Street, Suite 4  
Hudson, WI 54016
  - (2) FCC Identifier is U5X-RE116
  - (3) Copy of the installation/user instructions is furnished as Exhibit E.
  - (4) A brief description of the device and operation is furnished in Exhibit F. Schematic is furnished in Exhibit G.
  - (5) Block diagram furnished in Exhibit H.
  - (6) This document constitutes a technical test report.
  - (7) Internal and external photographs have been furnished in Exhibits A and C.
  - (8) Not applicable. There are no peripheral or accessory devices used with this device. It is a standalone device.
  - (9) This application not pursuant to the transition rules of section 15.37
  - (10) Not applicable. This device does not include a scanning receiver.
  - (11) Not applicable.
  - (12) Not applicable.
- c) Not applicable. This device shall operate under Part 15 of the rules.
- d) Not applicable.
- e) Not applicable. This is not a composite system.

### 3. Discussion of Laboratory Measurements and Rules Compliance

#### 3.1. FCC Part 15 §15.231(a)(1)

This transmitter is activated via a received RF signal or a tamper switch state change. Eight transmission packets are sent by the device upon valid activation. These packets are 16.86ms in length and are sent with a spacing that varies randomly between 125ms and 525ms. Upon completion of these packets, the device goes into sleep mode and will not transmit again until another activation. If no tamper activation and no RF signal is received for one hour, three supervisory packets are sent with the same spacing given above. All packets sent by the device, including supervisory packets, have the same packet length and spacing.

A plot of the transmissions is shown below. This plot shows the transmissions occurring in a 5 second window as a result of one activation. The packets are shown to conclude within the 5-second window. This plot made using Hewlett Packard Model 8595E Spectrum Analyzer.

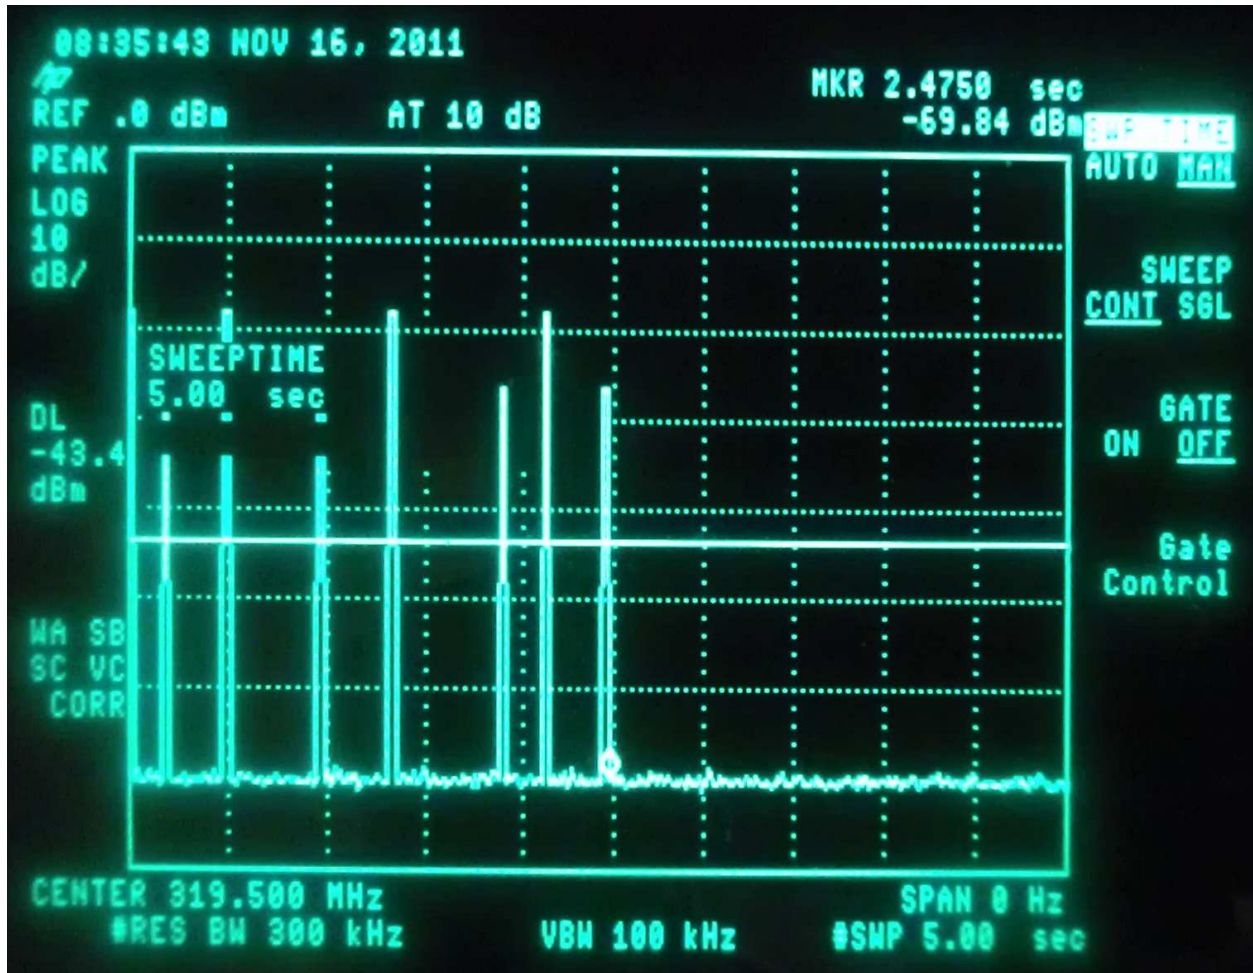

#### 3.2. FCC Part 15 §15.231(a)(3)

If no tamper activation and no RF signal is received for one hour, three supervision packets are transmitted. These supervision packets are then transmitted every hour in the absence of activations. The total transmission time resulting from these supervision transmissions is well under the allowed 2 seconds per hour. They conclude within the 5-second window.

### 3.3. FCC Part 15 §15.231(a)(4)

Device does not continue transmitting beyond the packets resulting from each activation.

### 3.4. FCC Part 15 §15.231(a)(5)

There is no setup information transmitted with this device.

### 3.5. FCC Part 15 §15.231(b)

#### 3.5.1. Raw Field Strength Limits

Interpolation performed on the data in the §15.231(b) table yields raw field strength limits as follows:

Fundamental: 75.9dBuV/m

Spurious: 55.9dBuV/m


Certain harmonics of the transmitted signal fall in the restricted bands of §15.205. These harmonics are all above 960MHz and have the following limit as given in §15.209:

**Restricted band limit = 500uV/m = 54dBuV/m.**

#### 3.5.2. Duty Cycle Correction Factor and Resulting Limits

This transmitter uses ASK modulation. 63 bits are transmitted in each packet, and the "on" time for each bit is 122usec, except for one bit which has an "on" time of 366usec. The resulting "on" time per packet is 7.93ms. The transmitted packets are limited to one packet in a 125ms period. The transmitter duty cycle over a 100ms time period is therefore  $7.93/100 = 7.93\%$ .

The packet width measurement below was made using Hewlett Packard Model 8595E Spectrum Analyzer.

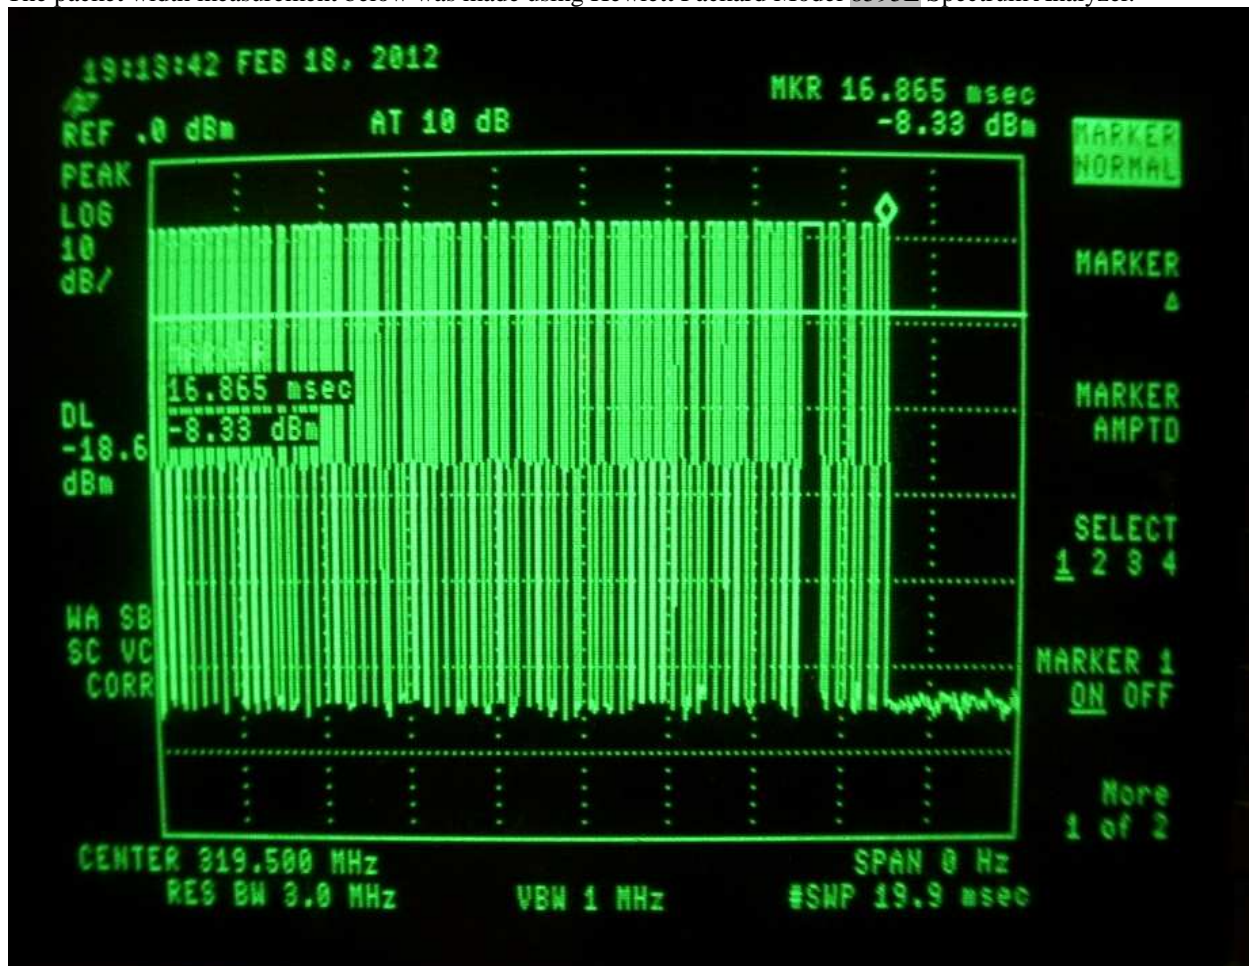

Calculating the allowed duty cycle correction factor as given in §15.35(c):

$$20\log(7.93/100) = -22.01\text{dB}$$

This transmitter therefore qualifies for the maximum duty cycle correction factor allowed in §15.35(c). The maximum duty cycle correction factor allowed is 20dB. Resulting radiated field strength limits are as follows:

<b>Fundamental:</b>	<b>95.9dBuV/m</b>
<b>Spurious:</b>	<b>75.9dBuV/m</b>
<b>Restricted Band:</b>	<b>74dBuV/m</b>

### 3.5.3. Measured Radiated Field Strength Data

Radiated emissions of the harmonics were tested at three meters. The EUT was tested in the three orthogonal planes with the receive antenna in both polarities. The emissions were maximized per ANSI C63.4:2003 8.3.1.2; that is, the measurement antenna height was varied between 1 and 4m, and the EUT was rotated through 360 degrees on a rotating turntable until the maximum emissions were found. Both horizontal and vertical measurement antenna polarizations were used. A resolution bandwidth of 100kHz was used for frequencies less than 1000MHz, and a resolution bandwidth of 1MHz was used for frequencies greater than or equal to 1000MHz. The video bandwidth was set to a value at least three times greater than the resolution bandwidth.

The EUT was adapted to continuously transmit for testing purposes.

Measured radiated field strength data is shown in Exhibit I for both transmit antennas. In this file, "DIP 1 On" table shows data from Antenna 1, and "DIP 2 On" table shows data from Antenna 2.

The fundamental signal is shown in Exhibit I on Antenna 2 at a peak of 91.0dBuV/m. Comparing this to the duty-cycle adjusted limit shown above in Section 3.5.2, the fundamental passed by  $95.9 - 91.0 = 4.9\text{dB}$ .

The highest spurious signal was the fourth harmonic on Antenna 2, which is shown in Exhibit I at a peak of 70.6dBuV/m. Comparing this to the duty-cycle adjusted Restricted Band limit shown above in Section 3.5.2, the fifth harmonic passed by  $74.0 - 70.6 = 3.4\text{dB}$ .

Another spurious signal was the fourth harmonic on Antenna 1, which is shown in Exhibit I at a peak of 69.1dBuV/m. Comparing this to the duty-cycle adjusted Restricted Band limit shown above in Section 3.5.2, the fourth harmonic passed by  $74.0 - 69.1 = 4.9\text{dB}$ .

### 3.6. FCC Part 15 §15.231(c)


Allowed 20dB bandwidth of the transmitted signal is 0.25% of the carrier frequency.

**BW Limit =  $0.0025 * 319.5\text{MHz}$**

**BW Limit =  $0.799\text{MHz}$**

Bandwidth measurements were made using Hewlett Packard Model 8595E Spectrum Analyzer. The plot below shows the modulated signal. Bandwidth of the modulated signal is 30.0kHz or 0.030MHz. These measurements show compliance with the bandwidth requirements.



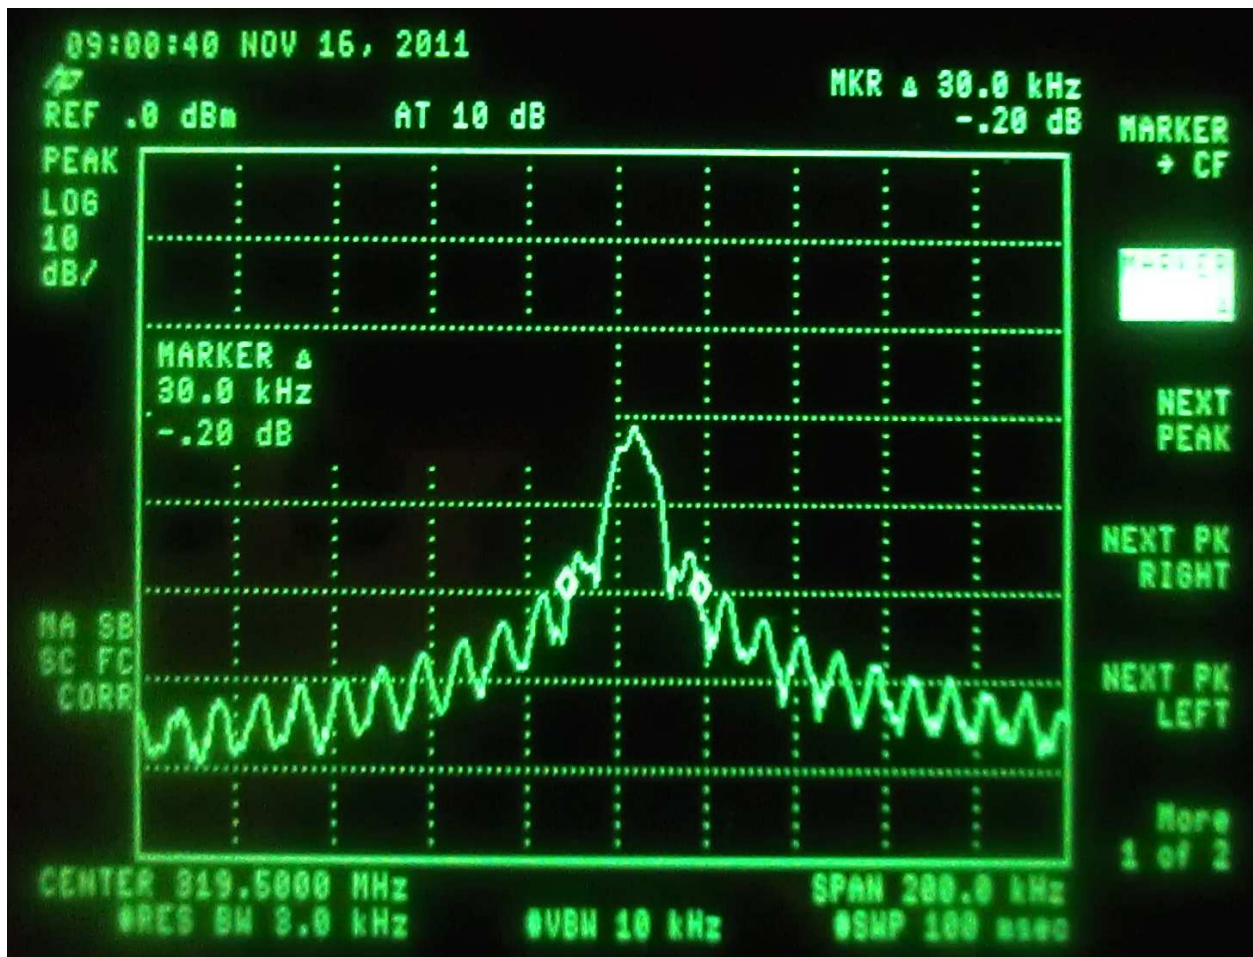

### 3.7. FCC Part 15 §15.207

Conducted line emissions are shown in Exhibit I and show compliance with the limits.