



Engineering Solutions & Electromagnetic Compatibility Services

FCC Part 15.231 Test Data

319.5 MHz Sensor

Model: 56-0098-01 RevA00

for

**Resolution Engineering, Inc.
1402 Heggen Street
Hudson, WI 54016
Contact: Chris Weltzien**

Testing Conducted By:

**Rhein Tech Laboratories, Inc.
360 Herndon Parkway, Suite 1400
Herndon, VA 20170**

RTL Test Engineer: Khue Do

RTL Project/Report Number: 2018011

January 26, 2018

This report may not be reproduced, except in full, without the full written approval of Rhein Tech Laboratories, Inc. and Resolution Engineering. Test results relate only to the item tested.

These tests are accredited and meet the requirements of ISO/IEC 17025 as verified by ANAB. Refer to certificate and scope of accreditation AT-1445.

Radiated Spurious Harmonics Emissions

The data and limits presented in this report are for radiated emissions per 15.231(b)(2) which references 15.35(b), and peak limiting for restricted bands per 15.209(e), which again references 15.35(b)(2), as procured by Resolution Engineering. No average data is presented in this report. Data is also presented for spurious, non-harmonic radiated emissions per 15.209. The Equipment Under Test (EUT) was the **319.508 MHz Sensor (RTL Bar Code 22687)**

Test Procedure

Radiated fundamental and spurious emissions were tested at three meters. The EUT was tested in the three orthogonal planes with the receive antenna in both polarities. The emissions were maximized; that is, the measurement antenna height was varied between 1 and 4 m, and the EUT was rotated through 360° on a rotating turntable until the maximum emissions were found. Both horizontal and vertical measurement antenna polarizations were used. A resolution bandwidth of 120 kHz was used for frequencies less than 1000 MHz, and a resolution bandwidth of 1 MHz was used for frequencies greater than or equal to 1000 MHz. The video bandwidth was set to a value at least three times greater than the resolution bandwidth.

EUT Disposition

The EUT was adapted to continuously transmit for testing purposes.

15.231 Radiated Spurious Harmonics Emissions Test Data – Peak


| Emission Frequency (MHz) | Test Detector | Antenna Polarity (H/V) | Analyzer Reading (dBUV) | Site Correction Factor (dB/m) | Emission Level (dBUV/m) | Limit (dBUV/m) | Margin (dB) |
|--------------------------|---------------|------------------------|-------------------------|-------------------------------|-------------------------|----------------|-------------|
| 319.508 | PK | H | 107.4 | -12.5 | 94.9 | 95.9 | -1.0 |
| 639.016 | PK | H | 46.0 | -18.9 | 27.1 | 75.9 | -48.8 |
| 958.524 | PK | H | 44.3 | -15.9 | 28.4 | 75.9 | -47.5 |
| 1278.032 | PK | H | 35.3 | 12.4 | 47.7 | 75.9 | -28.2 |
| 1597.540 | PK | H | 18.5 | 18.7 | 37.2 | 74.0 | -36.8 |
| 1917.048 | PK | V | 29.6 | 22.4 | 52.0 | 75.9 | -23.9 |
| 2236.556 | PK | H | 56.3 | -10.8 | 45.5 | 74.0 | -28.5 |
| 2556.064 | PK | H | 51.9 | -9.8 | 42.1 | 75.9 | -33.8 |
| 2875.572 | PK | V | 59.2 | -9.2 | 50.0 | 74.0 | -24.0 |
| 3195.080 | PK | H | 54.5 | -8.1 | 46.4 | 75.9 | -29.5 |

All spurious emissions in the applicable frequency range were investigated; only harmonic emissions were present as noted above.

Radiated Emissions Test Equipment

| RTL Bar Code | Manufacturer | Model | Part Type | Serial Number | Calibration Due Date |
|--------------|-------------------------------|-------------------|---------------------------------------|---------------|----------------------|
| 901592 | Insulated Wire Inc. | KPS-1503-3600-KPR | SMK RF Cables 20' | NA | 8/18/18 |
| 901593 | Insulated Wire Inc. | KPS-1503-360-KPR | SMK RF Cables 36" | NA | 8/18/18 |
| 901583 | Agilent Technologies | N9010A | EXA Signal Analyzer (10 Hz-26.5 GHz) | MY51250846 | 4/21/18 |
| 901135 | Par Electronics | 400-512 (25W) | UHF Notch Filter | N/A | 8/21/18 |
| 900811 | Rhein Tech Laboratories, Inc. | PR-1040 | Amplifier (20 MHz – 2 GHz) | 900811 | 8/18/18 |
| 900932 | Hewlett Packard | 8449B OPT H02 | Amplifier (1-26.5 GHz) | 3008A00505 | 8/18/18 |
| 901669 | ETS-Lindgren | 3142E | Biconilog Antenna (30 MHz – 6000 MHz) | 00166065 | 02/16/18 |
| 900772 | EMCO | 3161-02 | Horn Antenna 2 - 4 GHz | 9804-1044 | 4/9/18 |

Test Personnel:

| | | |
|---------------|---|------------------|
| Dan Baltzell |  | January 22, 2018 |
| Test Engineer | Signature | Date of Test |

FCC/IC Cross Reference


| | | |
|------------------------|------------------|----------------------|
| 5 second timing | FCC 15.231(a) | RSS-210 Issue 9 A1.1 |
| Field Strength | FCC 15.231(b)(2) | RSS-210 Issue 9 A1.2 |
| Timing correction | FCC 15.35(b) | RSS-Gen Issue 4 6.10 |
| Restricted Band | FCC 15.205 | RSS-Gen Issue 4 8.10 |
| General Field Strength | FCC 15.209 | RSS-Gen Issue 4 8.9 |
| Bandwidth | FCC 15.231(c) | RSS-210 Issue 9 A1.3 |

Occupied Bandwidth

15.231(c) The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz

319.508 MHz * 0.25% = 799 kHz = Limit
99% Bandwidth is 62.106 kHz
20 dB Bandwidth is 41.87 kHz

99% and 20 dB BW

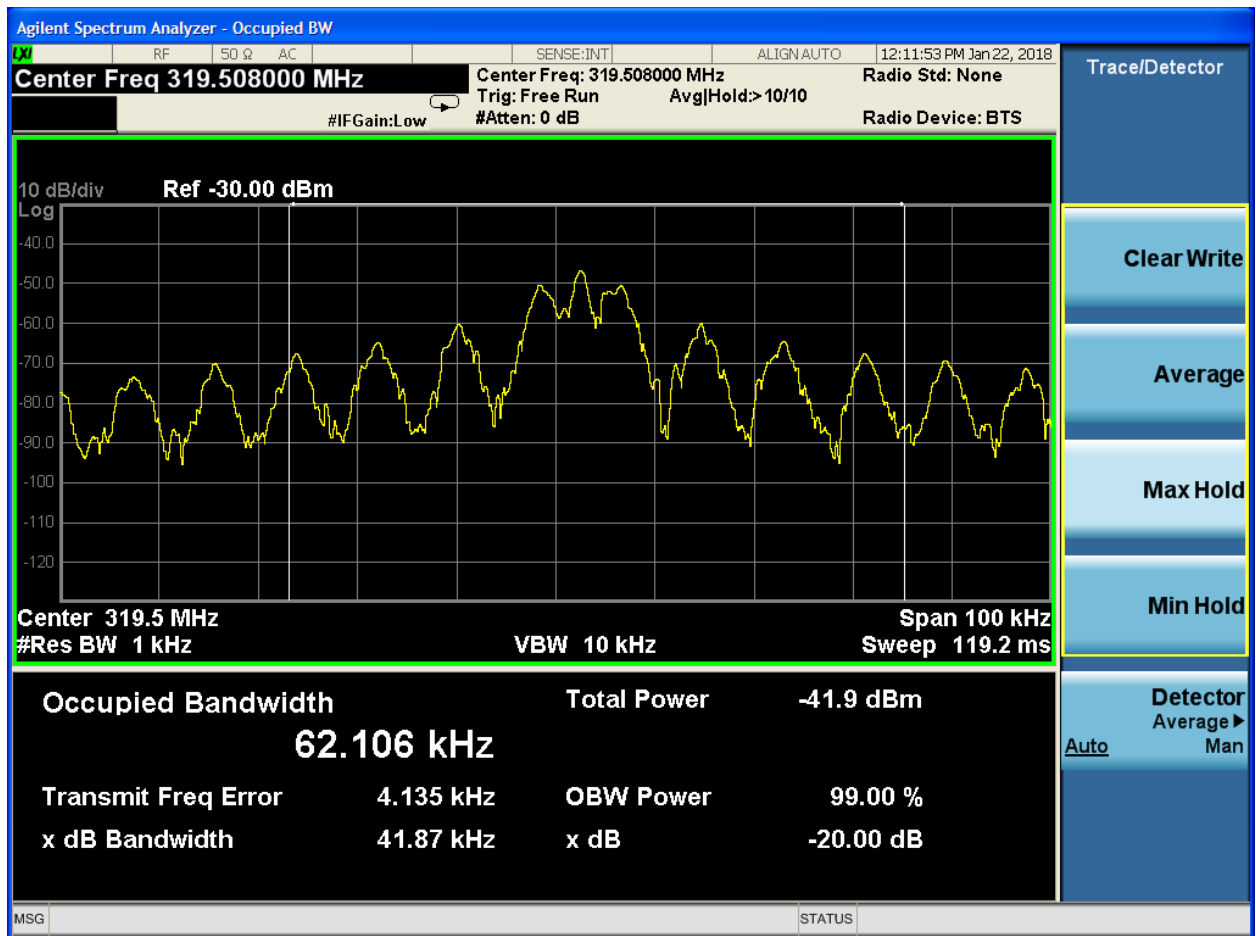

Occupied Bandwidth Test Equipment

| RTL Bar Code | Manufacturer | Model | Part Type | Serial Number | Calibration Due Date |
|--------------|----------------------|--------|--------------------------------------|---------------|----------------------|
| 901583 | Agilent Technologies | N9010A | EXA Signal Analyzer (10 Hz-26.5 GHz) | MY51250846 | 4/21/18 |


Test Personnel:

| | | |
|---------------|---|------------------|
| Dan Baltzell |  | January 22, 2018 |
| Test Engineer | Signature | Date of Test |

Transmitter Deactivation

15.231(a)


- (1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.
- (2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.

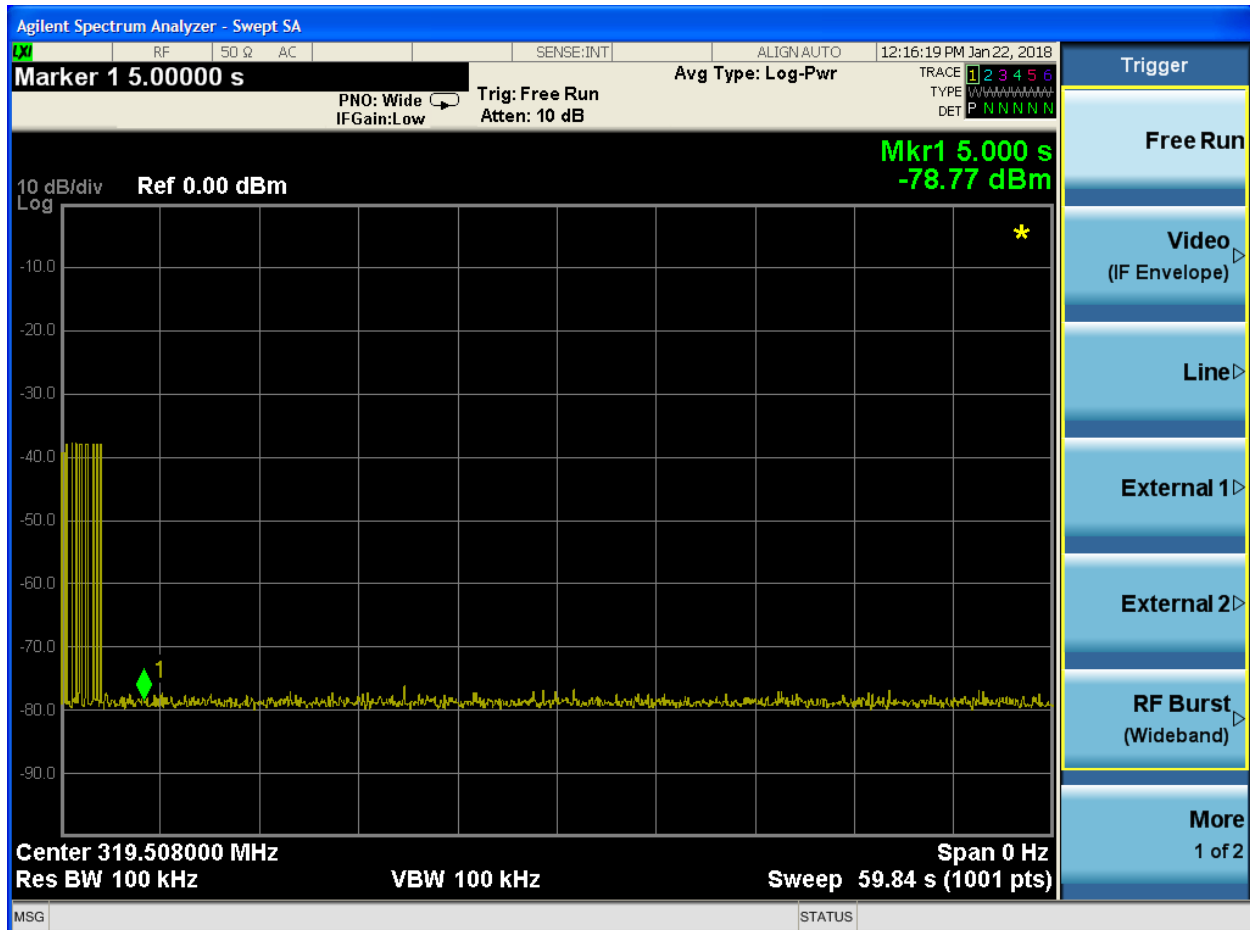

Test Equipment

| RTL Bar Code | Manufacturer | Model | Part Type | Serial Number | Calibration Due Date |
|--------------|----------------------|--------|--------------------------------------|---------------|----------------------|
| 901583 | Agilent Technologies | N9010A | EXA Signal Analyzer (10 Hz-26.5 GHz) | MY51250846 | 4/21/18 |

Test Personnel:

| | | |
|---------------|---|------------------|
| Dan Baltzell |  | January 22, 2018 |
| Test Engineer | Signature | Date of Test |

Appendix A: Test Configuration Photographs



Radiated Emissions (Less Than 1 GHz)



Radiated Emissions (Greater Than 1 GHz)