



Engineering Solutions & Electromagnetic Compatibility Services

**FCC Part 15.231 Test Data**

**EUT: 56-0039-02 Rev B01 345 MHz CO Detector**

**for**

**Resolution Engineering, Inc.  
226 Locust Street, Suite 4  
Hudson, WI 54016  
Contact: Josh Gathje**

**Testing Conducted By  
Rhein Tech Laboratories, Inc.  
360 Herndon Parkway, Suite 1400  
Herndon, VA 20170**

**RTL Test Engineer: Jon Wilson**

**RTL Project/Report Number: 2013191**

**August 30, 2013**

This report may not be reproduced, except in full, without the full written approval of Rhein Tech Laboratories, Inc. and Resolution Engineering. Test results relate only to the item tested.

These tests are accredited and meet the requirements of ISO/IEC 17025 as verified by ANSI-ASQ National Accreditation Board/ACLASS. Refer to certificate and scope of accreditation AT-1445.

## Testing Represented in Report

The data and limits presented in this report are for peak emissions limiting per 15.231(b)(2) which references 15.35(b), and peak limiting for restricted bands per 15.209(e), which again references 15.35(b)(2), as procured by Resolution Engineering. No average data is presented in this report. The Equipment Under Test (EUT) was the **56-0039-02 Rev B01 (RTL Bar Code 21094)**.

### 15.231 Radiated Emissions Test Data – FCC Limits / 3m Distance

Emission Frequency (MHz)	Test Detector	Antenna Polarity (H/V)	Analyzer Reading (dBuV)	Site Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pass/Fail
172.508	Peak	H	51.0	-16.5	34.5	57.3	-22.8	Pass
345.000*	Peak	H	81.6	15.4	97.0	97.3	-0.3	Pass
431.267	Peak	V	53.0	-4.3	48.7	57.3	-8.6	Pass
517.448	Peak	V	46.6	-6.5	40.1	57.3	-17.2	Pass
689.995	Peak	H	55.8	-6.6	49.2	77.3	-28.1	Pass
1,034.993	Peak	V	44.6	-2.6	42.0	74.0	-32.0	Pass
1,379.991	Peak	V	36.7	1.4	38.1	74.0	-35.9	Pass
1,724.991	Peak	V	36.6	3.7	40.3	77.3	-37.0	Pass
2,070.027	Peak	V	44.4	-11.4	33.0	77.3	-44.3	Pass
2,415.027	Peak	V	39.7	-10.4	29.3	77.3	-48.0	Pass
2,760.027	Peak	H	48.3	-9.6	38.7	74.0	-35.3	Pass
3,105.027	Peak	H	43.5	-8.7	34.8	77.3	-42.5	Pass
3,450.027	Peak	H	44.7	-8.0	36.7	77.3	-40.6	Pass

*\*fundamental*

## Test Procedure

Radiated fundamental and spurious emissions were tested at three meters. The EUT was tested in the three orthogonal planes with the receive antenna in both polarities. The emissions were maximized per ANSI C63.4:2003 8.3.1.2; that is, the measurement antenna height was varied between 1 and 4 m, and the EUT was rotated through 360° on a rotating turntable until the maximum emissions were found. Both horizontal and vertical measurement antenna polarizations were used. A resolution bandwidth of 100 kHz was used for frequencies less than 1000 MHz, and a resolution bandwidth of 1 MHz was used for frequencies greater than or equal to 1000 MHz. The video bandwidth was set to a value at least three times greater than the resolution bandwidth.

## EUT Disposition

The EUT was adapted to continuously transmit for testing purposes.

**Radiated Emissions Test Equipment**

Part	Manufacturer	Model	Serial Number	RTL Bar Code	Calibration Due Date
Amplifier (20 MHz-2 GHz)	Rhein Tech Laboratories, Inc.	PR-1040	900905	900905	8/20/14
Bilog Periodic Antenna (25 MHz-2 GHz)	Schaffner Chase	CBL6112	2099	900791	2/2/14
Spectrum Analyzer	Hewlett Packard	8596EM	3826A00144	901215	3/15/14
Amplifier (1 GHz–26.5 GHz)	Hewlett Packard	8449B OPT H02	3008A00505	900932	8/10/2014
Horn Antenna (2.0-4.0 GHz)	EMCO	3161-02	9804-1044	900772	4/20/15
Emissions Testing Software	Rhein Tech Laboratories, Inc.	Automated Emission Tester	Rev. 14.0.2	N/A	N/A

**Test Personnel:**

Jon Wilson		August 30, 2013
Test Engineer	Signature	Date of Test


**FCC/IC Cross Reference**

FCC 15.231(b)(2)	RSS-210 Issue 8 A1.1
FCC 15.35(b)	RSS-Gen Issue 3 7.2.3
FCC 15.205	RSS-Gen Issue 3 7.2.2
FCC 15.209	RSS-Gen Issue 3 7.2.5

## Test Configuration Photographs

### Radiated Emissions



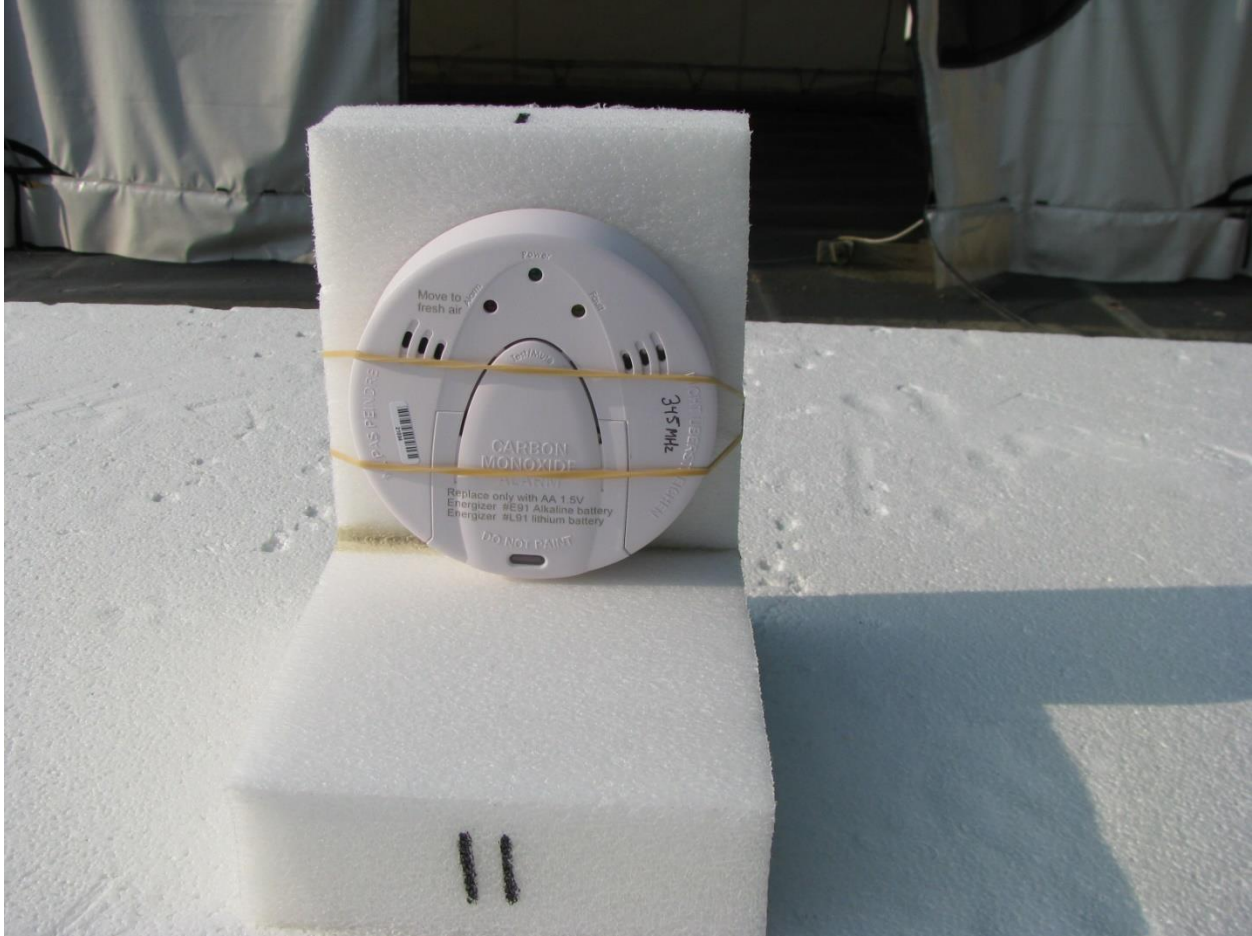

**EUT Photograph**

