


Exhibit C
RE214 Internal Photos





SINGLE STATION SMOKE ALARM WITH SUPPLEMENTAL HEAT ALARM

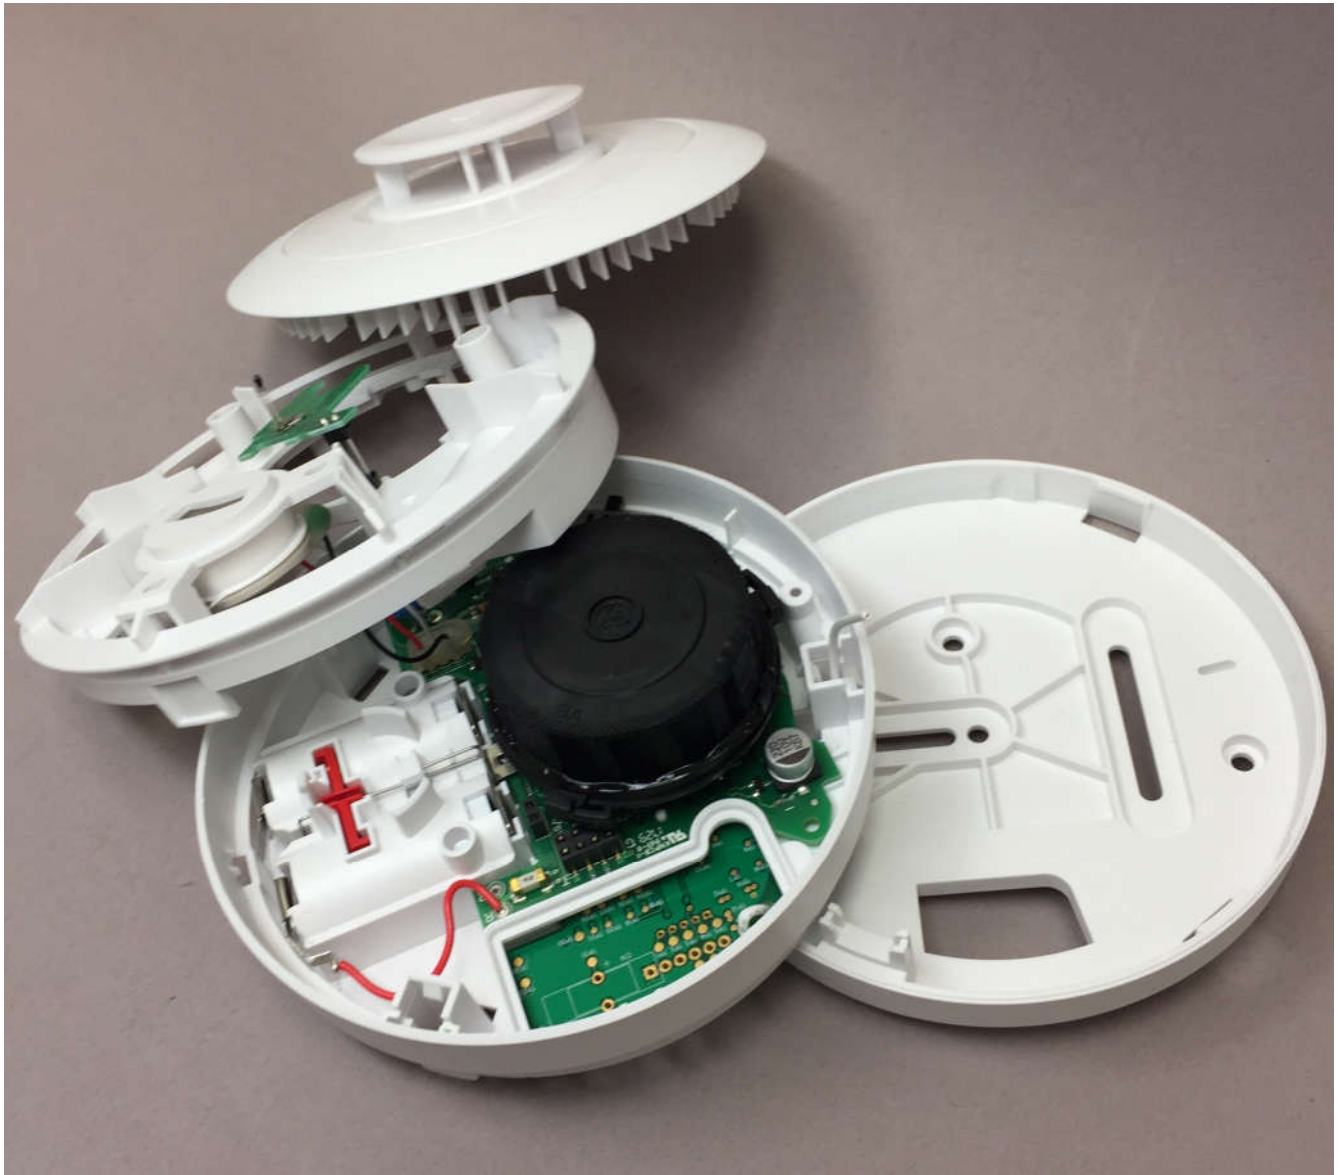

Model RE214
Smoke and Heat Alarm, HW
FCC ID: USX-RE214
IC ID: 8310A-RE214
Manual: 47-0023-02_RevA
Date: 17283

WARNING

PLEASE SEE USER MANUAL FOR IMPORTANT INFORMATION ON MAINTENANCE AND BATTERY LIFE. CONSTANT USE AT HIGH OR LOW TEMPERATURE OR HIGH HUMIDITY MAY REDUCE BATTERY LIFE. USE ONLY BATTERIES SPECIFIED, THE USE OF OTHER BATTERIES MAY HAVE A DETRIMENTAL EFFECT ON ALARM OPERATION. MAINTENANCE: CLEAN ALARM MONTHLY BY GENTLY VACUUMING THE OPENINGS IN THE EXTERIOR OF THE ALARM.

STANDBY: NO BEEP OR FLASH
LOW BATTERY: 1 BEEP + 1 YELLOW FLASH EVERY 48 SEC
ALARM: 3 LONG BEEPS, REPEATING WITH FLASHING RED LED
END OF LIFE: 3 BEEPS WITH 3 YELLOW FLASHES
ALARM SILENCE: 1 RED FLASH EVERY 8 SECS
SENSITIVITY: $\approx 1.95\% - 4.0\%$ OBSFT
CONFORMS TO UL STD 217
CERTIFIED TO UL STD 5531
FOR SERVICING, RETURN TO:
RESOLUTION PRODUCTS, INC.
1402 HEGGEN STREET
HUDSON, WI 54016

48-0024-02_RevA

EN FRANÇAIS




SN 037-1883

48-0024-02_RevA

Daughter Board



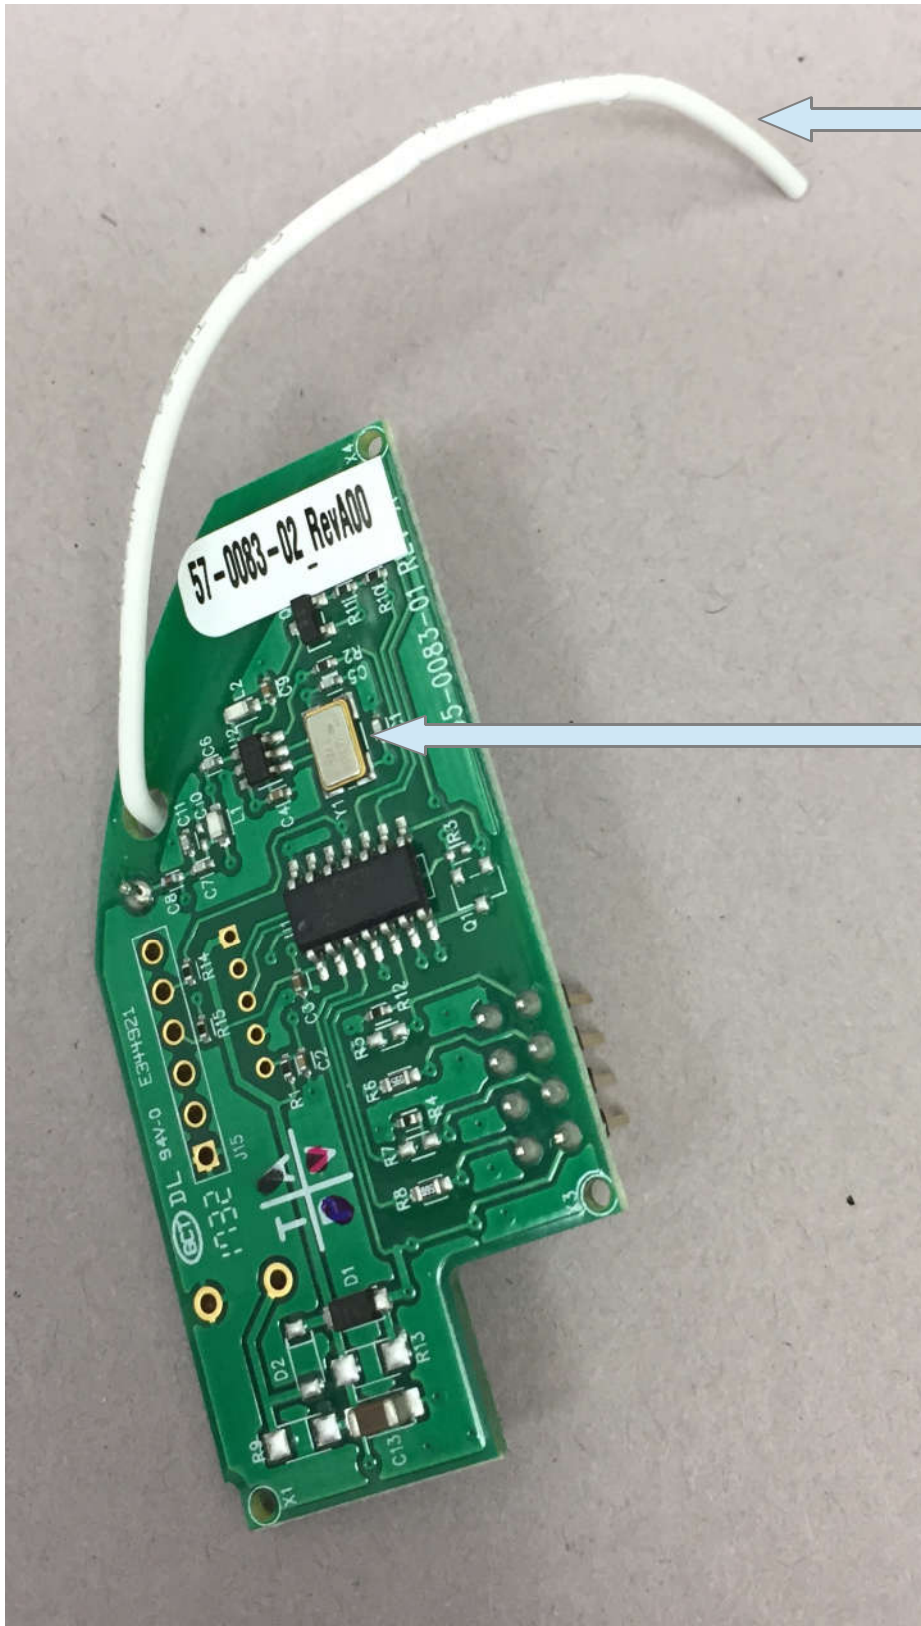

Antenna

Transmitter Ckt

