



Wireless
Security
Solutions



RE603 CryptiX-Compatible Panic

Features

- Portable device for emergency initiation of system.
- Single, red button with comfortable feel.
- Fully sealed, water resistant housing.
- Strong, reliable RF signal.
- “Heartbeat” LED blinks every minute to assure user.
- Comes with comfortable, elastic band for easy removability.
- 4-6 year battery life.

Key Instructions


- Enrolling:
 - Refer to the ResolutionProducts control unit installation manual.
 - Put the control panel in RF Learning mode.
 - Once panel is in RF learning mode, press the red button on the panic sensor.
 - Panel will show ID of sensor if successful enrollment

Operation

User presses button in emergency.
Unit will send low battery signals.
Unit sends supervisory signals hourly.

Heartbeat LED blinks
every 60 seconds

Red button is
Loop 1

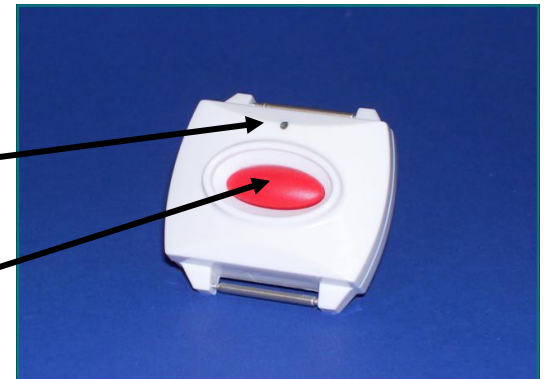

Specifications

Button Function:	Press=alarm/enrollment, no release function
Supervisory signals:	sent every hour.
Battery:	Sealed in unit; not replaceable
Water resistant:	Not submersible, but tested to 1 meter depth
Temperature Range:	0F to 120F
Housing dimensions:	1.5x1.2x0.6 inches

Specifications subject to change without notice.

Notices

Warranty

Resolution Products, Inc. will replace products that are defective in their first two (2) years.

FCC Notice

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference.

(2) This device must accept any interference that may be received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the Resolution Products, Inc. could void the user's authority to operate this equipment.

FCC ID: U5X-RE603

IC Notice

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

(1) This device may not cause interference, and

(2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

(1) l'appareil ne doit pas produire de brouillage, et

(2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

IC: 8310A-RE603

Model: RE603