

1. Material: See BOM for Blank Label
2. Text: Arial or equivalent, size per best fit
3. After printing, verify text does not smear/rub
4. Apply SynapSense and other Logo's per files provided
5. Serial Number and Human Readable Barcode: See Notes Below
6. Mark Applicable Part Number Revision

#### Serial Number (Human Readable):

PR = Fixed character (Pride); (AM for Amperor)

YY = Year (2010 = 10)

WW = Work Week (assigned per manufacturer calendar)


ZZZZ = Sequentially assigned number (hex-decimal 0-F)

DA = DA (Product Code for Damper Control)

#### Barcode:

Code 128, 0.1" Tall min., verify barcode is scannable

Barcode matches human readable characters

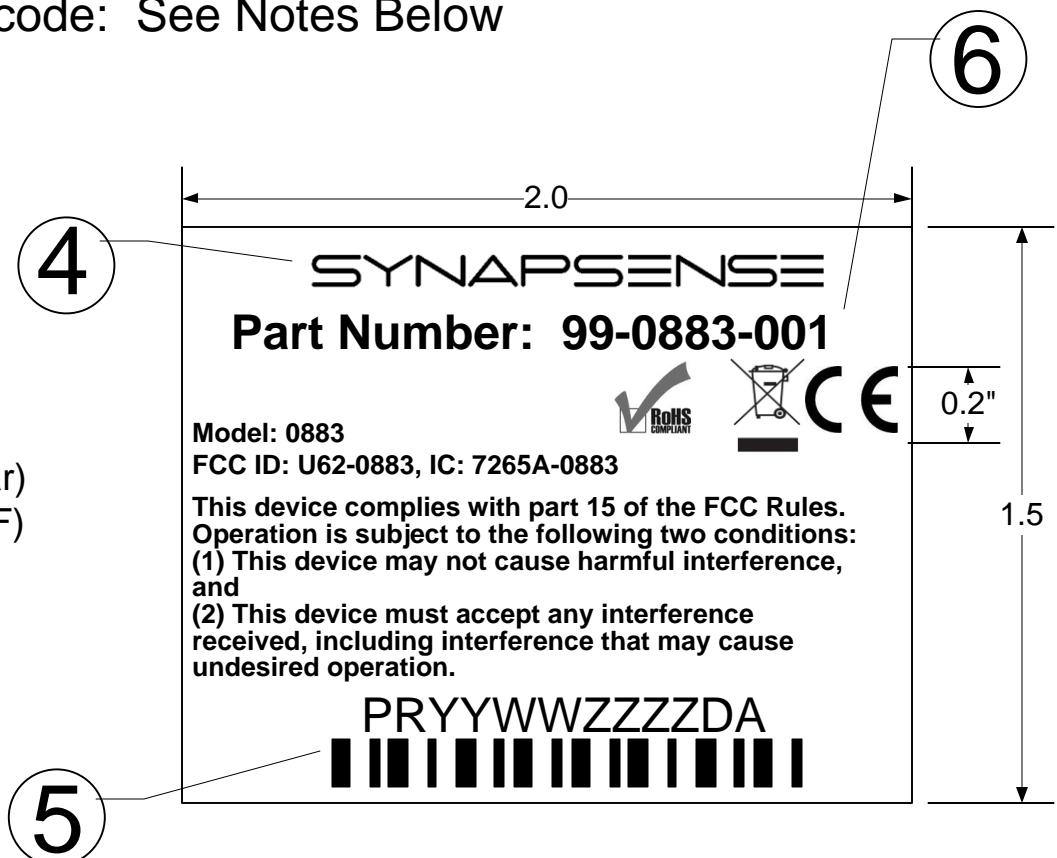

Dimensions in inches	SYNAPSENSE		
	Regulatory Label, DAMPER CONTROL NODE		
	SIZE A	FSCM NO 60-0952-001	DWG NO 2
	SCALE 1:2		SHEET 1 of 1