


**SK TECH CO., LTD.**

Page 1 of 33

## TEST REPORT

<b>Test Report No.:</b>	<b>SKTRFC-110413-009</b>		
<b>Applicant:</b>	<b>Camos Co., Ltd.</b>		
<b>Applicant Address:</b>	#429-9, Chongchon-2dong, Pupyong-ku, Inchon, South Korea		
<b>Manufacturer:</b>	<b>Camos Co., Ltd.</b>		
<b>Manufacturer Address:</b>	#429-9, Chongchon-2dong, Pupyong-ku, Inchon, South Korea		
<b>Device Under Test:</b>	<b>Digital Video Wireless System</b>		
<b>FCC ID:</b>	<b>U6C-DVWS-100</b>	<b>Model Name:</b>	<b>DVWS-100</b>
<b>Variant Model Name:</b>	<b>DVWS-100W, DVWS-100S, DVWS-100H</b>		
<b>Brand/Trade Name:</b>	<b>CAMOS</b>		
<b>Receipt No.:</b>	<b>SKTEU10-0734</b>	<b>Date of receipt:</b>	June 24, 2010
<b>Date of Issue:</b>	April 13, 2011		
<b>Location of Testing:</b>	<b>SK TECH CO., LTD.</b> #820-2, Wolmoon-ri, Wabu-up, Namyangju-si, Kyunggi-do, 472-905 South Korea		
<b>Test Procedure:</b>	<b>ANSI C63.4-2003</b>		
<b>Test Specification:</b>	<b>47CFR, FCC Part 15 Rules</b>		
<b>FCC Equipment Class:</b>	<b>DTS - Part 15 Digital Transmission System</b>		
<b>Test Result:</b>	The above-mentioned device has been tested and passed.		

Tested &amp; Reported by: Jungtae Kim

Approved by: Jongsoo Yoon

April 13, 2011

Signature

Date

April 13, 2011

Signature

Date

<b>Other Aspects:</b>	-
<b>Abbreviations:</b>	· OK, Pass = passed · Fail = failed · N/A = not applicable

- This test report is not permitted to copy partly and entirely without our permission.
- This test result is dependent on only equipment to be used.
- This test result is based on a single evaluation of submitted samples of the above mentioned.

**>> CONTENTS <<**

<b>1. GENERAL</b>	<b>4</b>
<b>2. TEST SITE</b>	<b>4</b>
2.1 Location	4
2.2 List of Test and Measurement Instruments	5
2.3 Test Date	5
2.4 Test Environment	5
<b>3. DESCRIPTION OF THE EQUIPMENT UNDER TEST</b>	<b>6</b>
3.1 Rating and Physical Characteristics	6
3.2 Equipment Modifications	6
3.3 Submitted Documents	6
<b>4. MEASUREMENT CONDITIONS</b>	<b>7</b>
4.1 Description of test configuration	7
4.2 List of Peripherals	7
4.3 Type of Used Cables	8
4.4 Uncertainty	8
<b>5. TEST AND MEASUREMENTS</b>	<b>9</b>
<b>5.1 ANTENNA REQUIREMENT</b>	<b>9</b>
5.1.1 Regulation	9
5.1.2 Result	9
<b>5.2 6dB BANDWIDTH</b>	<b>10</b>
5.2.1 Regulation	10
5.2.2 Test Procedure	10
5.2.3 Test Results	10
Table 1: Measured values of the 6dB Bandwidth	10
Figure 1: Plot of the 6dB Bandwidth	11
Figure 2: Plot of the Occupied Bandwidth (99%)	11
<b>5.3 MAXIMUM PEAK OUTPUT POWER</b>	<b>12</b>
5.3.1 Regulation	12
5.3.2 Test Procedure	12
5.3.3 Test Results	12
Table 2: Measured values of the Maximum Peak Conducted Output Power	12



<b>5.4 SPURIOUS EMISSION, BAND EDGE, AND RESTRICTED BANDS</b> .....	<b>13</b>
5.4.1 Regulation .....	13
5.4.2 Test Procedure .....	13
5.4.3 Test Results .....	15
Table 3: Measured values of the field strength of spurious emission (Radiated, Transmitter Unit) .....	15
Table 4: Measured values of the field strength of spurious emission (Radiated, Receiver Unit) .....	18
Figure 3: Plot of the Band Edge (Conducted) .....	21
Figure 4: Plot of the Band Edge (Radiated, Transmitter Unit) .....	22
Figure 5: Plot of the Band Edge (Radiated, Receiver Unit) .....	23
Figure 6: Plot of the Spurious RF conducted emission .....	24
Figure 7: Emission plot for the preliminary radiated measurements (Transmitter Unit) .....	25
Figure 8: Emission plot for the preliminary radiated measurements (Receiver Unit) .....	30
<b>5.5 PEAK POWER SPECTRAL DENSITY</b> .....	<b>31</b>
5.5.1 Regulation .....	31
5.5.2 Test Procedure .....	31
5.5.3 Test Results .....	31
Table 5: Measured values of the Peak Power Spectral Density .....	31
Figure 9: Plot of the Peak Power Spectral Density .....	32
<b>5.6 RF EXPOSURE</b> .....	<b>33</b>
5.6.1 Regulation .....	33
5.6.2 RF Exposure Compliance Issue .....	33



## 1. GENERAL

These tests were performed using the test procedure outlined in ANSI C63.4, 2003 for intentional radiators, and in accordance with the limits set forth in FCC Part 15.247. The EUT (Equipment Under Test) has been shown to be capable of compliance with the applicable technical standards.

We attest to the accuracy of data. All measurements reported herein were performed by SK TECH CO., LTD. and were made under Chief Engineer's supervision.

We assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

## 2. TEST SITE

SK TECH CO., Ltd.

### 2.1 Location

820-2, Wolmoon-ri, Wabu-up, Namyangju-si, Kyunggi-do, 472-905 South Korea

(FCC Registered Test Site Number: 938639)

(OPEN AREA TEST SITE INDUSTRY CANADA NUMBER: IC 5429A)

This test site is in compliance with ISO/IEC 17025 for general requirements for the competence of testing and calibration laboratories.

This laboratory is recognized as a Conformity Assessment Body (CAB) for CAB's Designation Number: KR0007 by FCC, is accredited by NVLAP for NVLAP Lab. Code: 200220-0.



## 2.2 List of Test and Measurement Instruments

No.	Description	Manufacturer	Model No.	Serial No.	Calibrated until	Used
1	Spectrum Analyzer	Agilent	E4405B	US40520856	2012.03	<input checked="" type="checkbox"/>
2	Spectrum Analyzer	Agilent	E4440A	MY46186322	2011.05	<input checked="" type="checkbox"/>
3	EMC Spectrum Analyzer	Agilent	E7405A	US40240203	2012.03	<input checked="" type="checkbox"/>
4	EMI Test Receiver	Rohde&Schwarz	ESPI7	101206	2011.07	<input checked="" type="checkbox"/>
5	EMI Test Receiver	Rohde&Schwarz	ESIB40	100277	2012.03	
6	EMI Test Receiver	Rohde&Schwarz	ESHS10	862970/019	2011.07	
7	Artificial Mains Network	Rohde&Schwarz	ESH3-Z5	836679/018	2011.07	
8	Pre-amplifier	HP	8447F	3113A05153	2011.07	<input checked="" type="checkbox"/>
9	Pre-amplifier	MITEQ	AFS44	1116321	2011.12	
10	Pre-amplifier	MITEQ	AFS44	1116322	2011.07	<input checked="" type="checkbox"/>
11	Power Meter	Agilent	E4417A	MY45100426	2011.07	
12	Power Meter	Agilent	E4418B	US39402176	2011.07	<input checked="" type="checkbox"/>
13	Power Sensor	Agilent	E9327A	MY44420696	2011.07	
14	Power Sensor	Agilent	8482A	MY41094094	2011.07	
15	Power Sensor	Agilent	8485A	3318A13916	2011.07	<input checked="" type="checkbox"/>
16	Attenuator (10dB)	HP	8491B	38067	2011.07	<input checked="" type="checkbox"/>
17	Attenuator (20dB)	Weinschel	44	AH6967	2011.07	
18	High Pass Filter	Wainwright	WHKX3.0/18G	8	2011.07	<input checked="" type="checkbox"/>
19	VHF Precision Dipole Antenna (TX/RX)	Schwarzbeck	VHAP	1014 / 1015	2011.05	
20	UHF Precision Dipole Antenna (TX/RX)	Schwarzbeck	UHAP	989 / 990	2011.05	
21	Loop Antenna	Schwarzbeck	HFH2-Z2	863048/019	2011.11	<input checked="" type="checkbox"/>
22	TRILOG Broadband Antenna	Schwarzbeck	VULB9168	230	2011.07	<input checked="" type="checkbox"/>
23	TRILOG Broadband Antenna	Schwarzbeck	VULB9168	189	2011.05	
24	Horn Antenna	AH Systems	SAS-200/571	304	N/A	
25	Horn Antenna	EMCO	3115	00040723	2011.04	
26	Horn Antenna	EMCO	3115	00056768	2011.10	<input checked="" type="checkbox"/>
27	Horn Antenna	Schwarzbeck	BBHA9170	BBHA9170318	2013.09	<input checked="" type="checkbox"/>
28	Vector Signal Generator	Agilent	E4438C	MY42080359	2011.08	
29	PSG analog signal generator	Agilent	E8257D-520	MY45141255	2011.07	
30	DC Power Supply	HP	6633A	3325A04972	2011.08	<input checked="" type="checkbox"/>
31	DC Power Supply	HP	6268B	2542A-07856	2011.07	
32	Temperature/Humidity Chamber	All Three	ATM-50M	20030425	2012.03	
33	Hygro/Thermo Graph	SATO	PC-5000TRH-II	-	2011.07	<input checked="" type="checkbox"/>

## 2.3 Test Date

Date of Test: April 5, 2011 ~ April 12, 2011

## 2.4 Test Environment

See each test item's description.



### 3. DESCRIPTION OF THE EQUIPMENT UNDER TEST

The product specification described herein was obtained from the product data sheet or user's manual.

#### 3.1 Rating and Physical Characteristics

Model Name	DVWS-100	
Variant Model Name *	DVWS-100W, DVWS-100S, DVWS-100H	
Power source	DC 12 V or 24 V (from the battery in a vehicle)	
System Composition **	Transmitter Unit	Receiver Unit
Local Oscillator or X-Tal	14.31818 MHz, 24 MHz, 40 MHz	24 MHz, 40 MHz
Transmit Frequency	2412 MHz to 2457 MHz	same as the Transmitter Unit
Antenna Type	External dipole antenna	same as the Transmitter Unit
Antenna Connector	Reverse polarity SMA type	same as the Transmitter Unit
Type of Modulation	64QAM (IEEE 802.11n HT20)	same as the Transmitter Unit
External Ports	DC INPUT for power source input 6-pin MiniDin for the connection to a camera (for video input, audio input, and power source output to the camera)	6-pin MiniDin for the connection to a monitor (for video output, audio output, and power source)

\* The variant model(s) is electrically the same as the basic model. The variant model name(s) is used for the marketing purpose, and this test report is only for the measurement results for the basic model name of DVWS-100.

\*\* The system consists of the Transmitter Unit and Receiver Unit. The both units use the same PCB and only some components are different from each other. The same radio module is used; the conducted RF measurements were made only for the Transmitter Unit, and the radiated spurious emission measurements were made for the both units.

#### 3.2 Equipment Modifications

During the radiated spurious emission measurement below 1 GHz, a gasket was attached to the ground plan of the PCB, and it was contacted to the metal enclosure. See the internal photographs. To comply with the radiated spurious emission limits as stipulated in Part 15.209, the modification shall be applied for all the products during the mass production.

#### 3.3 Submitted Documents

Block diagram

Schematic diagram

Antenna Specification

Part List


User manual



## 4. MEASUREMENT CONDITIONS

### 4.1 Description of test configuration

The measurements were taken in continuous transmitting mode provided by the applicant.

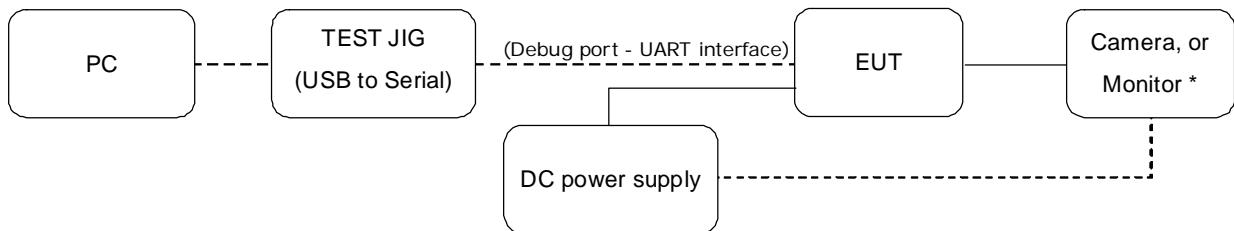

\* Camera for testing of Transmitter unit

\* Monitor for testing of Receiver unit

[ System Block Diagram of Test Configuration ]

Hyper Terminal was used as the test software for control of WLAN module.

The RF power output was set to 'ATETXPOW0=17' as the maximum power output as declared by the applicant.

### 4.2 List of Peripherals

Equipment Type	Manufacturer	Model	S/N
Notebook PC **	DELL	INSPIRATION	14791079949
Adaptor (for Notebook PC)	DELL	LA65NS0-00	CN-0DF263-71615-6BT-81A8
TEST JIG	Camos Co., Ltd.	-	-
Camera	Camos Co., Ltd.	CM-112AHT	C00377
Monitor	Clarion	CJ-7000	-
DC power supply	HP	6633A	3325A04972

\*\* For the control of the RF module with TEST JIG. For the radiated spurious emission measurements, the measurements were performed without PC after setting the radio module to TEST MODE.



### 4.3 Type of Used Cables

for testing of Transmitter Unit,

#	START		END		CABLE	
	NAME	I/O PORT	NAME	I/O PORT	LENGTH(m)	SHIELDED
1	EUT	6-pin MiniDin	Camera	6-pin MiniDin	0.5	NO (w/ ferrite core)
2	EUT	DC INPUT	DC power supply	DC output	1.9	NO
3	EUT	Debug	TESE JIG	UART	-	-
4	TEST JIG	USB	Notebook PC	USB	0.4	-
5	Notebook PC	DC Input	Adaptor	DC Output	1.5	NO
6	Adaptor	AC Input	AC mains	-	0.8	NO

for testing of Receiver Unit,

#	START		END		CABLE	
	NAME	I/O PORT	NAME	I/O PORT	LENGTH(m)	SHIELDED
1	EUT	6-pin MiniDin	Monitor	Multi cable	1.3	YES
2	Monitor	DC INPUT	DC power supply	DC output	1.2	NO
3	EUT	Debug	TESE JIG	UART	-	-
4	TEST JIG	USB	Notebook PC	USB	0.4	-
5	Notebook PC	DC Input	Adaptor	DC Output	1.5	NO
6	Adaptor	AC Input	AC mains	-	0.8	NO

### 4.4 Uncertainty

Measurement Item	Combined Standard Uncertainty $U_c$	Expanded Uncertainty $U = k \times U_c (k = 1.96)$
Conducted RF power	$\pm 0.71$ dB	$\pm 1.42$ dB
Radiated disturbance	$\pm 2.30$ dB	$\pm 4.60$ dB
Conducted disturbance	$\pm 1.96$ dB	$\pm 3.92$ dB



## 5. TEST AND MEASUREMENTS

### Summary of Test Results

Requirement	CFR 47 Section	Report Section	Test Result
Antenna Requirement	15.203, 15.247(b)(4)	5.1	PASS
6dB Bandwidth	15.247(a)(2)	5.2	PASS
Maximum Peak Output Power	15.247(b)(3), (4)	5.3	PASS
Spurious Emission, Band Edge, and Restricted bands	15.247(d), 15.205(a), 15.209(a)	5.4	PASS
Peak Power Spectral Density	15.247(e)	5.5	PASS
AC power line Conducted emissions	15.207(a)	-	N/A**
RF Exposure	15.247(i), 1.1307(b)(1)	5.6	PASS

\*\* The product is powered from a DC 12 V or 24 V lead-acid battery in a vehicle

### 5.1 ANTENNA REQUIREMENT

#### 5.1.1 Regulation

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 5.1.2 Result:

**PASS**

The transmitter has the integral dipole antenna. The unique antenna connector with the reverse polarity SMA type is used. The directional gain of the antenna is 5.33 dBi.



## 5.2 6 dB BANDWIDTH

### 5.2.1 Regulation

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

### 5.2.2 Test Procedure

1. Connect the antenna port of the EUT to RF input on the spectrum analyzer via a low loss cable.
2. Set the spectrum analyzer as follows:
  - RBW = 100 kHz, VBW  $\geq$  RBW
  - Span  $\gg$  RBW
  - Sweep = auto
  - Detector function = peak
  - Trace = max hold
3. Mark the peak frequency and -6dB (upper and lower) frequency.
4. Set the RBW to as close to 1% of the selected span as is possible without being below 1%.
5. Set the DETECTOR to sample where practical. [REMARK: the function of the PEAK HOLD was used]
6. Measure the 99% occupied bandwidth.
7. Repeat until all the rest channels are investigated.

### 5.2.3 Test Results:

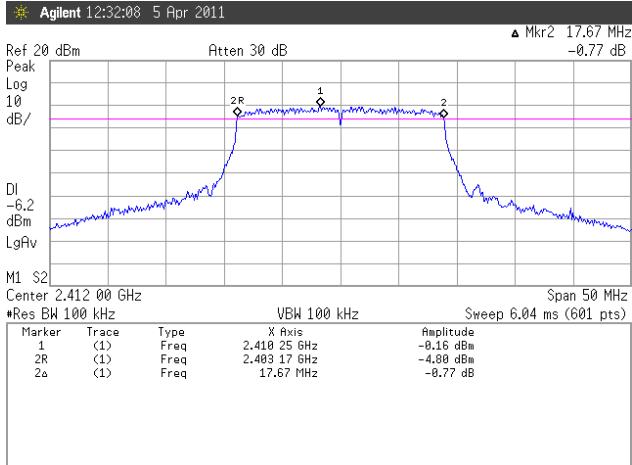
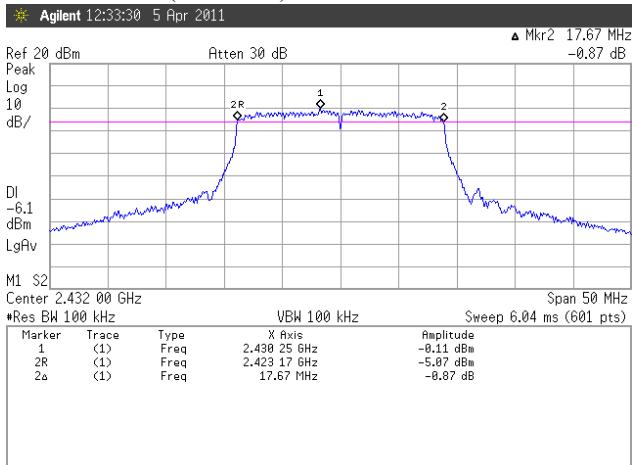
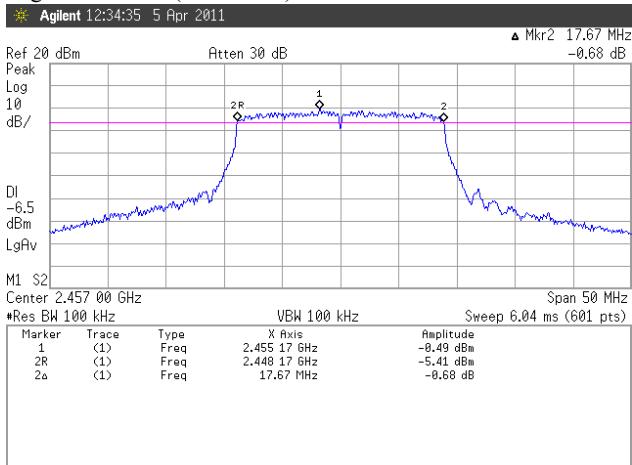
PASS

**Table 1: Measured values of the 6dB Bandwidth**

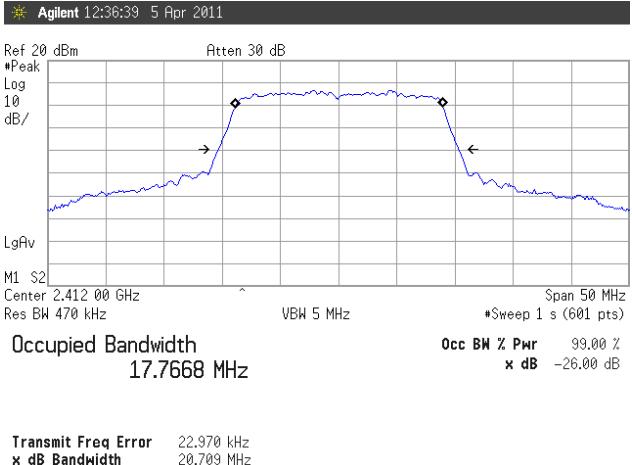
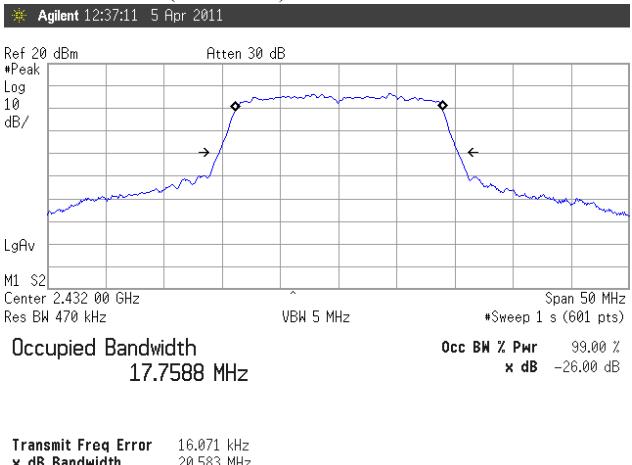
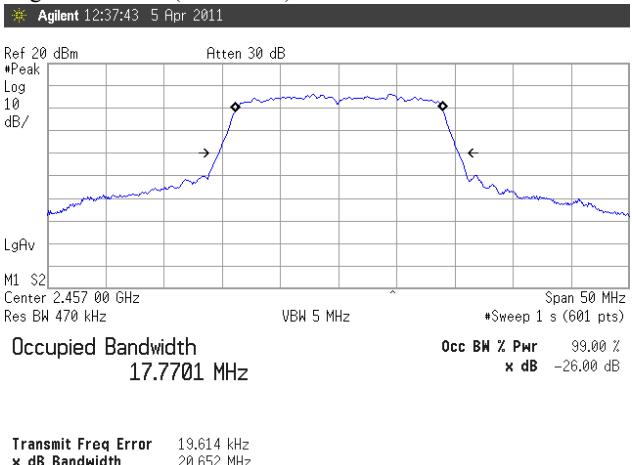
Operating frequency	Occupied Bandwidth (99%)	6dB Bandwidth	Limit (6dB)
2412 MHz	17.7668 MHz	17.67 MHz	$\geq$ 500 kHz
2432 MHz	17.7588 MHz	17.67 MHz	$\geq$ 500 kHz
2457 MHz	17.7701 MHz	17.67 MHz	$\geq$ 500 kHz

**Figure 1. Plot of the 6dB Bandwidth**

Lowest Channel (2412 MHz)

**Middle Channel (2432 MHz)****Highest Channel (2457 MHz)****Figure 2. Plot of the Occupied Bandwidth (99%)**

Lowest Channel (2412 MHz)

**Middle Channel (2432 MHz)****Highest Channel (2457 MHz)**



## 5.3 MAXIMUM PEAK OUTPUT POWER

### 5.3.1 Regulation

According to §15.247(b)(3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 5.3.2 Test Procedure

1. Connect the antenna port of the EUT to RF input on the Peak/Average power meter via a low loss cable and attenuator.
2. Turn on the EUT and set it to any one measured frequency within its operating range by controlling it via UART interface and make sure the power meter is operated in its linear range.
3. Correct the cable loss and the external attenuator if used.
4. Repeat above procedures until all frequencies measured were complete.

### 5.3.3 Test Results:

PASS

**Table 2: Measured values of the Maximum Peak Conducted Output Power**

Operating frequency	Reading [dBm]		CF [dB]	Actual [dBm]		Final [W]		Limit (Peak)
	Peak	Average		Peak	Average	Peak	Average	
2412 MHz	8.96	1.13	11.57	20.53	12.70	0.113	0.019	1 W
2432 MHz	8.66	0.85	11.59	20.25	12.44	0.106	0.018	1 W
2457 MHz	8.32	0.56	11.60	19.92	12.16	0.098	0.016	1 W

$$\text{Final [W]} = 10^3 \times 10^{(\text{Actual [dBm]}/10)}$$

$$\text{Actual [dBm]} = \text{Reading [dBm]} + \text{CF [dB]}$$

$$\text{CF [dB]} = \text{Cable loss [dB]} + \text{External 10 dB attenuator [dB]}$$

Reading [dBm]: reading value with Peak/Average power meter



## 5.4 SPURIOUS EMISSIONS, BAND EDGE, AND RESTRICTED BANDS

### 5.4.1 Regulation

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

According to §15.209(a), for an intentional device, the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Field strength ( $\mu$ V/m @ 3m)	Field strength (dB $\mu$ V/m @ 3m)
30–88	100	40.0
88–216	150	43.5
216–960	200	46.0
Above 960	500	54.0

According to §15.109(a), for an unintentional device, except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the above table.

\*\* The emission limits shown in the above table are based on measurement instrumentation employing a CISPR quasi-peak detector and above 1000 MHz are based on the average value of measured emissions.

### 5.4.2 Test Procedure

#### 1) Band-edge Compliance of RF Conducted Emissions

1. Set the spectrum analyzer as follows:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation

RBW  $\geq$  1% of the span

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

2. Allow the trace to stabilize. Set the marker on the emission at the band-edge, or on the highest modulation product outside of the band, if this level is greater than that at the band-edge. Enable the marker-delta function, and then use the marker-to-peak function to move the marker to the peak of the in-band emission.

3. Now, using the same instrument settings, enable the hopping function of the EUT. Allow the trace to stabilize. Follow the same procedure listed above to determine if any spurious emissions caused by the hopping function also comply with the specified limit.



## 2) Spurious RF Conducted Emissions:

1. Set the spectrum analyzer as follows:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

2. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.

## 3) Spurious Radiated Emissions:

1. The preliminary radiated measurements were performed to determine the frequency producing the maximum emissions in an anechoic chamber at a distance of 3 meters or 1 meter.
2. The EUT was placed on the top of the 0.8-meter height, 1  $\times$  1.5 meter non-metallic table. To find the maximum emission levels, the height of a measuring antenna was changed and the turntable was rotated 360°.
3. The antenna polarization was also changed from vertical to horizontal. The spectrum was scanned using the loop antenna below 30 MHz, from 30 to 1000 MHz using the Trilog broadband antenna, and from 1 GHz to tenth harmonic of the highest fundamental frequency using the horn antenna.
4. To obtain the final measurement data, the EUT was arranged on a turntable situated on a 4  $\times$  4 meter at the Open Area Test Site. The EUT was tested at a distance 3 meters.
5. Each frequency found during preliminary measurements was re-examined and investigated. The test-receiver system was set up to average, peak, and quasi-peak detector function with specified bandwidth.
6. The EUT is situated in three orthogonal planes (if appropriate)
7. The presence of ambient signals was verified by turning the EUT off. In case an ambient signal was detected, the measurement bandwidth was reduced temporarily and verification was made that an additional adjacent peak did not exist. This ensures that the ambient signal does not hide any emissions from the EUT.
8. If the emission on which a radiated measurement must be made is located at the edge of the authorized band of operation, then the alternative "marker-delta" method may be employed.

## 4) Marker-Delta Method at the edge of the authorized band of operation:

1. Perform an in-band field strength measurement of the fundamental emission using the RBW and detector function as the above Spurious Radiated Emissions test procedure.
2. Choose a spectrum analyzer span that encompasses both the peak of the fundamental emission and the band-edge emission under investigation. Set the analyzer RBW to 1% of the total span (but never less than 30 kHz) with a video bandwidth equal to or greater than the RBW. Record the peak levels of the fundamental emission and the relevant band-edge emission (i.e., run several sweeps in peak hold mode). Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not a field strength measurement; it is only a relative measurement to determine the amount by which the emission drops at the band-edge relative to the highest fundamental emission level.
3. Subtract the delta measured in step (2) from the field strengths measured in step (1). The resultant field strengths (CISPR QP, average, or peak, as appropriate) are then used to determine band-edge compliance as required by Section 15.205.
4. The above "delta" measurement technique may be used for measuring emissions that are up to two "standard" bandwidths away from the band-edge, where a "standard" bandwidth is the bandwidth specified by C63.4 for the frequency being measured. For example, for band-edge measurements in the restricted band that begins at 2483.5 MHz, C63.4 specifies a measurement bandwidth of at least 1 MHz. Therefore you may use the "delta" technique for measuring emissions up to 2 MHz removed from the band-edge. Radiated emissions that are removed by more than two "standard" bandwidths must be measured as the above Spurious Radiated Emissions test procedure.



### 5.4.3 Test Results:

PASS

**Band-edge compliance of RF conducted/radiated emissions was shown in the Figure 3, 4 and 5. Spurious RF conducted emissions were shown in the Figure 6.**

**Emission plot for the preliminary radiated measurements were shown in the Figure 7 and 8.**

*NOTE 1: for conducted measurement, we took the insertion loss of the cable loss into consideration within the measuring instrument. And for radiated measurement, the results were calibrated to the field strength within the measuring instrument; Table 3 and 4 contains the correction factors at the operating frequencies such as antenna factor, cable loss, etc.*

*NOTE 2: The preliminary radiated measurements were performed in the anechoic chamber in order to find the frequency, which falls in the restricted bands as defined in Section 15.205, and the results for the final measurements were indicated in the Table 3 and 4.*

**Table 3: Measured values of the Field strength of spurious emission (Radiated, Transmitter Unit)**

## **BELOW 1 GHz**

Frequency	Receiver Bandwidth	Pol.	Antenna Height	Turn Table	Reading	Amp Gain	ATT	AF	CL	Actual	Limit	Margin
[MHz]	[kHz]	[V/H]	[m]	[degree]	[dB(μV)]	[dB]	[dB]	[dB(1/m)]	[dB]	[dB(μV/m)]	[dB(μV/m)]	[dB]

## Average/Peak/Quasi-peak data, emissions below 30 MHz

### ***No Spurious Radiated Emissions Found***

## Quasi-peak data, emissions below 1000 MHz

48.08	120	H	1.13	44	41.99	28.44	0	13.45	0.69	27.69	40.00	12.31
48.08	120	V	1.00	0	35.55	28.44	0	13.45	0.69	21.25	40.00	18.75
216.64	120	H	1.00	90	46.82	27.71	0	11.02	1.44	31.57	46.00	14.43
216.64	120	V	1.34	73	44.51	27.71	0	11.02	1.44	29.26	46.00	16.74
270.00	120	H	1.00	196	45.75	27.58	0	12.58	1.61	32.36	46.00	13.64
270.00	120	V	1.26	132	41.26	27.58	0	12.58	1.61	27.87	46.00	18.13
600.01	120	H	1.33	308	41.23	28.91	0	17.86	2.43	32.61	46.00	13.39
600.01	120	V	1.44	270	37.22	28.91	0	17.86	2.43	28.60	46.00	17.40
648.66	120	H	1.27	303	40.73	28.94	0	19.15	2.52	33.46	46.00	12.54
648.66	120	V	1.54	274	36.21	28.94	0	19.15	2.52	28.94	46.00	17.06

**Margin (dB) = Limit – Actual**

[Actual = Reading – Amp Gain + Attenuator + AF + CL]

1. H = Horizontal, V = Vertical Polarization

2. ATT = Attenuation (10dB pad and/or Insertion Loss of HPF), AF/CL = Antenna Factor and Cable Loss

NOTE: All emissions not reported were more than 20 dB below the specified limit or in the noise floor.

**Table 3: Measured values of the Field strength of spurious emission (Radiated, Transmitter Unit)****ABOVE 1 GHz**

Frequency	Receiver Bandwidth	Pol.	Antenna Height	Turn Table	Reading	Amp Gain	ATT	AF	CL	Actual	Limit	Margin
[MHz]	[kHz]	[V/H]	[m]	[degree]	[dB(μV)]	[dB]	[dB]	[dB(1/m)]	[dB]	[dB(μV/m)]	[dB(μV/m)]	[dB]
<b>AVERAGE data, emissions above 1000 MHz</b>												
2410.8	1000	H	1.38	65	-	0	0	28.00	5.05	88.17	Not Applicable	
2410.8	1000	V	1.00	243	-	0	0	28.00	5.05	97.83		
2390.0	1000	H	1.38	65	-	0	0	27.93	5.02	44.55	54.00	9.45
2390.0	1000	V	1.00	243	-	0	0	27.93	5.02	47.28	54.00	6.72
3216.2	1000	H	1.00	0	40.98	48.26	3.25	30.50	5.86	32.33	54.00	21.67
3216.2	1000	V	1.34	46	41.29	48.26	3.25	30.50	5.86	32.64	54.00	21.36
4828.4	1000	H	1.00	0	41.55	48.27	1.18	32.76	7.30	34.52	54.00	19.48
4828.4	1000	V	1.40	10	46.55	48.27	1.18	32.76	7.30	39.52	54.00	14.48
2432.1	1000	H	1.26	34	-	0	0	28.07	5.08	88.92	Not Applicable	
2432.1	1000	V	1.13	230	-	0	0	28.07	5.08	96.99		
3242.7	1000	H	1.00	0	40.84	48.25	3.10	30.57	5.89	32.15	54.00	21.85
3242.7	1000	V	1.36	52	41.02	48.25	3.10	30.57	5.89	32.33	54.00	21.67
4864.0	1000	H	1.00	0	41.62	48.27	1.17	32.76	7.34	34.62	54.00	19.38
4864.0	1000	V	1.41	99	47.06	48.27	1.17	32.76	7.34	40.06	54.00	13.94
2455.6	1000	H	1.00	22	-	0	0	28.14	5.11	88.85	Not Applicable	
2455.6	1000	V	1.27	187	-	0	0	28.14	5.11	96.83		
2508.8	1000	H	1.00	22	-	0	0	28.31	5.15	44.49	54.00	9.51
2508.8	1000	V	1.27	187	-	0	0	28.31	5.15	48.88	54.00	5.12
3276.0	1000	H	1.00	0	41.06	48.24	2.93	30.66	5.92	32.33	54.00	21.67
3276.0	1000	V	1.44	278	40.86	48.24	2.93	30.66	5.92	32.13	54.00	21.87
4914.0	1000	H	1.00	0	41.70	48.28	1.17	32.77	7.38	34.74	54.00	19.26
4914.0	1000	V	1.38	302	48.98	48.28	1.17	32.77	7.38	42.02	54.00	11.98

Margin (dB) = Limit – Actual

[Actual = Reading – Amp Gain + Attenuator + AF + CL]

1. H = Horizontal, V = Vertical Polarization

2. ATT = Attenuation (10dB pad and/or Insertion Loss of HPF), AF/CL = Antenna Factor and Cable Loss

Remark 1. The reading values at the vicinity of the operating frequency including the band-edge were taken with the correction for the antenna factor and the cable loss as the final result ('Actual' value).

**Table 3: Measured values of the Field strength of spurious emission (Radiated, Transmitter Unit)****ABOVE 1 GHz**

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Antenna Height [m]	Turn Table [degree]	Reading [dB(μV)]	Amp Gain [dB]	ATT [dB]	AF [dB(1/m)]	CL [dB]	Actual [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
<b>PEAK data, emissions above 1000 MHz</b>												
2410.0	1000	H	1.38	65	-	0	0	27.99	5.05	97.84	Not Applicable	
2416.4	1000	V	1.00	243	-	0	0	28.01	5.06	108.03		
2390.0	1000	H	1.38	65	-	0	0	27.93	5.02	58.07	74.00	15.93
2390.0	1000	V	1.00	243	-	0	0	27.93	5.02	62.34	74.00	11.66
3216.2	1000	H	1.00	0	53.42	48.26	3.25	30.50	5.86	44.77	74.00	29.23
3216.2	1000	V	1.34	46	53.88	48.26	3.25	30.50	5.86	45.23	74.00	28.77
4828.4	1000	H	1.00	0	54.02	48.27	1.18	32.76	7.30	46.99	74.00	27.01
4828.4	1000	V	1.40	10	59.88	48.27	1.18	32.76	7.30	52.85	74.00	21.15
2431.9	1000	H	1.26	34	-	0	0	28.07	5.08	98.03	Not Applicable	
2431.9	1000	V	1.13	230	-	0	0	28.07	5.08	107.22		
3242.7	1000	H	1.00	0	53.49	48.25	3.10	30.57	5.89	44.80	74.00	29.20
3242.7	1000	V	1.36	52	53.76	48.25	3.10	30.57	5.89	45.07	74.00	28.93
4864.0	1000	H	1.00	0	54.06	48.27	1.17	32.76	7.34	47.06	74.00	26.94
4864.0	1000	V	1.41	99	59.39	48.27	1.17	32.76	7.34	52.39	74.00	21.61
2458.4	1000	H	1.00	22	-	0	0	28.15	5.11	98.98	Not Applicable	
2458.4	1000	V	1.27	187	-	0	0	28.15	5.11	106.57		
2508.8	1000	H	1.00	22	-	0	0	28.31	5.15	56.86	74.00	17.14
2508.8	1000	V	1.27	187	-	0	0	28.31	5.15	61.30	74.00	12.70
3276.0	1000	H	1.00	0	53.76	48.24	2.93	30.66	5.92	45.03	74.00	28.97
3276.0	1000	V	1.44	278	53.72	48.24	2.93	30.66	5.92	44.99	74.00	29.01
4914.0	1000	H	1.00	0	54.10	48.28	1.17	32.77	7.38	47.14	74.00	26.86
4914.0	1000	V	1.38	302	61.22	48.28	1.17	32.77	7.38	54.26	74.00	19.74

Margin (dB) = Limit – Actual

[Actual = Reading – Amp Gain + Attenuator + AF + CL]

1. H = Horizontal, V = Vertical Polarization

2. ATT = Attenuation (10dB pad and/or Insertion Loss of HPF), AF/CL = Antenna Factor and Cable Loss

NOTE: All emissions not reported were more than 20 dB below the specified limit or in the noise floor.

*Remark 1. The reading values at the vicinity of the operating frequency including the band-edge were taken with the correction for the antenna factor and the cable loss as the final result ('Actual' value).*

**Table 4: Measured values of the Field strength of spurious emission (Radiated, Receiver Unit)****BELOW 1 GHz**

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Antenna Height [m]	Turn Table [degree]	Reading [dB(μV)]	Amp Gain [dB]	ATT [dB]	AF [dB(1/m)]	CL [dB]	Actual [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
<b>Average/Peak/Quasi-peak data, emissions below 30 MHz</b>												
		<i>No Spurious Radiated Emissions Found</i>										
<b>Quasi-peak data, emissions below 1000 MHz</b>												
270.00	120	H	1.09	188	45.15	27.58	0	12.58	1.61	31.76	46.00	14.24
270.00	120	V	1.22	120	42.33	27.58	0	12.58	1.61	28.94	46.00	17.06
648.66	120	H	1.33	324	39.85	28.94	0	19.15	2.52	32.58	46.00	13.42
648.66	120	V	1.59	299	35.77	28.94	0	19.15	2.52	28.50	46.00	17.50
957.43	120	H	1.58	102	32.29	28.28	0	24.41	3.11	31.53	46.00	14.47
957.43	120	V	1.77	172	31.99	28.28	0	24.41	3.11	31.23	46.00	14.77

**Margin (dB) = Limit – Actual****[Actual = Reading – Amp Gain + Attenuator + AF + CL]**

1. H = Horizontal, V = Vertical Polarization

2. ATT = Attenuation (10dB pad and/or Insertion Loss of HPF), AF/CL = Antenna Factor and Cable Loss

NOTE: All emissions not reported were more than 20 dB below the specified limit or in the noise floor.

**Table 4: Measured values of the Field strength of spurious emission (Radiated, Receiver Unit)****ABOVE 1 GHz**

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Antenna Height [m]	Turn Table [degree]	Reading [dB(μV)]	Amp Gain [dB]	ATT [dB]	AF [dB(1/m)]	CL [dB]	Actual [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
<b>AVERAGE data, emissions above 1000 MHz</b>												
2410.8	1000	H	1.38	252	-	0	0	28.00	5.05	91.53	Not Applicable	
2410.8	1000	V	1.00	248	-	0	0	28.00	5.05	99.23		
2390.0	1000	H	1.38	252	-	0	0	27.93	5.02	45.65	54.00	8.35
2390.0	1000	V	1.00	248	-	0	0	27.93	5.02	49.96	54.00	4.04**
3216.2	1000	H	1.00	0	40.68	48.26	3.25	30.50	5.86	32.03	54.00	21.97
3216.2	1000	V	1.32	59	41.55	48.26	3.25	30.50	5.86	32.90	54.00	21.10
4822.5	1000	H	1.00	0	41.03	48.26	1.18	32.76	7.30	34.01	54.00	19.99
4822.5	1000	V	1.46	98	48.88	48.26	1.18	32.76	7.30	41.86	54.00	12.14
2432.1	1000	H	1.39	292	-	0	0	28.07	5.08	90.85	Not Applicable	
2432.1	1000	V	1.09	221	-	0	0	28.07	5.08	98.63		
3242.4	1000	H	1.00	0	40.77	48.25	3.11	30.57	5.89	32.09	54.00	21.91
3242.4	1000	V	1.40	88	40.99	48.25	3.11	30.57	5.89	32.31	54.00	21.69
4862.5	1000	H	1.00	0	41.00	48.27	1.17	32.76	7.34	34.00	54.00	20.00
4862.5	1000	V	1.43	124	49.02	48.27	1.17	32.76	7.34	42.02	54.00	11.98
2455.6	1000	H	1.33	252	-	0	0	28.14	5.11	92.31	Not Applicable	
2455.6	1000	V	1.00	270	-	0	0	28.14	5.11	99.22		
2483.6	1000	H	1.33	252	-	0	0	28.23	5.13	44.79	54.00	9.21
2483.6	1000	V	1.00	270	-	0	0	28.23	5.13	46.61	54.00	7.39
3276.0	1000	H	1.00	0	40.82	48.24	2.93	30.66	5.92	32.09	54.00	21.91
3276.0	1000	V	1.38	127	41.02	48.24	2.93	30.66	5.92	32.29	54.00	21.71
4912.0	1000	H	1.00	0	41.05	48.28	1.17	32.77	7.38	34.09	54.00	19.91
4912.0	1000	V	1.39	277	49.26	48.28	1.17	32.77	7.38	42.30	54.00	11.70

Margin (dB) = Limit – Actual

[Actual = Reading – Amp Gain + Attenuator + AF + CL]

1. H = Horizontal, V = Vertical Polarization

2. ATT = Attenuation (10dB pad and/or Insertion Loss of HPF), AF/CL = Antenna Factor and Cable Loss

*Remark 1. The reading values at the vicinity of the operating frequency including the band-edge were taken with the correction for the antenna factor and the cable loss as the final result ('Actual' value).*

*\*\*: The measured result is within the test standard limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95 % level of confidence. However, the result indicates that compliance is more probable than non-compliance.*

**Table 4: Measured values of the Field strength of spurious emission (Radiated, Receiver Unit)****ABOVE 1 GHz**

Frequency [MHz]	Receiver Bandwidth [kHz]	Pol. [V/H]	Antenna Height [m]	Turn Table [degree]	Reading [dB(μV)]	Amp Gain [dB]	ATT [dB]	AF [dB(1/m)]	CL [dB]	Actual [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]
<b>PEAK data, emissions above 1000 MHz</b>												
2416.4	1000	H	1.38	252	-	0	0	28.01	5.06	101.96	Not Applicable	
2416.4	1000	V	1.00	248	-	0	0	28.01	5.06	109.55		
2390.0	1000	H	1.38	252	-	0	0	27.93	5.02	60.24	74.00	13.76
2390.0	1000	V	1.00	248	-	0	0	27.93	5.02	65.24	74.00	8.76
3216.2	1000	H	1.00	0	53.12	48.26	3.25	30.50	5.86	44.47	74.00	29.53
3216.2	1000	V	1.32	59	54.02	48.26	3.25	30.50	5.86	45.37	74.00	28.63
4822.5	1000	H	1.00	0	54.12	48.26	1.18	32.76	7.30	47.10	74.00	26.90
4822.5	1000	V	1.46	98	61.03	48.26	1.18	32.76	7.30	54.01	74.00	19.99
2431.9	1000	H	1.39	292	-	0	0	28.07	5.08	101.55	Not Applicable	
2431.9	1000	V	1.09	221	-	0	0	28.07	5.08	107.92		
3242.4	1000	H	1.00	0	53.53	48.25	3.11	30.57	5.89	44.85	74.00	29.15
3242.4	1000	V	1.40	88	53.84	48.25	3.11	30.57	5.89	45.16	74.00	28.84
4862.5	1000	H	1.00	0	54.09	48.27	1.17	32.76	7.34	47.09	74.00	26.91
4862.5	1000	V	1.43	124	61.34	48.27	1.17	32.76	7.34	54.34	74.00	19.66
2461.2	1000	H	1.33	252	-	0	0	28.16	5.11	102.56	Not Applicable	
2458.4	1000	V	1.00	270	-	0	0	28.15	5.11	108.17		
2483.6	1000	H	1.33	252	-	0	0	28.23	5.13	57.32	74.00	16.68
2483.6	1000	V	1.00	270	-	0	0	28.23	5.13	59.79	74.00	14.21
3276.0	1000	H	1.00	0	53.62	48.24	2.93	30.66	5.92	44.89	74.00	29.11
3276.0	1000	V	1.38	127	53.88	48.24	2.93	30.66	5.92	45.15	74.00	28.85
4912.0	1000	H	1.00	0	54.21	48.28	1.17	32.77	7.38	47.25	74.00	26.75
4912.0	1000	V	1.39	277	62.33	48.28	1.17	32.77	7.38	55.37	74.00	18.63

Margin (dB) = Limit – Actual

[Actual = Reading – Amp Gain + Attenuator + AF + CL]

1. H = Horizontal, V = Vertical Polarization

2. ATT = Attenuation (10dB pad and/or Insertion Loss of HPF), AF/CL = Antenna Factor and Cable Loss

NOTE: All emissions not reported were more than 20 dB below the specified limit or in the noise floor.


*Remark 1. The reading values at the vicinity of the operating frequency including the band-edge were taken with the correction for the antenna factor and the cable loss as the final result ('Actual' value).*


**SK TECH CO., LTD.**


Page 21 of 33

**Figure 3. Plot of the Band Edge (Conducted)**

Lowest Channel (2412 MHz)

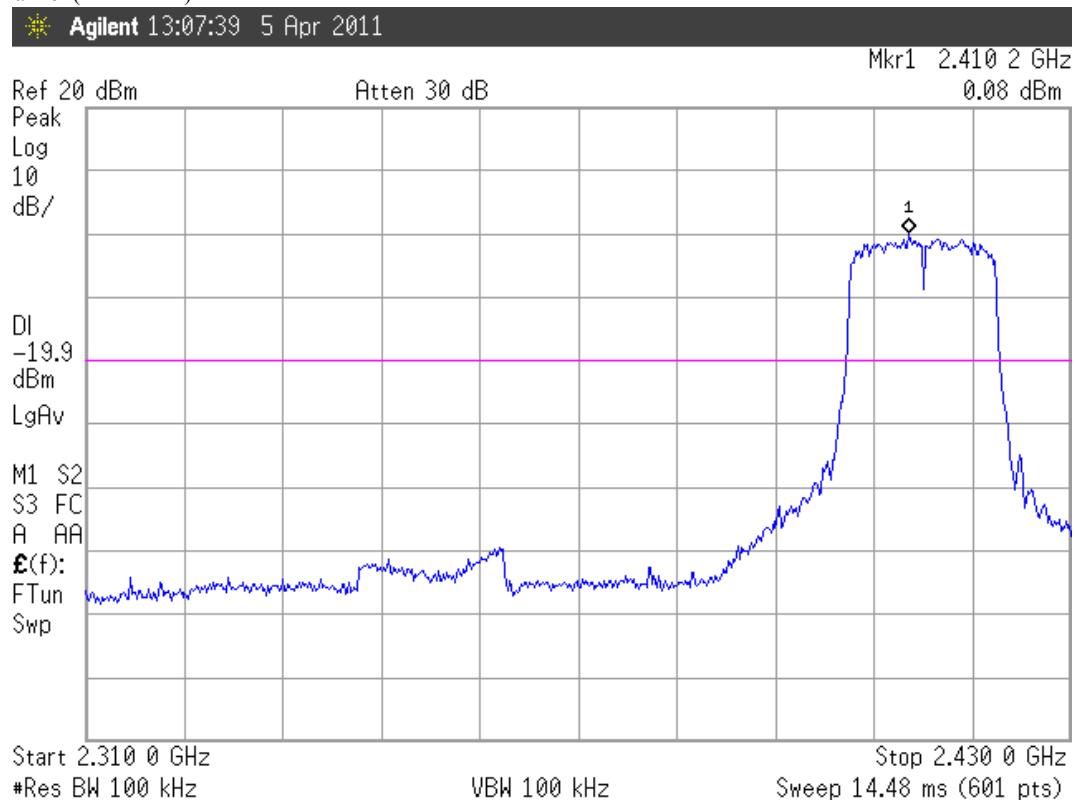

Highest Channel (2457 MHz)

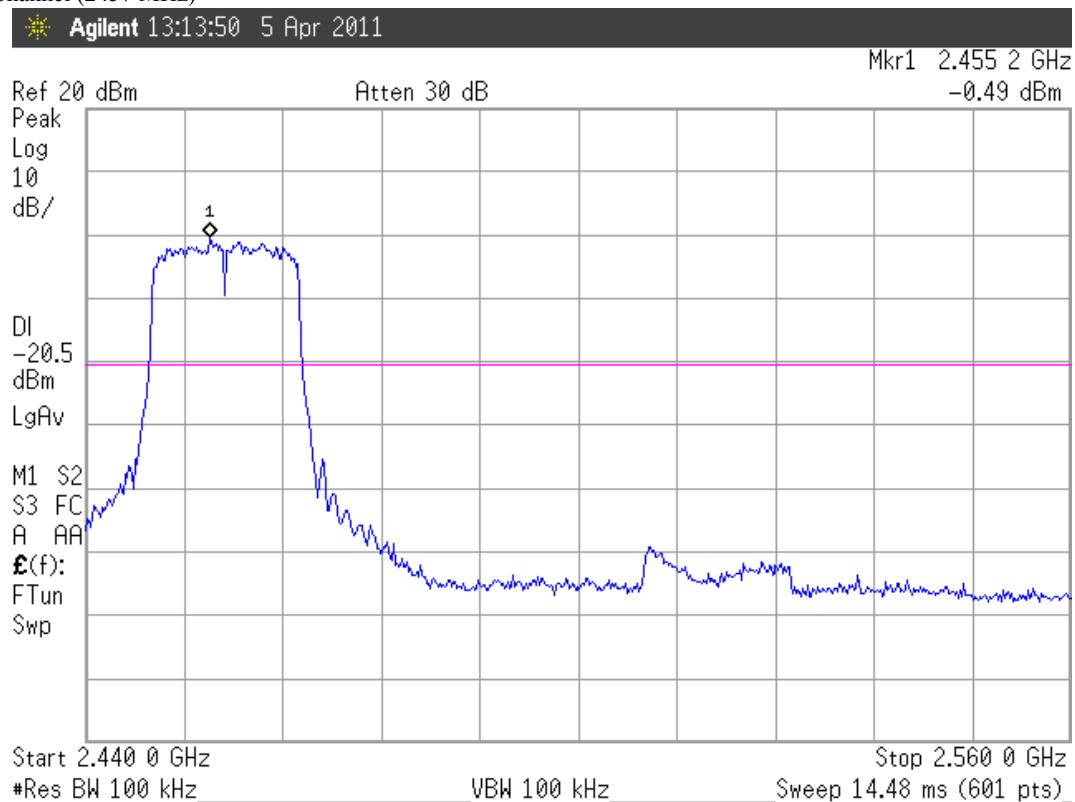




**SK TECH CO., LTD.**

Page 22 of 33

**Figure 4. Plot of the Band Edge (Radiated, Transmitter Unit)**

### Lowest Channel (2412 MHz)


## Horizontal

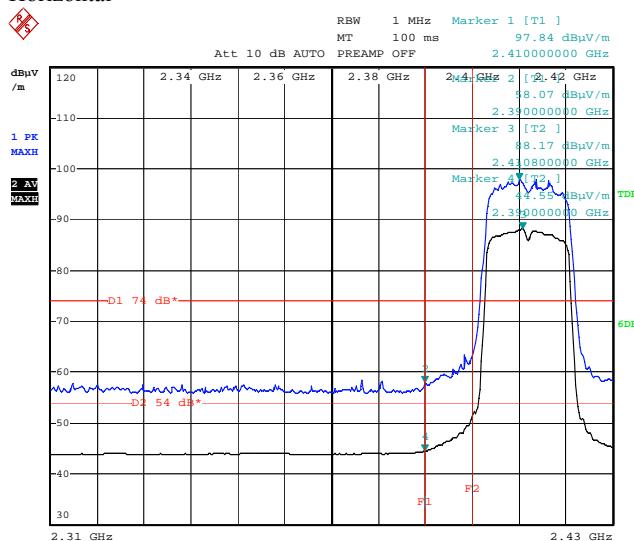

Date: 11.APR.2011 14:46:18

### Highest Channel (2457 MHz)


## Horizontal

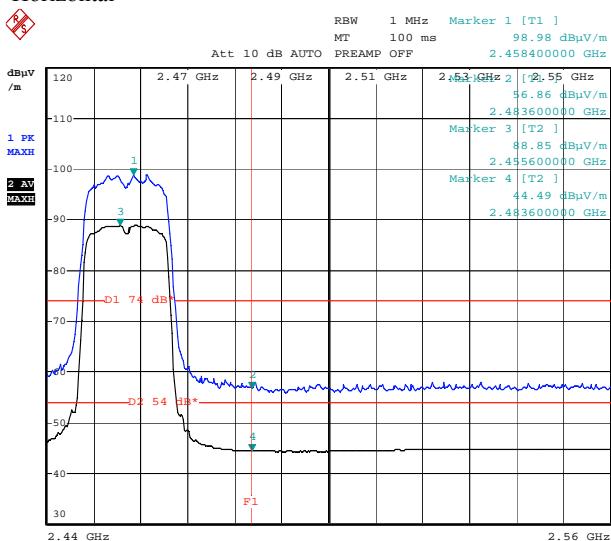

Date: 11.APR.2011 14:02:26

### Lowest Channel (2412 MHz)


## Vertical

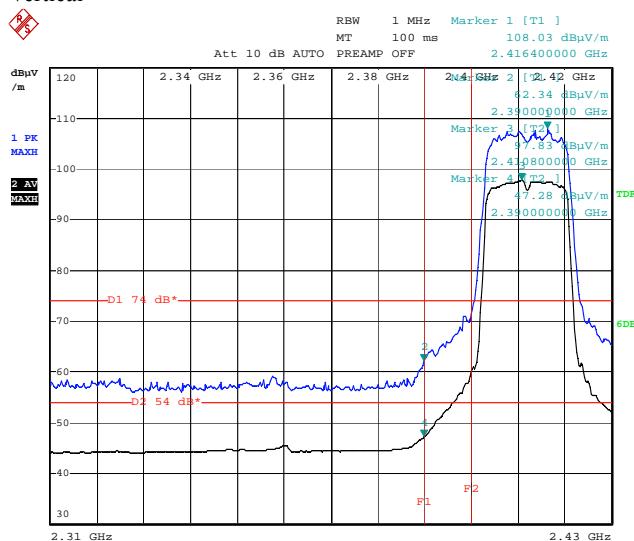

Date: 11.APR.2011 14:29:13

### Highest Channel (2457 MHz)

## Vertical

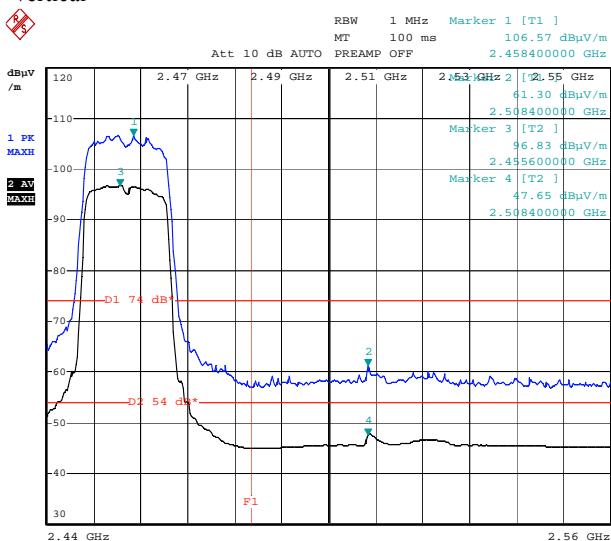


Date: 11.APR.2011 14:19:05



### Figure 5. Plot of the Band Edge (Radiated, Receiver Unit)

Lowest Channel (2412 MHz)


Horizontal

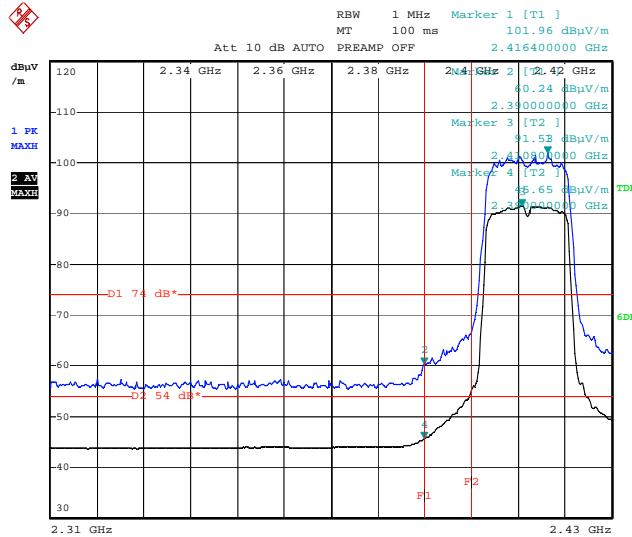

Date: 11.APR.2011 15:25:46

Highest Channel (2457 MHz)


Horizontal

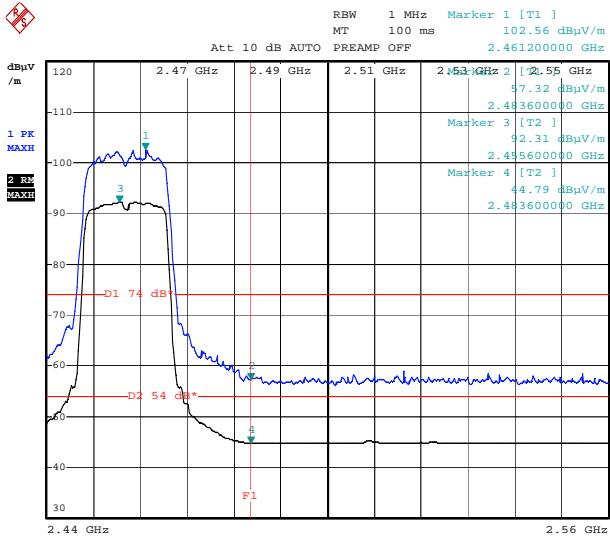

Date: 11.APR.2011 15:33:27

Lowest Channel (2412 MHz)


Vertical

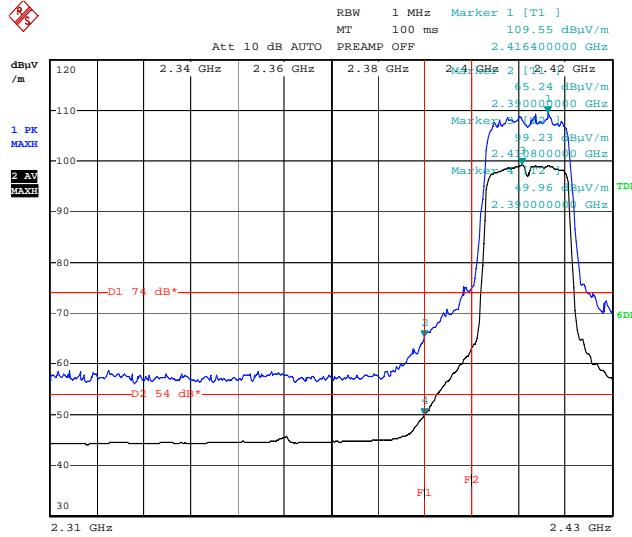

Date: 11.APR.2011 14:56:05

Highest Channel (2457 MHz)

Vertical

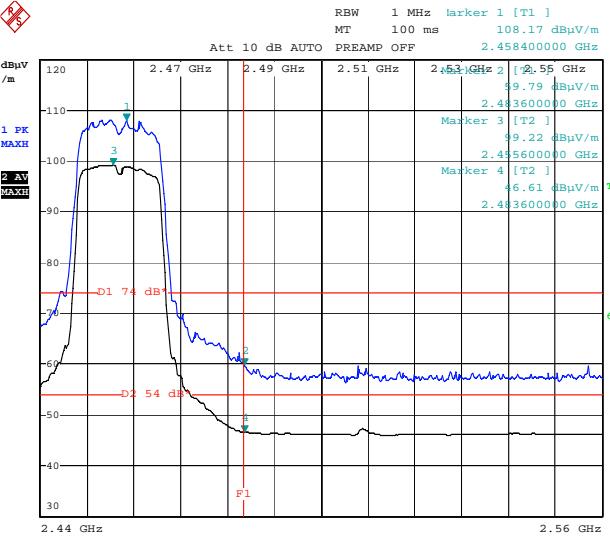


Date: 11.APR.2011 15:46:04




### Figure 6. Spurious RF conducted emissions


Lowest Channel (2412 MHz): 30 MHz ~ 6 GHz

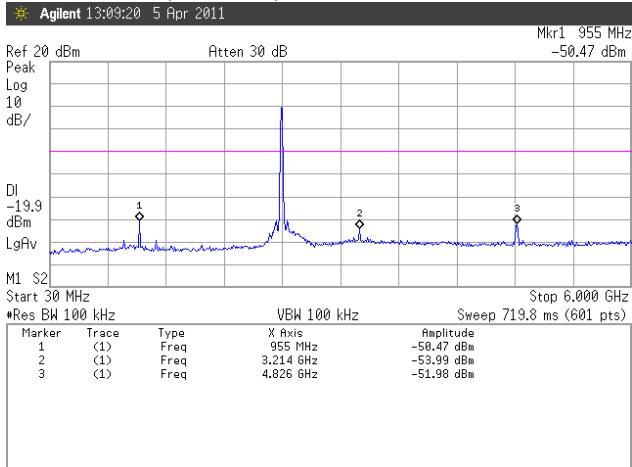


Lowest Channel (2412 MHz): 6 GHz ~ 25 GHz

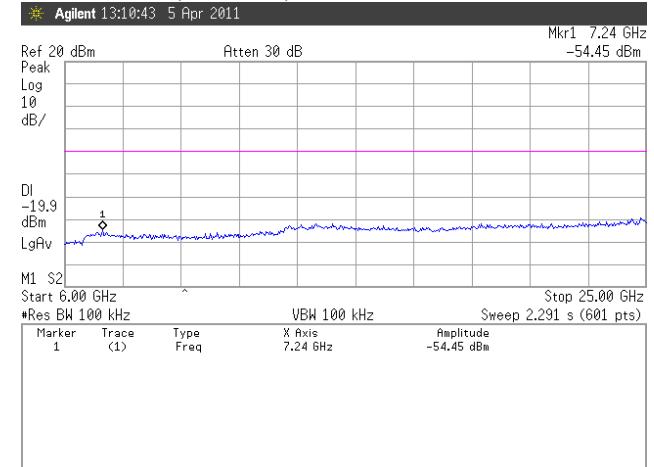


Middle Channel (2432 MHz): 30 MHz ~ 6 GHz

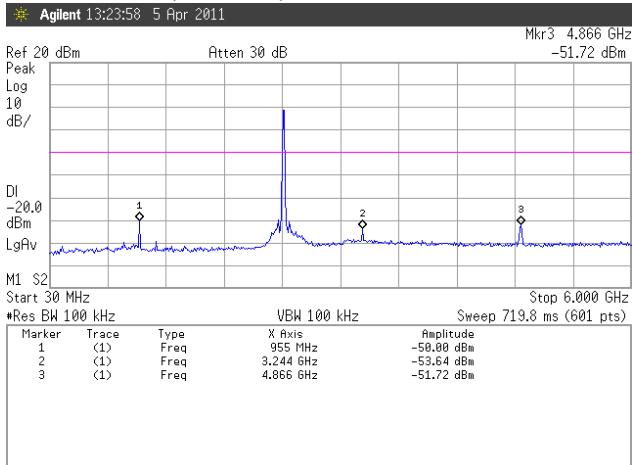


Middle Channel (2432 MHz): 6 GHz ~ 25 GHz

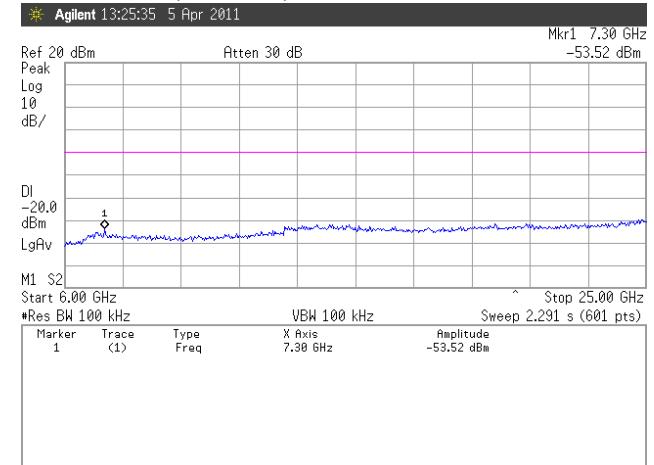

Highest Channel(2457 MHz): 30 MHz ~ 6 GHz

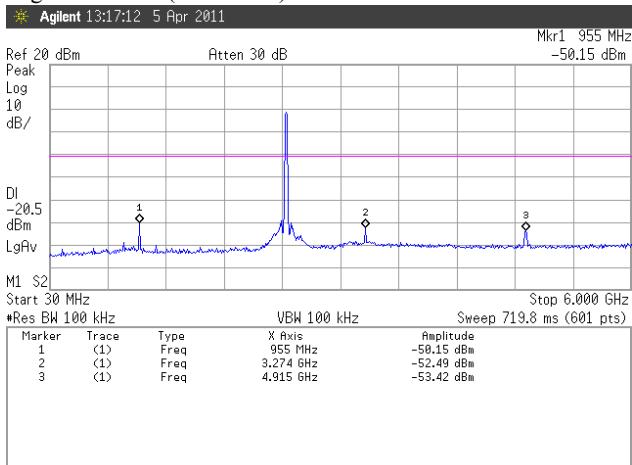


Highest Channel(2457 MHz): 6 GHz ~ 25 GHz

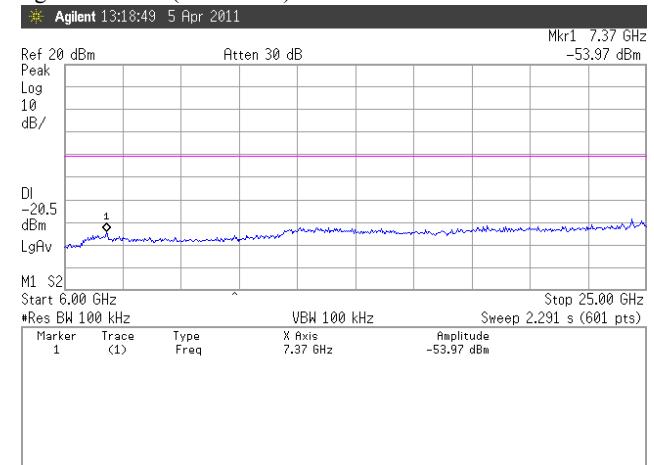




### Figure 7. Emission plot for the preliminary radiated measurements (Transmitter Unit)


Operating at 2412 MHz: 10 MHz ~ 30 MHz (@ 3-m distance)

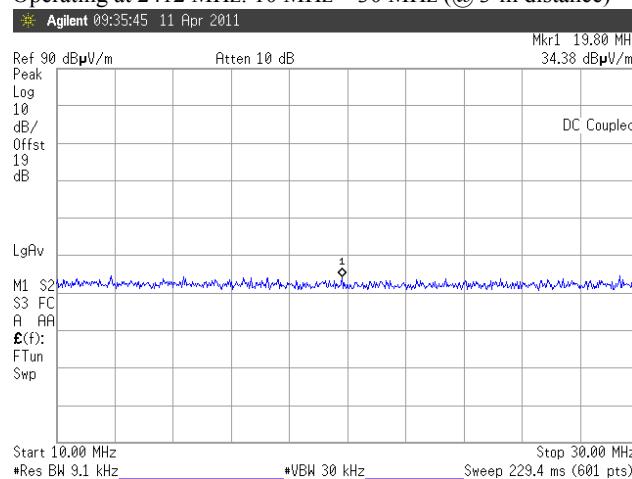


Operating at 2457 MHz: 10 MHz ~ 30 MHz (@ 3-m distance)

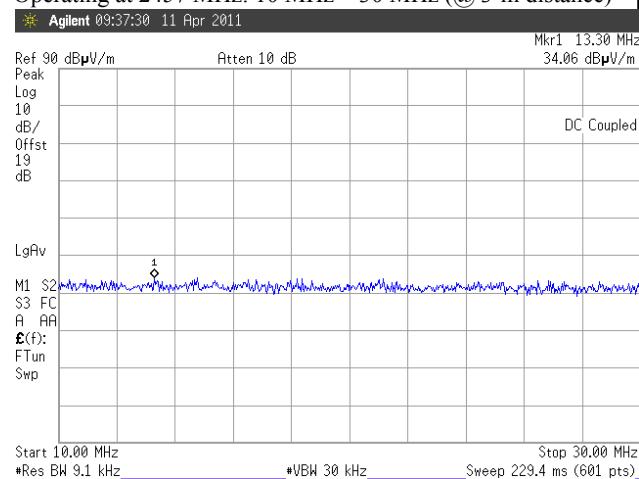


Operating at 2412 MHz: 30 MHz ~ 1 GHz (@ 3-m distance)

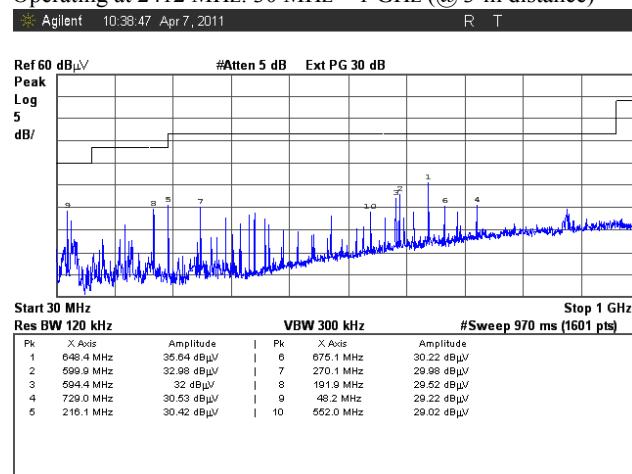


Operating at 2457 MHz: 30 MHz ~ 1 GHz (@ 3-m distance)

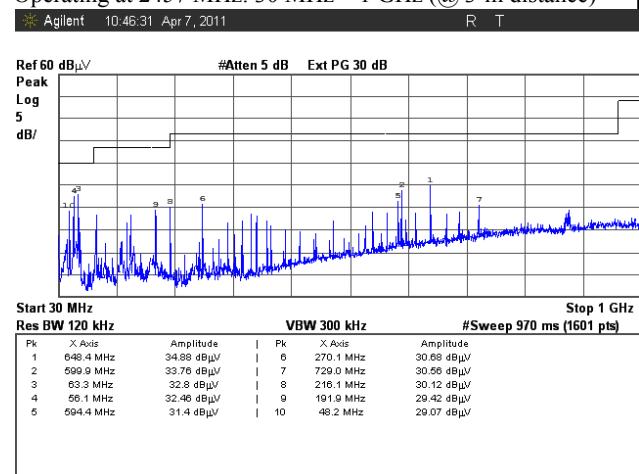

Operating at 2412 MHz: 1 GHz ~ 3 GHz (@ 3-m distance)

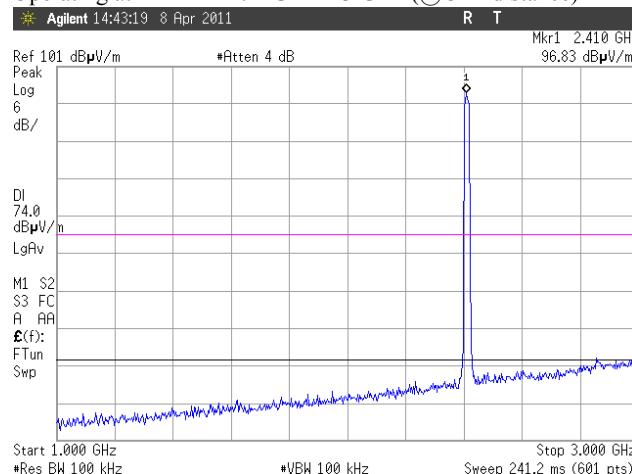


Operating at 2457 MHz: 1 GHz ~ 3 GHz (@ 3-m distance)

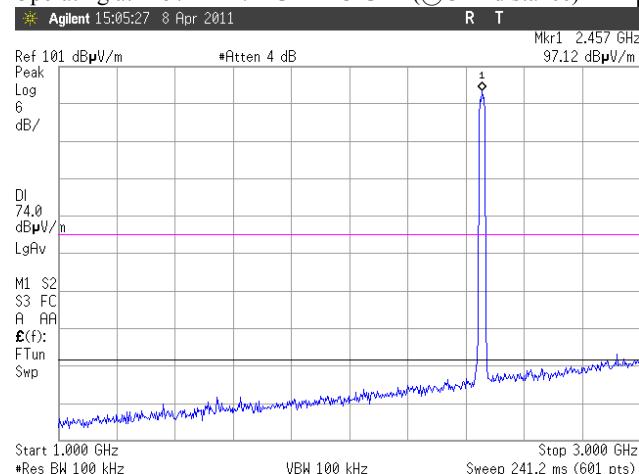




### Figure 7. Emission plot for the preliminary radiated measurements (Transmitter Unit)


Operating at 2412 MHz: 3 GHz ~ 6 GHz (@ 3-m distance)

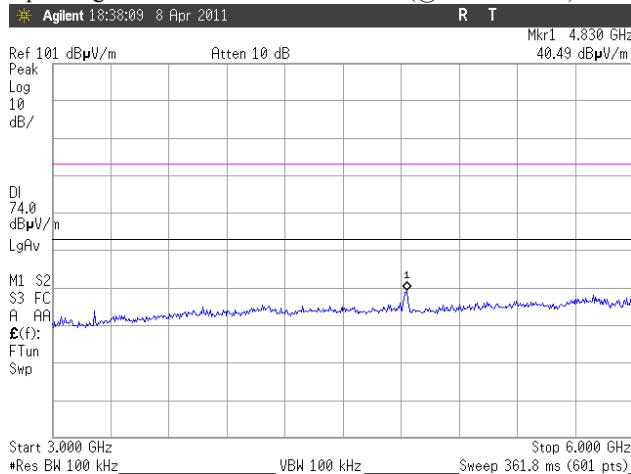


Operating at 2457 MHz: 3 GHz ~ 6 GHz (@ 3-m distance)

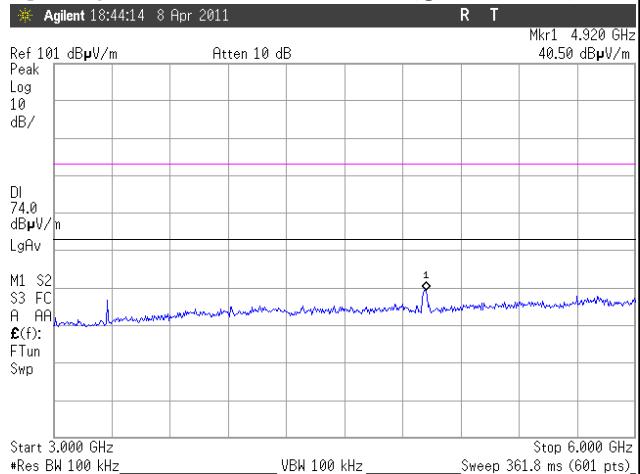


Operating at 2412 MHz: 6 GHz ~ 10 GHz (@ 3-m distance)

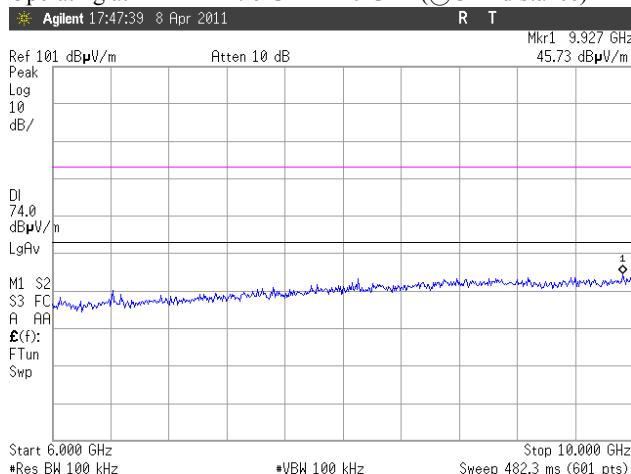


Operating at 2457 MHz: 6 GHz ~ 10 GHz (@ 3-m distance)

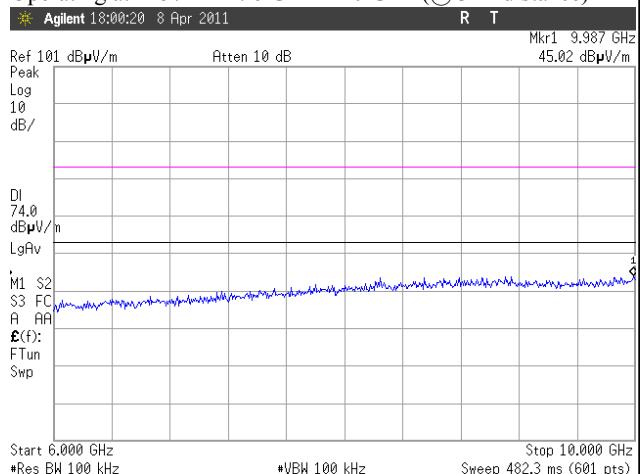

Operating at 2412 MHz: 10 GHz ~ 18 GHz (@ 1-m distance)

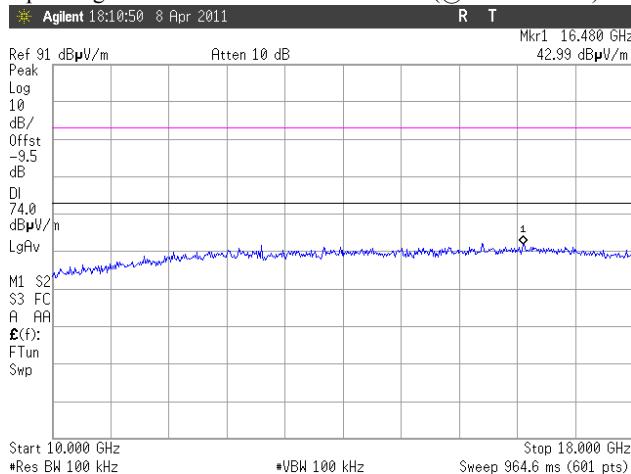

Operating at 2457 MHz: 10 GHz ~ 18 GHz (@ 1-m distance)

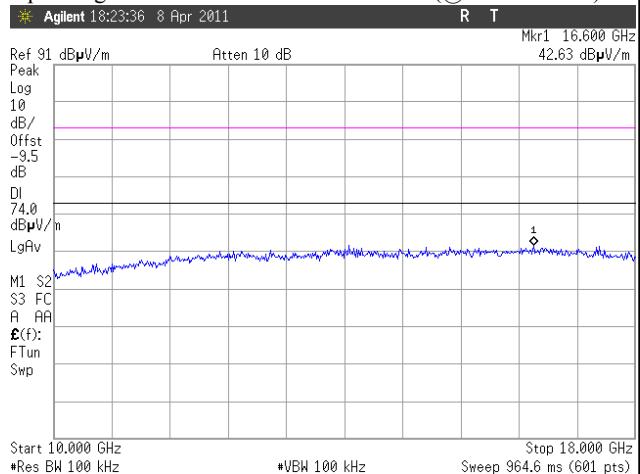



**SK TECH CO., LTD.**


Page 27 of 33

**Figure 7. Emission plot for the preliminary radiated measurements (Transmitter Unit)**

Operating at 2412 MHz: 18 GHz ~ 25 GHz (@ 1-m distance)

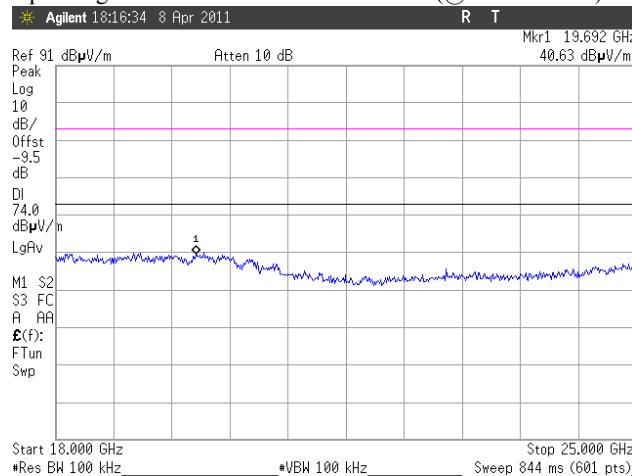

Operating at 2457 MHz: 18 GHz ~ 25 GHz (@ 1-m distance)

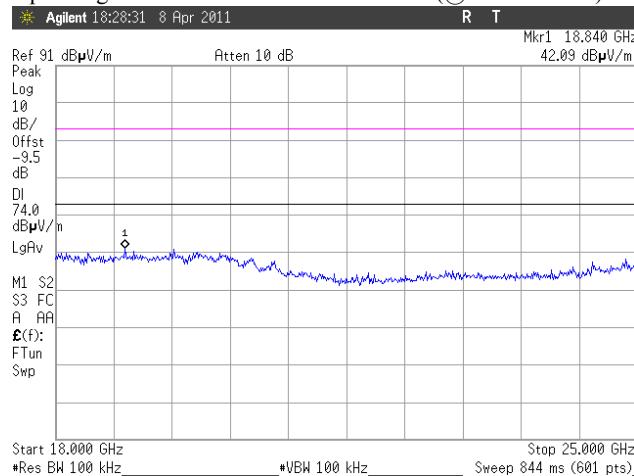




SK TECH CO., LTD.


Page 28 of 33

### Figure 8. Emission plot for the preliminary radiated measurements (Receiver Unit)


Operating at 2412 MHz: 10 MHz ~ 30 MHz (@ 3-m distance)

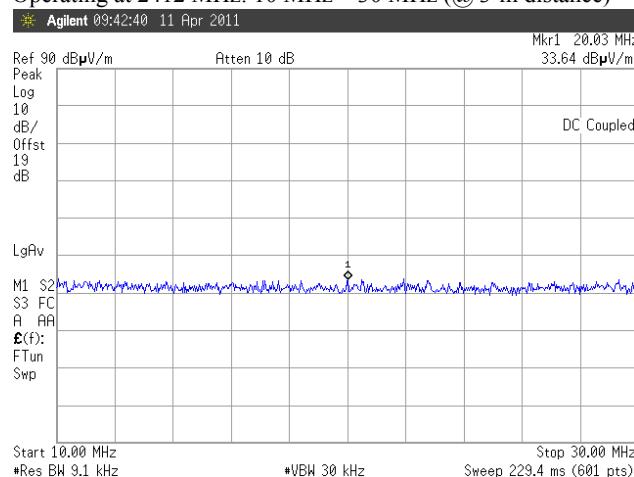


Operating at 2457 MHz: 10 MHz ~ 30 MHz (@ 3-m distance)

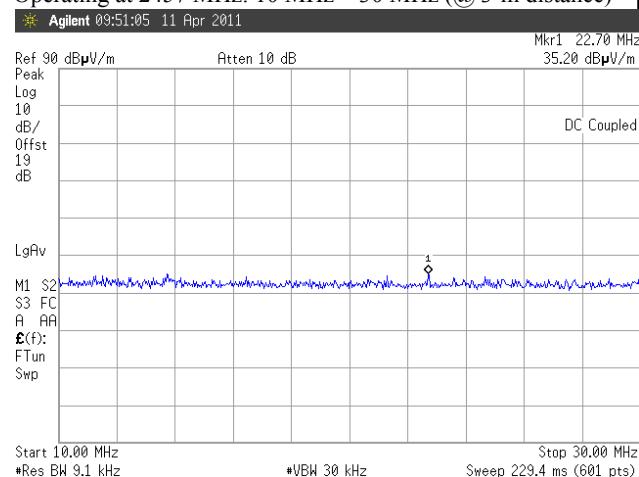


Operating at 2412 MHz: 30 MHz ~ 1 GHz (@ 3-m distance)

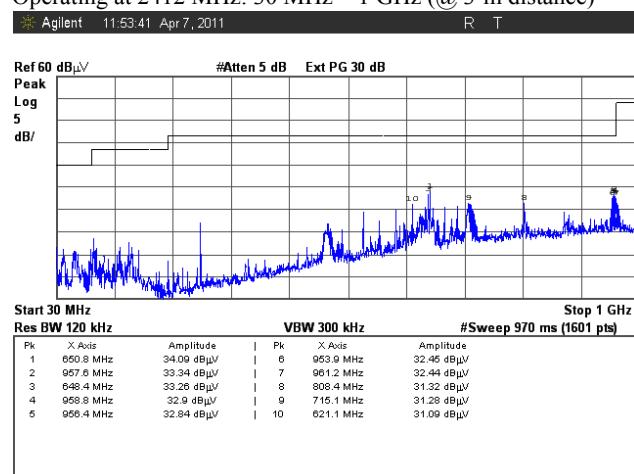


Operating at 2457 MHz: 30 MHz ~ 1 GHz (@ 3-m distance)

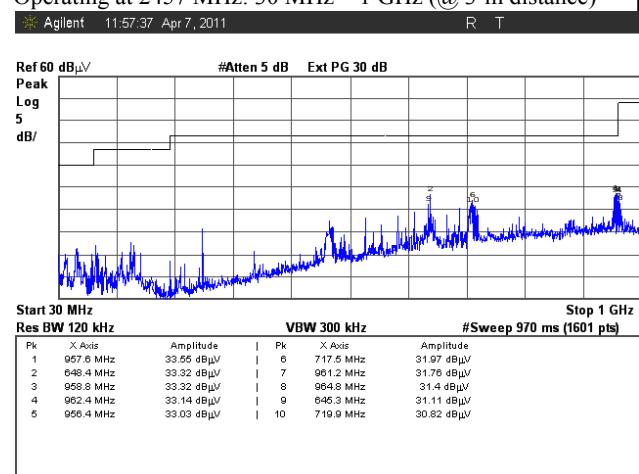

Operating at 2412 MHz: 1 GHz ~ 3 GHz (@ 3-m distance)

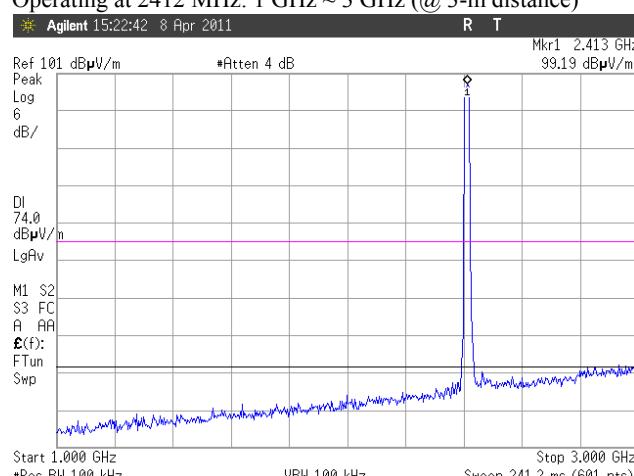


Operating at 2457 MHz: 1 GHz ~ 3 GHz (@ 3-m distance)

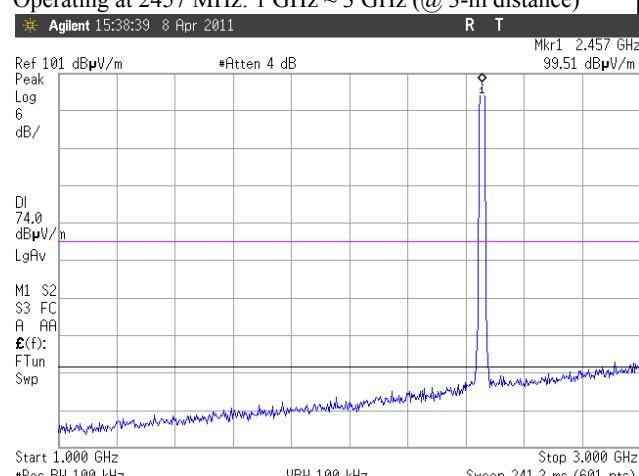




### Figure 8. Emission plot for the preliminary radiated measurements (Receiver Unit)


Operating at 2412 MHz: 3 GHz ~ 6 GHz (@ 3-m distance)

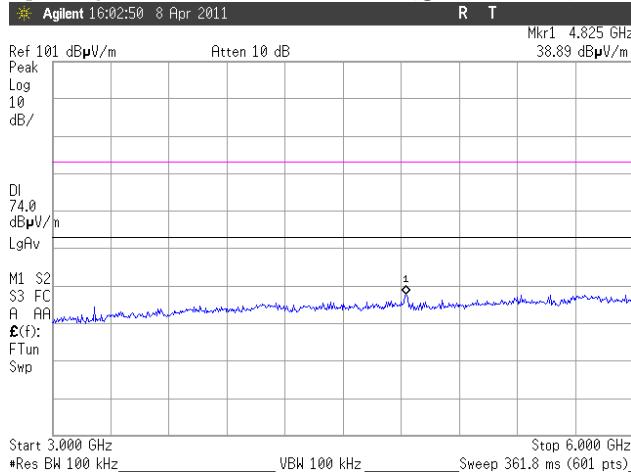


Operating at 2457 MHz: 3 GHz ~ 6 GHz (@ 3-m distance)

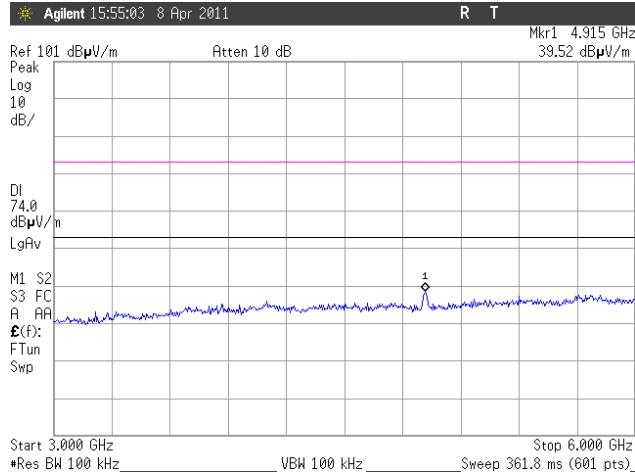


Operating at 2412 MHz: 6 GHz ~ 10 GHz (@ 3-m distance)

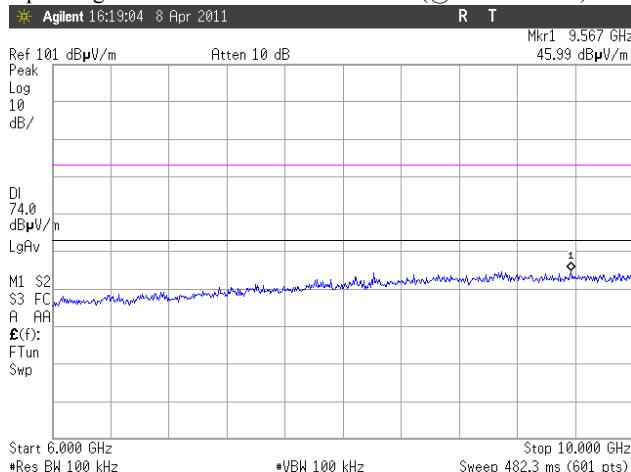


Operating at 2457 MHz: 6 GHz ~ 10 GHz (@ 3-m distance)

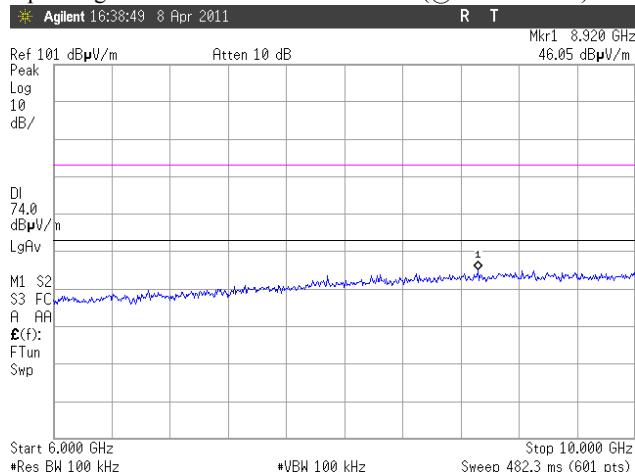

Operating at 2412 MHz: 10 GHz ~ 18 GHz (@ 1-m distance)

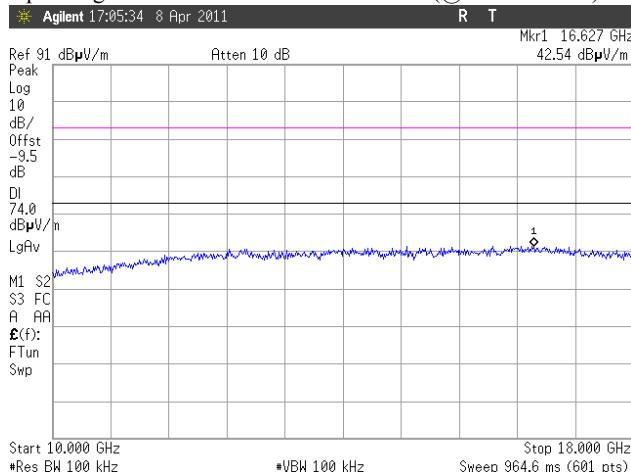

Operating at 2457 MHz: 10 GHz ~ 18 GHz (@ 1-m distance)

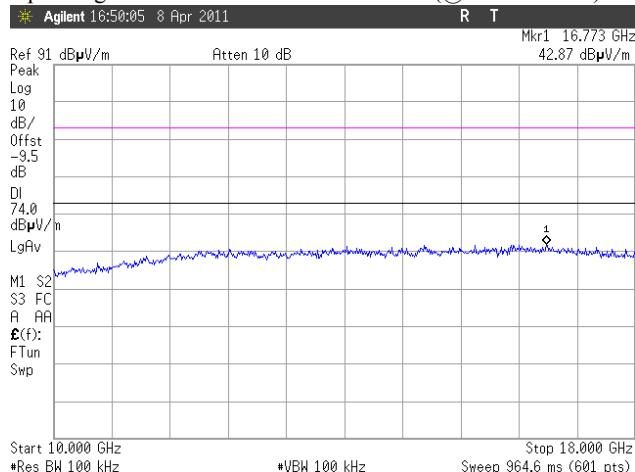



**SK TECH CO., LTD.**


Page 30 of 33

**Figure 8. Emission plot for the preliminary radiated measurements (Receiver Unit)**

Operating at 2412 MHz: 18 GHz ~ 25 GHz (@ 1-m distance)

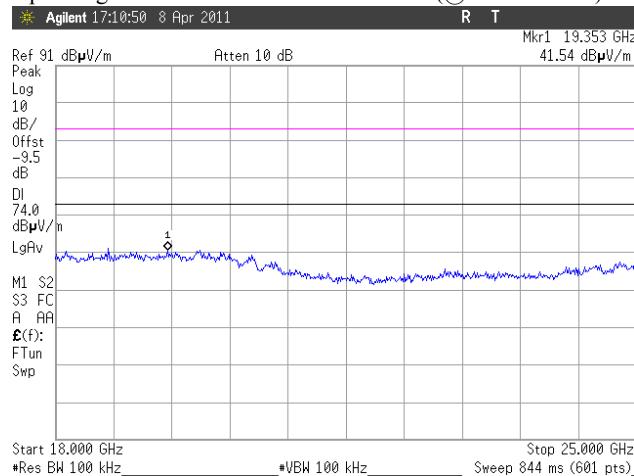

Operating at 2457 MHz: 18 GHz ~ 25 GHz (@ 1-m distance)

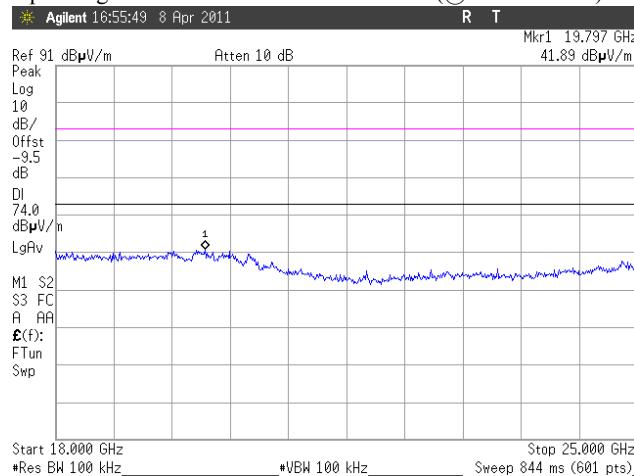



## 5.5 PEAK POWER SPECTRAL DENSITY

### 5.5.1 Regulation

According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### 5.5.2 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Connect the antenna port of the EUT to RF input on the spectrum analyzer via a low loss cable and attenuator.
3. Turn on the EUT and locate and zoom in on emission peak(s) within the passband.
4. Set the spectrum analyzer as follows:
  - RBW = 3 kHz, VBW  $\geq$  RBW
  - Span = 1.5 MHz
  - Sweep = 500 seconds
  - Detector function = peak
  - Trace = max hold
5. Measure the highest amplitude appearing on spectral display and record the level to calculate results.

### 5.5.3 Test Results:

**PASS**

**Table 5: Measured values of the Peak Power Spectral Density (Conducted)**

Operating frequency	Measured Value (PPSD)	Limit
2412 MHz	-15.19 dBm	8.0 dBm
2432 MHz	-15.18 dBm	8.0 dBm
2457 MHz	-15.51 dBm	8.0 dBm


*NOTE: We took the insertion loss of the cable loss into consideration within the measuring instrument.*


**SK TECH CO., LTD.**


Page 32 of 33

**Figure 9. Plot of the Peak Power Spectral Density**


Lowest Channel (2412 MHz)

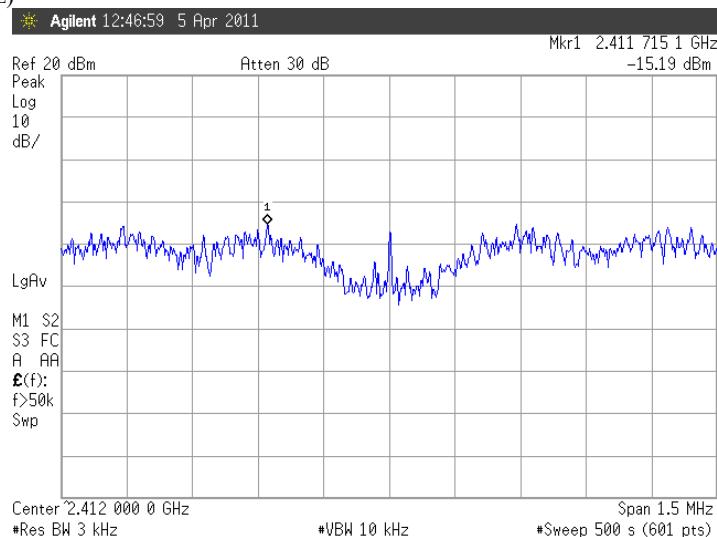

Middle Channel (2432 MHz)

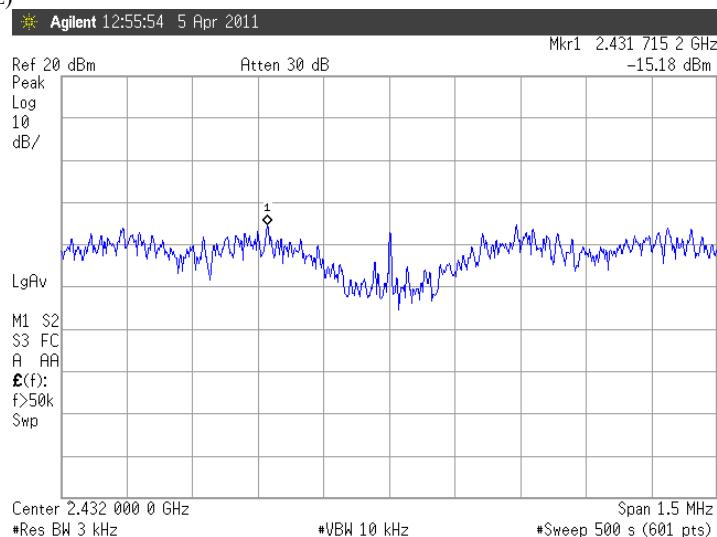

Highest Channel (2457 MHz)

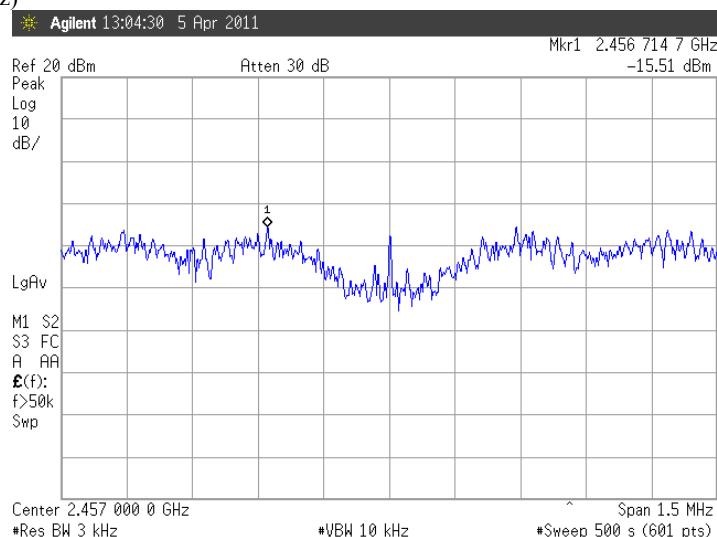



## 5.6 RF Exposure

### 5.6.1 Regulation

According to §15.247(i), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this Chapter.

Limits for Maximum Permissive Exposure: RF exposure is calculated.

Frequency Range	Electric Field Strength [V/m]	Magnetic Field Strength [A/m]	Power Density [mW/cm <sup>2</sup> ]	Averaging Time [minute]
Limits for General Population/Uncontrolled Exposure				
0.3 ~ 1.34	614	1.63	*(100)	30
1.34 ~ 30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30 ~ 300	27.5	0.073	0.2	30
300 ~ 1500	/	/	f/1500	30
1500 ~ 15000	/	/	<u>1.0</u>	<u>30</u>

f = frequency in MHz,

\* = Plane-wave equivalent power density

### MPE (Maximum Permissive Exposure) Prediction

Predication of MPE limit at a given distance: Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

S = power density [mW/cm<sup>2</sup>]

P = power input to antenna [mW]

$$(\Rightarrow R = \sqrt{PG/4\pi S})$$

G = power gain of the antenna in the direction of interest  
relative to an isotropic radiator

R = distance to the center of radiation of the antenna [cm]

EUT: Maximum peak output power = 112.98 [mW] (= 20.53 dBm) & Antenna gain = 3.41 (= 5.33 [dBi])	
100 mW, at 20 cm from an antenna 6 [dBi]	$S = PG/4\pi R^2 = 100 \times 3.98 / (4 \times \pi \times 400) = 0.0792 \text{ [mW/cm}^2\text{]} < 1.0 \text{ [mW/cm}^2\text{]}$
112.98 mW, at 20 cm from the antenna 5.33 [dBi]	$S = PG/4\pi R^2 = 0.0767 \text{ [mW/cm}^2\text{]} < 1.0 \text{ [mW/cm}^2\text{]}$
112.98 mW, at 2.5 cm from the antenna 5.33 [dBi]	$S = PG/4\pi R^2 = 4.9106 \text{ [mW/cm}^2\text{]}$

### 5.6.2 RF Exposure Compliance Issue

July 02 TCB Exclusion List: for portable transmitters,

Low threshold [(60/f<sub>GHZ</sub> ≈ 25) mW, d < 2.5 cm, (120/f<sub>GHZ</sub> ≈ 50) mW, d ≥ 2.5 cm], and

High threshold [(900/f<sub>GHZ</sub> ≈ 370) mW, d < 20 cm], where f<sub>GHZ</sub>: 2.44, d: distance to a person's body

*REMARK: The users manual for end users must include the following information in a prominent location*

*"IMPORTANT NOTE: To comply with FCC RF exposure compliance requirements, the antenna used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter."*