



FCC TEST REPORT

for

Wireless card
MODEL:RTV1WAPD

Test Report Number:
KS070530A01-RP

Issued for

Hangzhou H3C Technologies Co., Ltd
310 Liuhe Road, Zhijiang Science Park,
Hangzhou 310053, P.R.China

Issued by:

Compliance Certification Services Inc.
Kun shan Laboratory

No.10 Weiye Rd, Innovation park, Eco&Tec,
Development Zone, Kunshan City, Jiangsu, P.R.O.C
TEL: 86-512-57355888
FAX: 86-512-57370818

Issued Date:January 15, 2008



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NIST or any government agencies. The test results in the report only apply to the tested sample.

Revision History

| Rev. | Issue Date | Revisions | Effect Page | Revised By |
|------|------------------|---------------|-------------|------------|
| 00 | January 15, 2008 | Initial Issue | ALL | Miro chueh |
| | | | | |
| | | | | |
| | | | | |



TABLE OF CONTENTS

| | |
|---|-----------|
| 1 TEST CERTIFICATION | 4 |
| 2 TEST RESULT SUMMARY | 5 |
| 3 EUT DESCRIPTION..... | 6 |
| 4 TEST METHODOLOGY..... | 7 |
| 4.1. DESCRIPTION OF TEST MODES | 7 |
| 5 SETUP OF EQUIPMENT UNDER TEST | 9 |
| 5.1. DESCRIPTION OF SUPPORT UNITS..... | 9 |
| 5.2. CONFIGURATION OF SYSTEM UNDER TEST | 9 |
| 6 FACILITIES AND ACCREDITATIONS | 10 |
| 6.1. FACILITIES | 10 |
| 6.2. ACCREDITATIONS | 10 |
| 6.3. MEASUREMENT UNCERTAINTY..... | 10 |
| 7 LIMITS AND RESULTS | 11 |
| 7.1. POWER LINE CONDUCTED EMISSIONS MEASUREMENT | 11 |
| 7.2. SPURIOUS EMISSIONS MEASUREMENT..... | 22 |
| 7.3. 6dB BANDWIDTH MEASUREMENT | 61 |
| 7.4. PEAK OUTPUT POWER | 66 |
| 7.5. BAND EDGES MEASUREMENT:..... | 71 |
| 7.6. PEAK POWER SPECTRAL DENSITY MEASUREMENT..... | 83 |



1 TEST CERTIFICATION

Product:Wireless card

Model:RTV1WAPD

Brand: H3C

Tested: January 1,2008-january 15.2008

Applicant: Hangzhou H3C Technologies Co., Ltd
310 Liuhe Road, Zhijiang Science Park, Hangzhou 310053, P.R.China

Manufacturer: Hangzhou H3C Technologies Co., Ltd
310 Liuhe Road, Zhijiang Science Park, Hangzhou 310053, P.R.China

APPLICABLE STANDARDS

| Standard | Test Type | Standard | Test Type |
|--------------|--------------------------------|------------------------------|---|
| 15.207(a) | Power Line Conducted Emissions | 15.247(d) 15.209(a) | ● Spurious Emissions ● Conducted Measurement ● Radiated Emissions |
| 15.247(a)(2) | 6dB Bandwidth Measurement | 15.247(b)(3) 15.247(b)(4) | Peak Power Measurement |
| 15.247(d) | Band Edges Measurement | 15.247(e) | Peak Power Spectral Density |
| | | | |

DEVIATION FROM APPLICABLE STANDARD

None

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in **ANSI C63.4: 2003** and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

Approved by:

Miro Chueh
EMC Manager
Compliance Certification Service Inc.

Reviewed by:

Lin Zhang
EMC Section Manager
Compliance Certification Service Inc.



2 TEST RESULT SUMMARY

| APPLICABLE STANDARDS | | | |
|------------------------------|---|---------------|--------------------------------|
| Standard | Test Type | Result | Remark |
| 15.247(a)(2) | 6dB Bandwidth Measurement | Pass | Meet the requirement of limit. |
| 15.247(b)(3) 15.247(b)(4) | Peak Power Measurement | Pass | Meet the requirement of limit. |
| 15.247(d) | Band Edges Measurement | Pass | Meet the requirement of limit. |
| 15.247(e) | Peak Power Spectral Density | Pass | Meet the requirement of limit. |
| 15.247(d) 15.209(a) | Spurious Emissions ③ Conducted Measurement ③ Radiated Emissions | Pass | Meet the requirement of limit. |
| 15.207(a) | Power line Conducted Emissions | Pass | Meet the requirement of limit. |

Note: 1. The test result judgment is decided by the limit of test standard
2. The information of measurement uncertainty is available upon the customer's request.



3 EUT DESCRIPTION

| | |
|------------------------------|--|
| Product | Wireless card |
| Trade Name | H3C |
| Model Number | RTV1WAPD |
| Power Supply | Powered from AC power supply Input:100-240v 50/60Hz;0.6A |
| AC Power Cable Type | Unshielded, 1.5m (Detachable) |
| Frequency Range | 2412 ~ 2462 MHz |
| Transmit Power | IEEE 802.11b:17.64dBm IEEE 802.11g:16.58dBm |
| Modulation Technique | IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: DSSS (CCK, DQPSK, DBPSK) + OFDM (QPSK, BPSK, 16-QAM, 64-QAM) |
| Transmit Data Rate | IEEE 802.11b: 11, 5.5, 2, 1 Mbps IEEE 802.11g: 54, 48, 36, 24, 18, 12, 11, 9, 6, 5.5, 2, 1 Mbps |
| Number of Channels | 11 Channels |
| Antenna Specification | Indoor Omni Terminal antenna with 1.92dBi gain (Max) |

Note: 1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.

2. This submittal(s) (test report) is intended for FCC ID: **U6IRTV1WAPD** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.

4 TEST METHODOLOGY

4.1. DESCRIPTION OF TEST MODES

The EUT had been tested under the operating condition.

Software used to control the EUT for staying in continuous transmitting mode is programmed.

The field strength of spurious radiation emission was preliminary tested within the host routers below.

Host unit modes:

H3C MSR 20-10; Quidway AR19-10;

H3C MSR 20-12;

H3CMSR20-13; Quidway AR 19-13;

H3C MSR 20-15; Quidway AR 19-15;

And the components of different modes define as below:

| Item | | MSR 20-10 | MSR 20-12 | MSR 20-13 | MSR 20-15 |
|---------------------|----------------------------------|-----------|-----------|-----------|-----------|
| Fixed Interfaces | Console/AUX | 1 | 1 | 1 | 1 |
| | USB | 1 | 1 | 1 | 1 |
| | Layer 3 Ethernet interface | 1 | 1 | 1 | 1 |
| | Layer 2 Ethernet interface | 4 | 4 | 4 | 4 |
| | ADSL | 0 | 0 | 0 | 1 |
| | G.SHDSL | 0 | 0 | 1 | 0 |
| | SA | 0 | 0 | 0 | 0 |
| | ISDN BRI S/T | 0 | 0 | 1 | 1 |
| | E1/T1 | 0 | 1 | 0 | 0 |
| | AM | 0 | 0 | 0 | 1 |

And then the host unit was measured in the following position:

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only.

Channel Low (2412MHz) · Mid (2437MHz) and High (2462MHz) were chosen for full testing.

Then, the EUT configuration and cable configuration of the above highest emission mode was recorded for all final test items.

The following data rates were scanned during the preliminary test:



IEEE 802.11b: 11, 5.5, 2, 1 Mbps

IEEE 802.11g: 54, 48, 36, 24, 18, 12, 11, 9, 6, 5.5, 2, 1 Mbps

After the preliminary scan, the following data rate was found to produce the highest emission level.

IEEE802.11b: Channel Low and Channel High with 11Mbps data rate were chosen for full testing.

IEEE802.11g: Channel Low and Channel High with 6Mbps data rate were chosen for full testing.



5 SETUP OF EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| No. | Device Type | Brand | Model | Series No. | Data Cable | Power Cord |
|-----|-------------|-------|--------|------------|----------------|------------|
| 1. | NB | HP | HP6130 | 3106010149 | Shielded, 1.2m | N/A |

Note:

- 1) All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2) Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

5.2. CONFIGURATION OF SYSTEM UNDER TEST

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.



6 FACILITIES AND ACCREDITATIONS

6.1. FACILITIES

All measurement facilities used to collect the measurement data are located at

No.10Weiye Rd, Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, P.R.O.C

The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6.2. ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

| | |
|----------------|------------------|
| USA | FCC,A2LA |
| Germany | TUV Rheinland |
| Japan | VCCI |
| Norway | NEMKO |
| Canada | INDUSTRY CANADA, |
| Taiwan | TAF |

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsemc.com>.

6.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in ETR 028:

| Measurement | Frequency | Uncertainty |
|---------------------|-----------------|-------------|
| Conducted emissions | 9kHz~30MHz | +/- 1.13dB |
| Radiated emissions | 30MHz ~ 200MHz | +/- 3.84dB |
| | 200MHz ~1000MHz | +/- 3.82dB |

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



7 LIMITS AND RESULTS

7.1. POWER LINE CONDUCTED EMISSIONS MEASUREMENT

7.1.1. LIMITS OF CONDUCTED EMISSIONS MEASUREMENT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

| Frequency Range (MHz) | Limits (dB μ V) | |
|-----------------------|---------------------|-----------|
| | Quasi-peak | Average |
| 0.15 to 0.50 | 66 to 56* | 56 to 46* |
| 0.50 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

NOTE:

- (1) The lower limit shall apply at the transition frequencies.
- (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
- (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

TEST INSTRUMENTS

| Conducted Emission Test Site A (10m chamber) | | | | |
|--|--------------|--------------------|---------------|-----------------|
| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Due |
| EMI Test Receiver | R&S | ESI26 | 100068 | 02/11/2008 |
| EMC Analyzer | Agilent | E7402A | US41160329 | 02/11/2008 |
| LISN | FCC | FCC-LISN-50-50-2-M | 01067 | 02/11/2008 |
| LISN (EUT) | FCC | FCC-LISN-50-50-2-M | 01068 | 02/11/2008 |
| FOUR BALANCED TELECOM PAIRS ISN | FCC | FCC-TLISN-T8-02 | 20165 | 07/30/2008 |
| 4-WIRE ISN | R&S | ENY41 | 830663/024 | 04/08/2008 |
| Double 2-Wire ISN | R&S | ENY22 | 830661/027 | 04/08/2008 |
| TRANSIENT LIMITER | SCHAFFNER | CFL9206 | 1710 | 03/15/2008 |
| EMI Monitor control box | FCC | 0-SVDC | N/A | 05/11/2008 |

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


2. N.C.R = No Calibration Request.



7.1.2. TEST PROCEDURES (please refer to measurement standard)

- ③ The EUT and Support equipment, if needed, was placed on a non-conducted table, which is 0.8m above the ground plane and 0.4m away from the conducted wall.
- ③ The test equipment EUT installed received AC main power, through a Line Impedance Stabilization Network (LISN), which supplied power source and was grounded to the ground plane. All support equipment power received from a second LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- ③ The EUT test program was started. Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.
- ③ The frequency range from 150 kHz to 30 MHz was searched. The test data of the worst-case condition(s) was recorded. Emission levels under limit 20dB were not recorded.

7.1.3. TEST SETUP

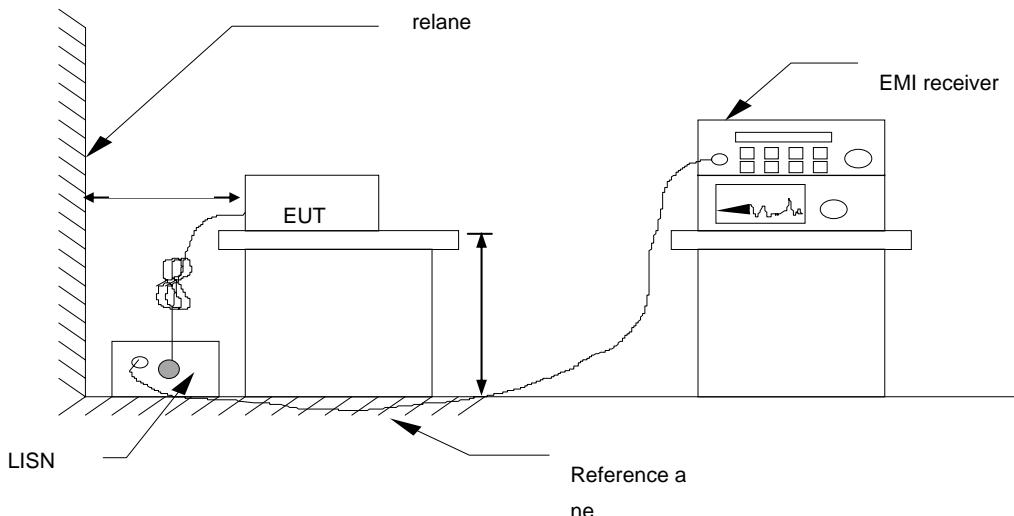

③ For the actual test configuration, please refer to the related item - Photographs of the Test Configuration.

7.1.4. Data Sample:

| Frequency (MHz) | QP Reading (dBuV) | AV Reading (dBuV) | Correction factor (dB) | QP Result (dBuV) | AV Result (dBuV) | QP Limit (dBuV) | AV Limit (dBuV) | QP Margin (dB) | AV Margin (dB) | Note |
|-----------------|-------------------|-------------------|------------------------|------------------|------------------|-----------------|-----------------|----------------|----------------|------|
| XXX | 37.58 | 35.11 | 10.10 | 47.68 | 45.21 | 63.49 | 53.49 | -15.81 | -8.28 | L1 |

Frequency (MHz)

= Emission frequency in MHz

Reading (dBuV)

= Uncorrected Analyzer/Receiver reading

Correction factor (dB)

= Insertion loss of LISN

Limit (dBuV)

= Limit stated in standard

Margin (dB)

= Reading (dBuV) – Limit (dBuV)

Note



= Current carrying line of reading

**7.1.5. TEST RESULTS**

| | | | |
|---------------------------------|----------------------------|------------------|--------------------|
| Model No. | MSR 20-10;Quidway AR 19-10 | Test Mode | Normal Link |
| Environmental Conditions | 25deg.C, 65% RH, 991 hPa | | |
| Tested by: | RUTH | | |

| Frequency (MHz) | Peak Amptd (dBuV) | QP Amptd (dBuV) | Avg Amptd (dBuV) | QP Limit (dBuV) | AV Limit (dBuV) | QP Margin (dB) | AV Margin (dB) | Factor (dB) | Note |
|--------------------|-------------------------|-----------------------|------------------------|-----------------------|-----------------------|----------------------|----------------------|----------------|------|
| 0.2 | 48.76 | 29.41 | 29.07 | 64.57 | 54.57 | -35.16 | -25.50 | 10.39 | L1 |
| 0.27 | 39.26 | 16 | 15.25 | 62.57 | 52.57 | -46.57 | -37.32 | 10.30 | L1 |
| 0.335 | 31.88 | 11.83 | 13.69 | 60.71 | 50.71 | -48.89 | -37.03 | 10.24 | L1 |
| 3.46 | 37.76 | 21.76 | 22.49 | 56 | 46 | -34.24 | -23.51 | 10.37 | L1 |
| 6.07 | 33.19 | 18.77 | 17.06 | 60 | 50 | -41.23 | -32.94 | 10.75 | L1 |
| 21.005 | 36.52 | 20.53 | 18.55 | 60 | 50 | -39.47 | -31.45 | 10.95 | L1 |
| | | | | | | | | | |
| 0.21 | 51.05 | 29.14 | 23.5 | 64.29 | 54.29 | -35.15 | -30.79 | 10.29 | L2 |
| 0.275 | 43.64 | 24.77 | 18.37 | 62.43 | 52.43 | -37.66 | -34.06 | 10.25 | L2 |
| 0.415 | 32.57 | 16.03 | 13.92 | 58.43 | 48.43 | -42.40 | -34.51 | 10.24 | L2 |
| 3.6 | 39.36 | 24.32 | 23.15 | 56 | 46 | -31.68 | -22.85 | 10.57 | L2 |
| 9.63 | 37.4 | 22.9 | 22.58 | 60 | 50 | -37.10 | -27.42 | 10.79 | L2 |
| 22.79 | 38.58 | 25.31 | 24.94 | 60 | 50 | -34.69 | -25.06 | 10.98 | L2 |

REMARKS: L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)

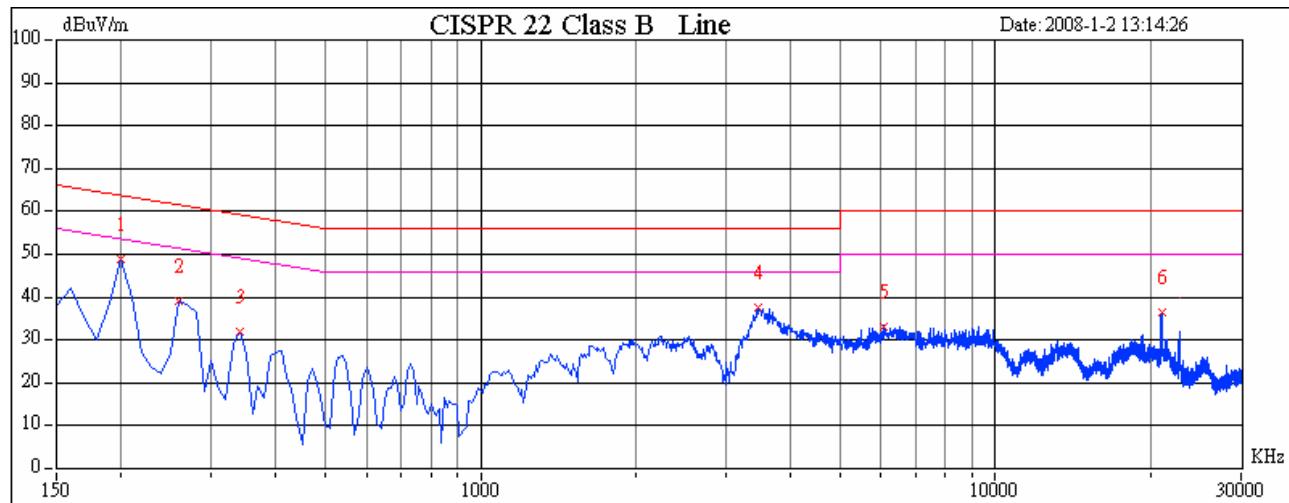
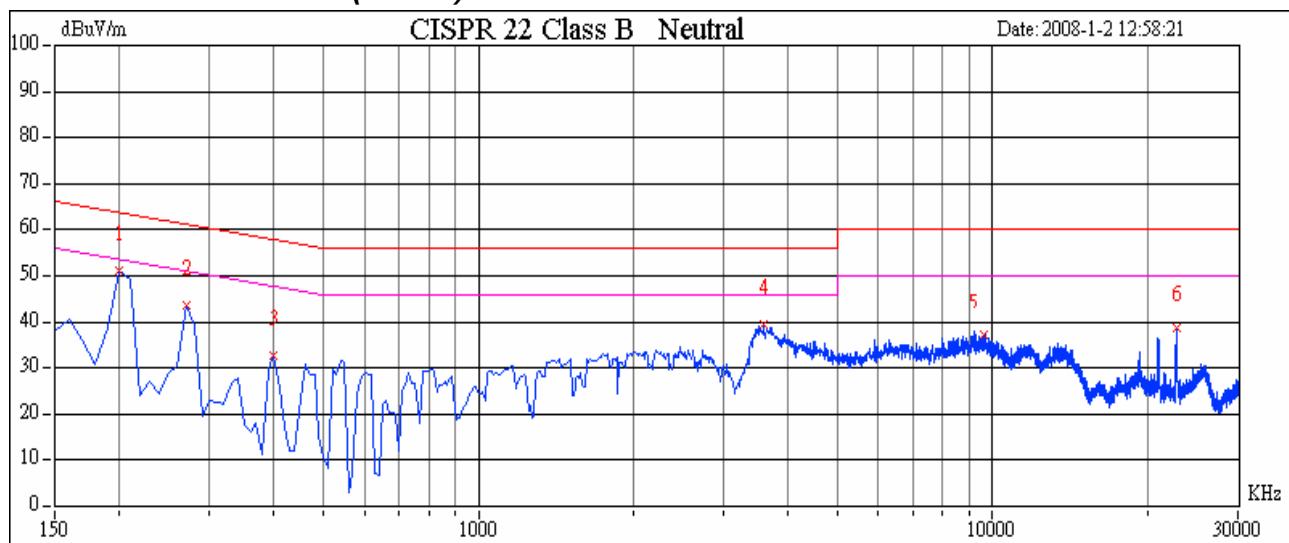
Test Plots***Conducted emissions (Line 1)******Conducted emissions (Line 2)***



| | | | |
|---------------------------------|--------------------------|------------------|--------------------|
| Model No. | MSR 20-12 | Test Mode | Normal Link |
| Environmental Conditions | 25deg.C, 65% RH, 991 hPa | | |
| Tested by: | RUTH | | |

| Frequency (MHz) | Peak Amptd (dBuV) | QP Amptd (dBuV) | Avg Amptd (dBuV) | QP Limit (dBuV) | AV Limit (dBuV) | QP Margin (dB) | AV Margin (dB) | Factor (dB) | Note |
|--------------------|-------------------------|-----------------------|------------------------|-----------------------|-----------------------|----------------------|----------------------|----------------|------|
| 0.205 | 49.97 | 25.35 | 24.22 | 64.43 | 54.43 | -39.08 | -30.21 | 10.38 | L1 |
| 0.275 | 41.91 | 15.36 | 22.13 | 62.43 | 52.43 | -47.07 | -30.30 | 10.29 | L1 |
| 0.345 | 34.72 | 17.06 | 14.94 | 60.43 | 50.43 | -43.37 | -35.49 | 10.23 | L1 |
| 3.52 | 34.4 | 19.52 | 19.48 | 56 | 46 | -36.48 | -26.52 | 10.38 | L1 |
| 13.335 | 30.87 | 16.01 | 17.02 | 60 | 50 | -43.99 | -32.98 | 11.06 | L1 |
| 16.5 | 44.79 | 17.99 | 12.36 | 60 | 50 | -42.01 | -37.64 | 11.10 | L1 |
| | | | | | | | | | |
| 0.195 | 48.74 | 18.02 | 16.6 | 64.71 | 54.71 | -46.69 | -38.11 | 10.44 | L2 |
| 0.28 | 36.76 | 12.22 | 13.77 | 62.29 | 52.29 | -50.07 | -38.52 | 10.25 | L2 |
| 0.405 | 34.98 | 19.34 | 20.05 | 58.71 | 48.71 | -39.37 | -28.66 | 10.24 | L2 |
| 3.615 | 38.67 | 24.16 | 24.27 | 56 | 46 | -31.84 | -21.73 | 10.57 | L2 |
| 12.035 | 36.76 | 22.79 | 22.44 | 60 | 50 | -37.21 | -27.56 | 10.96 | L2 |
| 21.015 | 40.71 | 22.95 | 21.12 | 60 | 50 | -37.05 | -28.88 | 10.96 | L2 |

REMARKS: L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)

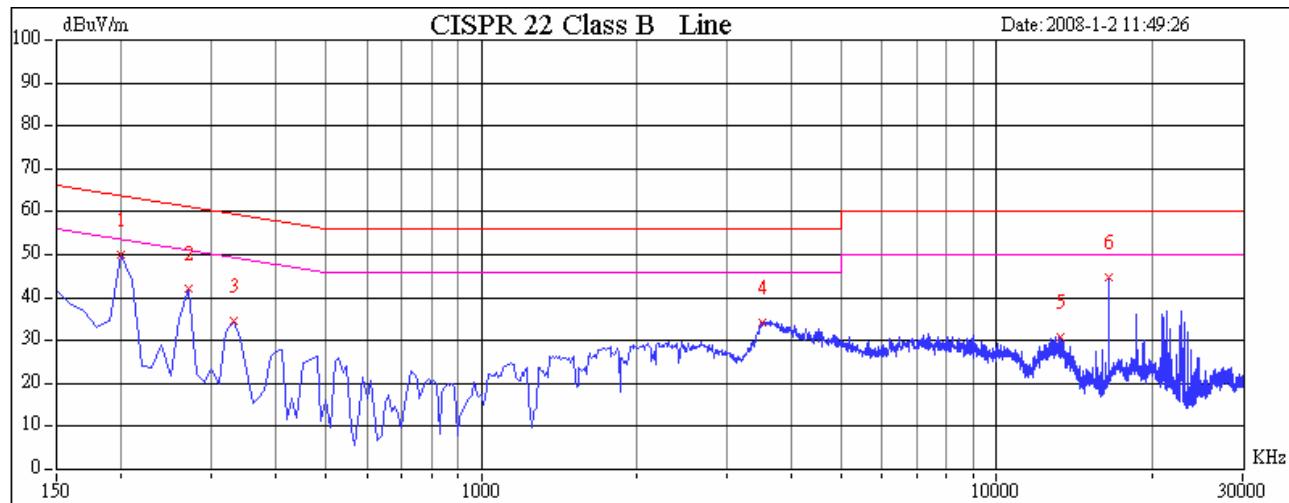
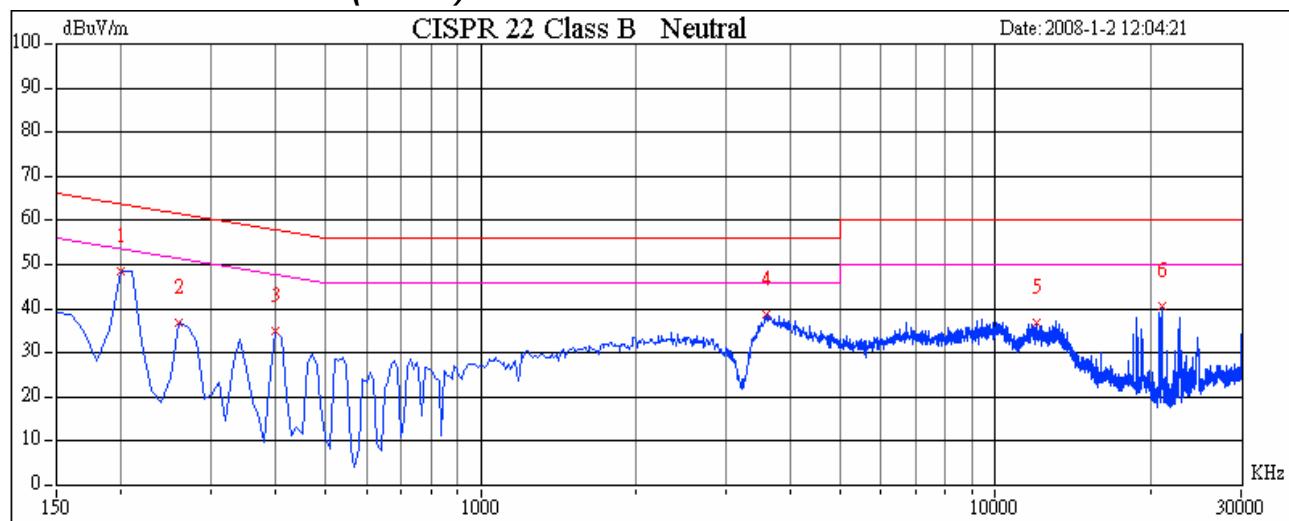
Test Plots***Conducted emissions (Line 1)******Conducted emissions (Line 2)***



| | | | |
|--------------------------|-----------------------------|-----------|-------------|
| Model No. | MSR 20-13; Quidway AR 19-13 | Test Mode | Normal Link |
| Environmental Conditions | 25deg.C, 65% RH, 991 hPa | | |
| Tested by: | RUTH | | |

| Frequency (MHz) | Peak Amptd (dBuV) | QP Amptd (dBuV) | Avg Amptd (dBuV) | QP Limit (dBuV) | AV Limit (dBuV) | QP Margin (dB) | AV Margin (dB) | Factor (dB) | Note |
|--------------------|-------------------------|-----------------------|------------------------|-----------------------|-----------------------|----------------------|----------------------|----------------|------|
| 0.19 | 49.26 | 28.44 | 31.51 | 64.86 | 54.86 | -36.42 | -23.35 | 10.65 | L1 |
| 0.335 | 35.81 | 20.64 | 19.41 | 60.71 | 51.71 | -40.08 | -31.31 | 10.24 | L1 |
| 0.39 | 35.9 | 21.48 | 23.39 | 59.14 | 49.14 | -37.67 | -25.76 | 10.21 | L1 |
| 0.455 | 34.58 | 20.2 | 18.91 | 57.29 | 47.29 | -37.09 | -28.38 | 10.14 | L1 |
| 5.675 | 38.17 | 19.8 | 19.08 | 60 | 50 | -40.20 | -30.92 | 10.74 | L1 |
| 8.7 | 43.02 | 28.3 | 27.63 | 60 | 50 | -31.70 | -22.37 | 10.81 | L1 |
| | | | | | | | | | |
| 0.195 | 51.43 | 31.75 | 31.13 | 64.71 | 54.71 | -32.96 | -23.58 | 10.44 | L2 |
| 0.255 | 43.23 | 23.27 | 27.15 | 63 | 53 | -39.73 | -25.85 | 10.26 | L2 |
| 0.445 | 37.86 | 24.94 | 21.71 | 57.57 | 47.57 | -32.63 | -25.86 | 10.24 | L2 |
| 2.385 | 41.77 | 22.22 | 21.43 | 56 | 46 | -33.78 | -24.57 | 10.49 | L2 |
| 3.21 | 43.96 | 27.7 | 27.13 | 56 | 46 | -28.30 | -18.87 | 10.58 | L2 |
| 8.37 | 42.75 | 28.03 | 28.35 | 60 | 50 | -31.97 | -21.65 | 10.71 | L2 |

REMARKS: L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)

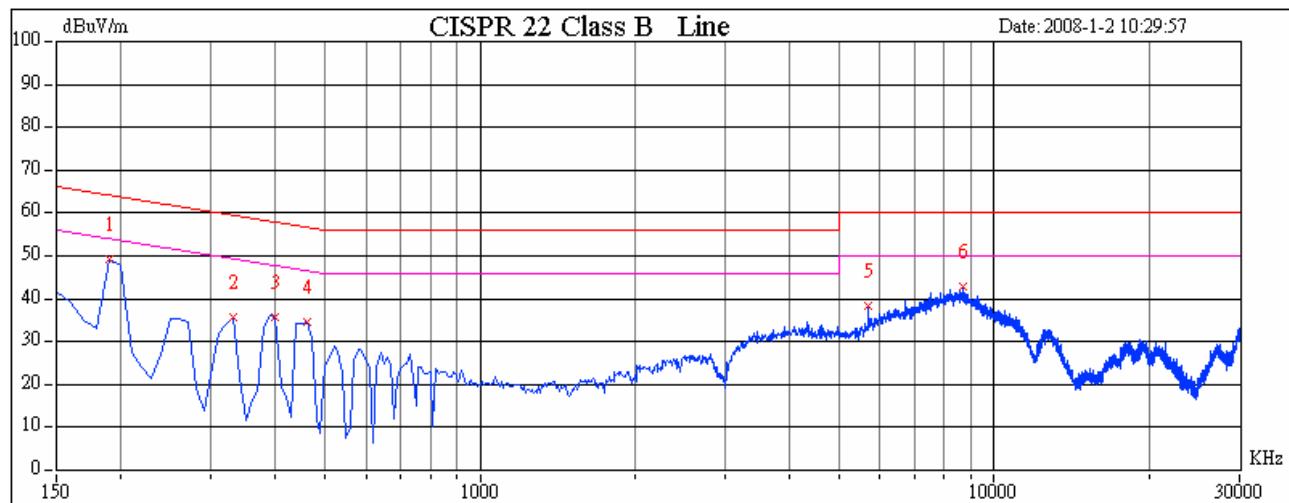
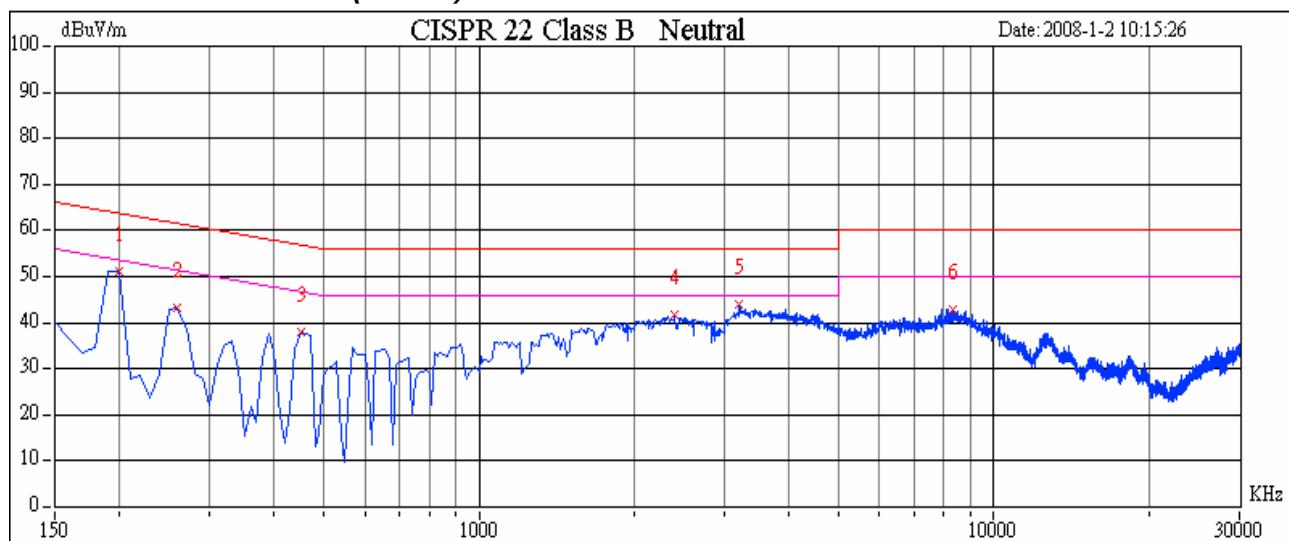
Test Plots***Conducted emissions (Line 1)******Conducted emissions (Line 2)***



| | | | |
|---------------------------------|----------------------------|------------------|--------------------|
| Model No. | MSR 20-15;Quidway AR 19-15 | Test Mode | Normal Link |
| Environmental Conditions | 25deg.C, 65% RH, 991 hPa | | |
| Tested by: | RUTH | | |

| Frequency (MHz) | Peak Amptd (dBuV) | QP Amptd (dBuV) | Avg Amptd (dBuV) | QP Limit (dBuV) | AV Limit (dBuV) | QP Margin (dB) | AV Margin (dB) | Factor (dB) | Note |
|-----------------|-------------------|-----------------|------------------|-----------------|-----------------|----------------|----------------|-------------|------|
| 0.205 | 49.01 | 31.08 | 25.94 | 64.43 | 54.43 | -33.35 | -28.49 | 10.38 | L1 |
| 0.34 | 38.12 | 18.47 | 17.37 | 60.57 | 50.57 | -42.11 | -33.21 | 10.24 | L1 |
| 0.415 | 33.74 | 14.3 | 13.84 | 58.43 | 48.43 | -44.12 | -34.58 | 10.18 | L1 |
| 3.615 | 35.3 | 19.66 | 19.46 | 56 | 46 | -36.34 | -26.54 | 10.39 | L1 |
| 16.455 | 43.64 | 14.62 | 15.45 | 60 | 50 | -45.38 | -34.55 | 11.10 | L1 |
| 21.19 | 46.05 | 14.48 | 14.3 | 60 | 50 | -45.52 | -35.70 | 10.95 | L1 |
| | | | | | | | | | |
| 0.2 | 54.09 | 33.66 | 38.48 | 64.57 | 54.57 | -30.91 | -16.09 | 10.29 | L2 |
| 0.27 | 43.05 | 25.98 | 22.87 | 62.57 | 52.57 | -36.59 | -29.70 | 10.25 | L2 |
| 0.395 | 38.81 | 18.22 | 18.54 | 59 | 49 | -40.78 | -30.46 | 10.24 | L2 |
| 3.49 | 40.52 | 24.29 | 25.01 | 56 | 46 | -31.71 | -20.99 | 10.57 | L2 |
| 16.715 | 39.66 | 17.46 | 22.33 | 60 | 50 | -42.54 | -27.67 | 11.10 | L2 |
| 21 | 40.26 | 25.59 | 26.58 | 60 | 50 | -34.41 | -23.42 | 10.96 | L2 |

REMARKS: L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)

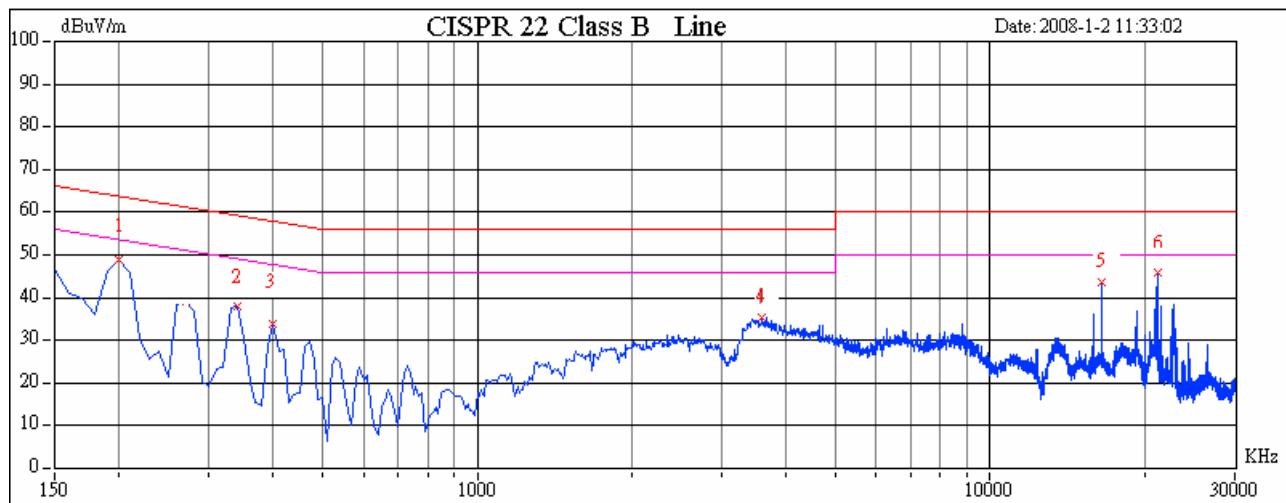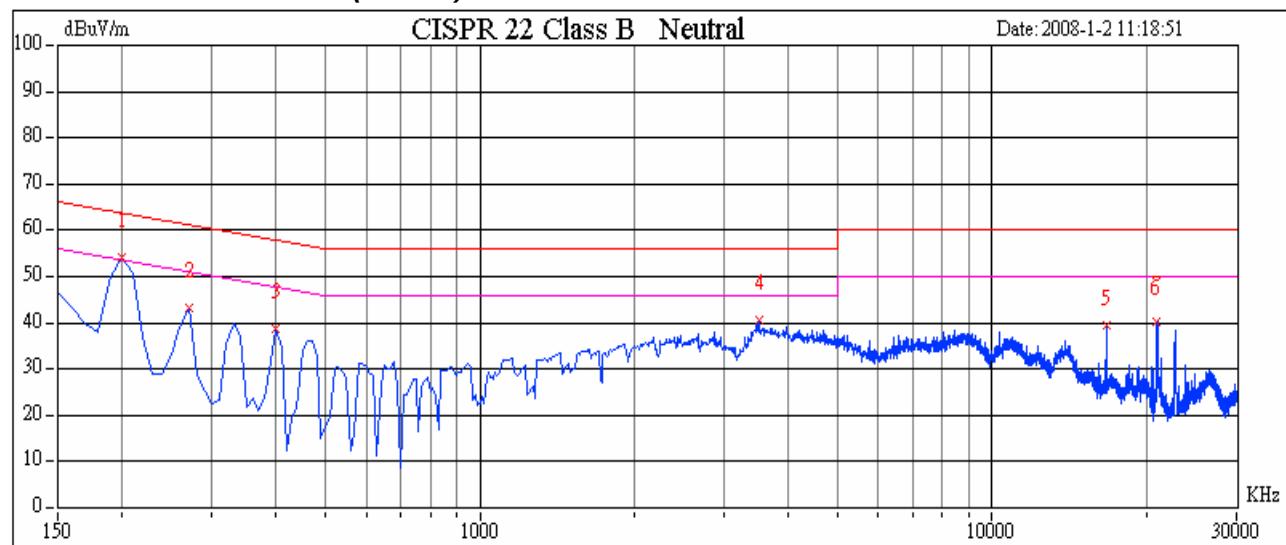Test Plots***Conducted emissions (Line 1)******Conducted emissions (Line 2)***



7.2. SPURIOUS EMISSIONS MEASUREMENT

7.2.1. LIMITS OF CONDUCTED EMISSIONS MEASUREMENT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

7.2.2. TEST INSTRUMENTS

| Conducted Emissions Test Site | | | | |
|-------------------------------|--------------|--------|---------------|-----------------|
| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Due |
| Spectrum Analyzer | Agilent | E4446A | MY44020154 | 08/15/2008 |

7.2.3. TEST PROCEDURE (please refer to measurement standard)

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site. The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.


Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

7.2.4. TEST RESULTS


Test Plot (IEEE 802.11b mode)

CH Low

30MHz ~ 2.9GHz

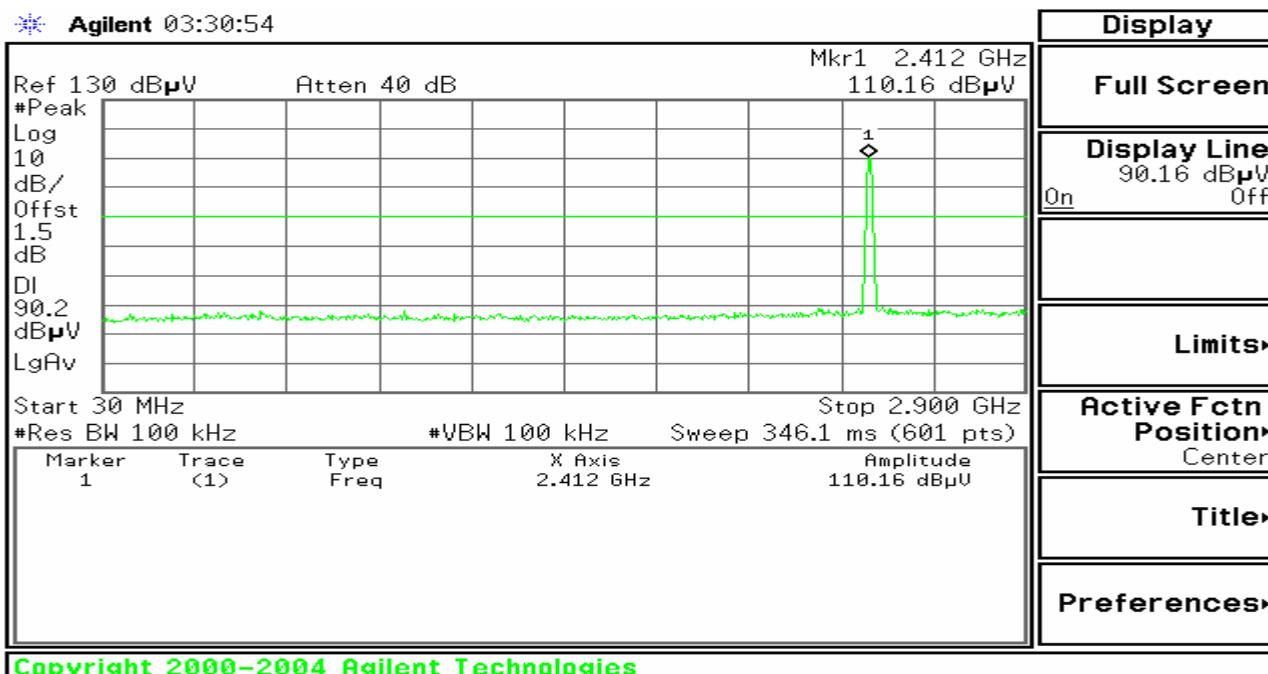

2.9GHz ~ 26.5GHz

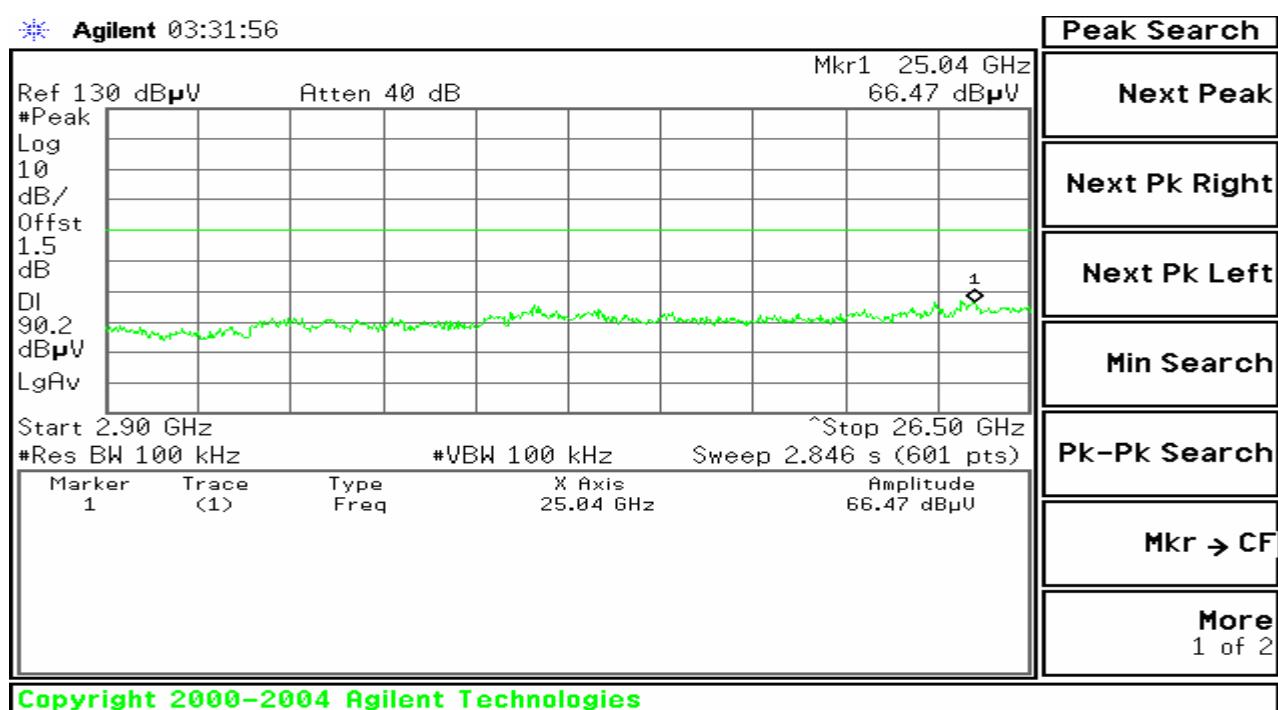




CH Mid

30MHz ~ 2.9GHz

* Agilent 03:33:07

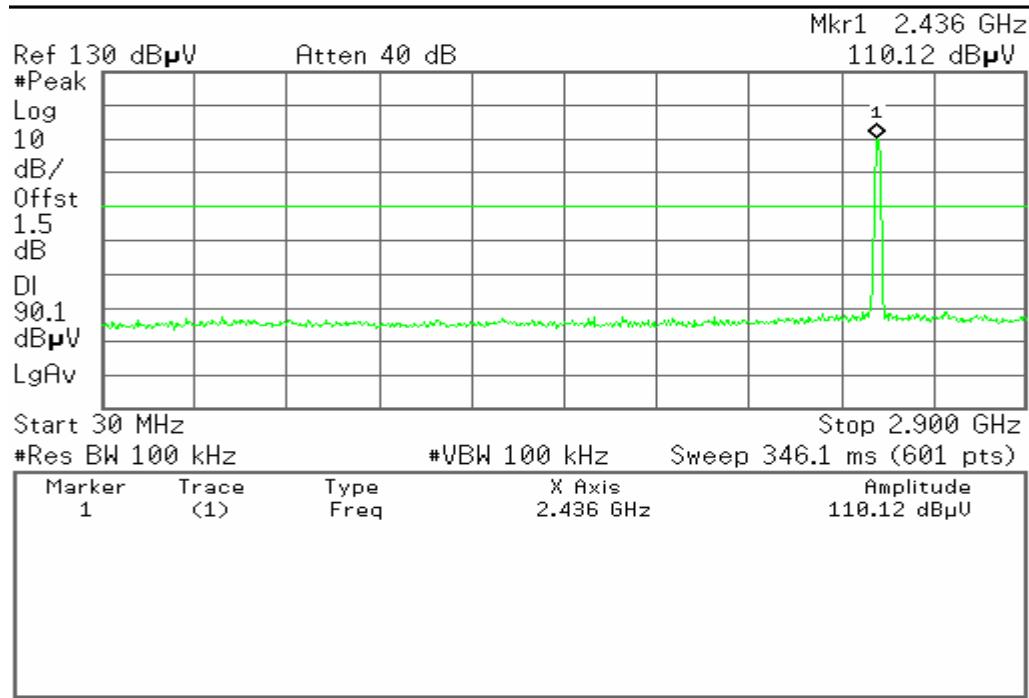

Display

Full Screen

Display Line

90.12 dB μ V

On

Off

Limits

Active Fctn Position

Center


Title

Preferences

Copyright 2000-2004 Agilent Technologies

2.9GHz ~ 26.5GHz

* Agilent 03:33:33

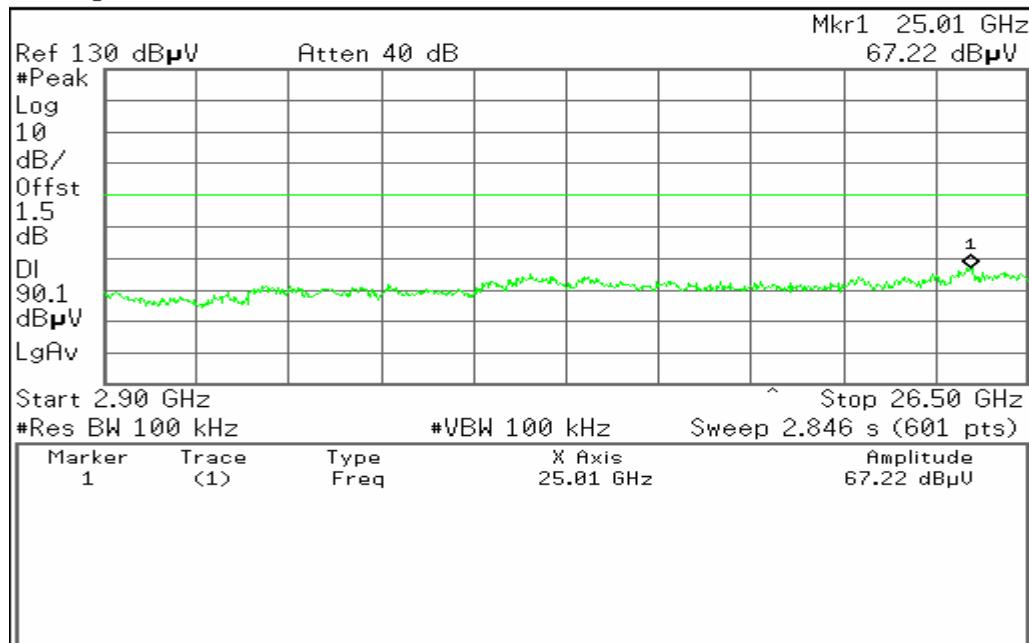

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search

Mkr → CF

More

1 of 2


Copyright 2000-2004 Agilent Technologies



CH High

30MHz ~ 2.9GHz

* Agilent 03:34:17

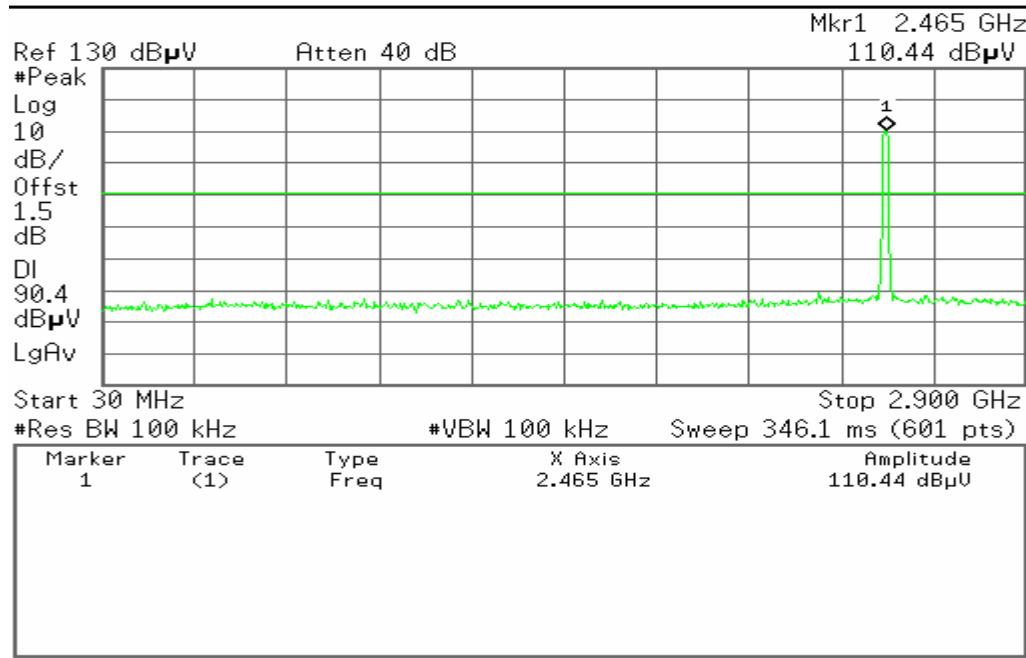

Display

Full Screen

Display Line
On Off

Limits

Active Fctn Position
Center


Title

Preferences

Copyright 2000-2004 Agilent Technologies

2.9GHz ~ 26.5GHz

* Agilent 03:35:00

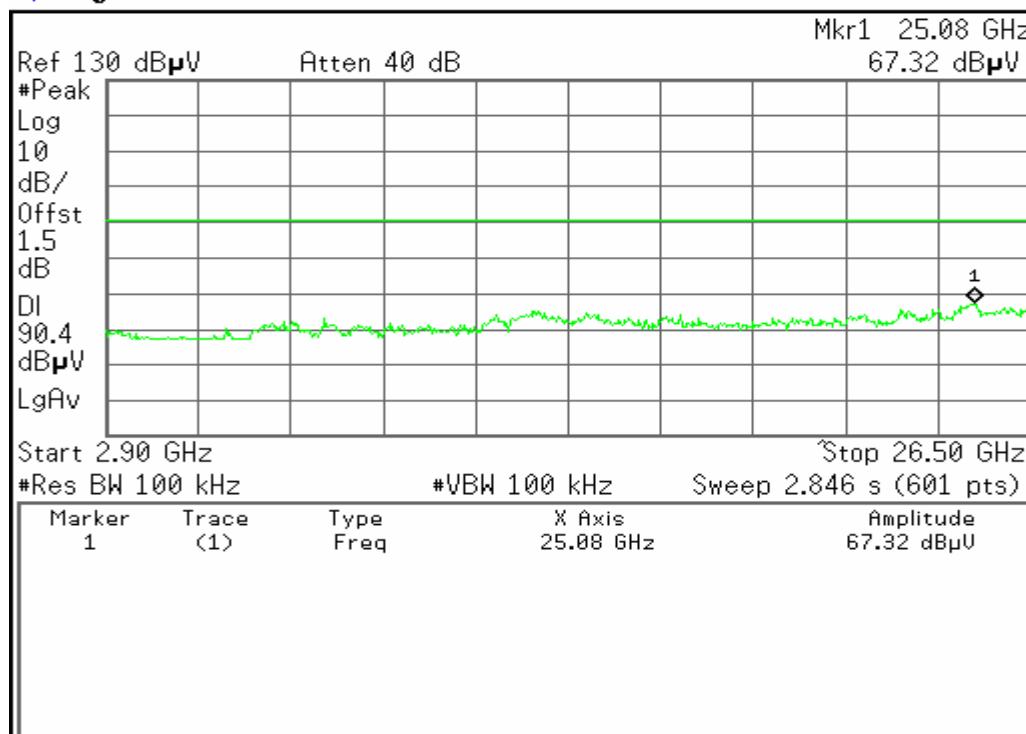

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Min Search

Pk-Pk Search

Mkr → CF

More
1 of 2


Copyright 2000-2004 Agilent Technologies




Test Plot (IEEE 802.11g mode)

CH Low

30MHz ~ 2.9GHz

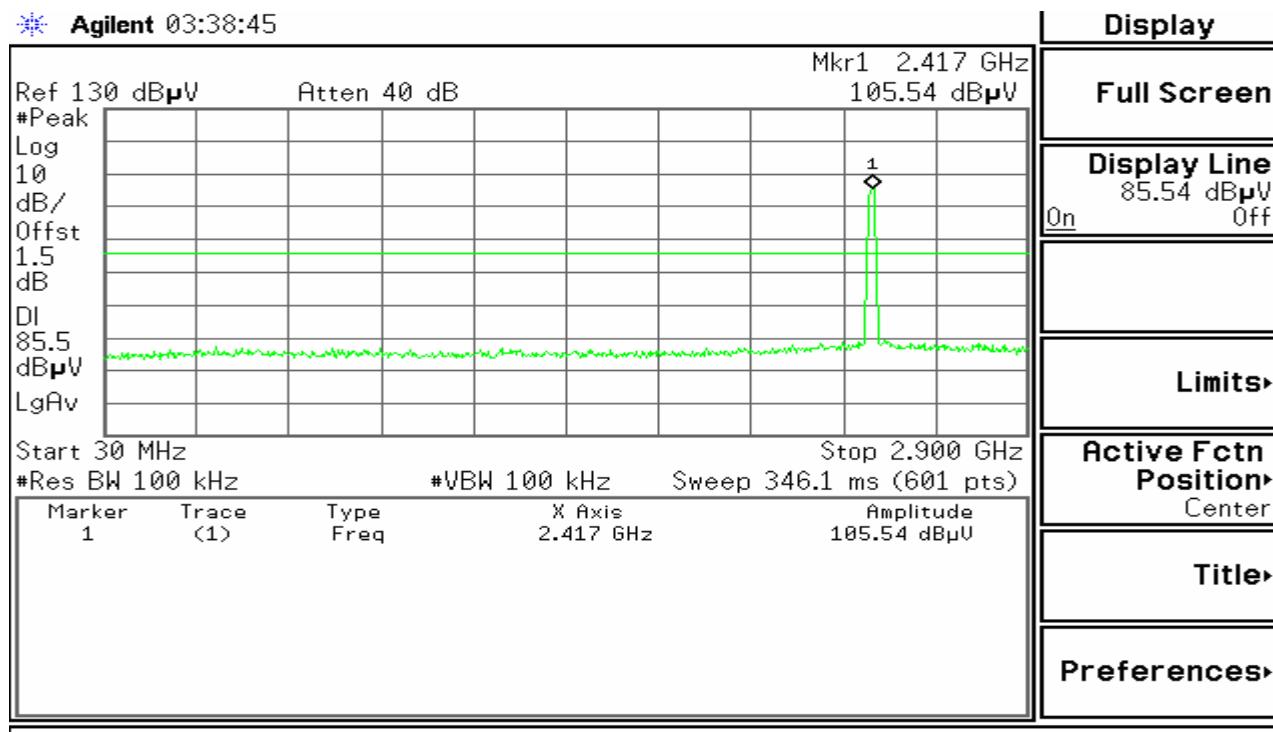


2.9GHz ~ 26.5GHz

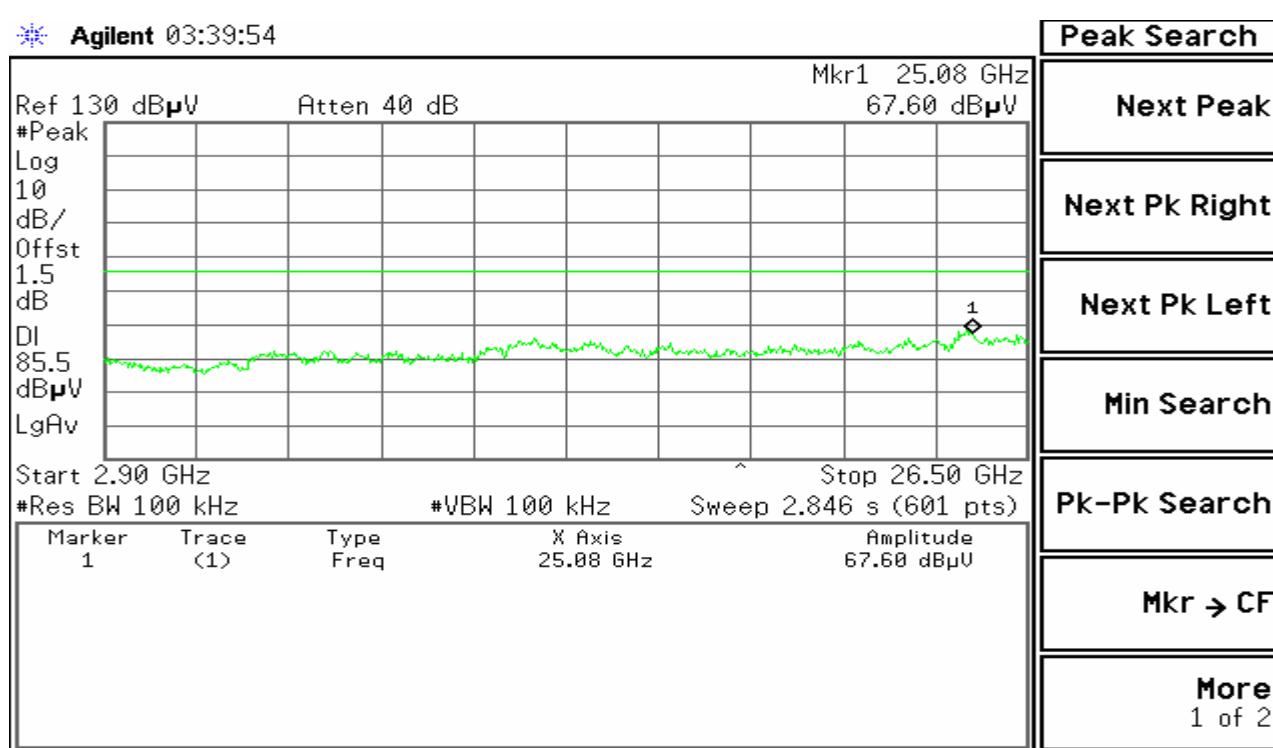




CH Mid

30MHz ~ 2.9GHz

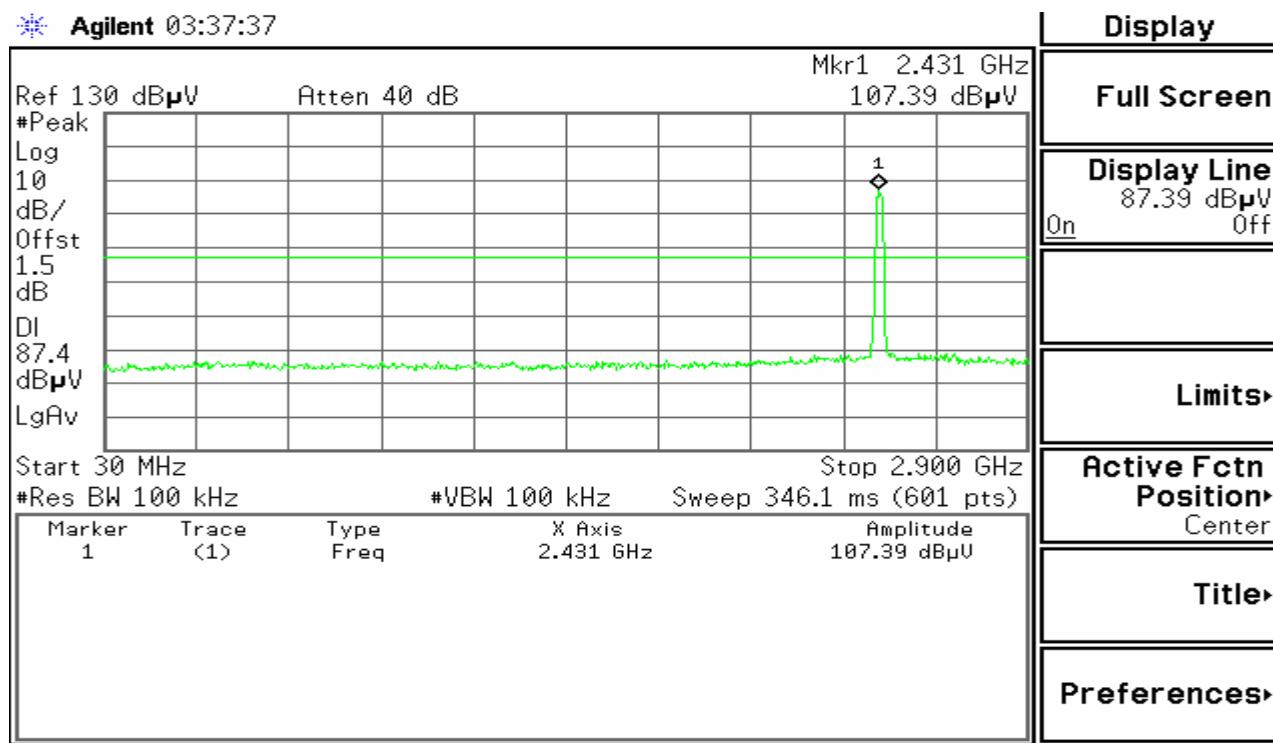

2.9GHz ~ 26.5GHz

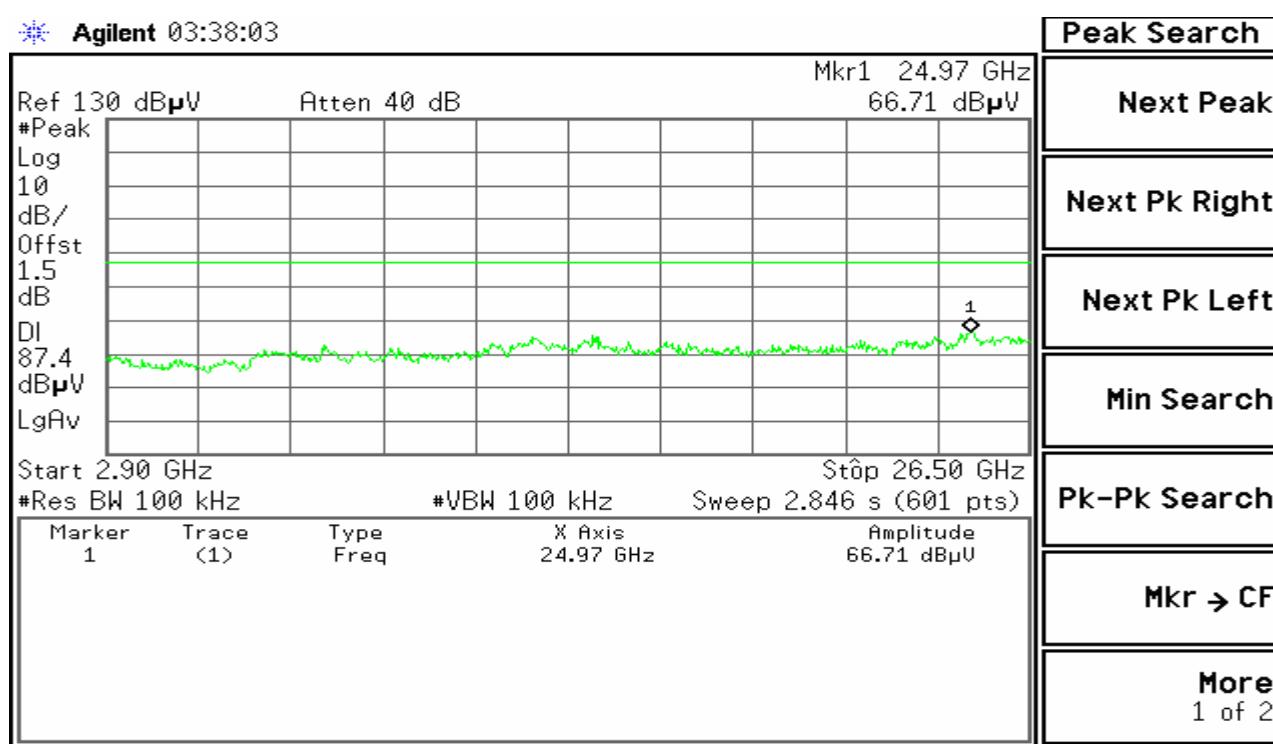




CH High

30MHz ~ 2.9GHz

* Agilent 03:36:13

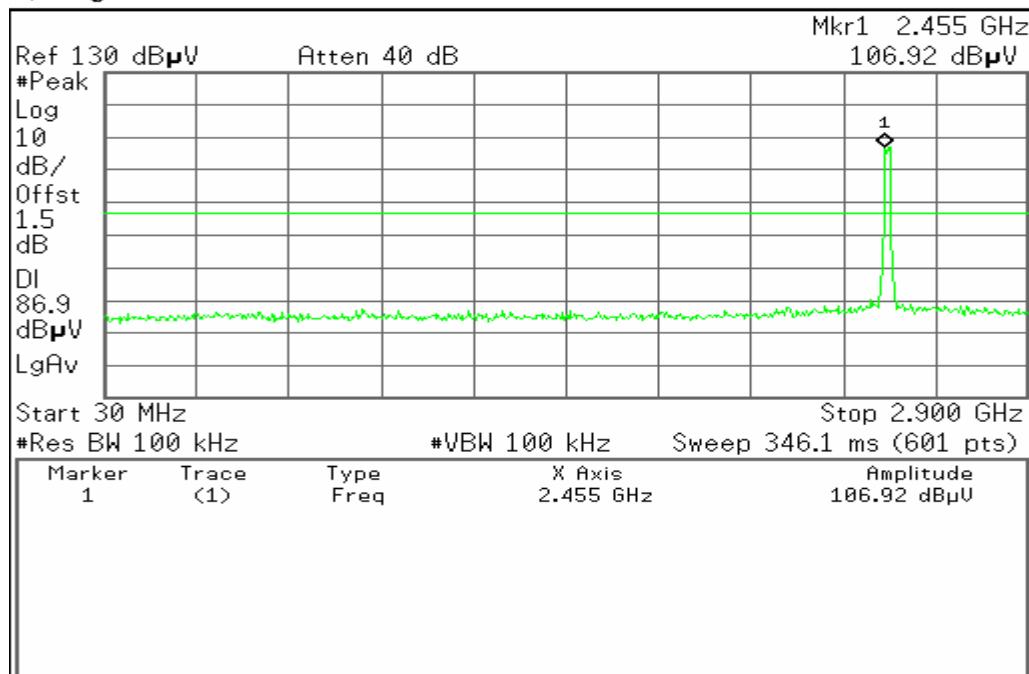


Display
Full Screen
Display Line 86.92 dBµV
On Off
Limits
Active Fctn Position Center
Title
Preferences

Copyright 2000-2004 Agilent Technologies

2.9GHz ~ 26.5GHz

* Agilent 03:36:44

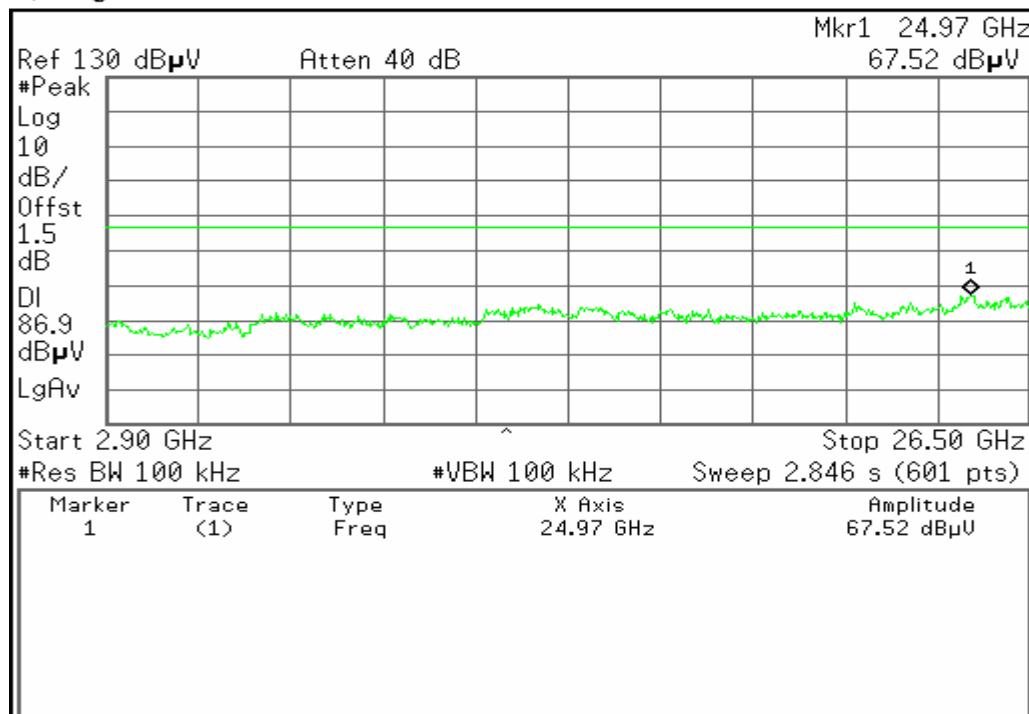

Peak Search
Next Peak
Next Pk Right
Next Pk Left
Min Search
Pk-Pk Search
Mkr → CF
More 1 of 2

Copyright 2000-2004 Agilent Technologies

**7.2.5. Radiated Emissions****7.2.5.1. LIMITS OF RADIATED EMISSIONS MEASUREMENT**

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field Strength (μ V/m) | Measurement Distance (m) |
|-----------------|-----------------------------|--------------------------|
| 30-88 | 100* | 3 |
| 88-216 | 150* | 3 |
| 216-960 | 200* | 3 |
| Above 960 | 500 | 3 |

Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the emission table above, the tighter limit applies at the band edges.

| Frequency (MHz) | Field Strength (μ V/m at 3-meter) | Field Strength (dB μ V/m at 3-meter) |
|-----------------|--|--|
| 30-88 | 100 | 40 |
| 88-216 | 150 | 43.5 |
| 216-960 | 200 | 46 |
| Above 960 | 500 | 54 |

NOTE: (1) The lower limit shall apply at the transition frequencies.

(2) Emission level (dB μ V/m) = 20 log Emission level (μ V/m).

**7.2.5.2. TEST INSTRUMENTS**

| 3M Semi Anechoic Chamber (977) | | | | |
|---------------------------------------|---------------------|--------------|----------------------|------------------------|
| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Due |
| Spectrum Analyzer | Agilent | E4446A | MY44020154 | 08/15/2008 |
| Spectrum Analyzer | Agilent | E4446A | US44300398 | 07/25/2008 |
| EMI Test Receiver | R&S | ESPI3 | 101026 | 11/11/2008 |
| Pre-Amplifier | MINI | ZFL-1000VH2 | d041703 | 12/13/2008 |
| Pre-Amplifier | Miteq | NSP4000-NF | 870731 | 01/28/2008 |
| Bilog Antenna | Sunol | JB1 | A110204-2 | 11/22/2008 |
| Horn-antenna | SCHWARZBECK | BBHA9120D | D:266 | 02/01/2008 |
| PSG Analog Signal Generator | Agilent | E8257C | MY43321570 | 12/19/2008 |
| Turn Table | CT | CT123 | 4165 | N.C.R |
| Antenna Tower | CT | CTERG23 | 3256 | N.C.R |
| Controller | CT | CT100 | 95637 | N.C.R |
| Site NSA | CCS | N/A | N/A | 04/06/2008 |

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The FCC Site Registration number is 93105,90471.
4. N.C.R = No Calibration Required.

7.2.5.3. TEST PROCEDURE (please refer to measurement standard)

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:


(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO


7. Repeat above procedures until the measurements for all frequencies are complete.

7.2.5.4. TEST SETUP

Below 1 GHz

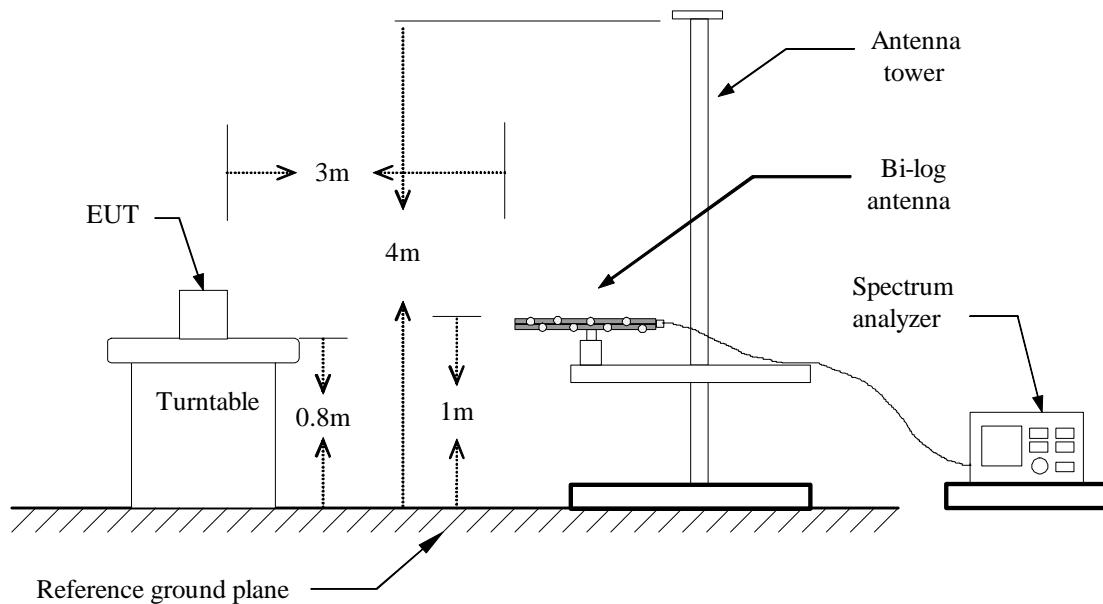

Above 1 GHz

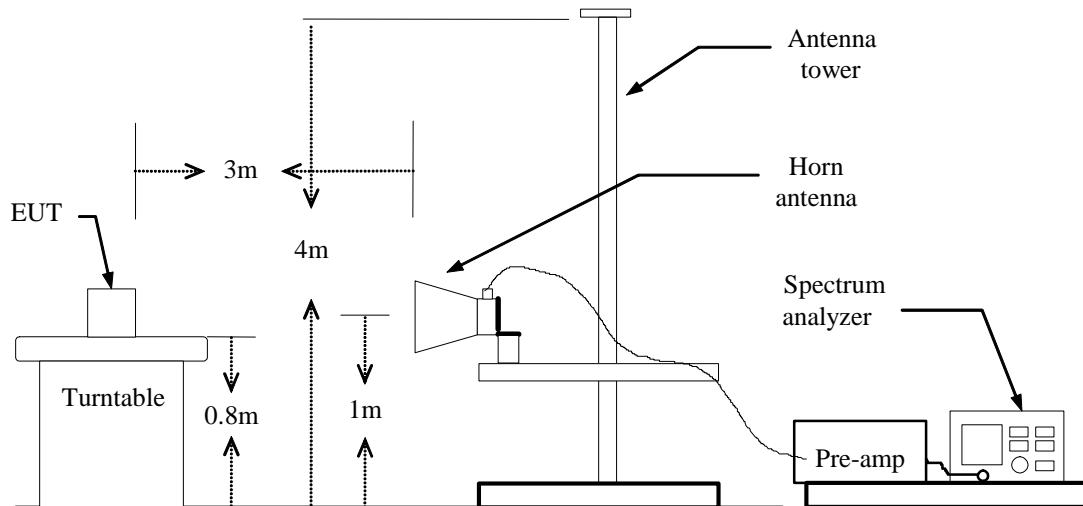

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

**7.2.5.5. Data Sample:****Below 1 GHz**

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Remark) (dBuV) | Correction Factor (dB/m) | Result (Remark) (dBuV/m) | Limit (Peak) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-------------------------|--------------------------|--------------------------|-----------------------|-------------|--------|
| xxx | V | 12.12 | 10.21 | 22.33 | 37.00 | -14.67 | Peak |

Above 1 GHz

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| xxx | V | 65.45 | 63.00 | -11.12 | 54.33 | 51.88 | 74.00 | 54.00 | -2.12 | AVG |

Frequency (MHz)

= Emission frequency in MHz

Ant.Pol. (H/V)

= Antenna polarization

Reading (dBuV)

= Uncorrected Analyzer / Receiver reading

Correction Factor (dB/m)

= Antenna factor + Cable loss – Amplifier gain

Result (dBuV/m)

= Reading (dBuV) + Correction Factor (dB/m)

Limit (dBuV/m)

= Limit stated in standard

Margin (dB)

= Remark Result (dBuV/m) – Limit (dBuV/m)

Peak

= Peak Reading

QP

= Quasi-peak Reading

AVG

= Average Reading



7.2.5.6. TEST RESULTS

Below 1 GHz

Operation Mode: Normal Link **Test Date:** Jan 3, 2008

Model No.: MSR 20-10;Quidway AR 19-10

Tested by: ruth

Environmental Conditions: 20°C , 70 % RH

Polarity: Ver. / Hor.

| Freq. (MHz) | Ant.Pol. | Detector | Reading (dBuV) | Factor (dB) | Actual FS (dBuV/m) | Limit 3m (dBuV/m) | Safe Margin (dB) |
|----------------|----------|-----------------|-------------------|----------------|-----------------------|----------------------|---------------------|
| | H/V | Mode (PK/QP) | | | | | |
| 50.25 | V | peak | 37.84 | -14.14 | 23.7 | 40.0 | -16.3 |
| 239.25 | V | peak | 42.72 | -9.45 | 33.27 | 46.0 | -12.7 |
| 252.75 | V | peak | 39.73 | -9.1 | 30.63 | 46.0 | -15.4 |
| 494.83 | V | peak | 36.19 | -2.39 | 33.8 | 46.0 | -12.2 |
| 594 | V | peak | 35.74 | -0.87 | 34.87 | 46.0 | -11.1 |
| 599.83 | V | peak | 33.86 | -0.9 | 32.96 | 46.0 | -13.0 |
| <hr/> | | | | | | | |
| 56.1 | H | peak | 30.01 | -15.06 | 14.95 | 40 | -25.05 |
| 239.25 | H | peak | 43.58 | -9.45 | 34.13 | 46.0 | -11.87 |
| 350.17 | H | peak | 29.1 | -6.06 | 23.04 | 46.0 | -22.96 |
| 494.83 | H | peak | 34.93 | -2.39 | 32.54 | 46.0 | -13.46 |
| 594 | H | peak | 34.2 | -0.87 | 33.33 | 46.0 | -12.67 |
| 792.33 | H | peak | 39.47 | 2.35 | 41.82 | 46.0 | -4.18 |

REMARKS:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).

**Above 1 GHz****Operation Mode:** TX / IEEE 802.11b / CH Low **Test Date:** June 20, 2007**Mode No:** MSR 20-10;Quidway AR 19-10**Tested by:** ruth**Environment condition:** 20°C 50 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1993.33 | V | 48.95 | | 2.2 | 51.15 | | 74.00 | 54.00 | -22.85 | peak |
| 4816.67 | V | 36.54 | | 11.02 | 47.56 | | 74.00 | 54.00 | -26.44 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| <hr/> | | | | | | | | | | |
| 2106.67 | H | 40.53 | | 3.61 | 44.14 | | 74.00 | 54.00 | -29.86 | peak |
| 4817.26 | H | 36.89 | | 11.02 | 47.91 | | 74.00 | 54.00 | -26.09 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11b / CH mid**Test Date:** June 20, 2007**Mode No:** MSR 20-10; Quidway AR 19-10**Tested by:** ruth**Environment condition:** 20°C 50 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1996.67 | V | 48.29 | | 2.3 | 50.59 | | 74.00 | 54.00 | -23.41 | peak |
| 4875.98 | V | 37.26 | | 11.04 | 48.3 | | 74.00 | 54.00 | -25.70 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| <hr/> | | | | | | | | | | |
| 1997.02 | H | 39.99 | | 2.4 | 42.39 | | 74.00 | 54.00 | -31.61 | peak |
| 4872.06 | H | 37.06 | | 11.05 | 48.11 | | 74.00 | 54.00 | -25.89 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11b / CH high
Mode No: MSR 20-10;Quidway AR 19-10
Environment condition: 20°C 50 % RH

Test Date: June 20, 2007
Tested by: ruth
Polarity: Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1993.33 | V | 47.99 | | 2.2 | 50.19 | | 74.00 | 54.00 | -23.81 | peak |
| 4924.02 | V | 37.99 | | 11.1 | 49.09 | | 74.00 | 54.00 | -24.91 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| <hr/> | | | | | | | | | | |
| 1993.33 | H | 40.02 | | 2.2 | 42.22 | | 74.00 | 54.00 | -31.78 | peak |
| 4923.95 | H | 38.26 | | 11.09 | 49.35 | | 74.00 | 54.00 | -24.65 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g / CH Low
Mode No: MSR 20-10;Quidway AR 19-10
Environment condition: 20°C 50 % RH

Test Date: June 20, 2007
Tested by: ruth
Polarity: Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|--------------------|-------------------|-----------------------------|--------------------------------|--------------------------------|------------------------------|---------------------------------|-----------------------------|--------------------------------|----------------|--------|
| 1993.33 | V | 48.02 | | 2.2 | 50.22 | | 74.00 | 54.00 | -23.78 | peak |
| 4824.06 | V | 39.05 | | 11.02 | 50.07 | | 74.00 | 54.00 | -23.93 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| <hr/> | | | | | | | | | | |
| 1993.33 | H | 41.02 | | 2.2 | 43.22 | | 74.00 | 54.00 | -30.78 | peak |
| 4825.06 | H | 38.59 | | 11.03 | 49.62 | | 74.00 | 54.00 | -24.38 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |

REMARKS:

7. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
8. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
9. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
10. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
11. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
12. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g / CH Mid
Mode No: MSR 20-10;Quidway AR 19-10
Environment condition: 20°C 50 % RH

Test Date: June 20, 2007
Tested by: ruth
Polarity: Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1996.67 | V | 47.89 | | 2.3 | 50.19 | | 74.00 | 54.00 | -23.81 | peak |
| 4874.06 | V | 38.29 | | 11.04 | 49.33 | | 74.00 | 54.00 | -24.67 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| <hr/> | | | | | | | | | | |
| 1993.33 | H | 40.02 | | 2.4 | 42.42 | | 74.00 | 54.00 | -31.58 | peak |
| 4873.02 | H | 36.99 | | 11.05 | 48.04 | | 74.00 | 54.00 | -25.96 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |

REMARKS:

7. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
8. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
9. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
10. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
11. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “N/A” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
12. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g / CH High
Mode No: MSR 20-10;Quidway AR 19-10
Environment condition: 20°C 50 % RH

Test Date: June 20, 2007
Tested by: ruth
Polarity: Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1993.33 | V | 48.02 | | 2.2 | 50.22 | | 74.00 | 54.00 | -23.78 | peak |
| 4928.02 | V | 38.02 | | 11.11 | 49.13 | | 74.00 | 54.00 | -24.87 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| <hr/> | | | | | | | | | | |
| 1993.33 | H | 39.99 | | 2.2 | 42.19 | | 74.00 | 54.00 | -31.81 | peak |
| 4927.02 | H | 38.02 | | 11.09 | 49.11 | | 74.00 | 54.00 | -24.89 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |

REMARKS:

7. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
8. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
9. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
10. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
11. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
12. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Below 1 GHz****Operation Mode:** Normal Link**Test Date:** Jan 3, 2008**Model No.:** MSR 20-12**Tested by:** ruth**Environmental Conditions:** 20°C , 70 % RH**Polarity:** Ver. / Hor.

| Freq. (MHz) | Ant.Pol. | Detector Mode (PK/QP) | Reading (dBuV) | Factor (dB) | Actual FS (dBuV/m) | Limit 3m (dBuV/m) | Safe Margin (dB) |
|------------------------|-----------------|--------------------------------------|---------------------------|------------------------|-------------------------------|------------------------------|---------------------------------|
| 48.12 | V | peak | 37.22 | -14.15 | 23.07 | 40.0 | -16.9 |
| 238.23 | V | peak | 43.11 | -9.4 | 33.71 | 46.0 | -12.3 |
| 251.32 | V | peak | 39.57 | -8.9 | 30.67 | 46.0 | -15.3 |
| 495.73 | V | peak | 36.71 | -2.31 | 34.4 | 46.0 | -11.6 |
| 595.64 | V | peak | 36.79 | -0.8 | 35.99 | 46.0 | -10.0 |
| 599.45 | V | peak | 33.56 | -0.89 | 32.67 | 46.0 | -13.3 |
| <hr/> | | | | | | | |
| 52.23 | H | peak | 30.12 | -14.89 | 15.23 | 40 | -24.77 |
| 240.3 | H | peak | 43.6 | -9.21 | 34.39 | 46.0 | -11.61 |
| 352.14 | H | peak | 29.56 | -6 | 23.56 | 46.0 | -22.44 |
| 495.11 | H | peak | 35.12 | -2.23 | 32.89 | 46.0 | -13.11 |
| 594.86 | H | peak | 34.6 | -8.1 | 26.5 | 46.0 | -19.5 |
| 793.22 | H | peak | 40.11 | 2.3 | 42.41 | 46.0 | -3.59 |

REMARKS:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).

**Above 1 GHz****Operation Mode:** TX / IEEE 802.11b / CH Low**Test Date:** Jan 3, 2008**Model No.:** MSR 20-12**Tested by:** ruth**Environmental Conditions:** 20°C , 70 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1994.06 | V | 49.01 | | 2.2 | 51.21 | | 74.00 | 54.00 | -22.79 | peak |
| 4816.55 | V | 36.02 | | 11.02 | 47.04 | | 74.00 | 54.00 | -26.96 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| <hr/> | | | | | | | | | | |
| 2108.32 | H | 41.03 | | 3.61 | 44.64 | | 74.00 | 54.00 | -29.36 | peak |
| 4816.98 | H | 37.02 | | 11.02 | 48.04 | | 74.00 | 54.00 | -25.96 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11b / CH Mid**Test Date:** Jan 3, 2008**Model No.:** MSR 20-12**Tested by:** ruth**Environmental Conditions:** 20°C , 70 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1997.26 | V | 48.02 | | 2.3 | 50.32 | | 74.00 | 54.00 | -23.68 | peak |
| 4876.02 | V | 39.02 | | 11.04 | 50.06 | | 74.00 | 54.00 | -23.94 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| <hr/> | | | | | | | | | | |
| 1998.01 | H | 40.01 | | 2.4 | 42.41 | | 74.00 | 54.00 | -31.59 | peak |
| 4874.01 | H | 36.99 | | 11.05 | 48.04 | | 74.00 | 54.00 | -25.96 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11b / CH High**Test Date:** Jan 3, 2008**Model No.:** MSR 20-12**Tested by:** ruth**Environmental Conditions:** 20°C , 70 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1993.33 | V | 48.91 | | 2.2 | 51.11 | | 74.00 | 54.00 | -22.89 | peak |
| 4924.03 | V | 38.01 | | 11.1 | 49.11 | | 74.00 | 54.00 | -24.89 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| <hr/> | | | | | | | | | | |
| 1993.33 | H | 41.02 | | 2.2 | 43.22 | | 74.00 | 54.00 | -30.78 | peak |
| 4924.01 | H | 39.01 | | 11.09 | 50.1 | | 74.00 | 54.00 | -23.90 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH Low**Test Date:** Jan 3, 2008**Model No.:** MSR 20-12**Tested by:** ruth**Environmental Conditions:** 20°C , 70 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|--------------------|-------------------|-----------------------------|--------------------------------|--------------------------------|------------------------------|---------------------------------|-----------------------------|--------------------------------|----------------|--------|
| 1993.33 | V | 48.11 | | 2.31 | 50.42 | | 74.00 | 54.00 | -23.58 | peak |
| 4824.51 | V | 39.45 | | 11.05 | 50.5 | | 74.00 | 54.00 | -23.50 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| <hr/> | | | | | | | | | | |
| 1993.33 | H | 41.2 | | 2.3 | 43.5 | | 74.00 | 54.00 | -30.50 | peak |
| 4823.84 | H | 39.14 | | 11 | 50.14 | | 74.00 | 54.00 | -23.86 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH Mid**Test Date:** Jan 3, 2008**Model No.:** MSR 20-12**Tested by:** ruth**Environmental Conditions:** 20°C , 70 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1995.54 | V | 48.01 | | 2.3 | 50.31 | | 74.00 | 54.00 | -23.69 | peak |
| 4874.12 | V | 38.3 | | 11.1 | 49.4 | | 74.00 | 54.00 | -24.60 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| <hr/> | | | | | | | | | | |
| 1995.15 | H | 40.57 | | 2.45 | 43.02 | | 74.00 | 54.00 | -30.98 | peak |
| 4873.80 | H | 37.54 | | 11.09 | 48.63 | | 74.00 | 54.00 | -25.37 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH High**Test Date:** Jan 3, 2008**Model No.:** MSR 20-12**Tested by:** ruth**Environmental Conditions:** 20°C , 70 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|--------------------|-------------------|-----------------------------|--------------------------------|--------------------------------|------------------------------|---------------------------------|-----------------------------|--------------------------------|----------------|--------|
| 1993.33 | V | 48.2 | | 2.33 | 50.53 | | 74.00 | 54.00 | -23.47 | peak |
| 4928.91 | V | 38.19 | | 11.14 | 49.33 | | 74.00 | 54.00 | -24.67 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| <hr/> | | | | | | | | | | |
| 1993.33 | H | 40.16 | | 2.32 | 42.48 | | 74.00 | 54.00 | -31.52 | peak |
| 4928.14 | H | 39.12 | | 11.29 | 50.41 | | 74.00 | 54.00 | -23.59 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Below 1 GHz****Operation Mode:** Normal Link **Test Date:** Jan 3, 2008**Model No.:** MSR 20-13;Quidway AR 19-13**Tested by:** ruth**Environmental Conditions:** 20°C , 70 % RH**Polarity:** Ver. / Hor.

| Freq. (MHz) | Ant.Pol. H/V | Detector Mode (PK/QP) | Reading (dBuV) | Factor (dB) | Actual FS (dBuV/m) | Limit 3m (dBuV/m) | Safe Margin (dB) |
|------------------------|-------------------------|--------------------------------------|---------------------------|------------------------|-------------------------------|------------------------------|---------------------------------|
| 50.12 | V | peak | 36.81 | -14.16 | 22.65 | 40.0 | -17.4 |
| 237.56 | V | peak | 42.65 | -9.47 | 33.18 | 46.0 | -12.8 |
| 250.34 | V | peak | 39.45 | -9 | 30.45 | 46.0 | -15.6 |
| 495.73 | V | peak | 36.3 | -2.33 | 33.97 | 46.0 | -12.0 |
| 596 | V | peak | 36.89 | -0.75 | 36.14 | 46.0 | -9.9 |
| 599.45 | V | peak | 33.56 | -0.89 | 32.67 | 46.0 | -13.3 |
| <hr/> | | | | | | | |
| 55.2 | H | peak | 30 | -15.6 | 14.4 | 40 | -25.6 |
| 240.31 | H | peak | 43.7 | -9.3 | 34.4 | 46.0 | -11.6 |
| 350.53 | H | peak | 29.24 | -6.01 | 23.23 | 46.0 | -22.77 |
| 495.11 | H | peak | 35 | -2.32 | 32.68 | 46.0 | -13.32 |
| 594.86 | H | peak | 34.64 | -0.82 | 33.82 | 46.0 | -12.18 |
| 790.33 | H | peak | 39.23 | 2.25 | 41.48 | 46.0 | -4.52 |

REMARKS:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).

**Above 1 GHz****Operation Mode:** TX / IEEE 802.11b / CH Low**Test Date:** Jan 3, 2008**Model No.:** MSR 20-13; Quidway AR 19-13**Tested by:** ruth**Environmental Conditions:** 20°C , 70 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1994.06 | V | 50.2 | | 2.41 | 52.61 | | 74.00 | 54.00 | -21.39 | peak |
| 4820.14 | V | 38.16 | | 11.35 | 49.51 | | 74.00 | 54.00 | -24.49 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| <hr/> | | | | | | | | | | |
| 2105.92 | H | 40.5 | | 3.52 | 44.02 | | 74.00 | 54.00 | -29.98 | peak |
| 4820.25 | H | 37.12 | | 11.3 | 48.42 | | 74.00 | 54.00 | -25.58 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11b / CH Mid
Model No.: MSR 20-13;Quidway AR 19-13
Environmental Conditions: 20°C , 70 % RH

Test Date: Jan 3, 2008
Tested by: ruth
Polarity: Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1996.67 | V | 48.29 | | 2.3 | 50.59 | | 74.00 | 54.00 | -23.41 | peak |
| 4875.98 | V | 37.26 | | 11.04 | 48.3 | | 74.00 | 54.00 | -25.70 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| <hr/> | | | | | | | | | | |
| 1997.02 | H | 39.99 | | 2.4 | 42.39 | | 74.00 | 54.00 | -31.61 | peak |
| 4872.06 | H | 37.06 | | 11.05 | 48.11 | | 74.00 | 54.00 | -25.89 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11b / CH High**Test Date:** Jan 3, 2008**Model No.:** MSR 20-13;Quidway AR 19-13**Tested by:** ruth**Environmental Conditions:** 20°C , 70 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1993.33 | V | 47.99 | | 2.2 | 50.19 | | 74.00 | 54.00 | -23.81 | peak |
| 4925.52 | V | 38 | | 11.32 | 49.32 | | 74.00 | 54.00 | -24.68 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| <hr/> | | | | | | | | | | |
| 1995.20 | H | 41.13 | | 2.31 | 43.44 | | 74.00 | 54.00 | -30.56 | peak |
| 4925.71 | H | 39.57 | | 11.35 | 50.92 | | 74.00 | 54.00 | -23.08 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH Low**Test Date:** Jan 3, 2008**Model No.:** MSR 20-13; Quidway AR 19-13**Tested by:** ruth**Environmental Conditions:** 20°C , 70 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1993.33 | V | 48 | | 2.21 | 50.21 | | 74.00 | 54.00 | -23.79 | peak |
| 4824.23 | V | 39.15 | | 11.02 | 50.17 | | 74.00 | 54.00 | -23.83 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| <hr/> | | | | | | | | | | |
| 1993.33 | H | 41.02 | | 2.2 | 43.22 | | 74.00 | 54.00 | -30.78 | peak |
| 4825.06 | H | 38.59 | | 11.03 | 49.62 | | 74.00 | 54.00 | -24.38 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH Mid**Test Date:** Jan 3, 2008**Model No.:** MSR 20-13;Quidway AR 19-13**Tested by:** ruth**Environmental Conditions:** 20°C , 70 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|--------------------|-------------------|-----------------------------|--------------------------------|--------------------------------|------------------------------|---------------------------------|-----------------------------|--------------------------------|----------------|--------|
| 1995.54 | V | 47.59 | | 2.21 | 49.8 | | 74.00 | 54.00 | -24.20 | peak |
| 4874.06 | V | 38.29 | | 11.04 | 49.33 | | 74.00 | 54.00 | -24.67 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| <hr/> | | | | | | | | | | |
| 1994.23 | H | 40.15 | | 2.43 | 42.58 | | 74.00 | 54.00 | -31.42 | peak |
| 4873.94 | H | 37.12 | | 11.11 | 48.23 | | 74.00 | 54.00 | -25.77 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH High**Test Date:** Jan 3, 2008**Model No.:** MSR 20-13;Quidway AR 19-13**Tested by:** ruth**Environmental Conditions:** 20°C , 70 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|--------------------|-------------------|-----------------------------|--------------------------------|--------------------------------|------------------------------|---------------------------------|-----------------------------|--------------------------------|----------------|--------|
| 1993.33 | V | 48.11 | | 2.23 | 50.34 | | 74.00 | 54.00 | -23.66 | peak |
| 4928.12 | V | 38.22 | | 11.14 | 49.36 | | 74.00 | 54.00 | -24.64 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| <hr/> | | | | | | | | | | |
| 1993.33 | H | 40.15 | | 2.3 | 42.45 | | 74.00 | 54.00 | -31.55 | peak |
| 4927.02 | H | 38.12 | | 11.2 | 49.32 | | 74.00 | 54.00 | -24.68 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Below 1 GHz****Operation Mode:** Normal Link **Test Date:** Jan 3, 2008**Model No.:** MSR 20-15;Quidway AR 19-15**Tested by:** ruth**Environmental Conditions:** 20°C , 70 % RH**Polarity:** Ver. / Hor.

| Freq. (MHz) | Ant.Pol. H/V | Detector Mode (PK/QP) | Reading (dBuV) | Factor (dB) | Actual FS (dBuV/m) | Limit 3m (dBuV/m) | Safe Margin (dB) |
|------------------------|-------------------------|--------------------------------------|---------------------------|------------------------|-------------------------------|------------------------------|---------------------------------|
| 51.23 | V | peak | 37.51 | -13.84 | 23.67 | 40.0 | -16.3 |
| 238.57 | V | peak | 43.9 | -9.3 | 34.6 | 46.0 | -11.4 |
| 251.36 | V | peak | 39.98 | -8.79 | 31.19 | 46.0 | -14.8 |
| 496.09 | V | peak | 36.51 | -2.2 | 34.31 | 46.0 | -11.7 |
| 595.94 | V | peak | 36.59 | -0.8 | 35.79 | 46.0 | -10.2 |
| 600.12 | V | peak | 33.86 | -0.85 | 33.01 | 46.0 | -13.0 |
| <hr/> | | | | | | | |
| 54.1 | H | peak | 29.98 | -15.71 | 14.27 | 40 | -25.73 |
| 241.75 | H | peak | 43.83 | -9.12 | 34.71 | 46.0 | -11.29 |
| 351 | H | peak | 29.51 | -5.89 | 23.62 | 46.0 | -22.38 |
| 495.72 | H | peak | 35.16 | -2.3 | 32.86 | 46.0 | -13.14 |
| 595.01 | H | peak | 35.21 | -8.5 | 26.71 | 46.0 | -19.29 |
| 792 | H | peak | 39.76 | 2.42 | 42.18 | 46.0 | -3.82 |

REMARKS:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).

**Above 1 GHz****Operation Mode:** TX / IEEE 802.11b / CH Low**Test Date:** Jan 3, 2008**Model No.:** MSR 20-15; Quidway AR 19-15**Tested by:** ruth**Environmental Conditions:** 20°C , 70 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1993.87 | V | 50 | | 2.4 | 52.4 | | 74.00 | 54.00 | -21.60 | peak |
| 4822.48 | V | 39.75 | | 11.45 | 51.2 | | 74.00 | 54.00 | -22.80 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| <hr/> | | | | | | | | | | |
| 2107.45 | H | 41.03 | | 4 | 45.03 | | 74.00 | 54.00 | -28.97 | peak |
| 4820.25 | H | 38.02 | | 11.41 | 49.43 | | 74.00 | 54.00 | -24.57 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11b / CH Mid**Test Date:** Jan 3, 2008**Model No.:** MSR 20-15;Quidway AR 19-15**Tested by:** ruth**Environmental Conditions:** 20°C , 70 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1995.67 | V | 48.1 | | 2.22 | 50.32 | | 74.00 | 54.00 | -23.68 | peak |
| 4874.57 | V | 36.94 | | 11.03 | 47.97 | | 74.00 | 54.00 | -26.03 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| <hr/> | | | | | | | | | | |
| 1996.23 | H | 39.71 | | 2.39 | 42.1 | | 74.00 | 54.00 | -31.90 | peak |
| 4873.12 | H | 37.56 | | 11.45 | 49.01 | | 74.00 | 54.00 | -24.99 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11b / CH High**Test Date:** Jan 3, 2008**Model No.:** MSR 20-15; Quidway AR 19-15**Tested by:** ruth**Environmental Conditions:** 20°C , 70 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1994.25 | V | 48.02 | | 2.29 | 50.31 | | 74.00 | 54.00 | -23.69 | peak |
| 4926.43 | V | 39.41 | | 11.4 | 50.81 | | 74.00 | 54.00 | -23.19 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| <hr/> | | | | | | | | | | |
| 1995.20 | H | 42.13 | | 2.4 | 44.53 | | 74.00 | 54.00 | -29.47 | peak |
| 4925.71 | H | 40.1 | | 11.39 | 51.49 | | 74.00 | 54.00 | -22.51 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH Low**Test Date:** Jan 3, 2008**Model No.:** MSR 20-15; Quidway AR 19-15**Tested by:** ruth**Environmental Conditions:** 20°C , 70 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1994.25 | V | 48.23 | | 2.31 | 50.54 | | 74.00 | 54.00 | -23.46 | peak |
| 4824.62 | V | 39.74 | | 11.39 | 51.13 | | 74.00 | 54.00 | -22.87 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| <hr/> | | | | | | | | | | |
| 1994.48 | H | 41.31 | | 2.35 | 43.66 | | 74.00 | 54.00 | -30.34 | peak |
| 4827.06 | H | 39.04 | | 11.23 | 50.27 | | 74.00 | 54.00 | -23.73 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH Mid**Test Date:** Jan 3, 2008**Model No.:** MSR 20-15; Quidway AR 19-15**Tested by:** ruth**Environmental Conditions:** 20°C , 70 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1997.42 | V | 48.1 | | 2.34 | 50.44 | | 74.00 | 54.00 | -23.56 | peak |
| 4875.64 | V | 38.98 | | 11.61 | 50.59 | | 74.00 | 54.00 | -23.41 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| <hr/> | | | | | | | | | | |
| 1996.45 | H | 41.24 | | 2.5 | 43.74 | | 74.00 | 54.00 | -30.26 | peak |
| 4874.41 | H | 37.84 | | 11.26 | 49.1 | | 74.00 | 54.00 | -24.90 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH High**Test Date:** Jan 3, 2008**Model No.:** MSR 20-15;Quidway AR 19-15**Tested by:** ruth**Environmental Conditions:** 20°C , 70 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant.Pol. | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|----------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 1993.33 | V | 48.2 | | 2.3 | 50.5 | | 74.00 | 54.00 | -23.50 | peak |
| 4928.46 | V | 38.4 | | 11.16 | 49.56 | | 74.00 | 54.00 | -24.44 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| <hr/> | | | | | | | | | | |
| 1993.33 | H | 41.11 | | 2.35 | 43.46 | | 74.00 | 54.00 | -30.54 | peak |
| 4928.56 | H | 38.42 | | 11.36 | 49.78 | | 74.00 | 54.00 | -24.22 | peak |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |
| N/A | | | | | | | | | | |

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



7.3. 6dB BANDWIDTH MEASUREMENT

7.3.1. LIMITS

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.


7.3.2. TEST INSTRUMENTS

| Conducted Emissions Test Site | | | | |
|-------------------------------|--------------|--------|---------------|-----------------|
| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Due |
| Spectrum Analyzer | Agilent | E4446A | MY44020154 | 08/15/2008 |

7.3.3. TEST PROCEDURES (please refer to measurement standard)

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100kHz, VBW = RBW, Span = 20MHz, Sweep = auto.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

7.3.4. TEST SETUP

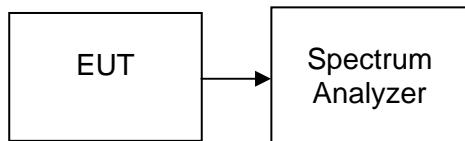



7.3.5. TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b


| Channel | Frequency (MHz) | Bandwidth (kHz) | Limit (kHz) | Test Result |
|---------|-----------------|-----------------|-------------|-------------|
| Low | 2412 | 11712 | >500 | PASS |
| Mid | 2437 | 11973 | | PASS |
| High | 2462 | 12305 | | PASS |

Test mode: IEEE 802.11g


| Channel | Frequency (MHz) | Bandwidth (kHz) | Limit (kHz) | Test Result |
|---------|-----------------|-----------------|-------------|-------------|
| Low | 2412 | 16436 | >500 | PASS |
| Mid | 2437 | 16390 | | PASS |
| High | 2462 | 16476 | | PASS |

Test Plot (IEEE 802.11b mode)

6dB Bandwidth (CH Low)

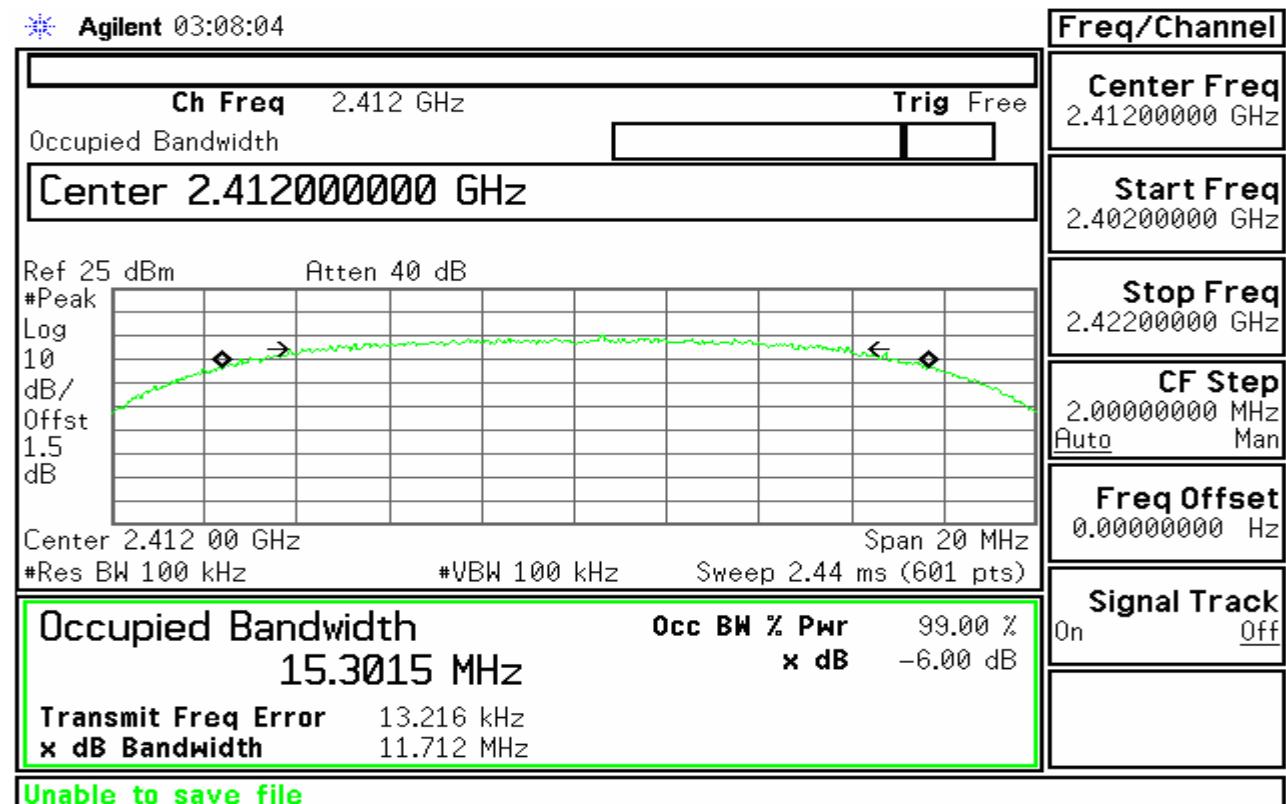



6dB Bandwidth (CH Mid)

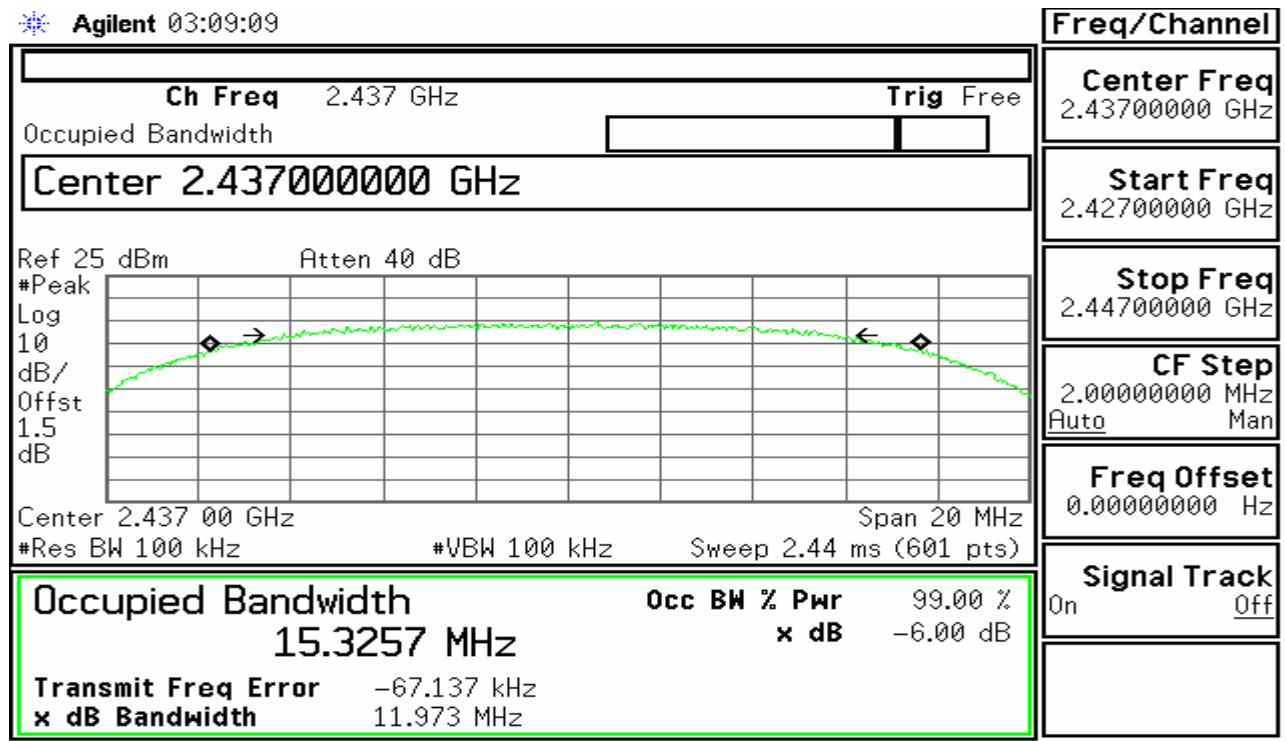

File Operation Status, A:\SCREEN011.GIF file saved


**6dB Bandwidth (CH High)**

Agilent 03:09:45

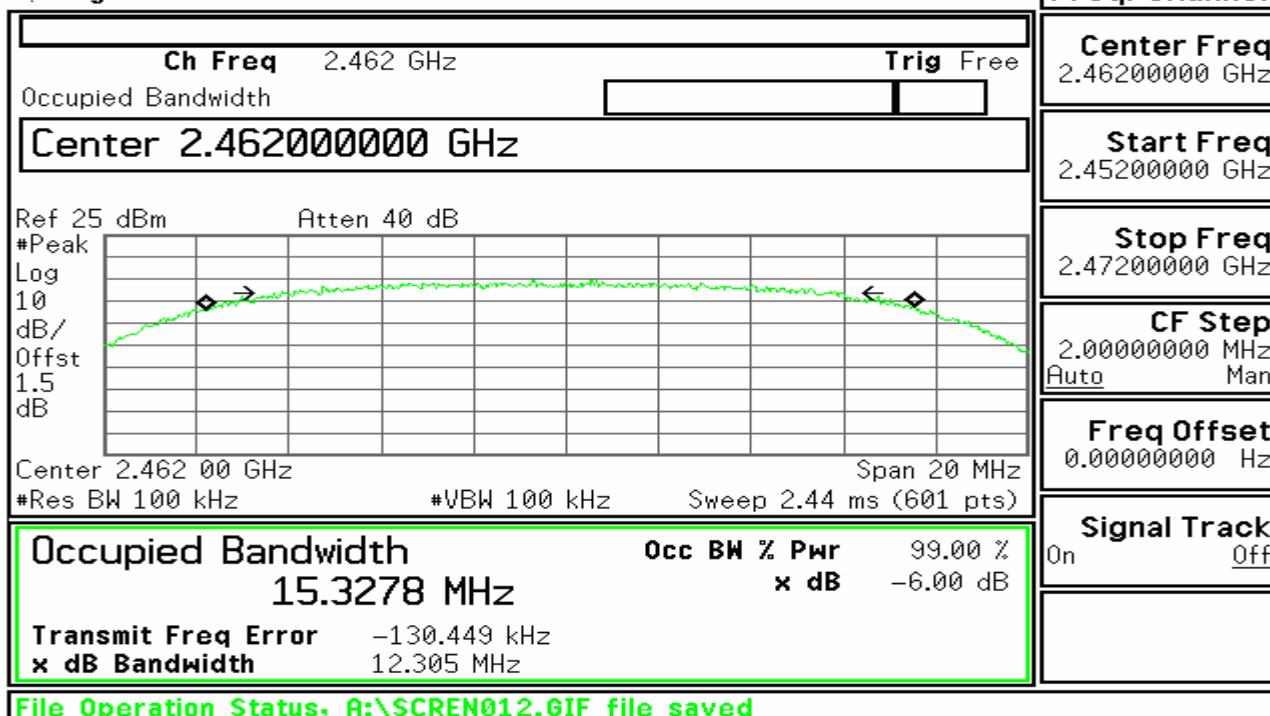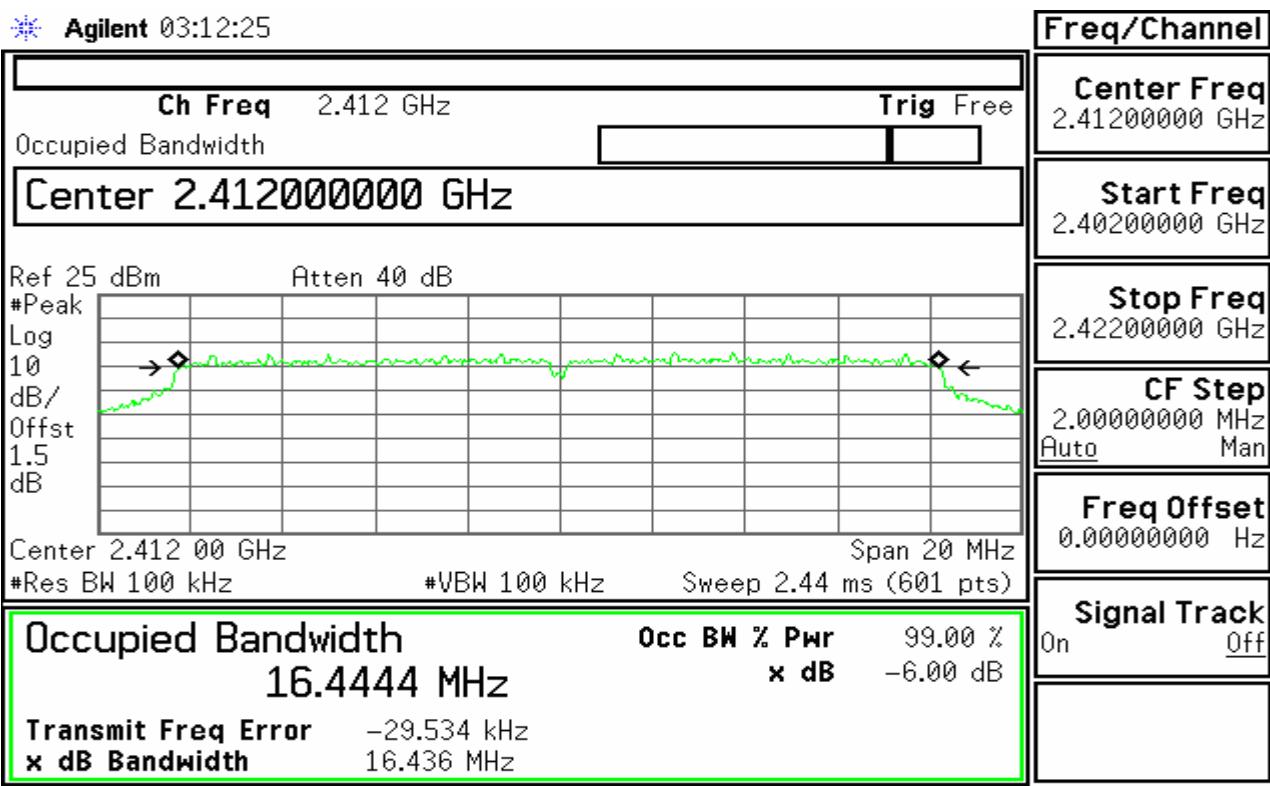**Test Plot (IEEE 802.11g mode)****6dB Bandwidth (CH Low)**

6dB Bandwidth (CH Mid)


* Agilent 03:11:49

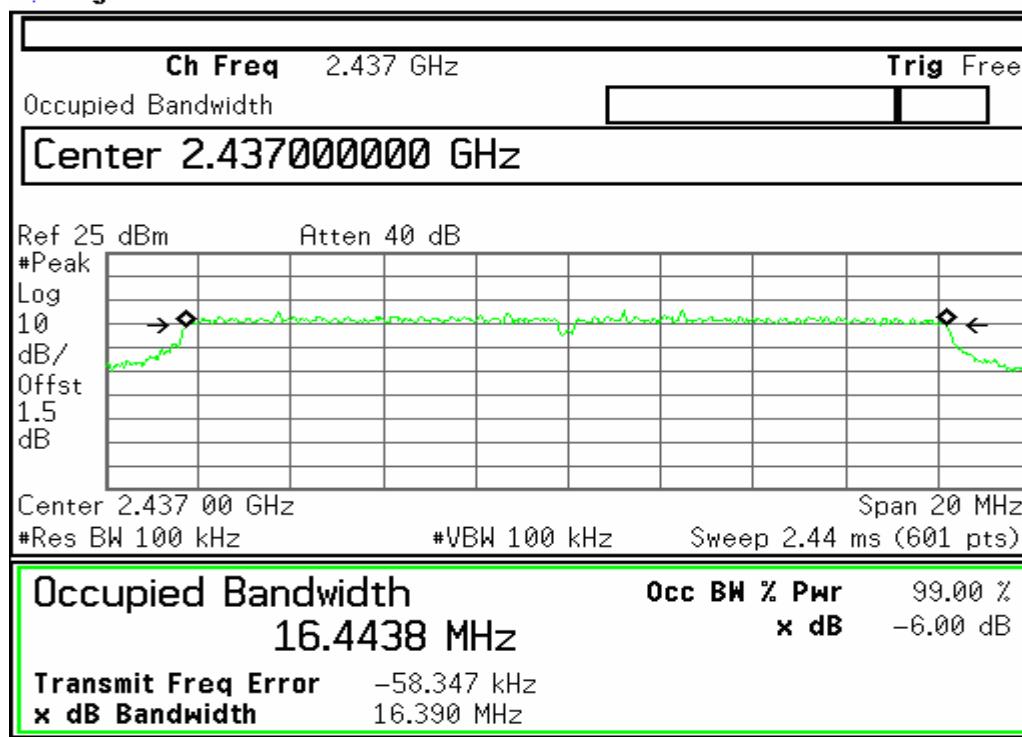

Trace
1 2 3
Clear Write
Max Hold
Min Hold
View
Blank

6dB Bandwidth (CH High)

* Agilent 03:11:04

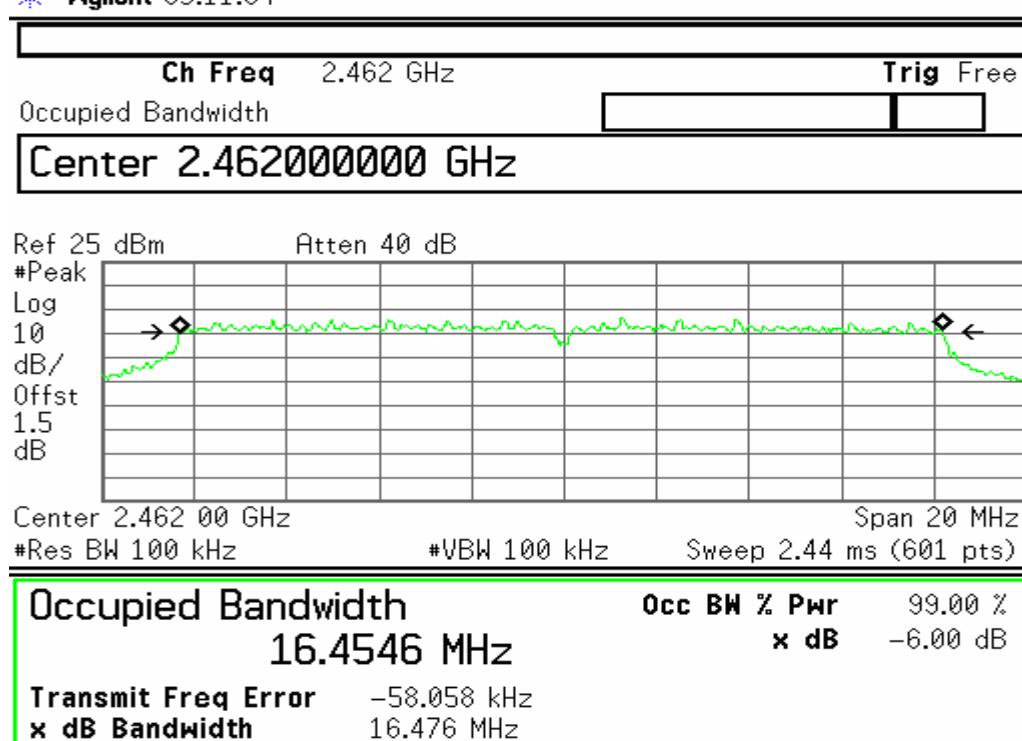

Freq/Channel
Center Freq 2.46200000 GHz
Start Freq 2.45200000 GHz
Stop Freq 2.47200000 GHz
CF Step 2.00000000 MHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off



7.4. PEAK OUTPUT POWER

7.4.1. LIMITS

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


7.4.2. TEST INSTRUMENTS

| Conducted Emissions Test Site | | | | |
|-------------------------------|--------------|--------|---------------|-----------------|
| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Due |
| Spectrum Analyzer | Agilent | E4446A | MY44020154 | 08/15/2008 |

7.4.3. TEST PROCEDURES (please refer to measurement standard)

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the peak power detection.

7.4.4. TEST SETUP

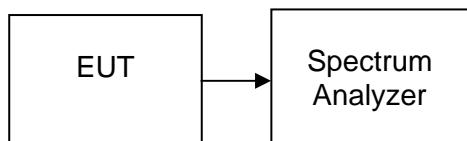



7.4.5. TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b

| Channel | Frequency (MHz) | Output Power (dBm) | Output Power (W) | Limit (W) | Result |
|---------|-----------------|--------------------|------------------|-----------|--------|
| Low | 2412 | 17.56 | 0.05702 | 1 | PASS |
| Mid | 2437 | 17.26 | 0.05321 | | PASS |
| High | 2462 | 17.64 | 0.05808 | | PASS |


Test mode: IEEE 802.11g

| Channel | Frequency (MHz) | Output Power (dBm) | Output Power (W) | Limit (W) | Result |
|---------|-----------------|--------------------|------------------|-----------|--------|
| Low | 2412 | 15.77 | 0.03776 | 1 | PASS |
| Mid | 2437 | 16.14 | 0.04111 | | PASS |
| High | 2462 | 16.58 | 0.04550 | | PASS |


Test Plot (IEEE 802.11b mode)



Peak Power (CH Low)

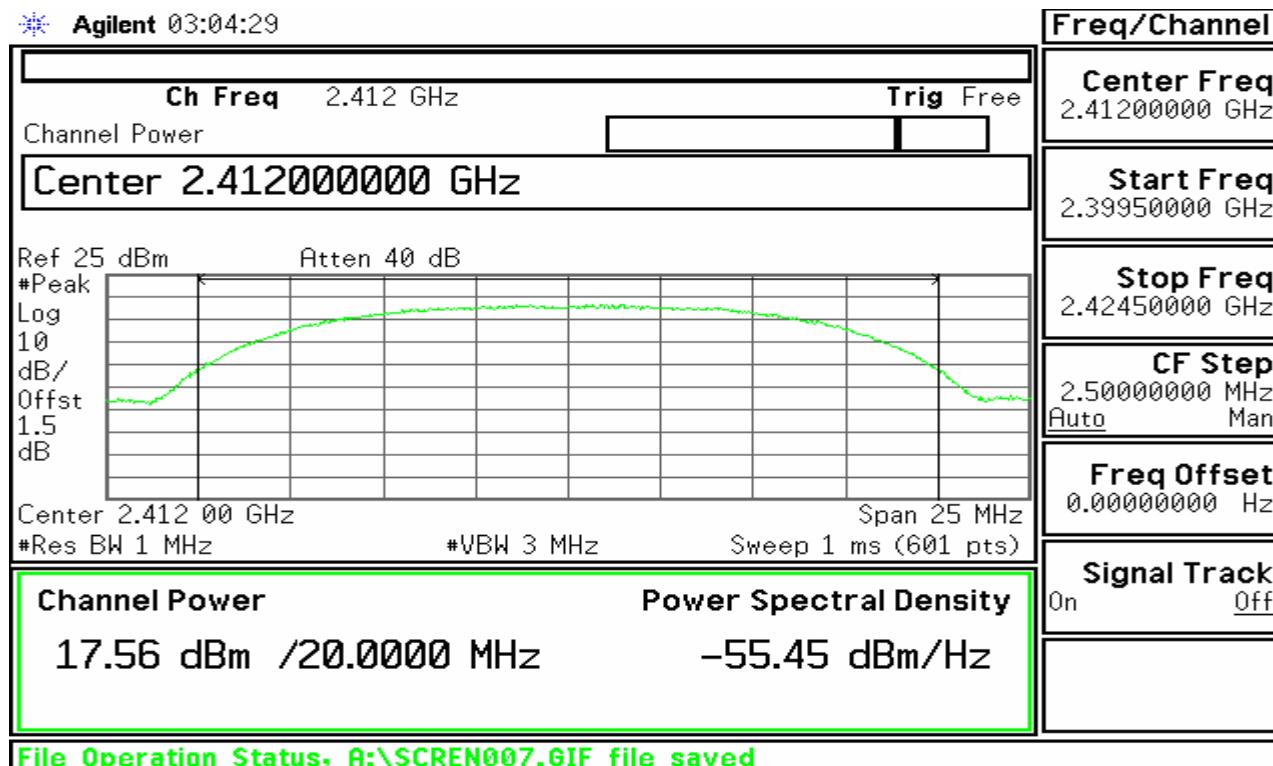



Peak Power (CH Mid)

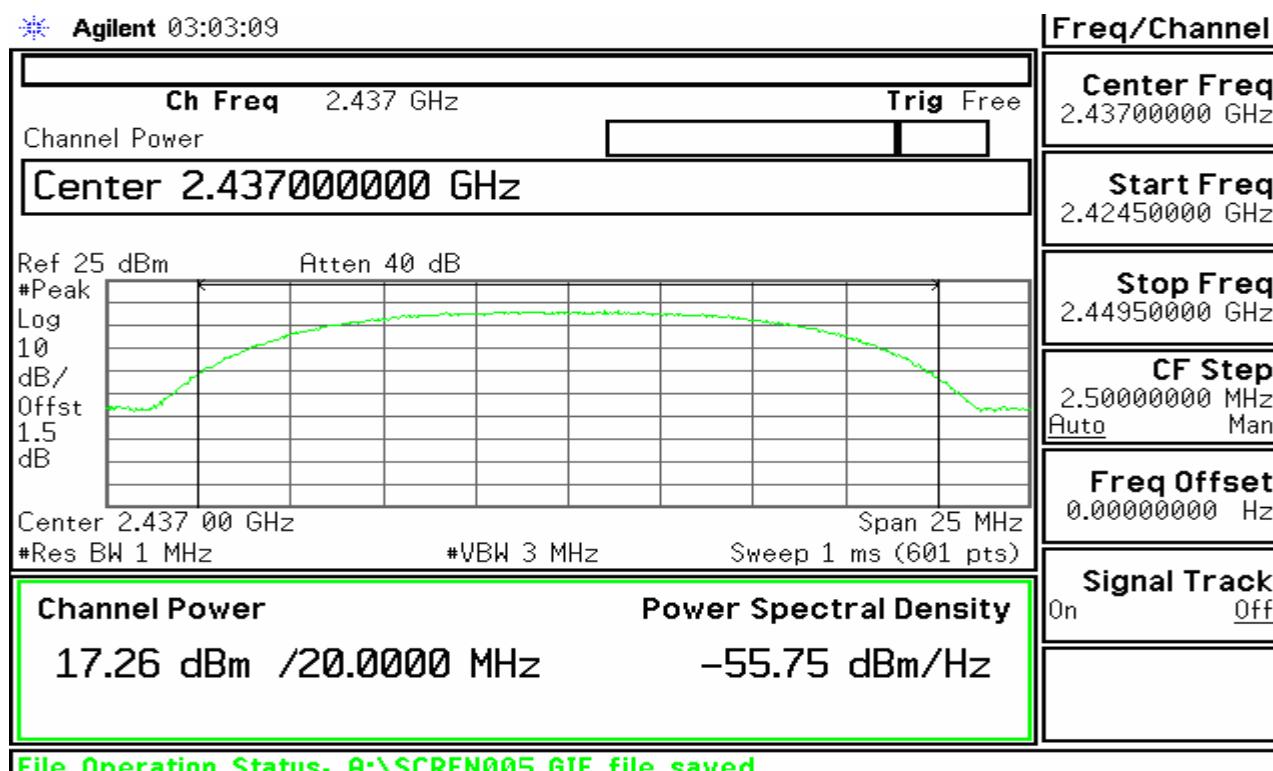

Peak Power (CH High)



Agilent 03:02:10

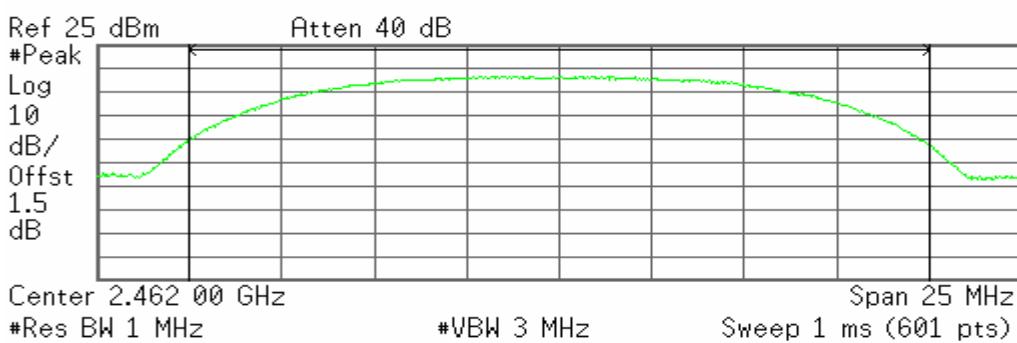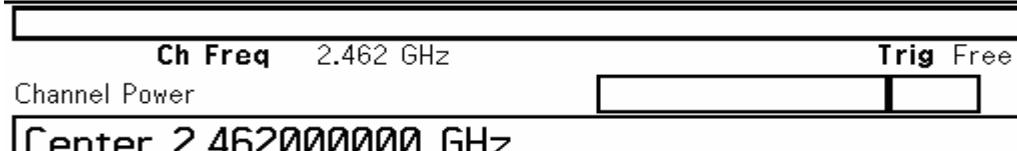

Freq/Channel

Center Freq 2.46200000 GHz

Start Freq 2.44950000 GHz

Stop Freq 2.47450000 GHz

CF Step 2.50000000 MHz Auto Man

Freq Offset 0.00000000 Hz

Signal Track On Off

Channel Power Power Spectral Density



17.64 dBm /20.0000 MHz -55.37 dBm/Hz

File Operation Status, A:\SCREEN004.GIF file saved

Test Plot (IEEE 802.11g mode)

Peak Power (CH Low)

Agilent 02:57:29

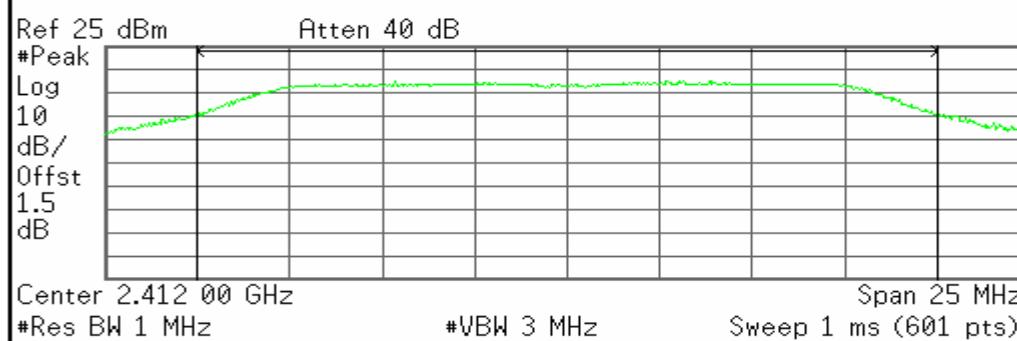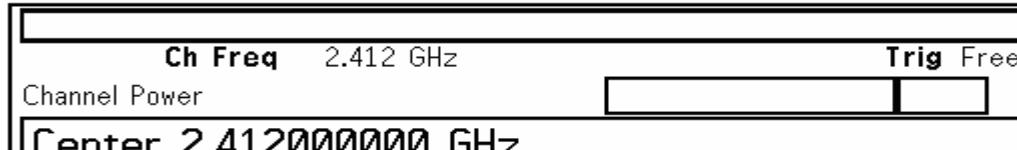

Freq/Channel

Center Freq 2.41200000 GHz

Start Freq 2.39950000 GHz

Stop Freq 2.42450000 GHz

CF Step 2.50000000 MHz Auto Man

Freq Offset 0.00000000 Hz

Signal Track On Off

Channel Power Power Spectral Density


15.77 dBm /20.0000 MHz -57.24 dBm/Hz

Bad, missing, or unformatted disk



Peak Power (CH Mid)

* Agilent 02:58:55

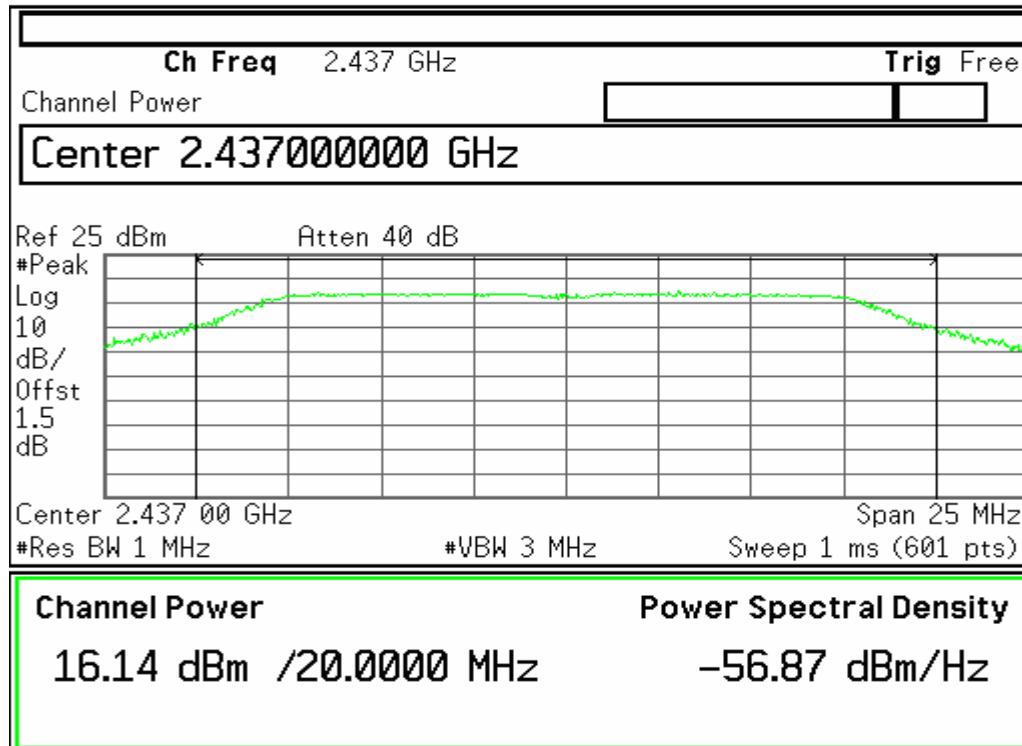

Freq/Channel

Center Freq 2.43700000 GHz

Start Freq 2.42450000 GHz

Stop Freq 2.44950000 GHz

CF Step 2.50000000 MHz Auto Man


Freq Offset 0.00000000 Hz

Signal Track On Off

File Operation Status, A:\SCREN002.GIF file saved

Peak Power (CH High)

* Agilent 03:00:25

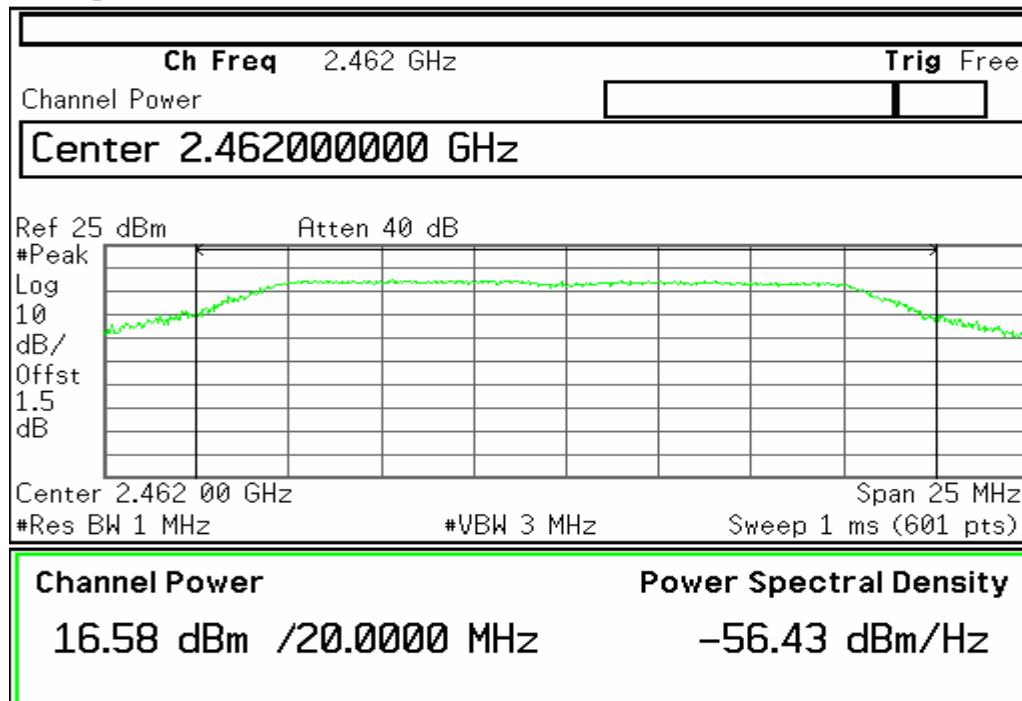

Freq/Channel

Center Freq 2.46200000 GHz

Start Freq 2.44950000 GHz

Stop Freq 2.47450000 GHz

CF Step 2.50000000 MHz Auto Man

Freq Offset 0.00000000 Hz

Signal Track On Off

File Operation Status, A:\SCREN003.GIF file saved



7.5. BAND EDGES MEASUREMENT:

7.5.1. LIMITS

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).


7.5.2. TEST INSTRUMENTS

| 3M Semi Anechoic Chamber (977) | | | | |
|---------------------------------------|---------------------|--------------|----------------------|------------------------|
| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Due |
| Spectrum Analyzer | Agilent | E4446A | MY44020154 | 08/15/2008 |
| Spectrum Analyzer | Agilent | E4446A | US44300398 | 07/25/2008 |
| EMI Test Receiver | R&S | ESPI3 | 101026 | 11/11/2008 |
| Pre-Amplifier | MINI | ZFL-1000VH2 | d041703 | 12/13/2008 |
| Pre-Amplifier | Miteq | NSP4000-NF | 870731 | 01/28/2008 |
| Bilog Antenna | Sunol | JB1 | A110204-2 | 11/22/2008 |
| Horn-antenna | SCHWARZBECK | BBHA9120D | D:266 | 02/01/2008 |
| PSG Analog Signal Generator | Agilent | E8257C | MY43321570 | 12/19/2008 |
| Turn Table | CT | CT123 | 4165 | N.C.R |
| Antenna Tower | CT | CTERG23 | 3256 | N.C.R |
| Controller | CT | CT100 | 95637 | N.C.R |
| Site NSA | CCS | N/A | N/A | 04/06/2008 |

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The FCC Site Registration number is 93105,90471.
4. N.C.R = No Calibration Required.

7.5.3. TEST PROCEDURES (please refer to measurement standard)

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are

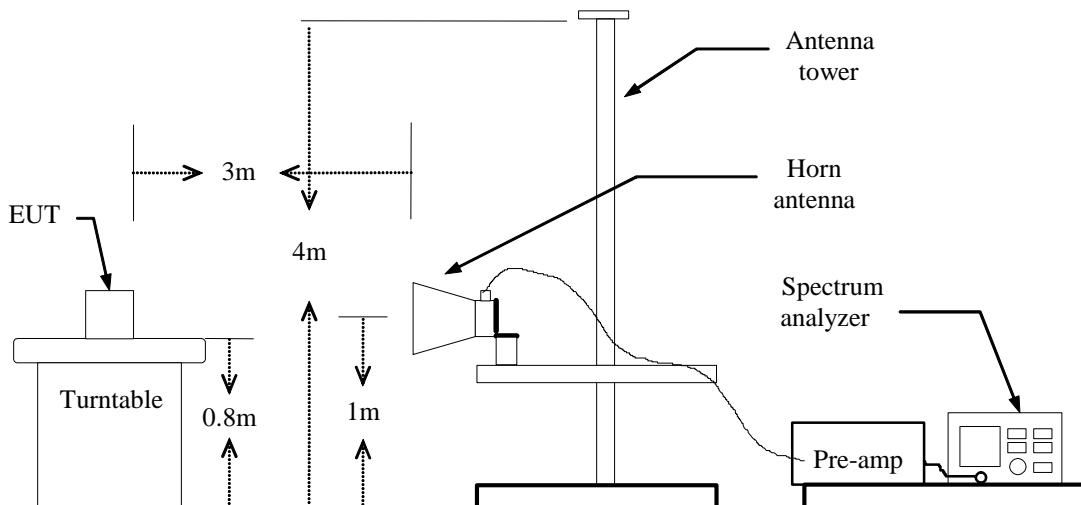7.5.4. TEST SETUP



Test Data

Test Plot (IEEE 802.11b mode)

Note: The mode H3CMSR20-13;Quidway AR 19-13 (which is worst case mode) was chosen for full testing.


7.5.5. TEST RESULTS

Test Plot (IEEE 802.11b mode)

Band Edges (CH Low)


Detector mode: Peak

Polarity: Vertical

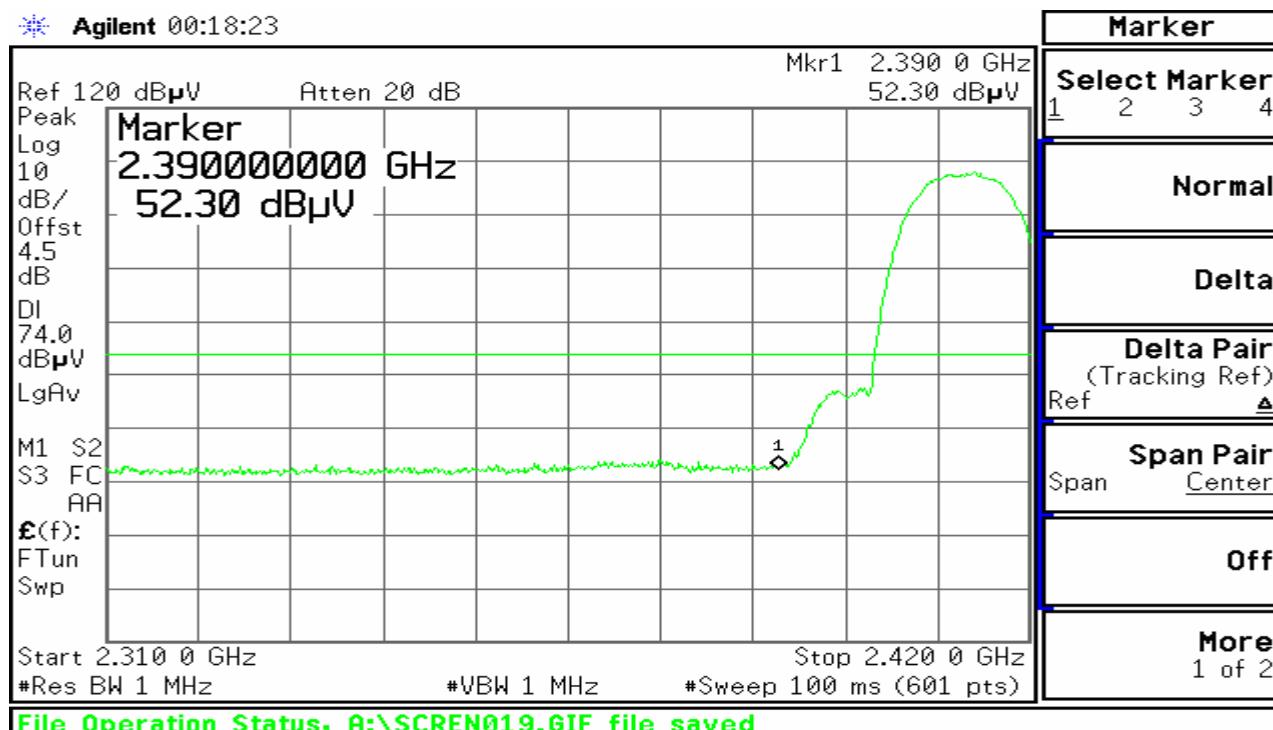

Detector mode: Average

Polarity: Vertical

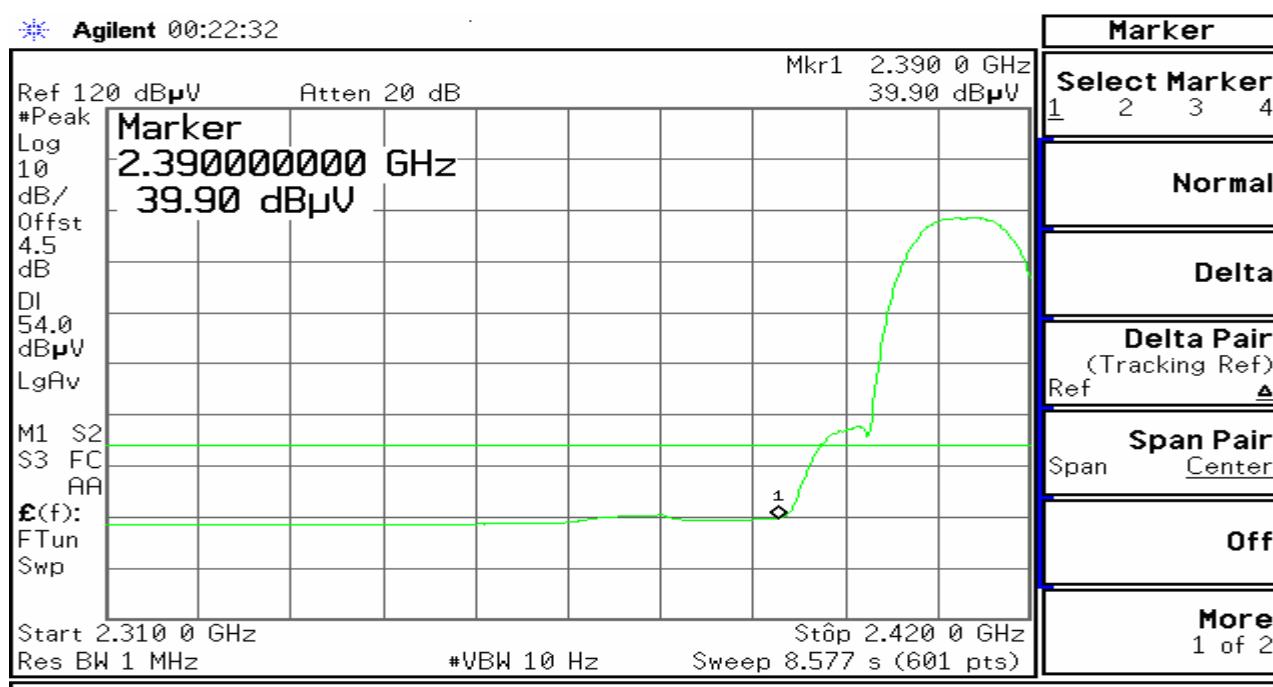




Detector mode: Peak

Polarity: Horizontal



* Agilent 00:28:55

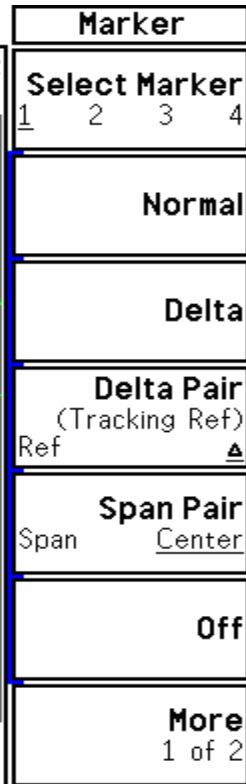

Detector mode: Average

Polarity: Horizontal

* Agilent 00:29:48

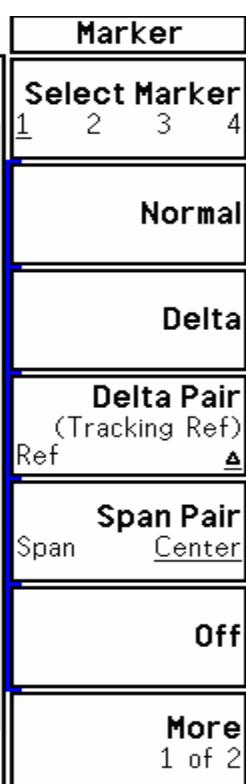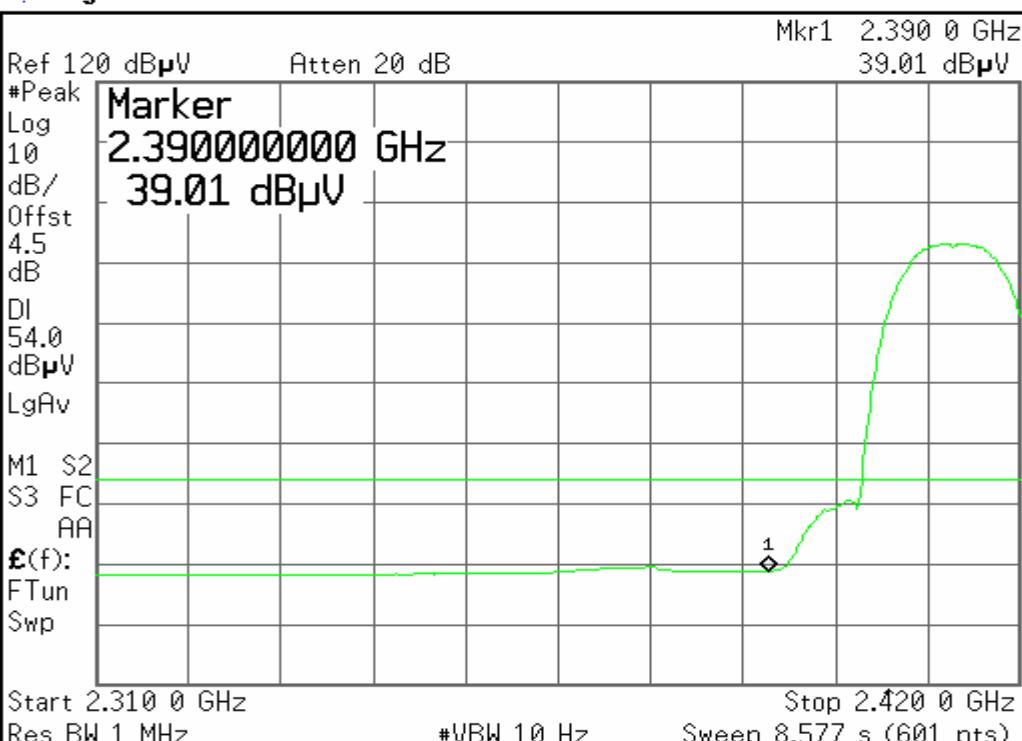


File Operation Status, A:\SCREN023.GIF file saved



Band Edges (CH High)


Detector mode: Peak

Polarity: Vertical

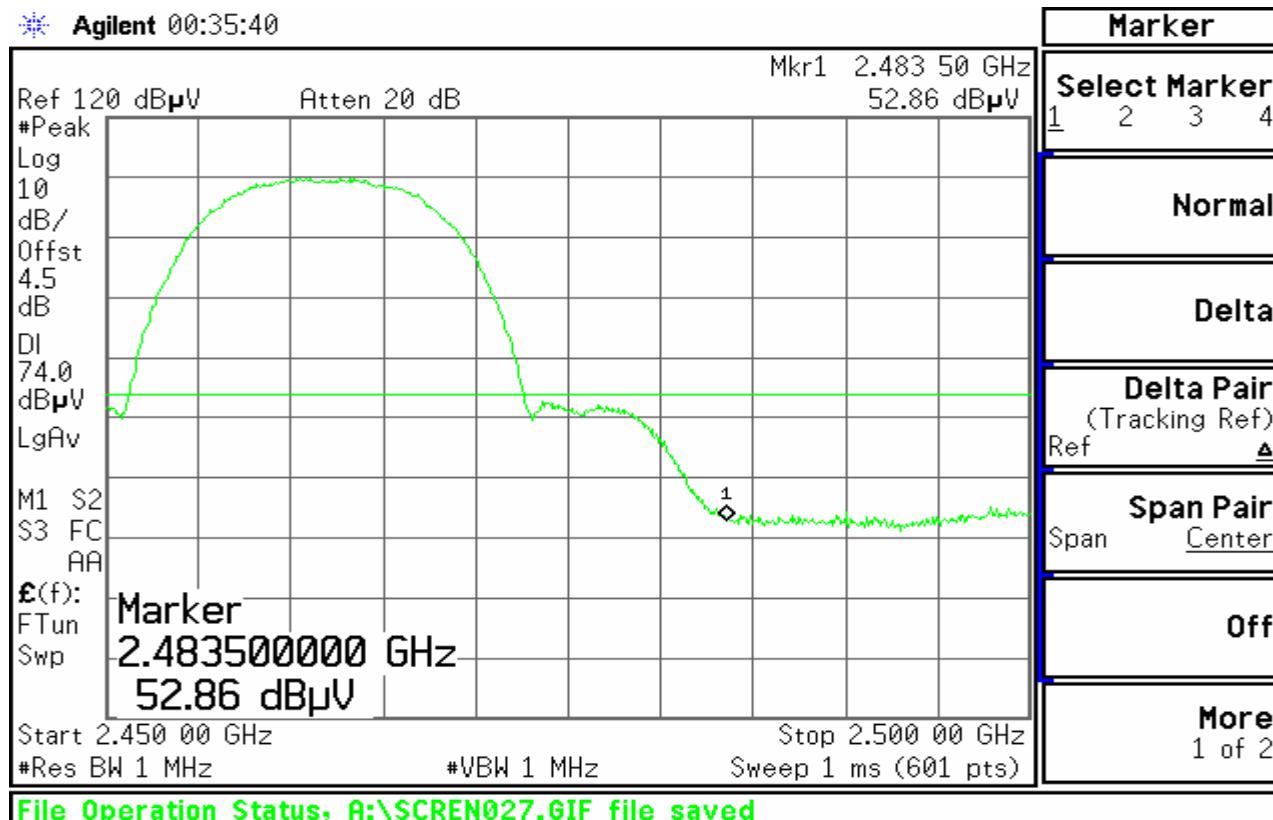

Detector mode: Average

Polarity: Vertical

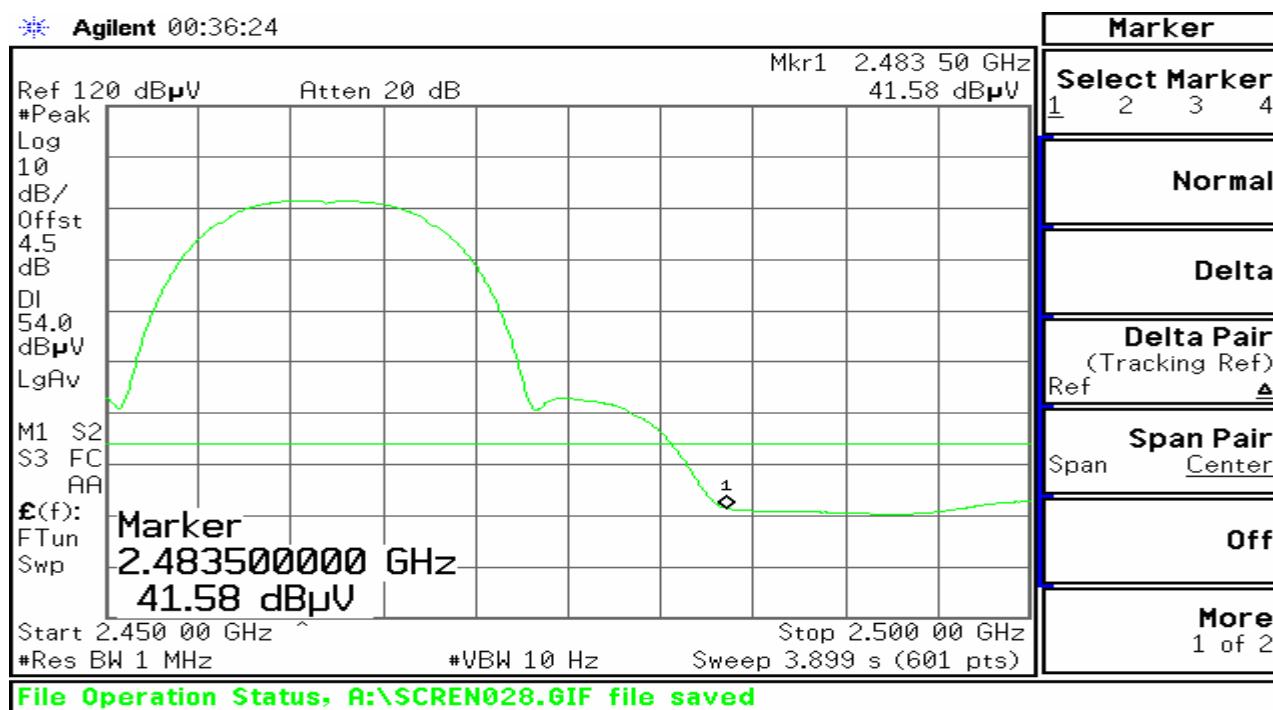




Detector mode: Peak

Polarity: Horizontal

* Agilent 00:41:42

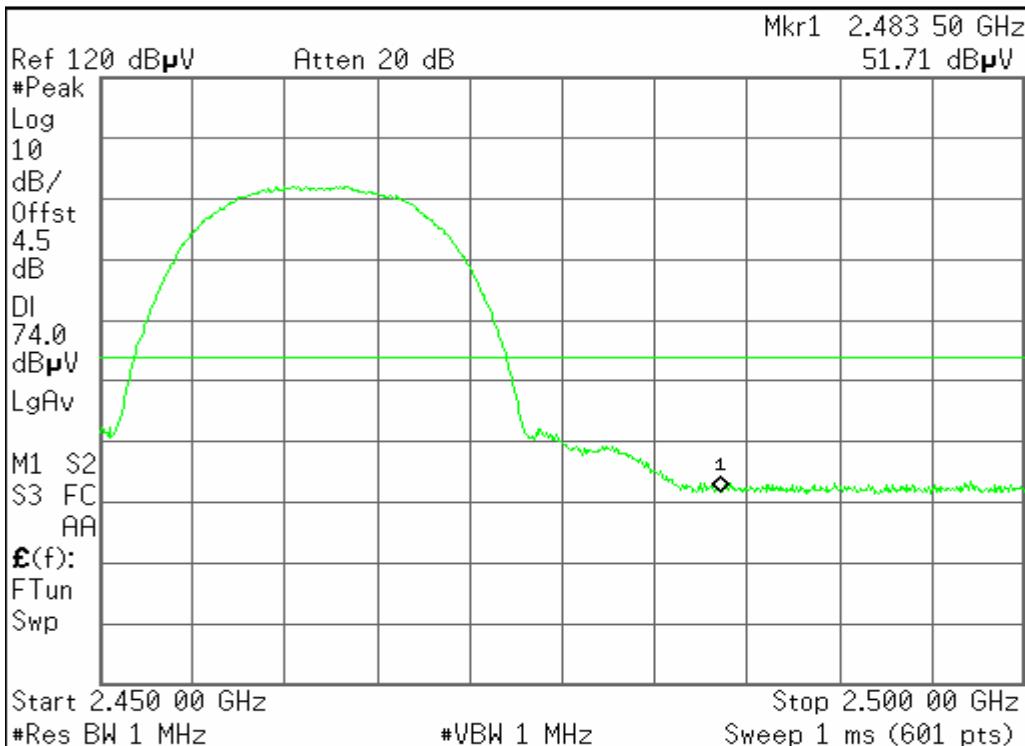


File Operation Status, A:\SCREN029.GIF file saved

Detector mode: Average

Polarity: Horizontal

* Agilent 00:42:15

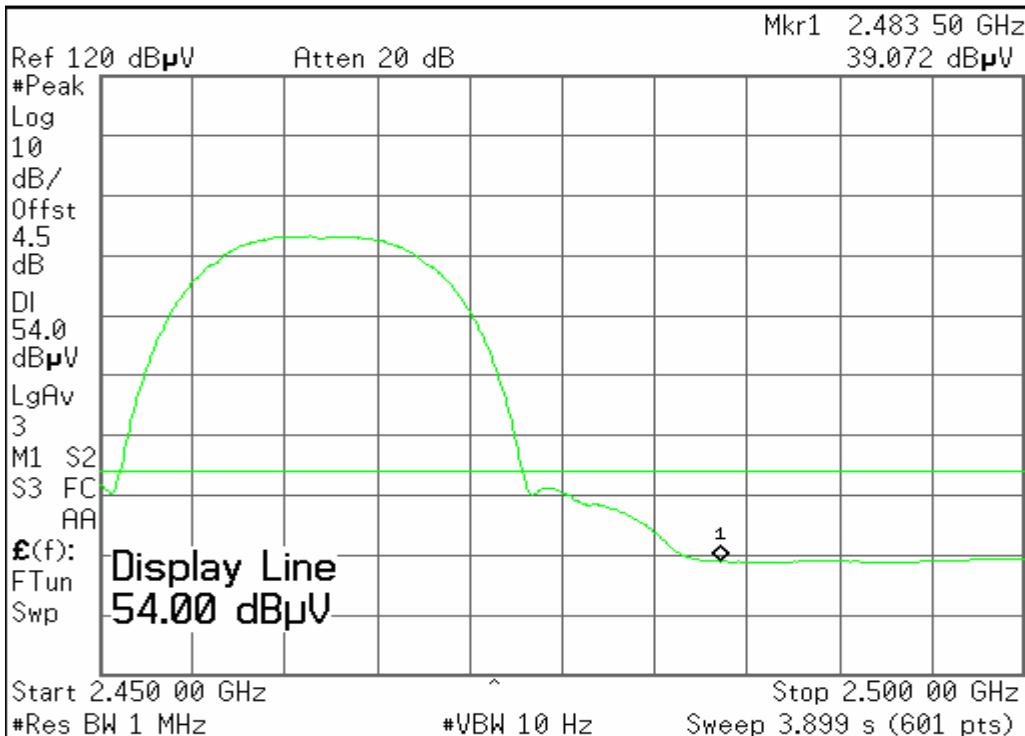

File Operation Status, A:\SCREN030.GIF file saved




Test Data

Test Plot (IEEE 802.11g mode)

Test Plot (IEEE 802.11g mode)**Band Edges (CH Low)**


Detector mode: Peak

Polarity: Vertical

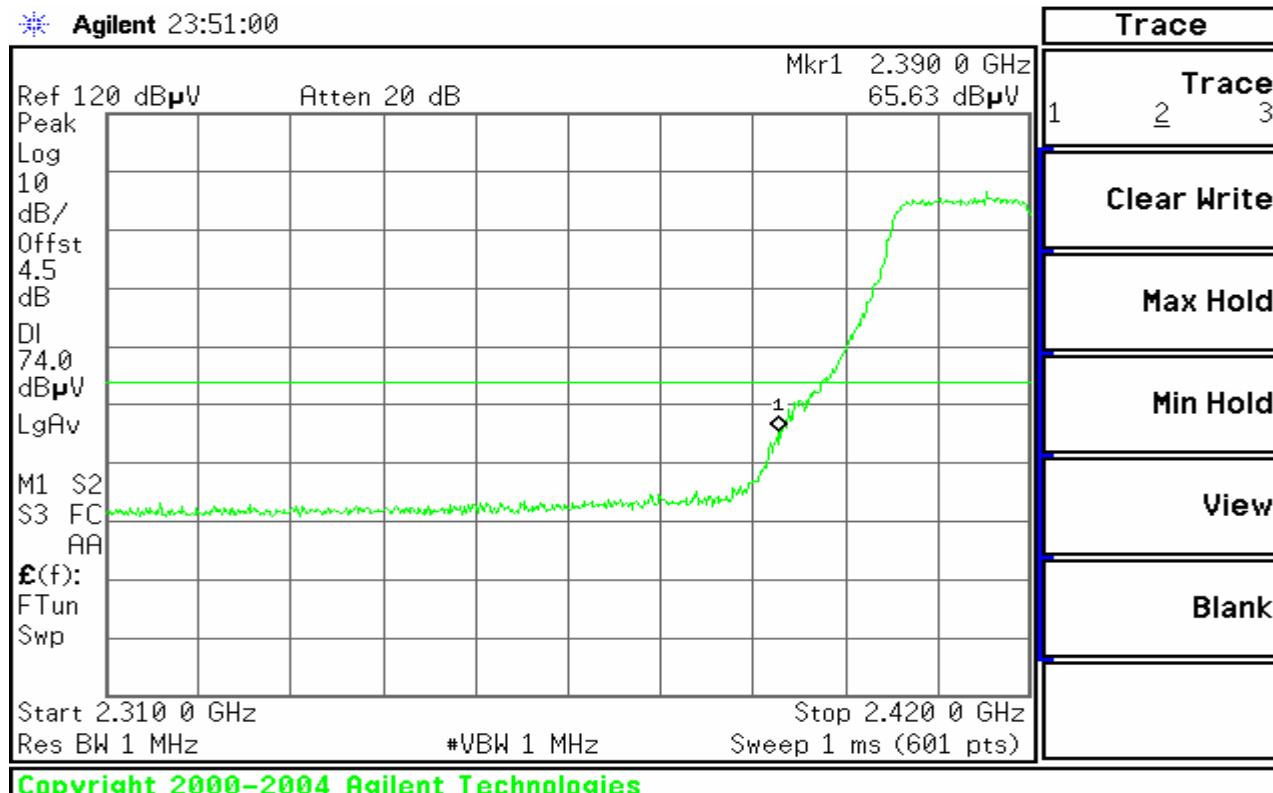

Detector mode: Average



Polarity: Vertical

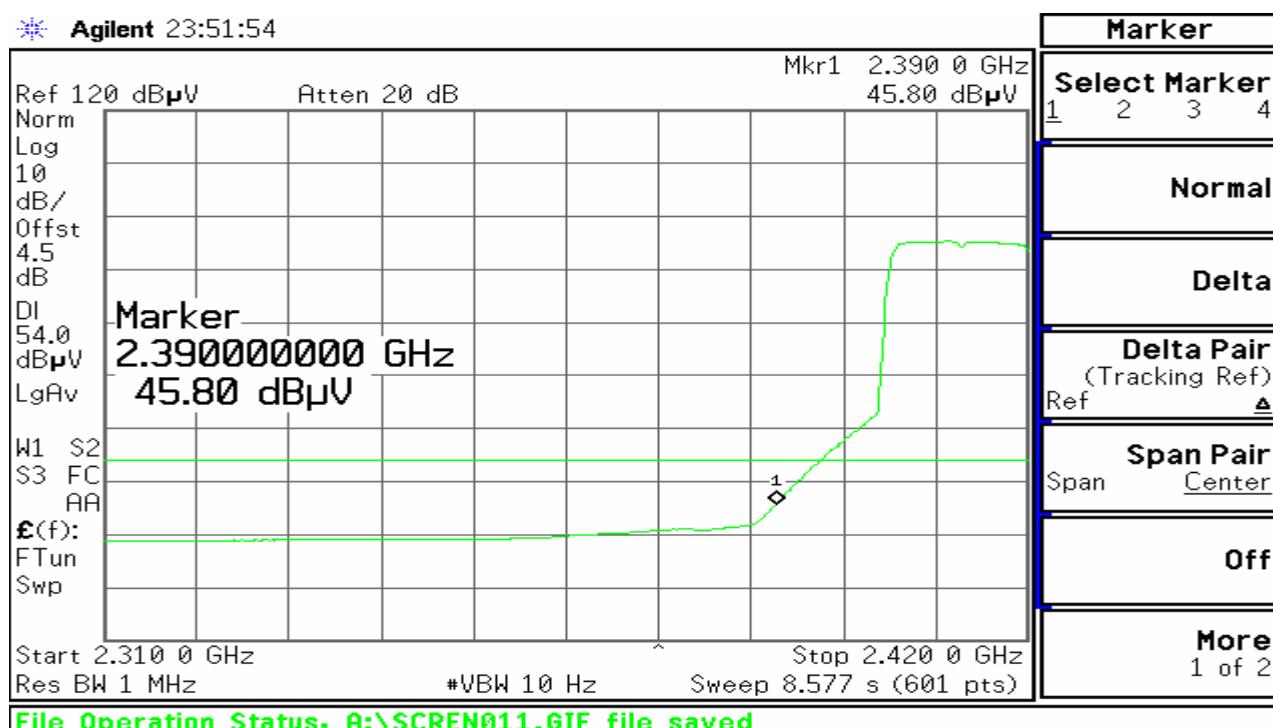

Detector mode: Peak

Polarity: Horizontal

* Agilent 00:12:08

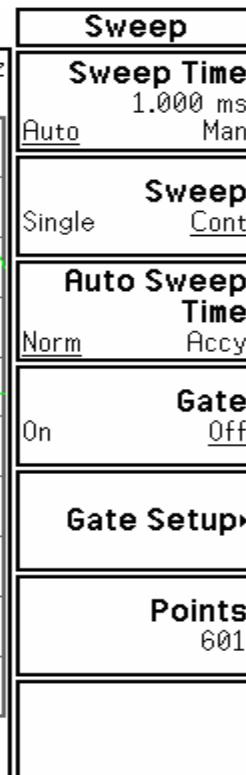
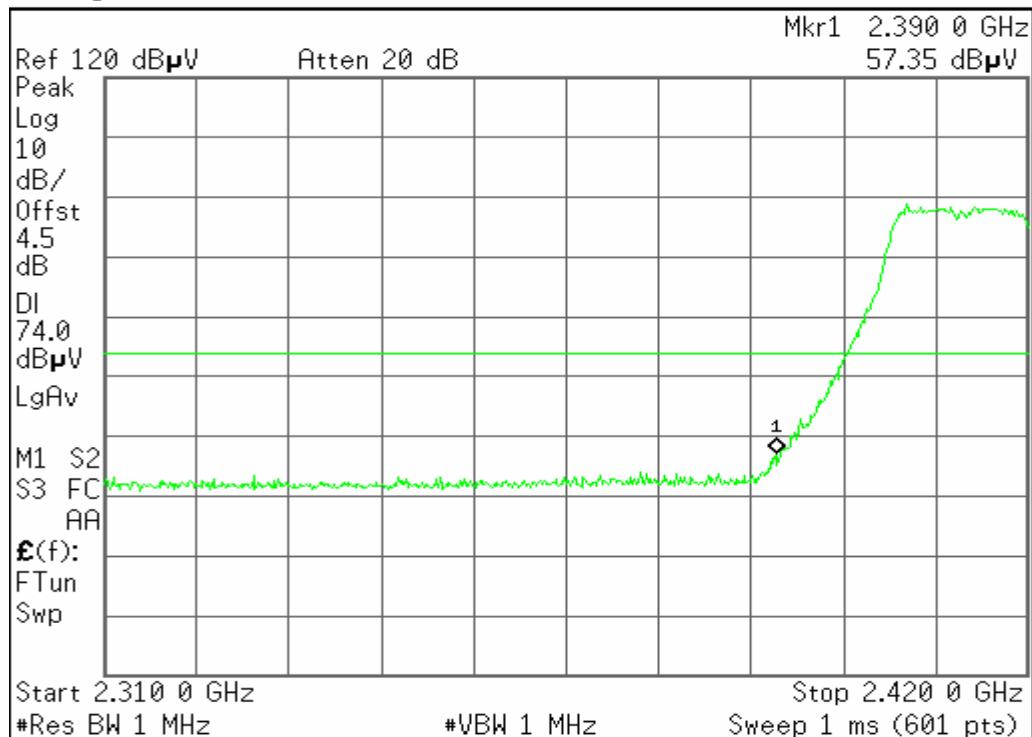


File Operation Status, A:\SCREN016.GIF file saved

Detector mode: Average

Polarity: Horizontal

* Agilent 00:12:40

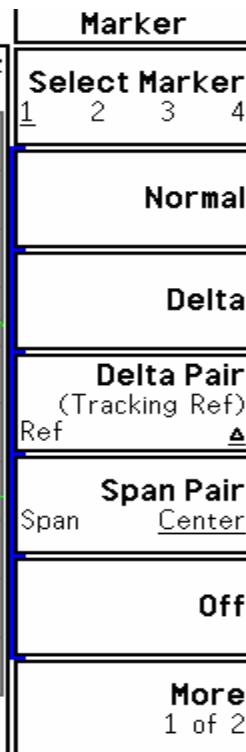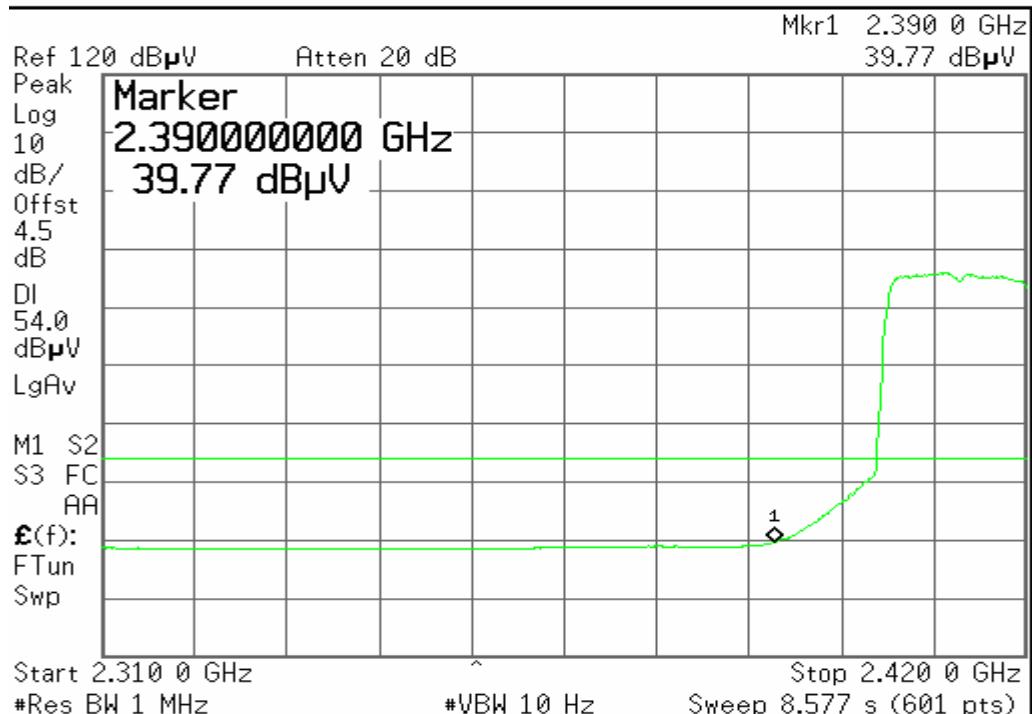


File Operation Status, A:\SCREN017.GIF file saved



Band Edges (CH High)


Detector mode: Peak

Polarity: Vertical

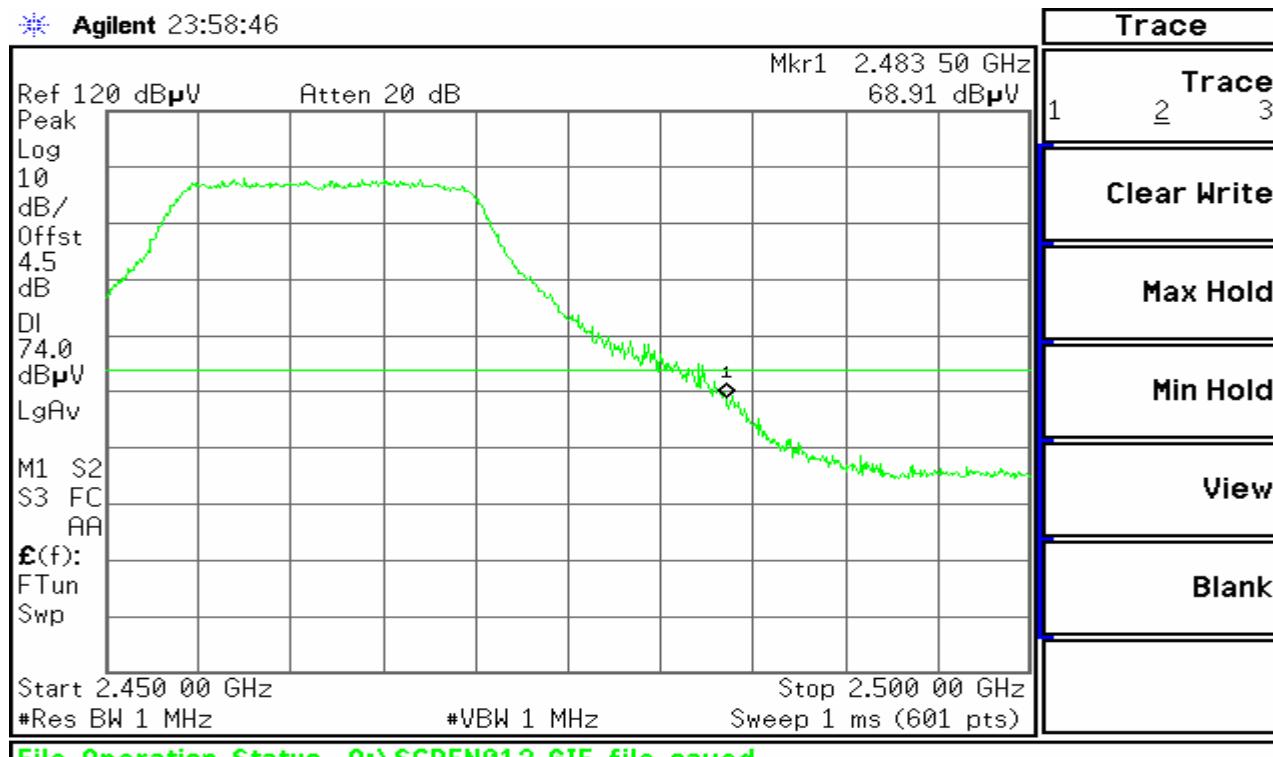


Detector mode: Average

Polarity: Vertical

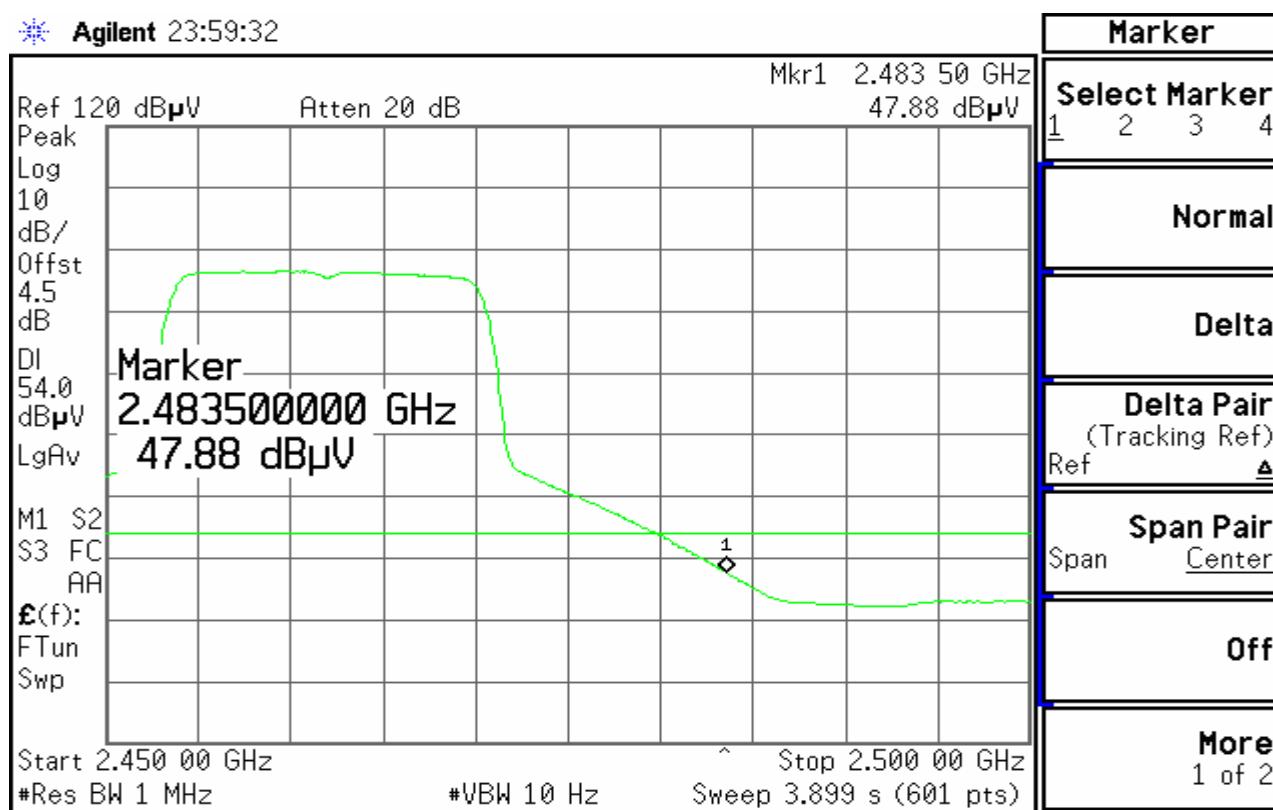


Detector mode: Peak

Polarity: Horizontal

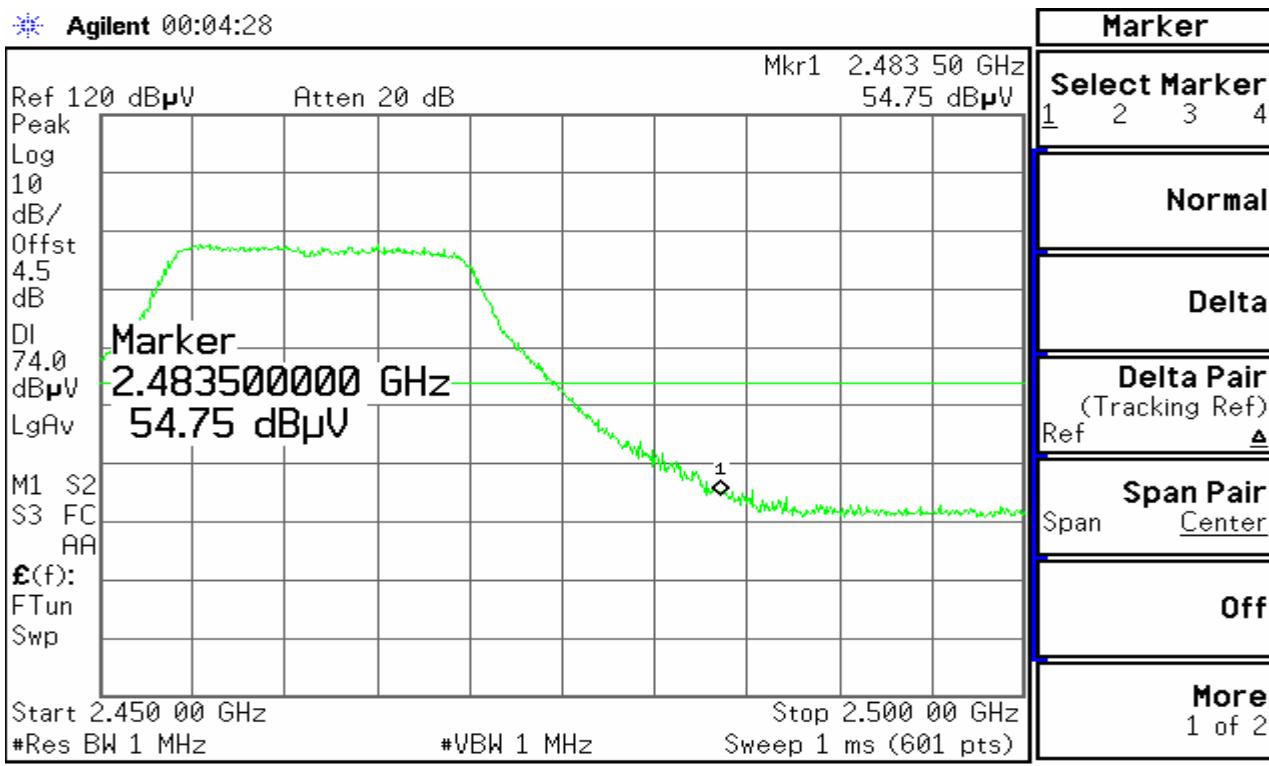

Detector mode: Average

Polarity: Horizontal

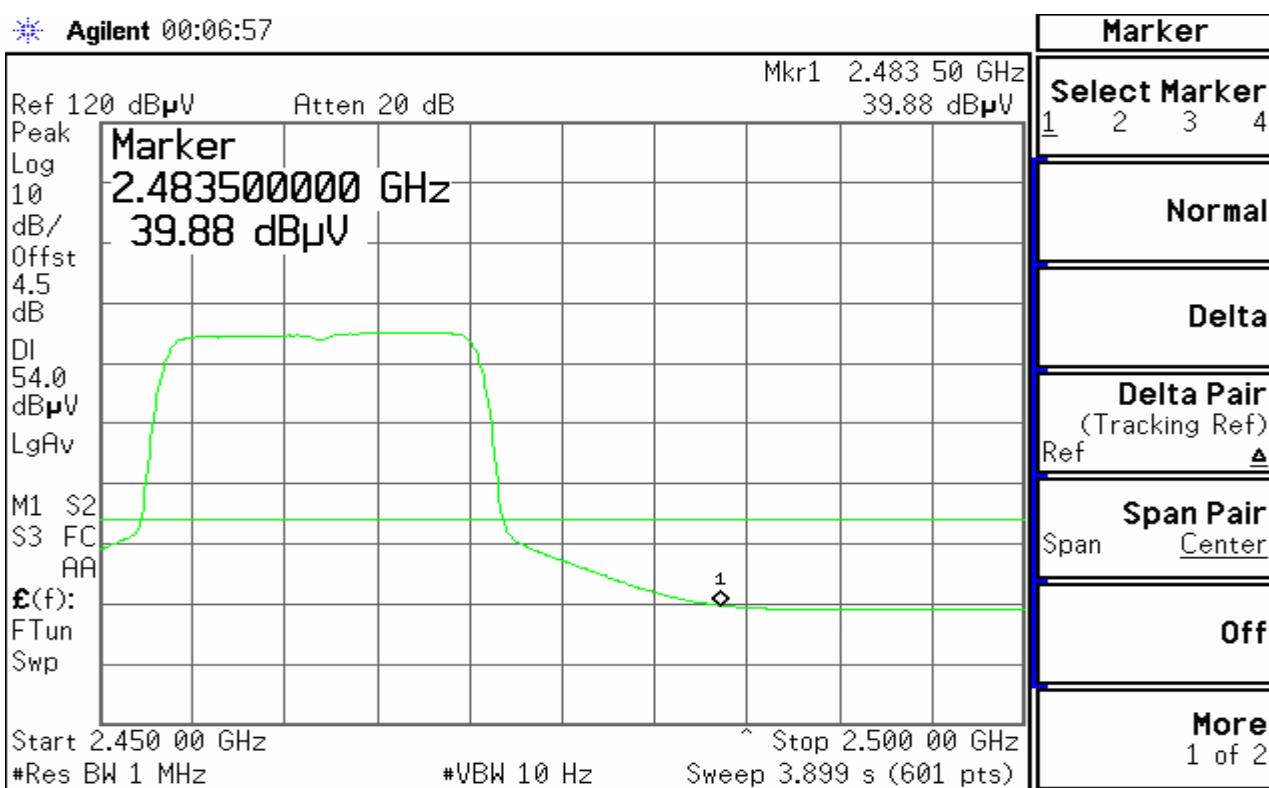



7.6. PEAK POWER SPECTRAL DENSITY MEASUREMENT

7.6.1. LIMITS

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.


7.6.2. TEST INSTRUMENTS

| Conducted Emissions Test Site | | | | |
|-------------------------------|--------------|--------|---------------|-----------------|
| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Due |
| Spectrum Analyzer | Agilent | E4446A | MY44020154 | 08/15/2008 |

7.6.3. TEST PROCEDURES (please refer to measurement standard)

1. Place the EUT on the table and set it in transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 300kHz, Sweep=100s
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

7.6.4. TEST SETUP

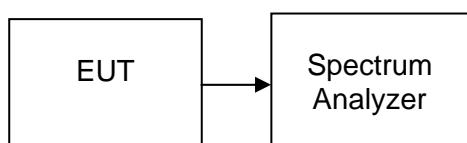



7.6.5. TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b

| Channel | Frequency (MHz) | PPSD (dBm) | Limit (dBm) | Test Result |
|---------|-----------------|------------|-------------|-------------|
| Low | 2412 | -5.16 | 8.00 | PASS |
| Mid | 2437 | -5.01 | | PASS |
| High | 2462 | -4.70 | | PASS |


Test mode: IEEE 802.11g

| Channel | Frequency (MHz) | PPSD (dBm) | Limit (dBm) | Test Result |
|---------|-----------------|------------|-------------|-------------|
| Low | 2412 | -11.66 | 8.00 | PASS |
| Mid | 2437 | -12.79 | | PASS |
| High | 2462 | -12.59 | | PASS |




Test Plot (IEEE 802.11b mode)

PPSD (CH Low)

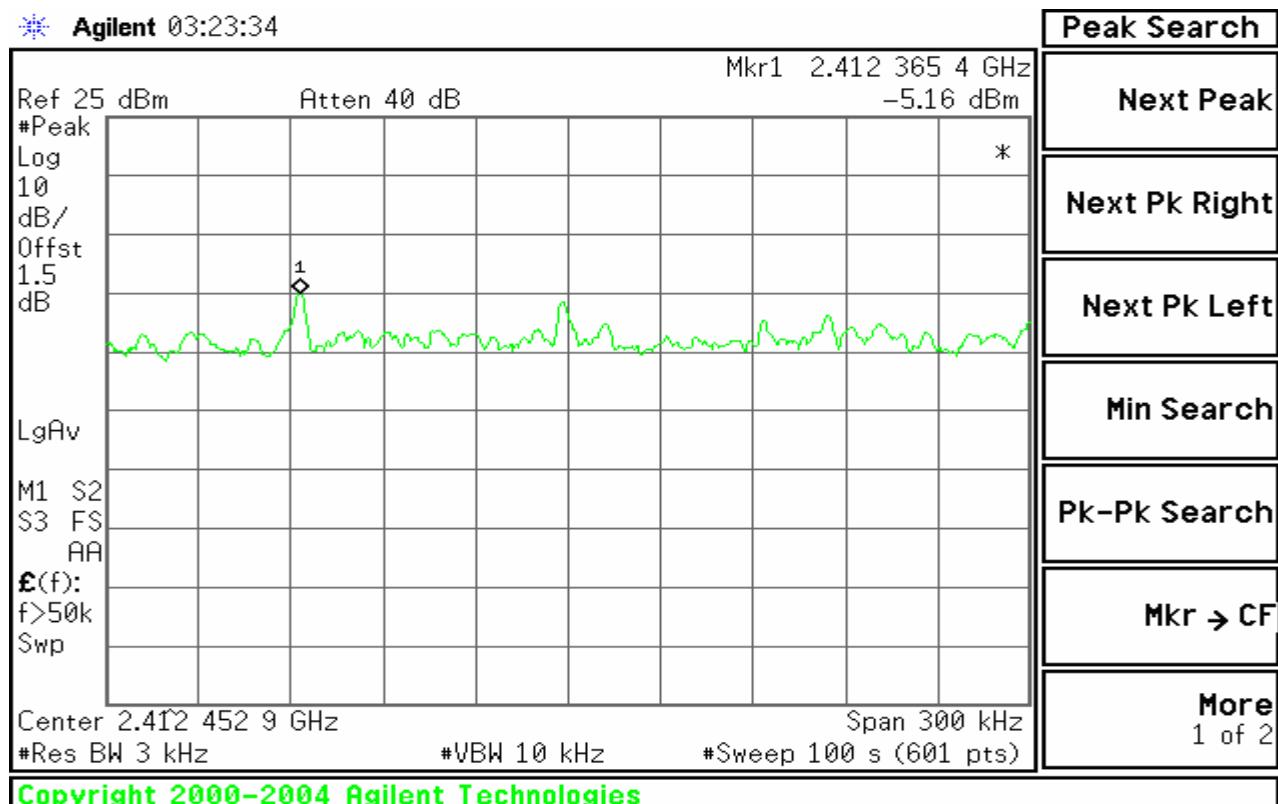


PPSD (CH Mid)

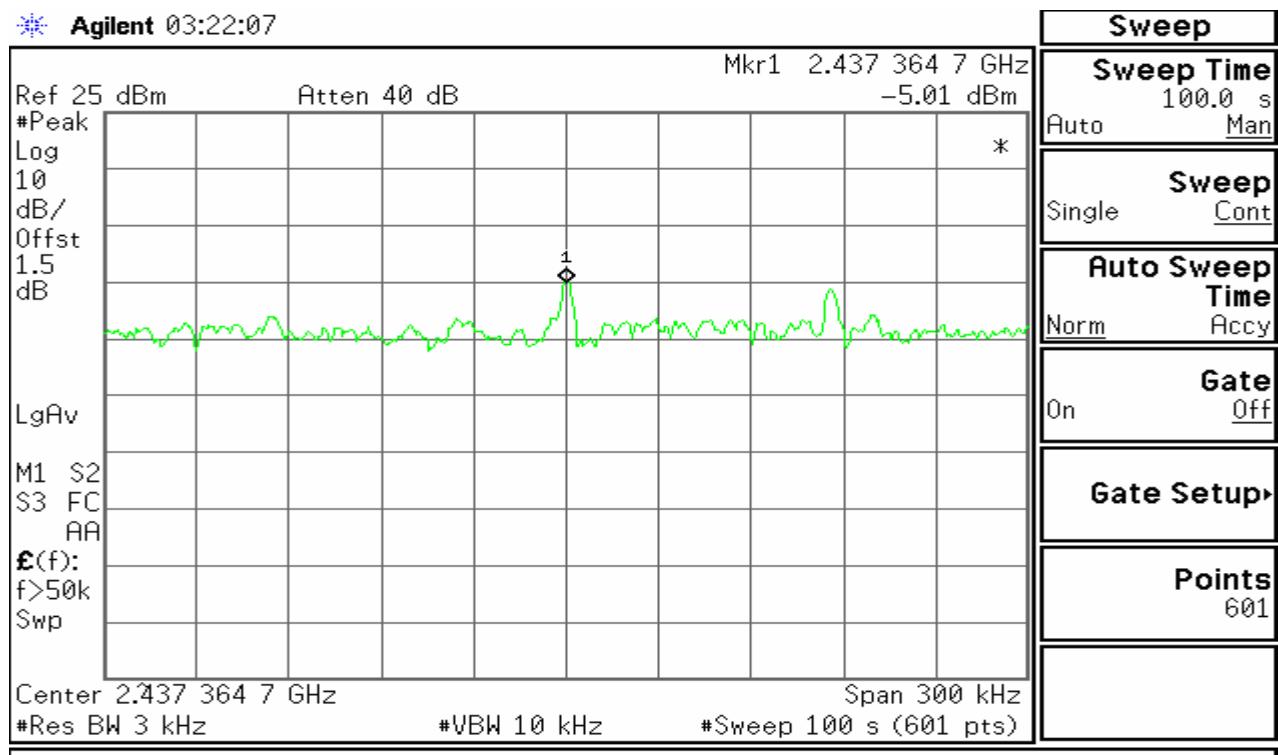




PPSD (CH High)

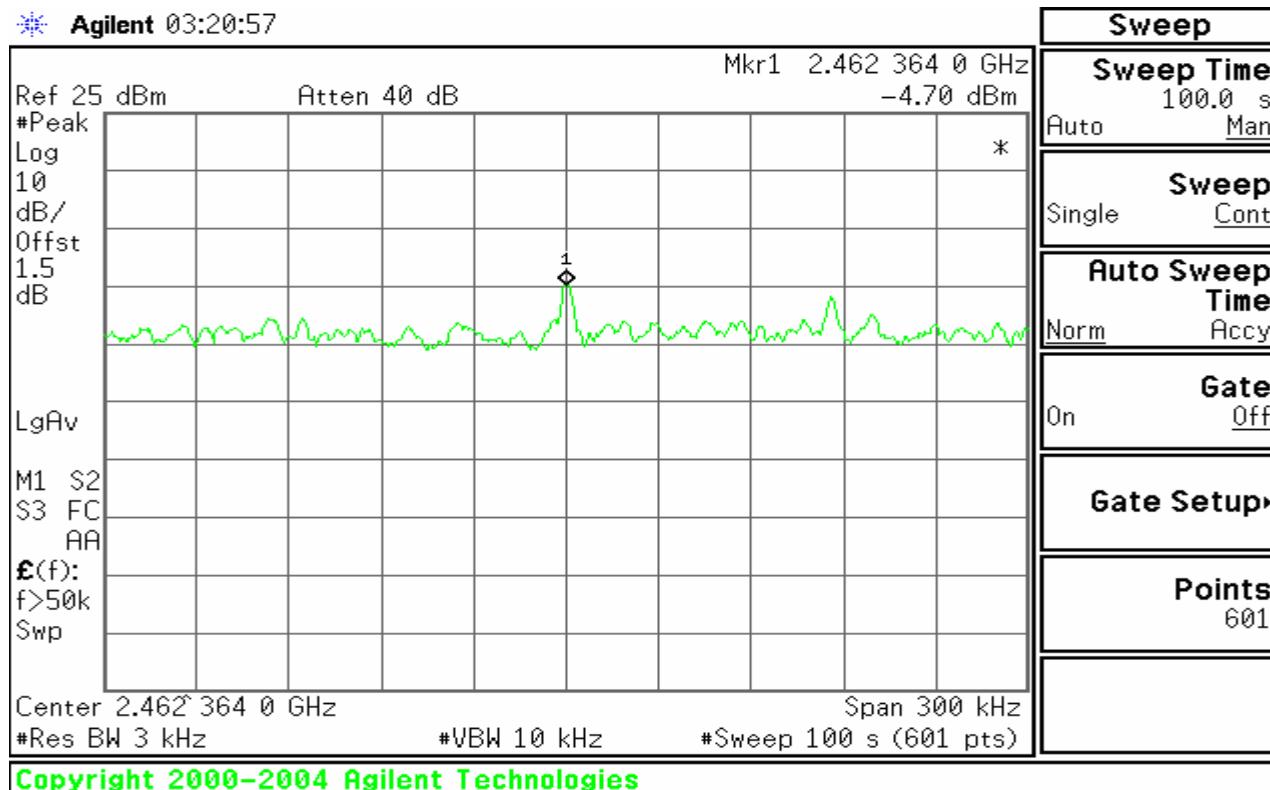

Test Plot (IEEE 802.11g mode)


PPSD (CH Low)

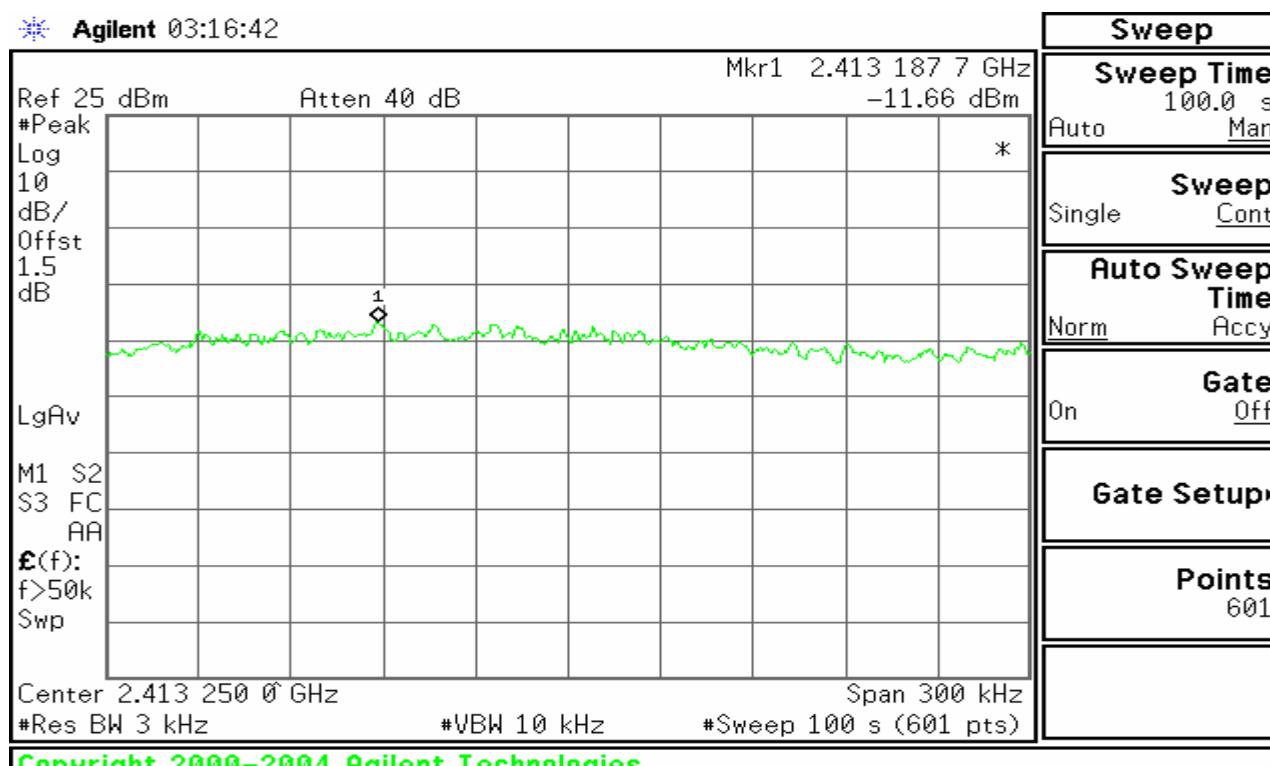



PPSD (CH Mid)

* Agilent 03:17:55

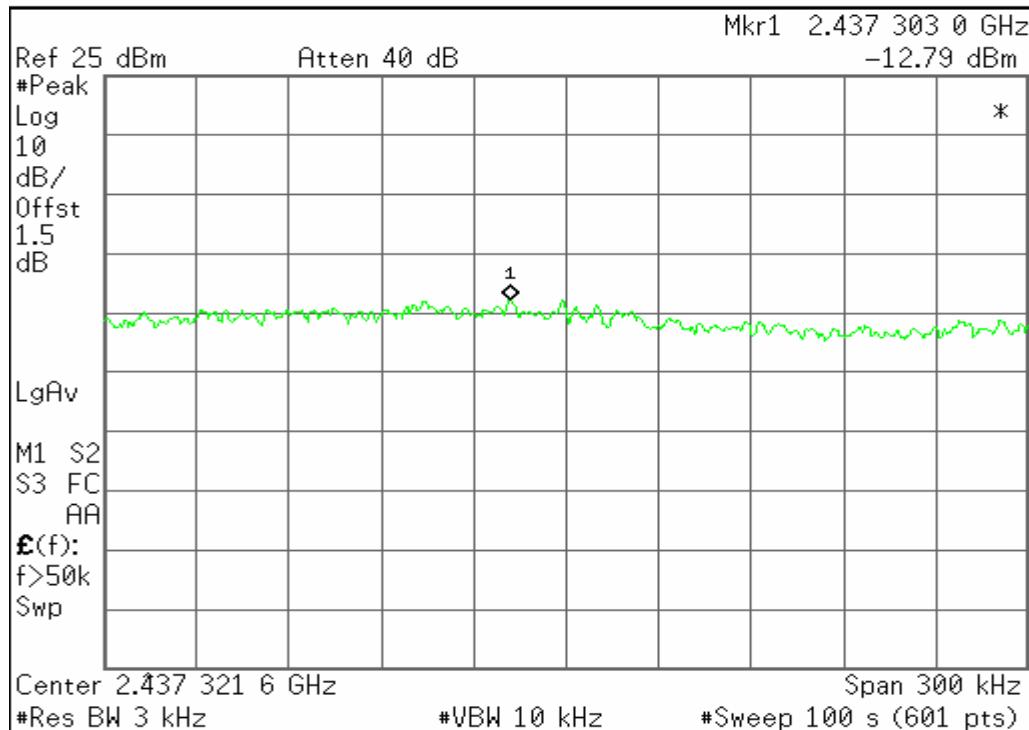


Sweep
Sweep Time
100.0 s
Auto Man
Sweep
Single Cont
Auto Sweep
Time Norm Accy
Gate
On Off
Gate Setup
Points
601

Copyright 2000-2004 Agilent Technologies

PPSD (CH High)

* Agilent 03:19:00

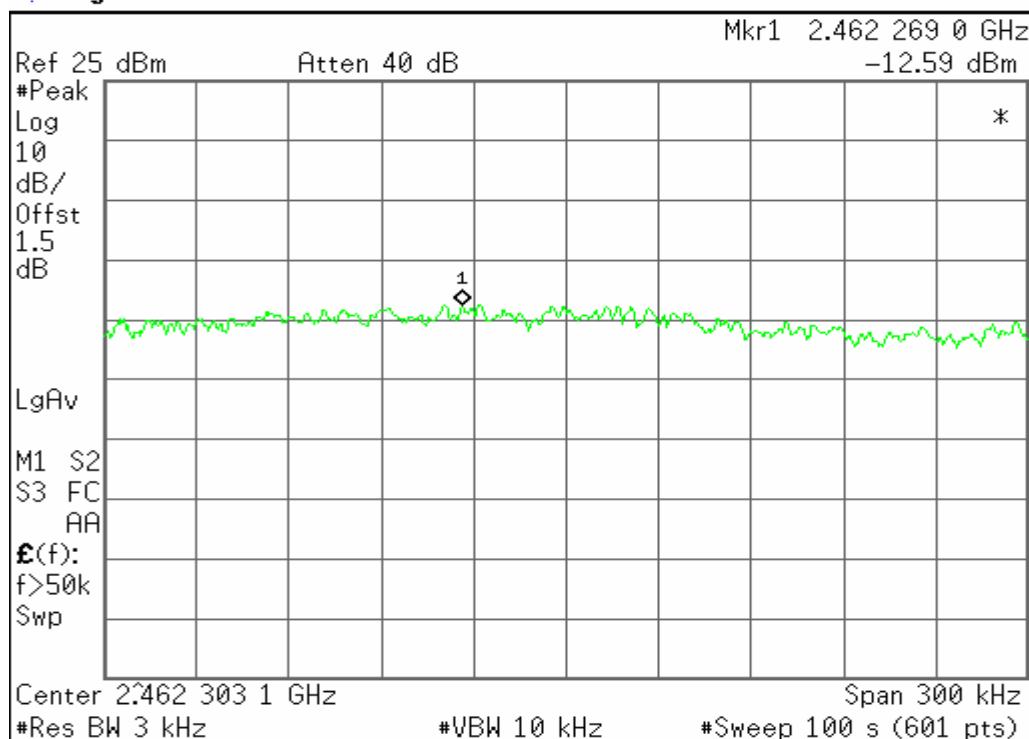

Peak Search
Next Peak
Next Pk Right
Next Pk Left
Min Search
Pk-Pk Search
Mkr → CF
More
1 of 2

Copyright 2000-2004 Agilent Technologies



APPENDIX I RADIO FREQUENCY EXPOSURE

LIMIT

According to §15.247(i), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this chapter.

EUT Specification

| | |
|-----------------------------------|--|
| EUT | Wireless access point |
| Frequency band (Operating) | <input checked="" type="checkbox"/> WLAN: 2.412GHz ~ 2.462GHz <input type="checkbox"/> WLAN: 5.18GHz ~ 5.32GHz / 5.50GHz ~ 5.70GHz <input type="checkbox"/> WLAN: 5.745GHz ~ 5.825GHz <input type="checkbox"/> Bluetooth: <u>2.402GHz ~ 2.480 GHz</u> |
| Device category | <input type="checkbox"/> Portable (<20cm separation) <input checked="" type="checkbox"/> Mobile (>20cm separation) |
| Exposure classification | <input type="checkbox"/> Occupational/Controlled exposure ($S = 5\text{mW/cm}^2$) <input checked="" type="checkbox"/> General Population/Uncontrolled exposure ($S=1\text{mW/cm}^2$) |
| Antenna diversity | <input type="checkbox"/> Single antenna <input checked="" type="checkbox"/> Multiple antennas <input type="checkbox"/> Tx diversity <input type="checkbox"/> Rx diversity <input checked="" type="checkbox"/> Tx/Rx diversity |
| Max. output power | IEEE 802.11b: 17.64 dBm (58.08mW) IEEE 802.11g: 16.58 dBm (45.50mW) |
| Antenna gain (Max) | 1.92dBi (Numeric gain: 1.56) |
| Evaluation applied | <input checked="" type="checkbox"/> MPE Evaluation* <input type="checkbox"/> SAR Evaluation <input type="checkbox"/> N/A |

Remark:

1. The maximum output power is 17.64dBm (58.08mW) at 2462MHz (with 1.56 numeric antenna gain.)
2. DTS device is not subject to routine RF evaluation; MPE estimate is used to justify the compliance.
3. For mobile or fixed location transmitters, no SAR consideration applied. The maximum power density is 1.0 mW/cm^2 even if the calculation indicates that the power density would be larger.



TEST RESULTS

No non-compliance noted.

Calculation

$$\text{Given } E = \frac{\sqrt{30 \times P \times G}}{d} \quad \& \quad S = \frac{E^2}{3770}$$

Where E = Field strength in Volts / meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power density in milliwatts / square centimeter

Combining equations and re-arranging the terms to express the distance as a function of the remaining variables yields:

$$S = \frac{30 \times P \times G}{3770 d^2}$$

Changing to units of mW and cm, using:

P (mW) = P (W) / 1000 and

d (cm) = d (m) / 100

Yields

$$S = \frac{30 \times (P/1000) \times G}{3770 \times (d/100)^2} = 0.0796 \times \frac{P \times G}{d^2} \quad \text{Equation 1}$$

Where d = Distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power density in mW / cm²

Maximum Permissible Exposure

EUT output power = 58.08mW

Numeric Antenna gain = 1.56

Substituting the MPE safe distance using $d = 20$ cm into Equation 1:

Yields

$$S = 0.000199 \times P \times G$$

Where P = Power in mW

G = Numeric antenna gain

S = Power density in mW / cm²

* Power density = 0.018mW / cm²