

Test Report
And Application for Grant of Equipment Authorization

TEST REPORT PERTAINING TO:

Equipment Under Test	Model Number(s)
SM-17 Smart Monitor	RD-FW7874-11

CONFIGURATION

Tested with an Intel PRO/Wireless 2915ABG Network Connection
with a Panasonic PIFA Type Antenna

MEASUREMENTS PERFORMED IN ACCORDANCE WITH THE FOLLOWING STANDARD (S)

Regulatory Standard(s)

47 CFR Part 15, Subpart E Section 15.407 (UNII Devices)

Test Method:

ANSI C63.4: 2003 American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz



Certificate Number: 1111.01

PREPARED FOR:

Panasonic Avionics
26200 Enterprise Way
Lake Forest, CA 92630
Contact(s): Mr. William Wallace

PREPARED BY:

Aegis Labs, Inc.
8 Rancho Circle
Lake Forest, CA 92630
Agent(s): Mr. Rick Candelas
Mr. Johnny Candelas



Test Report #: PANAS-070131F

Test Report Revision: NONE

	REPORT BODY	APPENDICES		TOTAL PAGES
		A	B	
PAGES	12	29	1	42

The contents of this report shall not be reproduced except in full, without the written approval of Aegis Labs, Inc.
The Panasonic Avionics logo is used for identification purposes only and is a registered trademark of Panasonic Avionics



TABLE OF CONTENTS

SECTION	TITLE	PAGE
	COVER SHEET.....	01
	TABLE OF CONTENTS.....	02
1.0	REGULATORY COMPLIANCE GUIDELINES.....	03
1.1	Guidelines For Testing To Emissions Standards.....	03
2.0	SUMMARY OF REGULATORY LIMITS.....	04
3.0	ADMINISTRATIVE DATA AND TEST DESCRIPTION.....	06
4.0	DESCRIPTION OF EUT CONFIGURATION.....	07
4.1	EUT Description	07
4.2	EUT Configuration.....	08
4.3	List of EUT Sub-Assemblies and Host Equipment.....	09
4.4	I/O Cabling Diagram and Description	10
4.5	EMC Test Hardware and Software Measurement Equipment.....	11
5.0	CONDITIONS DURING EMISSIONS MEASUREMENTS.....	12
5.1	General.....	12
5.2	Radiated Emissions Test Setup.....	12

APPENDICES

A	Test Data
B	Modifications And Recommendations



1.0 REGULATORY COMPLIANCE GUIDELINES

Aegis Labs, Inc. operates as both a Nevada and California Corporation with no organizational or financial relationship with any company, institution, or private individual. Testing and engineering functions provided by Aegis Labs were furnished by RF technicians and engineers with accredited qualifications and training credentials to carry out their duties.

The object of this report was to publish verifiable test results of an EUT subjected to the tests outlined in the standard listed on the cover page of this report.

1.1 Guidelines For Testing To Emissions Standards

This standard for EMC emission requirements apply to electrical equipment for Information Technology Equipment (ITE). Compliance to these standards and in combination with the other standards listed in this test report can be used to demonstrate presumption of compliance with the protection requirements of the appropriate agency standard.

The purpose of this standard is to specify minimum requirements for emissions regarding electromagnetic compatibility (EMC) and protect the radio frequency spectrum 9 kHz. – 400 GHz. from unwanted interference generated from electrical/digital systems that intentionally or unintentionally generated RF energy. The emissions standards, normative documents and/or publications were used to conduct all tests performed on the equipment herein referred to as “Equipment Under Test”.



2.0 SUMMARY OF TEST RESULTS

802.11a Mode (5150-5250 MHz)

EMISSIONS STANDARD			
FCC Part 15 Section	Description	Results	Comments
Operation in the 5.15-5.25 GHz Band			
15.407(d)	Any UNII device shall use a transmitting antenna that is an integral part of the device.	PASSED	The antenna will be integral when installed in a notebook computer
15.407(e)	UNII devices will be restricted to indoor operations.	PASSED	Refer to "User's Manual" Exhibit
15.407(a)(1)	26dB emissions bandwidth in MHz.	N/A	5.18 GHz = 23.42 MHz 5.24 GHz = 23.17 MHz
15.407(a)(1)	Peak transmit power shall not exceed the lesser of 50mW or 4dBm+10logB (where B = 26dB emissions bandwidth).	PASSED	5.18 GHz = 16.80dBm (47.86mW) 5.24 GHz = 16.90dBm (48.98mW)
15.407(a)(1)	The peak power spectral density shall not exceed 4dBm in any 1MHz band.	PASSED	5.18 GHz = 2.17dBm 5.24 GHz = 3.00dBm
15.407(a)(1)	Peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the transmitting antenna exceeds 6dBi.	N/A	All antennas tested have less than 6dBi antenna gain (Please see the antenna data sheets)
15.407(b)(1)	All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.	PASSED	See Data Sheets
General Requirements For All Bands			
15.407(a)(6)	The ratio of the peak excursion of the modulation envelope to the peak transmit power shall not exceed 13dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.	PASSED	5.18 GHz = 8.33 dB 5.24 GHz = 8.17 dB
15.407(f)	Radio frequency radiation exposure requirement.	PASSED	Refer to SAR Test Report
15.407(b)(6) 15.209	Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209.	PASSED	See Data Sheets




2.0 Summary Of Test Results (Continued)

ANALYSIS AND CONCLUSIONS

Based upon the measurement results we find that this equipment is within the limits of the global standards listed on the cover page of this test report. All results are based on a test of one sample. If any significant changes are made to the unit, the changes shall be evaluated and a retest may be required.


Approval Signatories

Test and Report Completed By:



Johnny Candelas **04/25/07**
Test Technician **Date:**
Aegis Labs, Inc.

Report Approved By:



Rick Candelas **05/02/07**
Quality Assurance & EMC Lab Manager **Date:**
Aegis Labs, Inc.



3.0 ADMINISTRATIVE DATA AND TEST DESCRIPTION

DEVICE TESTED:	ITE Type: SM-17 Smart Monitor Model Number(s): RD-FW7874-11 Serial Number: D387286 FCC ID: U6YRD-FW7874
DATE EUT RECEIVED:	April 10 th , 2007
TEST DATE(S):	April 10 th – 23 rd , 2007
ORIGIN OF TEST SAMPLE(S):	Production
EQUIPMENT CLASS:	EUT tested as CLASS B device
RESPONSIBLE PARTY:	Panasonic Avionics 26200 Enterprise Way Lake Forest, CA 92630
CLIENT CONTACT:	Mr. William Wallace
MANUFACTURER:	Panasonic Avionics
TEST LOCATION:	Aegis Labs, Inc. 32231 Trabuco Creek Road Trabuco Canyon, CA 92678 Open Area Test Site #1& #2
ACCREDITATION CERTIFICATE(S):	A2LA Certificate Number: 1111.01, Valid through February 28, 2008
PURPOSE OF TEST:	To demonstrate compliance with the standards as described in Sections 1.0 & 2.0 of this report.
UNCERTAINTY BUDGET:	Proficiency Testing and Uncertainty Calculations for all tests indicated in this report have been conducted in accordance with ISO 17025: 2005 requirements Section 5.4.6, and 5.9. Uncertainty Budgets and Proficiency Test results available upon request.
STATEMENT OF CALIBRATION:	All accredited equipment calibrations were performed by Liberty Labs, Inc. and World Cal. with typical calibration uncertainty estimates derived from ISO Guide to the determination of uncertainties with a Coverage Factor of k=2 for 95% level of confidence.

4.0 DESCRIPTION OF EUT CONFIGURATION

4.1 EUT Description

Equipment Under Test (EUT)	
Trade Name:	SM-17 Smart Monitor
Model Number:	RD-FW7874-11
Frequency Range:	802.11a = 5.15-5.25 GHz
Enclosure:	The EUT contains it's own shield made of aluminum approximately 3.5cm wide by 3.5cm deep by 2mm high.
Transfer Rate:	6/36/54 Mbps for 802.11a mode
Antenna Type:	PIFA
Antenna Gain (See Note 2):	Panasonic Antenna @ 5 GHz = 0.01 dB
Transmit Output Power:	Please see Appendix A (Data Sheets) for actual output power.
Power Supply:	28VDC
Number of External Test Ports Exercised:	1 Antenna Port

The SM-17 is a device designed to provide video entertainment for one seat in the business class of an aircraft. It will be installed in a swing arm that comes out from the side of the seat. An 802.11abg radio module (Intel PRO/Wireless 2915ABG) will be integrated in the chassis of the SM-17 and the transmitter/receiving antenna is mounted at the bottom of the display facing the passenger. It is possible the passenger directly in front of the SM-17 monitor may be positioned approximately 3.35 inches from the radiating antennas.

NOTE 1: For a more detailed description, please refer to the manufacture's specifications or User's Manual.

NOTE 2: The EUT was tested with a set of Panasonic Antennas. (Refer to the antenna specifications exhibits).



4.2 EUT Configuration

The EUT was tested with an Intel PRO/Wireless 2915ABG Network Connection (MN: WM3B2915ABG) installed in its Mini PCI slot and was connected to a Panasonic multi-band antenna via its main antenna port. Data for a Panasonic Antenna can be found in Appendix A.

The low, middle, and high channels were tested in 802.11a, b, & g modes. Also, the EUT was tested transmitting from the Main antenna port. The EUT was placed in either continuous transmit or continuous receive mode by a program provided by the Panasonic Avionics (*CRTU Version 3.2.15.0000*).



4.3 List of EUT, Sub-Assemblies and Host Equipment

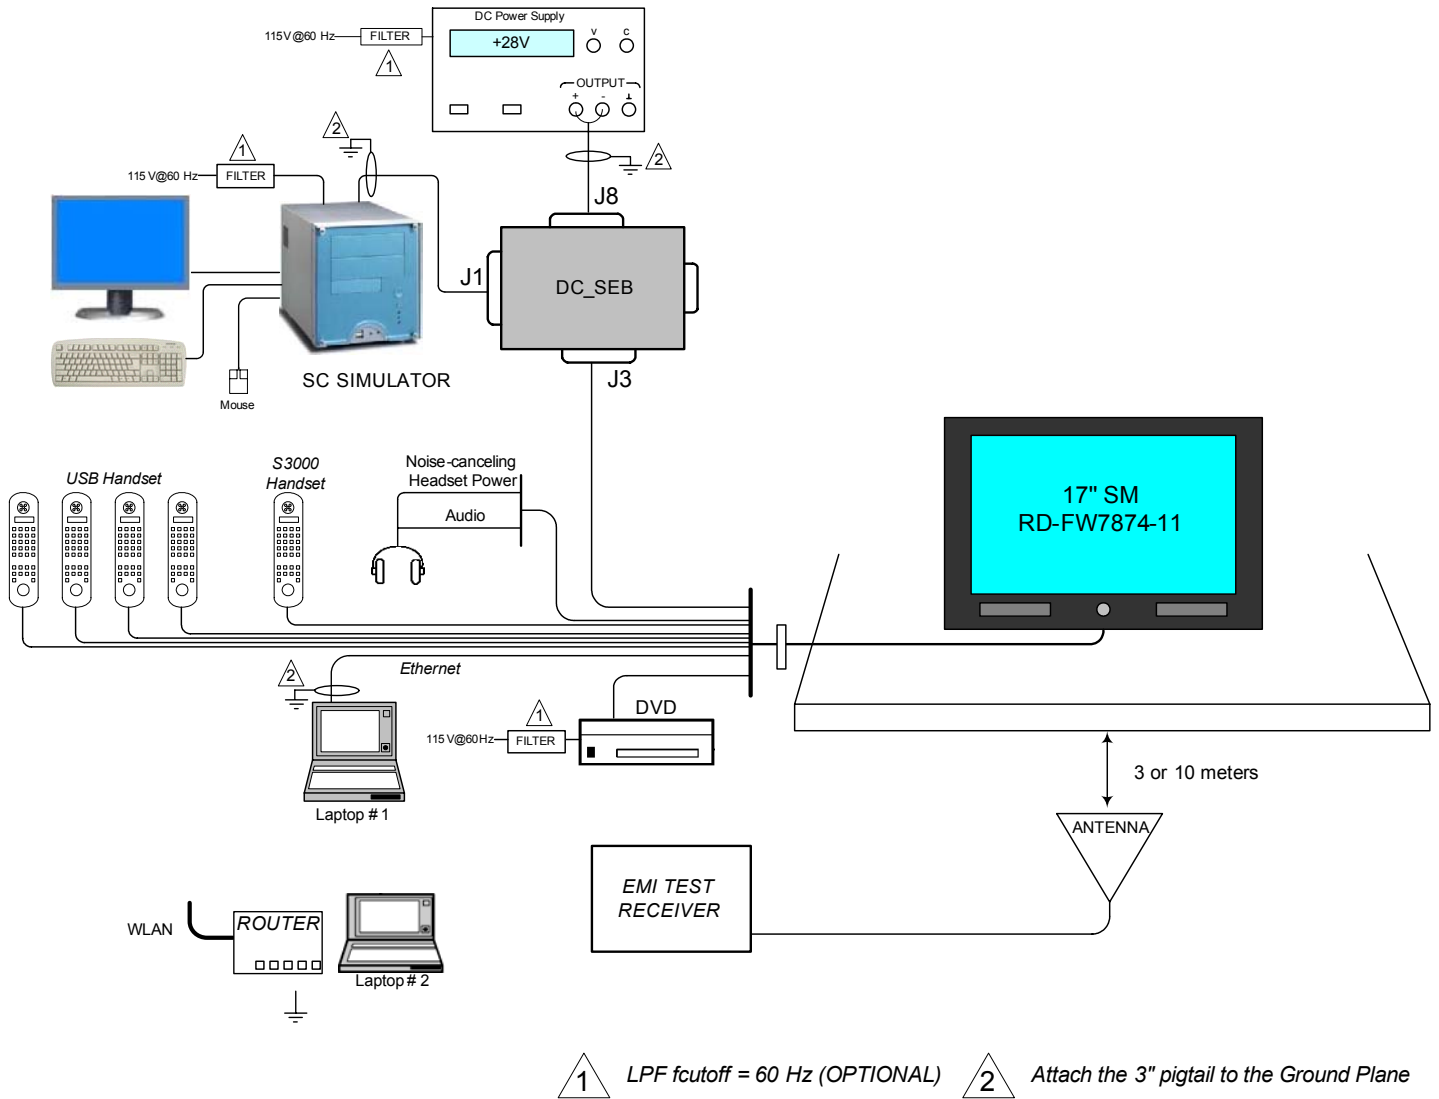
Equipment Under Test			
Manufacturer	Equipment Name	Model or Part Number	Serial Number
Panasonic Avionics	SM-17 Smart Monitor	RD-FW7874-11	D387286

EUT Sub Assemblies			
Manufacturer	Equipment Name	Model or Part Number	Serial Number
Intel Corporation	Intel PRO/Wireless Network Connection	WM3B2915ABG	N/A
Panasonic Avionics	Main Antenna	R8U3FW7874Z	N/A

HOST EQUIPMENT LIST			
Manufacturer	Equipment Name	Model or Part Number	Serial Number
eMachines	Keyboard	ACK-260	203363102V 3(PS/2)
Dell	Keyboard	AT101W	12741-84K-3366
Panasonic	Laptop	CF-48	3JYUA13992
Panasonic	Laptop	CF-48	3JYUA13840
Sony	Portable DVD Player	DVP-FX705	5029236
Panasonic	DC-SEB	RD-FA3124-01	D027293
Panasonic	USB Handset	RD-FA5001-02	D073250
Panasonic	USB Handset	RD-FA5001-02	D073143
Panasonic	USB Handset	RD-FA5001-02	D073168
Panasonic	USB Handset	RD-FA5001-02	D073439
Panasonic	S3000 Handset	RD-AA6601-01	C190194
Dell	LCD Monitor	E153FP	CN-0Y4413-72872-52M-8145
BK Precision	DC Power Supply	1760	6270200 1494
Linksys	Wireless A+G Router	WRT55A6 Ver. 2	MDJ106603305
Generic	SC Simulator	112760	SM17 EMI
Labtec	Mouse	851980-0000	M-B1291
Generic	Handset	N/A	N/A

NOTE: All the power cords of the above support equipment are standard and non-shielded.

4.4 I/O Cabling Diagram and Description



Note: Diagram was obtained from Panasonic Avionics Corporation.



4.5 EMC Test Hardware and Software Measurement Equipment

TEST EQUIPMENT LIST - Emissions					
Equipment Name	Manufacturer	Model Number	Serial Number	Calibration Due Date	Maintenance Calibration Cycle
Spectrum Analyzer	Agilent	8565EC	3946A00245	07/24/07	1 Year
Antenna - Horn	ETS	3117	00057432	03/21/08	1 Year
Preamp	Aegis Labs, Inc	AEGIS-OATS1-1-18	001	07/27/07	1 Year
30 Foot Coax - Armored	Semflex	0619	S130SFBS10360	07/26/07	1 Year
5.15-5.35 GHz Notch Filter	Microwave Circuits	N0452502	3173-01	NCR	NCR
Antenna - 18-26.5 GHz Pre-amplified Horn	Aegis Labs, Inc.	H042	SLK-35-3W	02/08/08	1 Year
Antenna - 26.5-40 GHz Pre-amplified Horn	Aegis Labs, Inc.	H028	GM1260-10	02/08/08	1 Year
EMI Receiver - RF Section	Hewlett Packard	8546A	3325A00137	04/26/07	1 Year
EMI Receiver - RF Filter Section	Hewlett Packard	85460A	3325A00138	04/26/07	1 Year
Antenna - Biconical	EMCO	3110B	3383	03/20/08	1 Year
Antenna - Log Periodic	EMCO	3148	47943	03/20/08	1 Year
Power Meter	Anritsu	ML2487A	6K00001785	05/30/07	1 Year
Wide Bandwidth Sensor	Anritsu	MA2491A	31193	05/30/07	1 Year
12dB Attenuator	Narda	4779-12	203	07/09/07	2 Years
Temperature/Humidity Monitor	Dickson	TH550	7255185	04/13/08	1 Year

NCR – No Calibration Required.

5.0 CONDITIONS DURING EMISSIONS MEASUREMENTS

5.1 General

All measurements were made according to the procedures defined in or referred to by the standard listed on the cover page of this report. The measurements were made in the operating mode producing the largest emissions consistent with normal operation and connected to the minimum configuration of auxiliary devices.

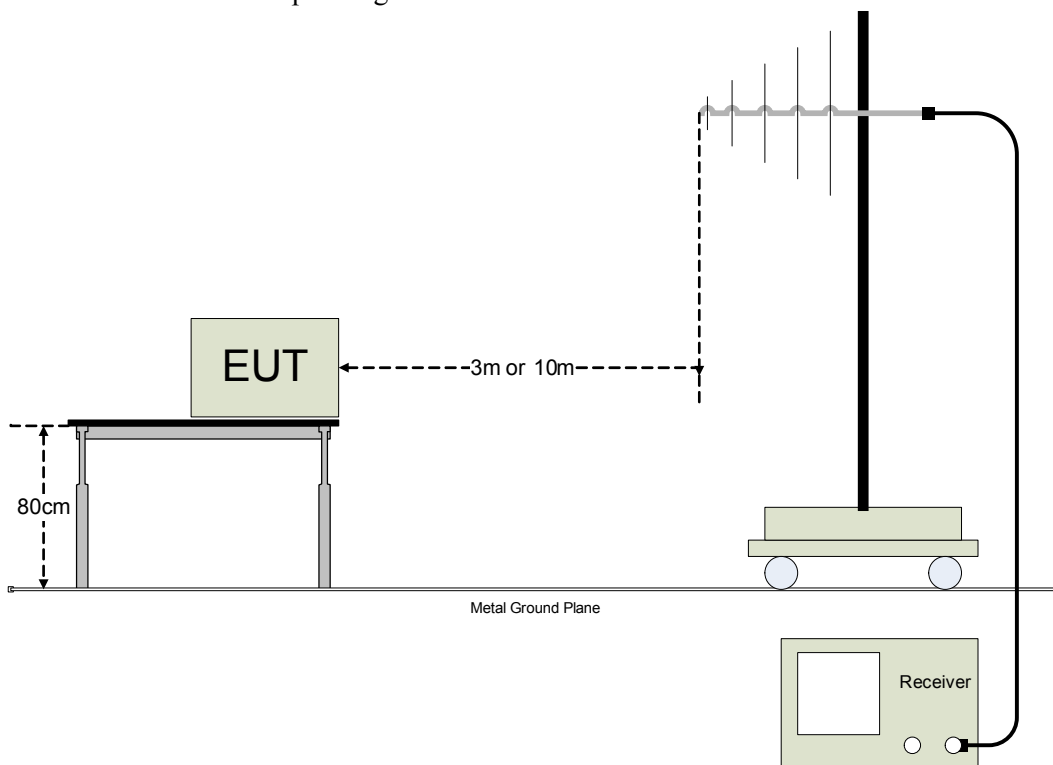
5.2 Radiated Emissions Test Setup

The Open Area Test Site (OATS) was used for radiated emission testing. The receiving (Rx) antenna(s) was placed 10m from the nearest side of the EUT facing the Rx antenna. The EUT (if floor-standing) was placed directly on the flush-mounted 360 degree rotating turntable. The EUT (if table-top) was placed directly on an 80cm high non-metallic table, and the table was placed on the rotating turntable. During the initial EMI scan, all the suspect frequencies, i.e.; harmonics, broadband signals were checked with the Rx broadband antennas in both vertical and horizontal polarities. The biconical Rx, log periodic Rx, and horn Rx antennas were used from 30MHz – 299.99MHz, 300MHz – 1000MHz, and 1GHz – 18GHz respectively.

Upon completion of all harmonic and broadband measurements, the balance of any remaining frequencies was checked between 30MHz – 18GHz. Any signals appearing within 20 dB of the classification limit was measured. Each signal was maximized by first rotating the turntable at least 360 degrees and recording the azimuth in the data sheet. Lastly, the Rx antenna was raised and/or lowered to maximize the signal elevation. If the measured signal was obtained using the peak detector and that signal appeared within 3 dB of the regulatory limit line, then the same signal was re-measured using the quasi-peak detector on the EMI receiver. Both meter readings if necessary were recorded on the data sheet.

Climatic Conditions:

The EUT was tested within its intended operating and climatic conditions.





APPENDIX A

TEST DATA

**RADIATED EMISSIONS TEST RESULTS**

CLIENT:	Panasonic Avionics	DATE:	04/10/07
EUT:	SM-17 Smart Monitor	PROJECT NUMBER:	PANAS-070130
MODEL NUMBER:	RD-FW7874-11	TEST ENGINEER:	PC
SERIAL NUMBER:	D387286	SITE #:	1
CONFIGURATION:	Tested with an Intel PRO/Wireless 2915ABG Network Connection installed in the EUT's mini PCI slot.	TEMPERATURE:	21 deg. C
		HUMIDITY:	50%
		TIME:	11:00 AM

Description:	Radiated RF Emissions (30 MHz – 1000 MHz)
Results:	PASSED Horizontal and Vertical Antenna Polarizations Class B Limits
Note:	Radiated Emissions Measurements were performed on the EUT with the power supply set at the following voltage. <ul style="list-style-type: none">• 28VDC

Radiated Emissions Sample Calculations

$$\text{Corrected Meter Reading} = \text{Meter Reading} + F + C - D$$

Where, F = Antenna Factor

C = Cable Factor

G = Amplifier Gain

D = Distance Factor (if applicable)

Therefore, the equation for determining the Corrected Meter Reading Limit (CML) is:

$$\text{CML} = \text{Specification Limit} - F - C + D$$



Radiated Emissions Test Results (Continued)

SC Simulator Mode (PANAS-070130-01)

Horizontal Open Field Maximized Data

<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Cable Factor (dB)</i>	<i>Antenna Factor (dB)</i>	<i>Distance Factor (dB)</i>	<i>Corrected Reading (dBuV/m)</i>	<i>Limits (dBuV/m)</i>	<i>Diff (dB) +=FAIL</i>
42.45	6.11	400	0		2.68	10.83	10.46	30.08	40.00	-9.92
110.00	7.04	400	0		2.38	10.40	10.46	30.28	43.50	-13.22
125.00	6.58	400	0		2.46	11.35	10.46	30.85	43.50	-12.65
150.00	5.06	400	0		2.53	12.20	10.46	30.25	43.50	-13.25
200.01	7.25	400	0		2.68	15.00	10.46	35.39	43.50	-8.11
250.00	9.14	400	0		2.91	17.30	10.46	39.81	46.00	-6.19
269.95	5.35	400	0		2.95	19.06	10.46	37.82	46.00	-8.18
300.00	9.75	400	135		3.05	13.90	10.46	37.16	46.00	-8.84
324.00	5.43	400	45		3.14	15.15	10.46	34.18	46.00	-11.82
347.62	4.92	400	0		3.23	15.02	10.46	33.63	46.00	-12.37
366.47	5.08	400	0		3.31	14.93	10.46	33.78	46.00	-12.22
375.01	6.43	400	0		3.35	14.90	10.46	35.14	46.00	-10.86
399.99	9.57	400	315		3.45	15.20	10.46	38.68	46.00	-7.32
423.70	7.18	200	0		3.55	15.67	10.46	36.86	46.00	-9.14
433.33	11.33	100	0		3.59	16.07	10.46	41.45	46.00	-4.55
445.46	6.08	400	0		3.64	16.60	10.46	36.78	46.00	-9.22
466.68	12.28	100	315		3.72	17.73	10.46	44.19	46.00	-1.81
499.74	10.17	400	0		3.84	18.99	10.46	43.46	46.00	-2.54
575.06	4.47	400	0		4.10	18.90	10.46	37.93	46.00	-8.07



Radiated Emissions Test Results (Continued)

SC Simulator Mode (PANAS-070130-01)

Vertical Open Field Maximized Data

<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Cable Factor (dB)</i>	<i>Antenna Factor (dB)</i>	<i>Distance Factor (dB)</i>	<i>Corrected Reading (dBuV/m)</i>	<i>Limits (dBuV/m)</i>	<i>Diff (dB) +=FAIL</i>
33.36	8.84	100	0		2.77	12.03	10.46	34.10	40.00	-5.90
42.84	11.89	100	0		2.68	10.44	10.46	35.47	40.00	-4.53
110.02	8.30	100	0		2.38	10.20	10.46	31.34	43.50	-12.16
125.02	5.74	100	0		2.46	11.30	10.46	29.96	43.50	-13.54
149.92	6.28	100	0		2.53	11.70	10.46	30.97	43.50	-12.53
200.01	5.64	100	0		2.68	15.60	10.46	34.38	43.50	-9.12
250.00	8.24	100	0		2.91	18.40	10.46	40.01	46.00	-5.99
270.02	5.05	100	0		2.95	19.52	10.46	37.98	46.00	-8.02
300.00	14.63	100	0		3.05	14.20	10.46	42.34	46.00	-3.66
324.02	8.35	100	0		3.14	15.93	10.46	37.88	46.00	-8.12
333.33	7.16	100	0		3.18	15.87	10.46	36.66	46.00	-9.34
366.65	10.65	100	0		3.31	15.33	10.46	39.75	46.00	-6.25
378.01	5.14	100	0		3.36	15.30	10.46	34.25	46.00	-11.75
400.02	13.59	100	0		3.45	16.00	10.46	43.50	46.00	-2.50
405.02	6.46	100	0		3.47	16.06	10.46	36.45	46.00	-9.55
433.33	8.75	400	0		3.59	16.63	10.46	39.43	46.00	-6.57
466.67	10.36	400	0		3.72	17.83	10.46	42.37	46.00	-3.63
499.75	9.79	350	0		3.84	17.90	10.46	41.99	46.00	-4.01
575.07	4.70	100	0		4.10	18.80	10.46	38.06	46.00	-7.94



Radiated Emissions Test Results (Continued)

DVD Mode (PANAS-070130-01)**Horizontal Open Field Maximized Data**

<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Cable Factor (dB)</i>	<i>Antenna Factor (dB)</i>	<i>Distance Factor (dB)</i>	<i>Corrected Reading (dBuV/m)</i>	<i>Limits (dBuV/m)</i>	<i>Diff (dB) +=FAIL</i>
200.01	7.07	400	0		2.68	15.00	10.46	35.21	43.50	-8.29
250.00	7.12	400	0		2.91	17.30	10.46	37.79	46.00	-8.21
400.01	8.60	400	315		3.45	15.20	10.46	37.71	46.00	-8.29
433.34	10.30	100	315		3.59	16.07	10.46	40.42	46.00	-5.58
466.67	10.50	100	315		3.72	17.73	10.46	42.41	46.00	-3.59
499.74	9.29	400	0		3.84	18.99	10.46	42.58	46.00	-3.42

Vertical Open Field Maximized Data

<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Cable Factor (dB)</i>	<i>Antenna Factor (dB)</i>	<i>Distance Factor (dB)</i>	<i>Corrected Reading (dBuV/m)</i>	<i>Limits (dBuV/m)</i>	<i>Diff (dB) +=FAIL</i>
42.84	9.04	100	0		2.68	10.44	10.46	32.62	40.00	-7.38
200.02	6.08	100	0		2.68	15.60	10.46	34.82	43.50	-8.68
300.00	17.11	100	0		3.05	14.20	10.46	44.82	46.00	-1.18
400.02	15.43	400	0		3.45	16.00	10.46	45.34	46.00	-0.66
466.67	10.85	300	315		3.72	17.83	10.46	42.86	46.00	-3.14
499.75	11.65	400	0		3.84	17.90	10.46	43.85	46.00	-2.15



Radiated Emissions Test Results (Continued)

HDD Mode (PANAS-070130-01)

Horizontal Open Field Maximized Data

<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Cable Factor (dB)</i>	<i>Antenna Factor (dB)</i>	<i>Distance Factor (dB)</i>	<i>Corrected Reading (dBuV/m)</i>	<i>Limits (dBuV/m)</i>	<i>Diff (dB) +=FAIL</i>
200.01	7.18	400	0		2.68	15.00	10.46	35.32	43.50	-8.18
250.00	8.73	400	0		2.91	17.30	10.46	39.40	46.00	-6.60
400.01	10.01	400	0		3.45	15.20	10.46	39.12	46.00	-6.88
433.34	10.80	100	315		3.59	16.07	10.46	40.92	46.00	-5.08
466.67	11.97	100	0		3.72	17.73	10.46	43.88	46.00	-2.12
499.99	9.05	400	0		3.84	19.00	10.46	42.35	46.00	-3.65

Vertical Open Field Maximized Data

<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Cable Factor (dB)</i>	<i>Antenna Factor (dB)</i>	<i>Distance Factor (dB)</i>	<i>Corrected Reading (dBuV/m)</i>	<i>Limits (dBuV/m)</i>	<i>Diff (dB) +=FAIL</i>
42.79	10.68	100	0		2.68	10.44	10.46	34.26	40.00	-5.74
200.02	5.92	100	0		2.68	15.60	10.46	34.66	43.50	-8.84
300.01	17.51	100	45		3.05	14.20	10.46	45.22	46.00	-0.78
400.02	15.57	400	0		3.45	16.00	10.46	45.48	46.00	-0.52
466.67	10.80	400	0		3.72	17.83	10.46	42.81	46.00	-3.19
499.75	11.39	400	0		3.84	17.90	10.46	43.59	46.00	-2.41

**RADIATED EMISSIONS TEST RESULTS**

CLIENT:	Panasonic Avionics	DATE:	04/11/07
EUT:	SM-17 Smart Monitor	PROJECT NUMBER:	PANAS-070130
MODEL NUMBER:	RD-FW7874-11	TEST ENGINEER:	JC/BM
SERIAL NUMBER:	D387286	SITE #:	1
CONFIGURATION:	Tested with an Intel PRO/Wireless 2915ABG Network Connection installed in the EUT's mini PCI slot in 802.11a (5150-5250 MHz) mode with Panasonic Antenna.	TEMPERATURE:	20 deg. C
		HUMIDITY:	51% RH
		TIME:	2:00 PM

Description:	Radiated RF Emissions (1 GHz – 18 GHz)
Results:	PASSED Horizontal and Vertical Antenna Polarizations Class B Limits
Note:	Radiated Emissions Measurements were performed on the EUT with power supply set at the following voltage. <ul style="list-style-type: none"> • 28VDC

Unwanted Spurious Emissions Limits			
Frequency (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m) (Emissions in the restricted bands)	Field Strength (dBm/MHz) (Emissions outside the restricted bands)
Above 960	500	54.00 (Average) 74.00 (Peak)	< -20 dBc

Radiated Emissions Sample Calculations

$$\text{Corrected Meter Reading} = \text{Meter Reading} + F + C - D$$

Where, F = Antenna Factor

C = Cable Factor

G = Amplifier Gain

D = Distance Factor (if applicable)

Therefore, the equation for determining the Corrected Meter Reading Limit (CML) is:

$$\text{CML} = \text{Specification Limit} - F - C + D$$



Radiated Emissions Test Results (Continued)

*Fundamental Measurements in 802.11a mode (5150-5250 MHz)
Channels 36 & 48
Continuous TX at Main Antenna port with Panasonic Antenna
Aegis Labs, Inc. File #: PANAS-070130-03*

RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5180.00	53.83	125	270			3.77	34.32	91.92			Ch. 36
5180.00				45.13	A	3.77	34.32	83.22			
5240.00	55.17	100	270			3.80	34.39	93.35			Ch. 48
5240.00				46.54	A	3.80	34.39	84.72			

RADIATED EMISSIONS – Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5180.00	65.50	125	45			3.77	34.31	103.58			Ch. 36
5180.00				55.30	A	3.77	34.31	93.38			
5240.00	64.00	125	45			3.80	34.34	102.14			Ch. 48
5240.00				54.99	A	3.80	34.34	93.13			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the “Marker Delta Method”.



Radiated Emissions Test Results (Continued)

Band Edge Field Strength Measurements in 802.11a mode (5150-5250 MHz)
Channels 36
Continuous TX at Main Antenna port with Panasonic Antenna
Aegis Labs, Inc. File #: PANAS-070130-03

RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5150.00							42.42	74.00	-31.58	Ch. 36
5150.00				A			27.88	54.00	-26.12	

RADIATED EMISSIONS – Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
5150.00							54.08	74.00	-19.92	Ch. 36
5150.00				A			38.04	54.00	-15.96	

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = F_m - \Delta_m$$

Where

BE = Band Edge Field Strength

F_m = Measured Fundamental (Peak or Average)

Δ_m = Measured Conducted Band Edge Delta (Peak or Average)



Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11a mode (5150-5250 MHz)
Channels 36 & 48
Continuous TX at Main Antenna port with Panasonic Antenna
Aegis Labs, Inc. File #: PANAS-070130-04*

RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
1000.00	57.33	100	135			51.17	1.58	27.50	35.24	74.00	-38.76	Ch. 36
1000.00				47.76	A	51.17	1.58	27.50	25.67	54.00	-28.33	
1200.00	59.67	100	135			51.34	1.78	27.62	37.73	74.00	-36.27	
1200.00				51.68	A	51.34	1.78	27.62	29.74	54.00	-24.26	
1500.00	62.67	100	225			51.36	1.99	27.80	41.10	74.00	-32.90	
1500.00				57.29	A	51.36	1.99	27.80	35.72	54.00	-18.28	
3453.33	53.17	100	225			50.78	3.04	32.78	38.21	68.00	-29.79	
6906.66	54.67	100	180			50.50	4.39	35.68	44.24	68.00	-23.76	
1000.00	57.83	100	135			51.17	1.58	27.50	35.74	74.00	-38.26	Ch. 48
1000.00				47.06	A	51.17	1.58	27.50	24.97	54.00	-29.03	
1500.00	62.83	100	225			51.36	1.99	27.80	41.26	74.00	-32.74	
1500.00				58.08	A	51.36	1.99	27.80	36.51	54.00	-17.49	
3493.33	52.17	100	225			50.76	3.06	32.80	37.26	68.00	-30.74	
6986.66	52.83	100	135			50.44	4.42	35.70	42.51	68.00	-25.49	

RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
1000.00	59.17	100	225			51.17	1.58	27.30	36.88	74.00	-37.12	Ch. 36
1000.00				49.00	A	51.17	1.58	27.30	26.71	54.00	-27.29	
1200.00	62.83	100	180			51.34	1.78	27.46	40.73	74.00	-33.27	
1200.00				57.63	A	51.34	1.78	27.46	35.53	54.00	-18.47	
3453.33	53.33	100	0			50.78	3.04	32.87	38.46	68.00	-29.54	
6906.66	54.17	100	45			50.50	4.39	35.60	43.66	68.00	-24.34	
1000.00	60.17	125	225			51.17	1.58	27.30	37.88	74.00	-36.12	Ch. 48
1000.00				51.46	A	51.17	1.58	27.30	29.17	54.00	-24.83	
1200.00	62.67	100	180			51.34	1.78	27.46	40.57	74.00	-33.43	
1200.00				57.03	A	51.34	1.78	27.46	34.93	54.00	-19.07	
1500.00	63.83	100	225			51.36	1.99	27.70	42.16	74.00	-31.84	
1500.00				59.17	A	51.36	1.99	27.70	37.50	54.00	-16.50	
3493.33	52.83	100	180			50.76	3.06	32.90	38.02	68.00	-29.98	
6986.66	53.17	100	135			50.44	4.42	35.60	42.75	68.00	-25.25	



Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11a mode (5150-5250 MHz)
 Channels 36 & 48
 Continuous RX at Main Antenna port with Panasonic Antenna
 Aegis Labs, Inc. File #: PANAS-070130-04*

RADIATED EMISSIONS - Horizontal Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
1000.00	56.67	100	180			51.17	1.58	27.50	34.58	74.00	-39.42	Ch. 36
1000.00				46.87	A	51.17	1.58	27.50	24.78	54.00	-29.22	
1200.00	58.17	100	135			51.34	1.78	27.62	36.23	74.00	-37.77	
1200.00				50.32	A	51.34	1.78	27.62	28.38	54.00	-25.62	
1500.00	60.33	100	135			51.36	1.99	27.80	38.76	74.00	-35.24	
1500.00				53.78	A	51.36	1.99	27.80	32.21	54.00	-21.79	
3453.33	51.57	100	0			50.78	3.04	32.78	36.61	74.00	-37.39	
3453.33				39.93	A	50.78	3.04	32.78	24.97	54.00	-29.03	
6906.66	51.33	100	0			50.50	4.39	35.68	40.90	74.00	-33.10	
6906.66				39.67	A	50.50	4.39	35.68	29.24	54.00	-24.76	
10359.99	50.83	100	0			50.39	5.52	37.42	43.38	74.00	-30.62	
10359.99				38.63	A	50.39	5.52	37.42	31.18	54.00	-22.82	
1000.00	56.83	100	270			51.17	1.58	27.50	34.74	74.00	-39.26	Ch. 48
1000.00				47.63	A	51.17	1.58	27.50	25.54	54.00	-28.46	
1200.00	60.17	100	90			51.34	1.78	27.62	38.23	74.00	-35.77	
1200.00				52.22	A	51.34	1.78	27.62	30.28	54.00	-23.72	
1500.00	60.83	100	90			51.36	1.99	27.80	39.26	74.00	-34.74	
1500.00				54.75	A	51.36	1.99	27.80	33.18	54.00	-20.82	
3493.33	52.00	100	0			50.76	3.06	32.80	37.09	74.00	-36.91	
3493.33				39.43	A	50.76	3.06	32.80	24.52	54.00	-29.48	
6986.66	52.17	100	0			50.44	4.42	35.70	41.85	74.00	-32.15	
6986.66				39.97	A	50.44	4.42	35.70	29.65	54.00	-24.35	
10479.99	50.33	100	0			50.42	5.55	37.49	42.95	74.00	-31.05	
10479.99				38.48	A	50.42	5.55	37.49	31.10	54.00	-22.90	



Radiated Emissions Test Results (Continued)

RADIATED EMISSIONS - Vertical Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)		Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
1000.00	59.83	100	225			51.17	1.58	27.30	37.54	74.00	-36.46	Ch. 36
1000.00				51.18	A	51.17	1.58	27.30	28.89	54.00	-25.11	
1200.00	60.67	100	225			51.34	1.78	27.46	38.57	74.00	-35.43	
1200.00				53.37	A	51.34	1.78	27.46	31.27	54.00	-22.73	
1500.00	64.17	100	135			51.36	1.99	27.70	42.50	74.00	-31.50	
1500.00				59.57	A	51.36	1.99	27.70	37.90	54.00	-16.10	
3453.33	52.33	100	180			50.78	3.04	32.87	37.46	74.00	-36.54	
3453.33				40.59	A	50.78	3.04	32.87	25.72	54.00	-28.28	
6906.66	52.00	100	0			50.50	4.39	35.60	41.49	74.00	-32.51	
6906.66				39.57	A	50.50	4.39	35.60	29.06	54.00	-24.94	
10359.99	50.33	100	0			50.39	5.52	37.42	42.88	74.00	-31.12	
10359.99				38.66	A	50.39	5.52	37.42	31.21	54.00	-22.79	
1000.00	57.33	100	225			51.17	1.58	27.30	35.04	74.00	-38.96	Ch. 48
1000.00				48.48	A	51.17	1.58	27.30	26.19	54.00	-27.81	
1200.00	62.67	100	45			51.34	1.78	27.46	40.57	74.00	-33.43	
1200.00				56.10	A	51.34	1.78	27.46	34.00	54.00	-20.00	
1500.00	64.17	100	135			51.36	1.99	27.70	42.50	74.00	-31.50	
1500.00				60.00	A	51.36	1.99	27.70	38.33	54.00	-15.67	
3493.33	51.67	100	180			50.76	3.06	32.90	36.86	74.00	-37.14	
3493.33				39.57	A	50.76	3.06	32.90	24.76	54.00	-29.24	
6986.66	52.00	100	0			50.44	4.42	35.60	41.58	74.00	-32.42	
6986.66				39.70	A	50.44	4.42	35.60	29.28	54.00	-24.72	
10479.99	50.33	100	0			50.42	5.55	37.49	42.95	74.00	-31.05	
10479.99				38.32	A	50.42	5.55	37.49	30.94	54.00	-23.06	

**PEAK TRANSMIT POWER**

CLIENT:	Panasonic Avionics	DATE:	04/11/07
EUT:	SM-17 Smart Monitor	PROJECT NUMBER:	PANAS-070130
MODEL NUMBER:	RD-FW7874-11	TEST ENGINEER:	JC
SERIAL NUMBER:	D387286	SITE #:	1
CONFIGURATION:	Tested with an Intel PRO/Wireless 2915ABG Network Connection installed in the EUT's mini PCI slot.	TEMPERATURE:	19 deg. C
		HUMIDITY:	54% RH
		TIME:	1:00 PM

Description:	<p>For the band 5.15-5.25 GHz, the peak transmit power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10\log B$, where B is the 26-dB emission bandwidth in MHz.</p> <p>For the band 5.25-5.35 GHz, the peak transmit power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10\log B$, where B is the 26-dB emission bandwidth in MHz.</p>
Results:	Passed (See Data Sheet)
Note:	<p>Conducted Emissions Measurements were performed on the EUT with power supply set at the following voltage.</p> <ul style="list-style-type: none">• 28VDC



Peak Transmit Power (Continued)

Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Average Power (dBm)	Average Power (mW)	Peak Power (dBm)	Peak Power (mW)
802.11a	36	5180	6	11.73	14.89	16.80	47.86
802.11a	36	5180	6	11.60	14.45	16.60	45.71
802.11a	36	5180	6	11.51	14.16	16.50	44.67
802.11a	48	5240	6	11.97	15.74	16.90	48.98
802.11a	48	5240	6	12.27	16.87	16.90	48.98
802.11a	48	5240	6	11.72	14.86	16.70	46.77

NOTE: The output power measurement is conducted.



CONDCUTED BAND EDGE EMISSIONS TEST RESULTS

CLIENT:	Panasonic Avionics	DATE:	04/14/07
EUT:	SM-17 Smart Monitor	PROJECT NUMBER:	PANAS-070130
MODEL NUMBER:	RD-FW7874-11	TEST ENGINEER:	JC
SERIAL NUMBER:	D387286	SITE #:	1
CONFIGURATION:	Tested with an Intel PRO/Wireless 2915ABG Network Connection installed in the EUT's mini PCI slot.	TEMPERATURE:	17 deg. C
		HUMIDITY:	61% RH
		TIME:	10:00 AM

Description:	For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band.
Results:	See Data Sheet
Note:	Conducted Emissions Measurements were performed on the EUT with power supply set at the following voltage. <ul style="list-style-type: none"> • 28VDC

Unwanted Spurious Emissions Limits	
Frequency (MHz)	Field Strength (dBm/Hz) (Emissions outside the restricted bands)
5250-5350	EIRP < -27dBm/Hz (68.3dBuV/m)

<i>Freq. (MHz)</i>	<i>Power Spec Den. Reading (dBm/Hz)</i>	<i>Antenna Gain (dBi)</i>	<i>Corrected Reading (dBm/Hz)</i>	<i>Limits (dBm/Hz)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
With Panasonic Antenna (Gain at 5GHz) Transmitting on Main Antenna Port						
5250.00	-39.10	0.01	-39.09	-27.00	-12.09	Tx @ 5240 MHz



Conducted Band Edge Emissions Test Results (Continued)

802.11a Mode

Test Date	Data	Test Eng.
04/14/07	5.24 GHz band edge (PANAS-070130-09f01)	JC
<p>*ATTEN 20dB VAVG 100 MKR -42.17dBm RL 16.0dBm 10dB/ 5.25325GHz</p> <p>D R</p> <p>TOTAL -39.1dBm DENSITY -99.1dBm/Hz</p> <p>CENTER 5.25000GHz SPAN 50.00MHz *RBW 1.0MHz *VBW 1.0MHz SWP 50.0ms</p>		

**26dB EMISSIONS BANDWIDTH**

CLIENT:	Panasonic Avionics	DATE:	04/14/07
EUT:	SM-17 Smart Monitor	PROJECT NUMBER:	PANAS-070130
MODEL NUMBER:	RD-FW7874-11	TEST ENGINEER:	JC
SERIAL NUMBER:	D387286	SITE #:	1
CONFIGURATION:	Tested with an Intel PRO/Wireless 2915ABG Network Connection installed in the EUT's mini PCI slot.	TEMPERATURE:	17 deg. C
		HUMIDITY:	61% RH
		TIME:	10:00 AM

Description:	26dB emissions bandwidth in MHz.
Results:	See Data Sheet
Note:	Conducted Emissions Measurements were performed on the EUT with power supply set at the following voltage. <ul style="list-style-type: none">• 28VDC

**PEAK POWER SPECTRAL DENSITY**

CLIENT:	Panasonic Avionics	DATE:	04/14/07
EUT:	SM-17 Smart Monitor	PROJECT NUMBER:	PANAS-070130
MODEL NUMBER:	RD-FW7874-11	TEST ENGINEER:	JC
SERIAL NUMBER:	D387286	SITE #:	1
CONFIGURATION:	Tested with an Intel PRO/Wireless 2915ABG Network Connection installed in the EUT's mini PCI slot.	TEMPERATURE:	17 deg. C
		HUMIDITY:	61% RH
		TIME:	10:00 AM

Description:	For the band 5.15-5.25 GHz, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band
Results:	See Data Sheet
Note:	Conducted Emissions Measurements were performed on the EUT with power supply set at the following voltage. <ul style="list-style-type: none">• 28VDC

Peak Power Spectral Density Limits	
Frequency (MHz)	Limit (dBm)
5150-5250	4

Using "Method 1" of the FCC Public Notice (DA 02-2138) for 5150-5250MHz band



Peak Power Spectral Density (Continued)

802.11a Mode

Test Date	Data	Test Eng.
04/14/07	5.18 GHz (PANAS-070130-09e01)	JC
<p>*ATTEN 20dB VAUG 100 MKR 2.17dBm RL 16.0dBm 10dB/ 5.18130GHz</p> <p>CENTER 5.18000GHz SPAN 20.00MHz *RBW 1.0MHz *VBW 3.0MHz SWP 50.0ms</p>		
Test Date	Data	Test Eng.
04/14/07	5.24 GHz (PANAS-070130-09e02)	JC
<p>*ATTEN 20dB VAUG 100 MKR 3.00dBm RL 16.0dBm 10dB/ 5.24277GHz</p> <p>CENTER 5.24000GHz SPAN 20.00MHz *RBW 1.0MHz *VBW 3.0MHz SWP 50.0ms</p>		

**PEAK EXCURSION**

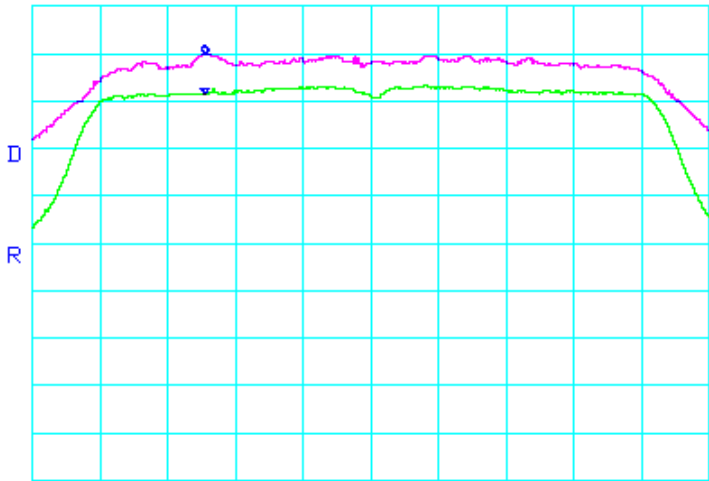
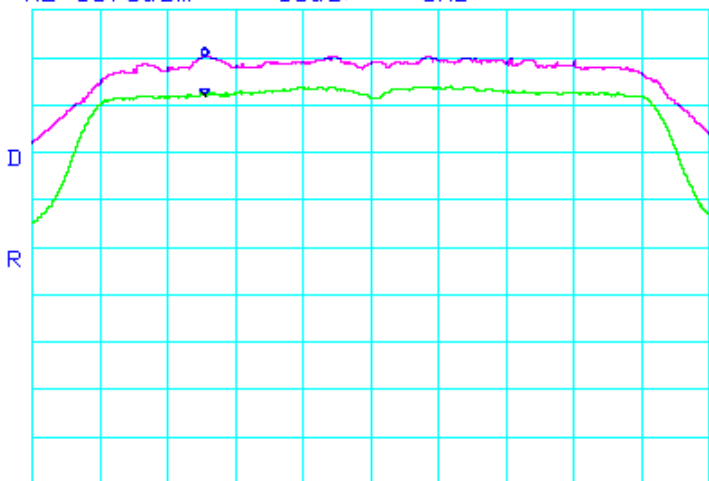
CLIENT:	Panasonic Avionics	DATE:	04/14/07
EUT:	SM-17 Smart Monitor	PROJECT NUMBER:	PANAS-070130
MODEL NUMBER:	RD-FW7874-11	TEST ENGINEER:	JC
SERIAL NUMBER:	D387286	SITE #:	1
CONFIGURATION:	Tested with an Intel PRO/Wireless 2915ABG Network Connection installed in the EUT's mini PCI slot.	TEMPERATURE:	17 deg. C
		HUMIDITY:	61% RH
		TIME:	10:00 AM

Description:	The ratio of the peak excursion of the modulation envelope to the peak transmit power shall not exceed 13dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.
Results:	See Data Sheet
Note:	Conducted Emissions Measurements were performed on the EUT with power supply set at the following voltage. <ul style="list-style-type: none">• 28VDC

Peak Power Spectral Density Limits	
Frequency (MHz)	Limit (dBm)
5150-5250	13

Peak Excursion (Continued)

802.11a Mode

<i>Test Date</i>	<i>Data</i>	<i>Test Eng.</i>
04/14/07	5.18 GHz (PANAS-070130-09c01)	JC
<div style="display: flex; justify-content: space-between;"> *ATTEN 20dB RL 16.0dBm 10dB/ ΔMKR 8.33dB 0Hz </div>  <div style="display: flex; justify-content: space-between; margin-top: 10px;"> CENTER 5.18000GHz *RBW 1.0MHz SPAN 20.00MHz *VBW 30kHz SWP 50.0ms </div>		
<i>Test Date</i>	<i>Data</i>	<i>Test Eng.</i>
04/14/07	5.24 GHz (PANAS-070130-09c02)	JC
<div style="display: flex; justify-content: space-between;"> *ATTEN 20dB RL 16.0dBm 10dB/ ΔMKR 8.17dB 0Hz </div>  <div style="display: flex; justify-content: space-between; margin-top: 10px;"> CENTER 5.24000GHz *RBW 1.0MHz SPAN 20.00MHz *VBW 30kHz SWP 50.0ms </div>		

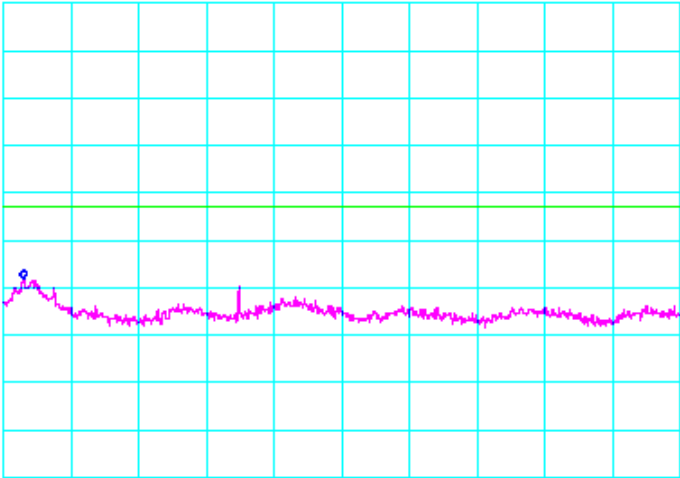
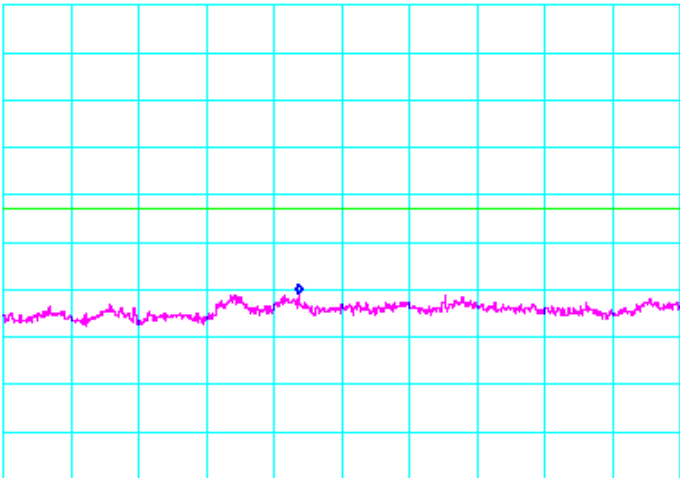
**CONDUCTED OUT OF BAND EMISSIONS**

CLIENT:	Panasonic Avionics	DATE:	04/14/07
EUT:	SM-17 Smart Monitor	PROJECT NUMBER:	PANAS-070130
MODEL NUMBER:	RD-FW7874-11	TEST ENGINEER:	JC
SERIAL NUMBER:	D387286	SITE #:	1
CONFIGURATION:	Tested with an Intel PRO/Wireless 2915ABG Network Connection installed in the EUT's mini PCI slot.	TEMPERATURE:	17 deg. C
		HUMIDITY:	61% RH
		TIME:	10:00 AM

Description:	<p>For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.</p> <p>For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band.</p>
Results:	See Data Sheet
Note:	Conducted Emissions Measurements were performed on the EUT with power supply set at the following voltage. <ul style="list-style-type: none">• 28VDC

Conducted Out Of Band Emissions (Continued)

802.11a Mode

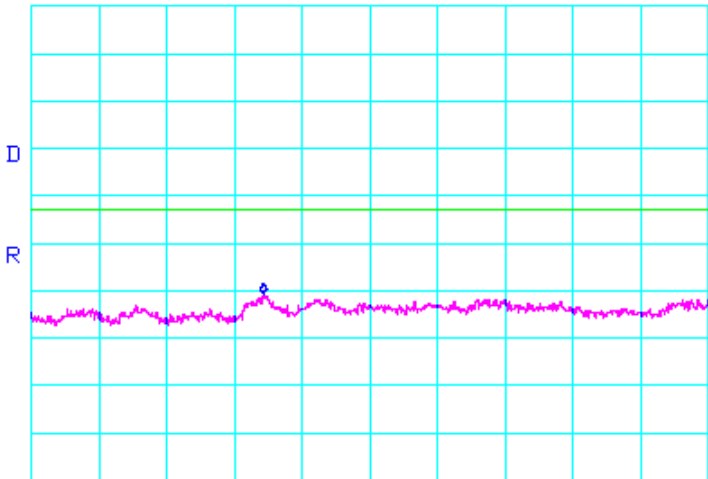
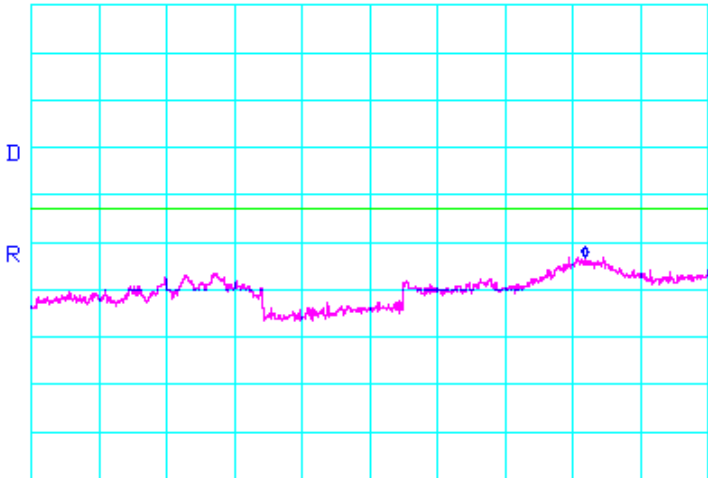
Test Date	Data	Test Eng.
04/14/07	5.18 GHz (PANAS-070130-09d03)	JC
<p data-bbox="332 430 966 483">*ATTEN 20dB MKR -42.17dBm RL 16.0dBm 10dB/ 5.393GHz</p>  <p data-bbox="332 966 998 1018">START 5.250GHz STOP 10.000GHz *RBW 1.0MHz *VBW 1.0MHz SWP 95.0ms</p>		
Test Date	Data	Test Eng.
04/14/07	5.18 GHz (PANAS-070130-09d04)	JC
<p data-bbox="332 1146 966 1199">*ATTEN 20dB MKR -44.83dBm RL 16.0dBm 10dB/ 14.37GHz</p>  <p data-bbox="332 1682 982 1734">START 10.00GHz STOP 20.00GHz *RBW 1.0MHz *VBW 1.0MHz SWP 200ms</p>		

Conducted Out Of Band Emissions (Continued)

802.11a Mode

<i>Test Date</i>	<i>Data</i>	<i>Test Eng.</i>
04/14/07	5.18 GHz (PANAS-070130-09d05)	JC
<p>*ATTEN 20dB MKR -36.50dBm RL 16.0dBm 10dB/ 36.50GHz</p> <p>START 20.00GHz STOP 40.00GHz *RBW 1.0MHz *VBW 1.0MHz SWP 400ms</p>		
<i>Test Date</i>	<i>Data</i>	<i>Test Eng.</i>
04/14/07	5.24 GHz (PANAS-070130-09d06)	JC
<p>*ATTEN 20dB MKR -50.33dBm RL 16.0dBm 10dB/ 764.0MHz</p> <p>START 30.0MHz STOP 1.0000GHz *RBW 1.0MHz *VBW 1.0MHz SWP 50.0ms</p>		

Conducted Out Of Band Emissions (Continued)
802.11a Mode

<i>Test Date</i>	<i>Data</i>	<i>Test Eng.</i>
04/14/07	5.24 GHz (PANAS-070130-09d09)	JC
<p>*ATTEN 20dB MKR -44.67dBm RL 16.0dBm 10dB/ 13.43GHz</p>  <p>START 10.00GHz STOP 20.00GHz *RBW 1.0MHz *VBW 1.0MHz SWP 200ms</p>		
<i>Test Date</i>	<i>Data</i>	<i>Test Eng.</i>
04/14/07	5.24 GHz (PANAS-070130-09d10)	JC
<p>*ATTEN 20dB MKR -37.00dBm RL 16.0dBm 10dB/ 36.37GHz</p>  <p>START 20.00GHz STOP 40.00GHz *RBW 1.0MHz *VBW 1.0MHz SWP 400ms</p>		



APPENDIX B

MODIFICATIONS AND RECOMMENDATIONS

1.0	NONE