

Electromagnetic Compatibility Test Report

Prepared in accordance with

FCC Part 15, RSS-210 and ANSI C63.10

On

Grid Alignment Radio GA

Prepared for:

Carestream Health Inc.



150 Verona St

Rochester NY, 14608

Prepared by:

TUV Rheinland of North America, Inc.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TUV Rheinland, NVLAP or any agency of the United States Government.

Auftraggeber: <i>Client:</i>		Carestream Health Inc. 150 Verona St Rochester NY, 14608	Ronald Cain 585-627-8321 / 585-477-2718 ronald.cain@carestreamhealth.com
Bezeichnung: <i>Identification:</i>	Grid Alignment Radio	Serien-Nr.: <i>Serial No.</i>	prototype
Gegenstand der Prüfung: <i>Test item:</i>	GA	Prüfdatum: <i>Date tested:</i>	09/13/2011
Prüfort: <i>Testing location:</i>	TUV Rheinland of North America 336 Initiative Drive Rochester, NY 14624 U.S.A.		
Prüfgrundlage: <i>Test specification:</i>	Emissions: FCC Part 15.209(a), RSS-210 Issue 8 & RSS-GEN Issue 3, ANSI C63.10 RSS-210 Issue 8, RSS-GEN Issue 3 FCC Part 15.205 & RSS-GEN Issue 3, FCC Part 15.203 RSS-210 Issue 8 & RSS-GEN Issue 3, RSS-GEN Issue 3		
Prüfergebnis: <i>Test Result</i>	Der vorstehend beschriebene Prüfgegenstand wurde geprüft und entspricht oben genannter Prüfgrundlage. The above product was found to be Compliant to the above test standard(s)		
geprüft / tested by: Randall Masline		reviewed by: Cecil Gittens	
<u>2 March 2012</u> <i>Date</i>		<u>2 March 2012</u> <i>Date</i>	
<i>Name</i>		<i>Name</i>	
<i>Signature</i>		<i>Signature</i>	
Sonstiges : <i>Other Aspects:</i>	None		
Abkürzungen: OK, Pass, Compliant, Complies = entspricht Prüfgrundlage Fail, Not Compliant, Does not Comply = entspricht nicht Prüfgrundlage N/A = nicht anwendbar		Abbreviations: OK, Pass, Compliant, Complies = passed Fail, Not Compliant, Does Not Comply = failed N/A = not applicable	
		Industry Canada	BSMI
US5253	NVLAP CODE 200313-0	3466C-1	SL2-IN-E-050R

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

TABLE OF CONTENTS

1	GENERAL INFORMATION	4
1.1	SCOPE	4
1.2	PURPOSE	4
1.3	SUMMARY OF TEST RESULTS	5
2	LABORATORY INFORMATION	6
2.1	ACCREDITATIONS & ENDORSEMENTS	6
2.2	MEASUREMENT UNCERTAINTY	7
2.3	CALIBRATION TRACEABILITY	8
2.4	MEASUREMENT EQUIPMENT USED	9
3	PRODUCT INFORMATION	10
3.1	PRODUCT DESCRIPTION	10
3.2	EQUIPMENT MODIFICATIONS	10
3.3	TEST PLAN	10
4	EMISSIONS.....	11
4.1	RADIATED EMISSIONS	11
4.2	CONDUCTED EMISSIONS	18
4.3	RESTRICTED BANDS OF OPERATION	21
4.4	ANTENNA REQUIREMENTS	21
4.5	99% BANDWIDTH	22
	APPENDIX A	23
5	TEST PLAN.....	23
5.1	GENERAL INFORMATION	23
5.2	MODEL(S) NAME	23
5.3	TYPE OF PRODUCT	23
5.4	EUT ELECTRICAL POWERED INFORMATION	24
5.5	ELECTRICAL SUPPORT EQUIPMENT	24

1 General Information

1.1 Scope

This report is intended to document the status of conformance with the requirements of the FCC Part 15, RSS-210 and ANSI C63.10, based on the results of testing performed on 09/13/2011 on the Grid Alignment Radio, Model No. GA, manufactured by Carestream Health Inc.. This report only applies to the specific samples tested under the stated test conditions. It is the responsibility of the manufacturer to assure that additional production units of this model are manufactured with identical or EMI equivalent electrical and mechanical components. This report is further intended to document changes and modifications to the EUT throughout its life cycle. All documentation will be included as a supplement.

1.2 Purpose

Testing was performed to evaluate the EMC performance of the EUT (Equipment Under Test) in accordance with the applicable requirements, procedures, and criteria defined in the application of regulations and application of standards listed in this report.

1.3 Summary of Test Results

Applicant	Carestream Health Inc. 150 Verona St Rochester NY, 14608	Tel	585-627-8321	Contact	Ronald Cain
		Fax	585-477-2718	e-mail	ronald.cain@carestreamhealth.com
Description	Grid Alignment Radio	Model Number	GA		
Serial Number	prototype	Test Voltage/Freq.	120VAC/60Hz		
Test Date Completed:	09/13/2011	Test Engineer	Randall Masline		
Standards	Description	Severity Level or Limit		Measurement	Test Result
RSS-210 Issue 8	Industry Canada - Low-power License-exempt Radiocommunication Devices	See called out basic standards below		See Below	Complies
ANSI C63.10	American National Standard for Unlicensed Wireless Devices	See called out basic standards below		See Below	Complies
RSS-GEN Issue 3	General Requirements and information for the certification of radio apparatus	See called out basic standards below		See Below	Complies
FCC Part 15.209(a), RSS-210 Issue 8 & RSS-GEN Issue 3	Radiated Emissions	30 - 1000 MHz			Complies
FCC Part 15.207(a) RSS-210 Issue 8 & RSS-GEN Issue 3	Conducted Emissions	150 kHz - 30 MHz		Limit	Complies
FCC Part 15.205 & RSS-GEN Issue 3	Restricted Bands				Complies
FCC Part 15.203 RSS-210 Issue 8 & RSS-GEN Issue 3	Antenna Requirements				Complies
RSS-GEN Issue 3	99% Bandwidth				Complies

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

2 Laboratory Information

2.1 Accreditations & Endorsements

2.1.1 US Federal Communications Commission (Expires 12/7/2013)

TUV Rheinland of North America located at, 336 Initiative Drive, Rochester, NY 14624-6217 is accredited by the commission for performing testing services for the general public on a fee basis. This laboratory test facilities have been fully described in reports submitted to and accepted by the FCC (Registration No 90575). The laboratory scope of accreditation includes: Title 47 CFR Part 15, and 18. The accreditation is updated every 3 years.

2.1.2 NIST / NVLAP (Expires 6/30/2013)

This is a program which is administered under the auspices of the National Institute of Standards and Technology. The laboratory has been assessed and accredited in accordance with ISO Standard 17025:2005 (Lab code: 200313-0). The scope of laboratory accreditation includes emission and immunity testing. The accreditation is updated annually.

2.1.3 VCCI

VCCI Accredited test lab. Registration numbers R-1065, C-1120, & C-1121.

2.1.4 Industry Canada (Expires 12/08/2014)

(Registration No.: 3466C-1) The OATS has been accepted by Industry Canada to perform testing to 3 and to 10m, based on the test procedures described in ANSI C63.4-2009.

2.1.5 BSMI

Registration No.: SL2-IN-E-050R. The BSMI accreditation was obtained by NIST MRA with the BSMI.

2.1.6 Korea

Recognized by Radio Research Agency as an accredited Conformity Assessment Body (CAB) under the terms of Phase I of the APEC TEL.

2.2 Measurement Uncertainty

Sample Calculation – radiated & conducted emissions

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{RAW} - \text{AMP} + \text{CBL} + \text{ACF}$$

Where: RAW = Measured level before correction (dB μ V)

AMP = Amplifier Gain (dB)

CBL = Cable Loss (dB)

ACF = Antenna Correction Factor (dB/m)

$$\mu\text{V/m} = 10^{\frac{\text{dB}\mu\text{V} / \text{m}}{20}}$$

Sample radiated emissions calculation @ 30 MHz

Measurement +Antenna Factor–Amplifier Gain+Cable loss=Radiated Emissions (dBuV/m)

$$25 \text{ dBuV/m} + 17.5 \text{ dB} - 20 \text{ dB} + 1.0 \text{ dB} = 23.5 \text{ dBuV/m}$$

Measurement Uncertainty Emissions

	U_{lab}	U_{cispr}
Radiated Disturbance @ 10m		
30 MHz – 1,000 MHz	4.57 dB	5.2 dB
Conducted Disturbance @ Mains Terminals		
150 kHz – 30 MHz	2.62 dB	3.6 dB
Disturbance Power		
30 MHz – 300 MHz	3.88 dB	4.5 dB

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

General

<input type="checkbox"/>	The estimated combined standard uncertainty for ESD immunity measurements is $\pm 0.43\%$.
<input type="checkbox"/>	The estimated combined standard uncertainty for radiated immunity measurements is $\pm 2.0\text{dB}$.
<input type="checkbox"/>	The estimated combined standard uncertainty for EFT fast transient immunity measurements is $\pm 6.0\%$.
<input type="checkbox"/>	The estimated combined standard uncertainty for surge immunity measurements is $\pm 5.0\%$.
<input type="checkbox"/>	The estimated combined standard uncertainty for conducted immunity measurements is $\pm 2.0\text{ dB}$.
<input type="checkbox"/>	The estimated combined standard uncertainty for power frequency magnetic field immunity measurements is $\pm 2.57\%$.
<input type="checkbox"/>	The estimated combined standard uncertainty for voltage variation and interruption measurements is $\pm 4.89\%$.
<input checked="" type="checkbox"/>	The estimated combined standard uncertainty for radiated emissions measurements is $\pm 4.6\text{ dB}$.
<input type="checkbox"/>	The estimated combined standard uncertainty for conducted emissions measurements is $\pm 2.6\text{ dB}$.
<input type="checkbox"/>	The estimated combined standard uncertainty for harmonic current $\pm 7.27\%$ and flicker measurements is $\pm 3.87\%$.

2.3 Calibration Traceability

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Measurement method complies with ANSI/NCSL Z540-1-1994 and ISO Standard 17025:2005. Equipment calibration records are kept on file at the test facility.

2.4 Measurement Equipment Used

Equipment	Manufacturer	Model #	Ref.	Serial #	Last Cal dd/mm/yy	Next Cal dd/mm/yy	Test
Biconical Antenna	EMCO	3110	C005	1246	15 Dec 10	15 Dec 12	RE
BiLog	Chase	CBL6111	C017	1169	2 Aug 10	2 Aug 11	RE
Log Periodic Antenna	EMCO	3147	C024	1370	15 Dec 10	15 Dec 12	RE
Horn	EMCO	3115	C025	9512-4630	20-Jul-11	20-Jul-13	RE
BiLog	Chase	CBL6111	C041	1170	31-Mar 11	31-Mar 12	RE
LISN	Schwarzbeck	8121-200	C102	200	11-Dec-10	11-Dec-11	CE
Spectrum analyzer	HP	8590A	C302	2839A03834	9-Aug-11	9-Aug-12	RE
EMI Receiver	Rohde & Schwarz	ESVS 30	C310	826006/015	12-Dec-10	12-Dec-11	RE
Analyzer w RF Filter Section 85460A	HP	8546A	C311	3325A00127	9-Aug- 11	9-Aug- 12	RE
Receiver (20Hz-40GHz)	Rohde & Schwarz	ESI 40	C320	839283/005	11-Dec-10	11-Dec-11	RE,CE
Multimeter	Fluke	87	C405	49050672	9-Aug- 11	9-Aug- 12	All tests
Amplifier (1-26.5 GHz.)	Agilent	8449B	C438	3008A01842	18-Dec-09	18-Dec-11	RE
Amplifier 1 - 18GHz	Rohde & Schwarz	TS-PR18	C439	122002/001	18-Dec-09	18-Dec-11	RE
Amplifier (18-26.5GHz)	Rohde & Schwarz	TS-PR26	C443	100005	10-Aug- 11	10-Aug- 12	RE
Digital Pressure/Temp/RH	Davis	Perception II	C444	40917	23-Mar 11	22-Mar 12	All tests

Note: CE = Conducted Emissions, CI= Conducted Immunity, DP=Disturbance Power, EFT=Electrical Fast Transients, ESD = Electrostatic Discharge, FLI=Flicker, HAR=Harmonics, MF=Magnetic Field Immunity, RE=Radiated Emissions, RI=Radiated Immunity, SI=Surge Immunity, VDSI=Voltage Dips and Short Interruptions

3 Product Information

3.1 Product Description

See Section Appendix A

3.2 Equipment Modifications

No modifications were needed to bring product into compliance.

3.3 Test Plan

The EUT product information, test configuration, mode of operation, test types, test procedures, test levels, pass/failure criteria, in this report were carried out per the product test plan located in appendix A of this report.

The EUT has a switch for “X” and “Y” axis, during fundamental and spurious emissions testing the switch was exercised in order to find the maximum emission and both switch configurations produced the same output and amplitude; therefore “X” and “Y” were alternately for the duration of testing.

4 Emissions

4.1 Radiated Emissions

This test measures the electromagnetic levels of spurious signals generated by the EUT that radiated from the EUT and may affect the performance of other nearby electronic equipment.

4.1.1 Over View of Test

Results	Complies (as tested per this report)				Date	09/13/2011	
Standard	FCC Part 15.209(a), RSS-210 Issue 8 & RSS-GEN Issue 3						
Product Model	GA			Serial#	prototype		
Configuration	See test plan for details						
Test Set-up	Tested on 10m O.A.T.S. at 3 m distance placed on turn-table, see test plans for details						
EUT Powered By	120VAC/60Hz	Temp	24°C	Humidity	54%	Pressure	1013mbar
Frequency Range	30 - 1000 MHz @ 3m						
Criteria	(Below Limit)		Perf. Verification		Readings Under Limit		
Mod. to EUT	None		Test Performed By		Randall Masline		

4.1.2 Test Procedure(s)

Radiated and FCC emissions tests were performed using the procedures of ANSI C63.10 including methods for signal maximizations and EUT configuration. The photos included with the report show the EUT in its maximized configuration.

The frequency range from 30 - 1000 MHz was investigated for radiated emissions.

Radiated emission testing was first performed at a distance of 3 meters in the semi-anechoic chamber in order to identify the specific frequencies for which these measurements will be made on the 10 m OATS. At a 3m distance.

4.1.3 Deviations

There were no deviations from the test methodology listed in the test plan for the radiated emission test.

4.1.4 Final Test

All final radiated emissions measurements were below (in compliance) the limits.


Prescan Graphs

NOTES:

Radiated Emissions Prescan

Vertical / Horizontal

H - 0 Deg F side Y sweep

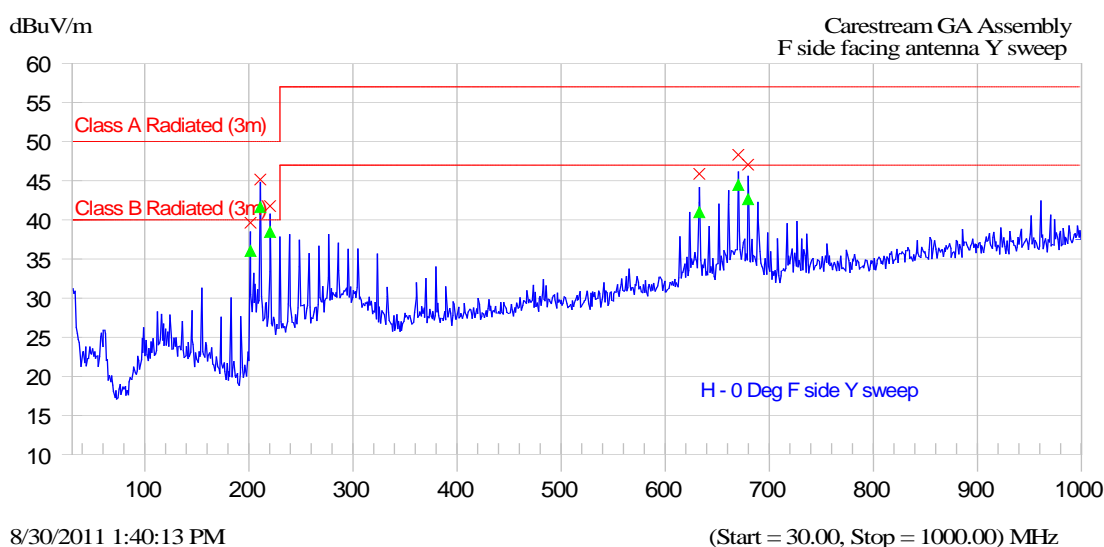

Frequency	Peak	QP	Class B-QP	Class A-QP	Trace Name
MHz	dBuV/m	dBuV/m	dB	dB	
201.584	39.6	36.0	-4.0	-14.0	H - 0 Deg F side Y sweep
210.931	45.2	41.6	1.6	-8.4	H - 0 Deg F side Y sweep
220.341	41.8	38.4	-1.6	-11.6	H - 0 Deg F side Y sweep
632.854	45.9	41.0	-6.0	-16.0	H - 0 Deg F side Y sweep
670.297	48.3	44.4	-2.6	-12.6	H - 0 Deg F side Y sweep
679.714	47.0	42.6	-4.4	-14.4	H - 0 Deg F side Y sweep


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

NOTES:

Radiated Emissions Prescan

Vertical / Horizontal

V - 0 Deg F side Y sweep

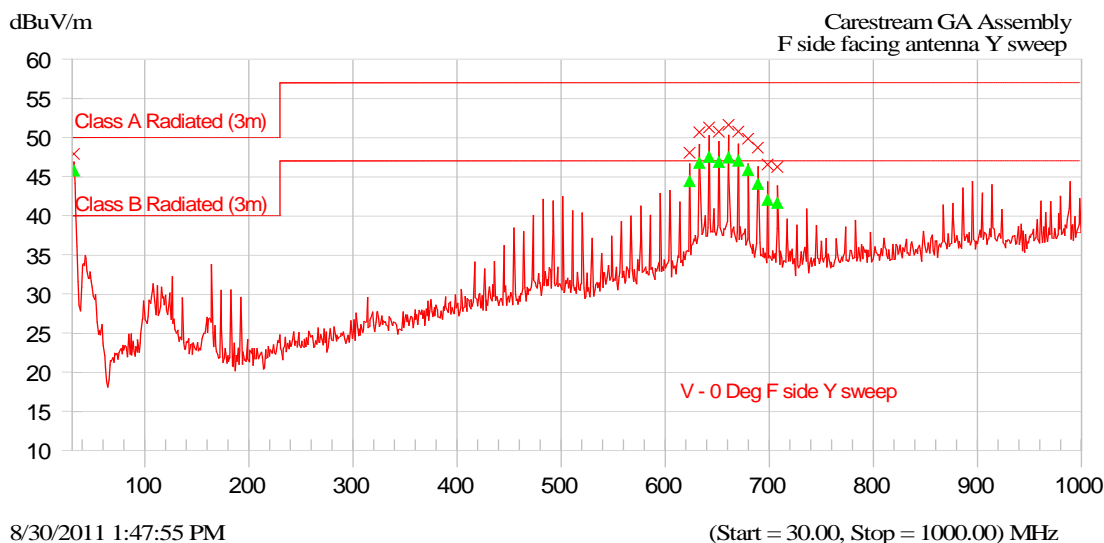


Frequency MHz	Peak dBuV/m	QP dBuV/m	Class B-QP dB	Class A-QP dB	Trace Name
31.914	47.9	45.7	5.7	-4.3	V - 0 Deg F side Y sweep
623.439	48.0	44.4	-2.6	-12.6	V - 0 Deg F side Y sweep
632.810	50.7	46.7	-0.3	-10.3	V - 0 Deg F side Y sweep
642.160	51.3	47.5	0.5	-9.5	V - 0 Deg F side Y sweep
651.522	50.7	46.8	-0.2	-10.2	V - 0 Deg F side Y sweep
660.963	51.6	47.4	0.4	-9.6	V - 0 Deg F side Y sweep
670.312	50.7	47.0	-0.0	-10.0	V - 0 Deg F side Y sweep
679.698	49.8	45.8	-1.2	-11.2	V - 0 Deg F side Y sweep
689.048	48.7	44.0	-3.0	-13.0	V - 0 Deg F side Y sweep
698.454	46.5	42.0	-5.0	-15.0	V - 0 Deg F side Y sweep
707.789	46.2	41.6	-5.4	-15.4	V - 0 Deg F side Y sweep

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

NOTES:

Radiated Emissions 3kHz – 1 MHz**Vertical**

Marker 1 [T1] RBW 100 kHz RF Att 30 dB
Ref Lvl 127 dBV 93.81 dBV VBW 100 kHz
127 dBV 319.0000000 kHz SWT 5 ms Unit dBV

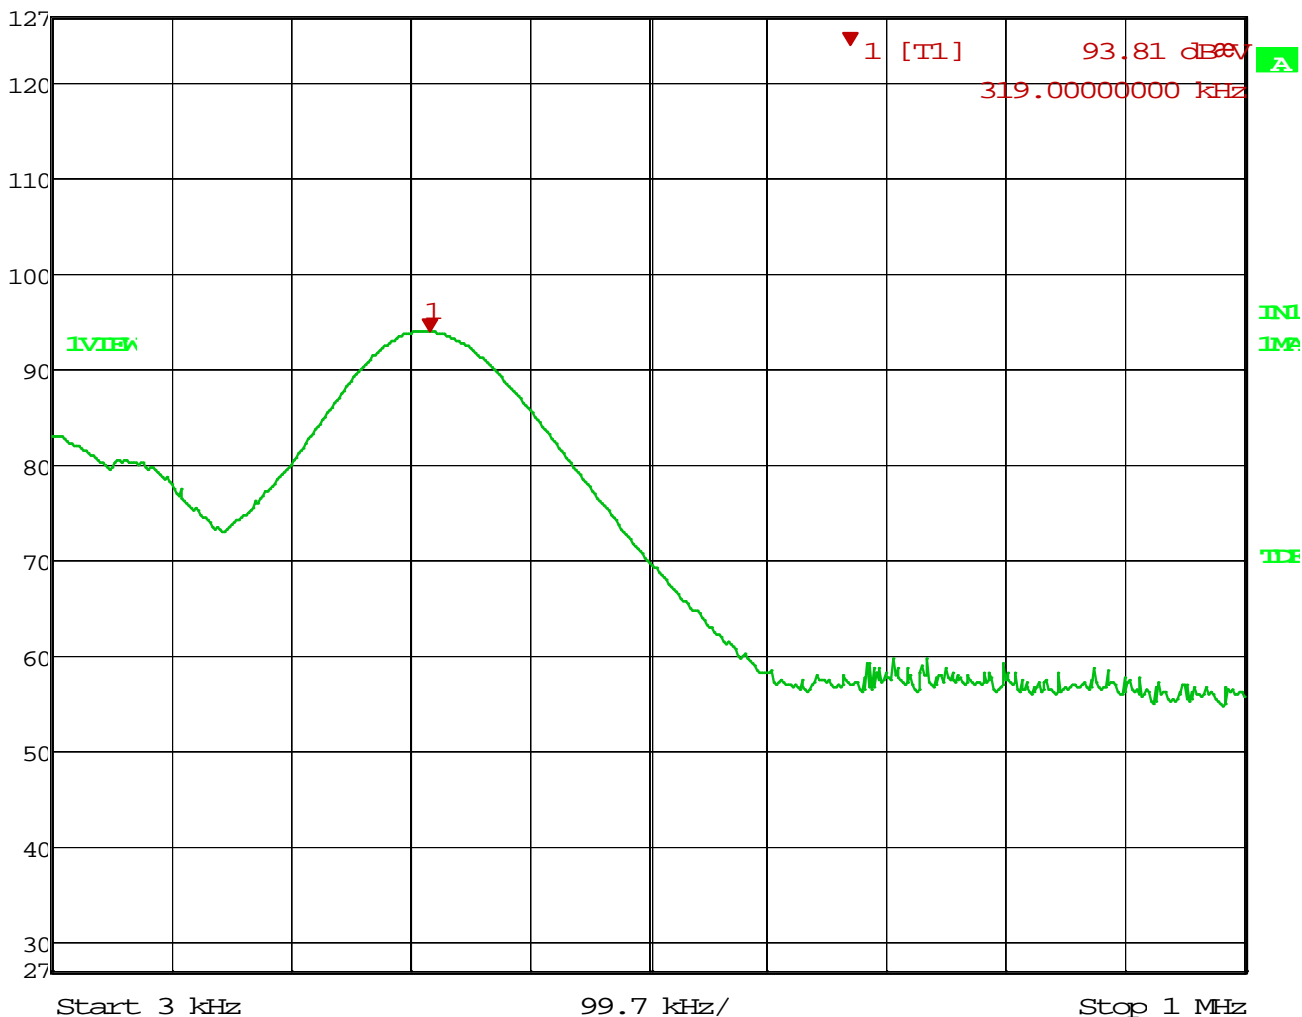


Date: 3.FEB.2012 14:55:14

Taken at 1 meter

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

NOTES:

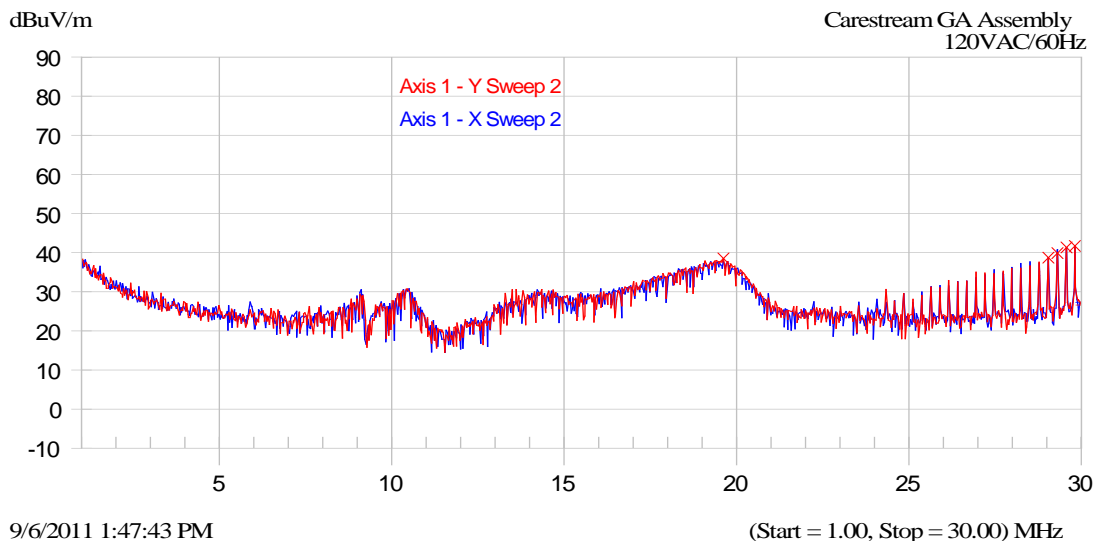Radiated Emissions 1 MHz – 30 MHz**Vertical / Horizontal**

Frequency MHz	Peak dBuV/m	QP dBuV/m	Class B-QP dB	Class A-QP dB	Trace Name
19.617	38.5		0.0	0.0	Axis 1 - Y Sweep 2
29.040	38.7		0.0	0.0	Axis 1 - Y Sweep 2
29.306	39.9		0.0	0.0	Axis 1 - Y Sweep 2
29.567	41.3		0.0	0.0	Axis 1 - Y Sweep 2
29.814	41.7		0.0	0.0	Axis 1 - Y Sweep 2

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

4.1.5 Final Tabulated Data

The 15.209 Limits for an intentional radiator operating at 319 kHz are 2400/F(kHz)

$2400/319 = 7.59$ microvolts/meter at 300m or 21.04 dBuV at 300m

To extrapolate the field strength from 300m to 3m where the field strength could be measured, measurements were taken at 2 distances according to FCC Part 15.31(e)(2)

The extrapolation factor is 32.96 dB per decade at 2 decades from 300m down to 3 m testing distance.
 $21.05 \text{ dBuV} + 65.92 \text{ dB} = 86.97 \text{ dBuV/m}$ Limit from 9 kHz to 490 kHz

The Average field strength of the EUT at 100% duty cycle at 3 meters is 44.2 dBuV/m and the limit is 86.97 dBuV/m

The AC input was varied from 85% to 115% with no change in field strength.

Distance (m)	QP (dBuV)	PK (dBuV)	AVG (dBuV)	Extrapolated Limit	Result
1	75.25	82.8	60.68	-	-
3	54.2	61.2	44.2	86.97 dBuV/m	Complies

Table 1 – Extrapolation for 15.209 Limits

Radiated Emissions Measurements									
Standard:	FCC Part 15.209(a)/ICES-003 Issue 4				PRESCAN or FINAL:		final	Date: 9/13/2011	
Device Tested:	Carestream GA Radio					Distance:	3m		
	Measured Level								
Meas #	Freq (MHz)	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Δ	Result	Antenna Polarization	Angle (degrees)	Antenna Height (meters)	Comment
1	623.4390	35.70	47.00	-11.30	Complied	Vertical	0	1.00	
2	632.8100	36.80	47.00	-10.20	Complied	Vertical	0	1.00	
3	651.5220	34.80	47.00	-12.20	Complied	Vertical	0	1.00	
4	670.3120	34.10	47.00	-12.90	Complied	Vertical	0	1.00	
5	679.6980	33.60	47.00	-13.40	Complied	Vertical	0	1.00	
6	689.0480	34.10	47.00	-12.90	Complied	Vertical	0	1.00	
7	698.4540	33.70	47.00	-13.30	Complied	Vertical	0	1.00	
7	707.7890	33.80	47.00	-13.20	Complied	Vertical	0	1.00	
8	201.5840	28.20	40.00	-11.80	Complied	Horizontal	0	4.00	
9	220.3410	28.50	40.00	-11.50	Complied	Horizontal	0	4.00	
10	670.2970	33.70	47.00	-13.30	Complied	Horizontal	0	4.00	

Figure 1 - Spurious Emissions at 3 m

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

4.2 Conducted Emissions

This test measures the electromagnet levels of spurious signals generated by the EUT on the AC power line that may affect the performance of other near by electronic equipment.

4.2.1 Over View of Test

Results	Complies (as tested per this report)					Date	8/30/2011	
Standard	FCC Part 15.207(a) RSS-210 Issue 8 & RSS-GEN Issue 3							
Product Model	GA			Serial#	Prototype			
Configuration	See test plan for details							
Test Set-up	Tested in shielded room		EUT placed on table		see test plans for details			
EUT Powered By	120VAC/60Hz	Temp	22° C	Humidity	43%	Pressure	1016mbar	
Frequency Range	150 kHz - 30 MHz							
Perf. Criteria	(Below Limit)		Perf. Verification		Readings Under Limit for L1 & Neutral			
Mod. to EUT	None		Test Performed By		Randall Masline			

4.2.2 Test Procedure

Conducted and FCC emissions tests were performed using the procedures of EN55022 & ANSI C63.4 including methods for signal maximizations and EUT configuration. The photos included with the report show the EUT in its maximized configuration. Further conducted emission tests were performed per the procedures stated in the other emissions standards listed in this report.

The frequency range from **150 kHz - 30 MHz** was investigated for conducted emissions.

Conducted Emissions measurements were performed in the shielded room using procedures specified in the test plan and standard.


4.2.3 Deviations

There were no deviations from the test methodology listed in the test plan for the conducted emission test.

4.2.4 Final Test

All final conducted emissions measurements were below (in compliance) the limits.


4.2.5 Final Graphs

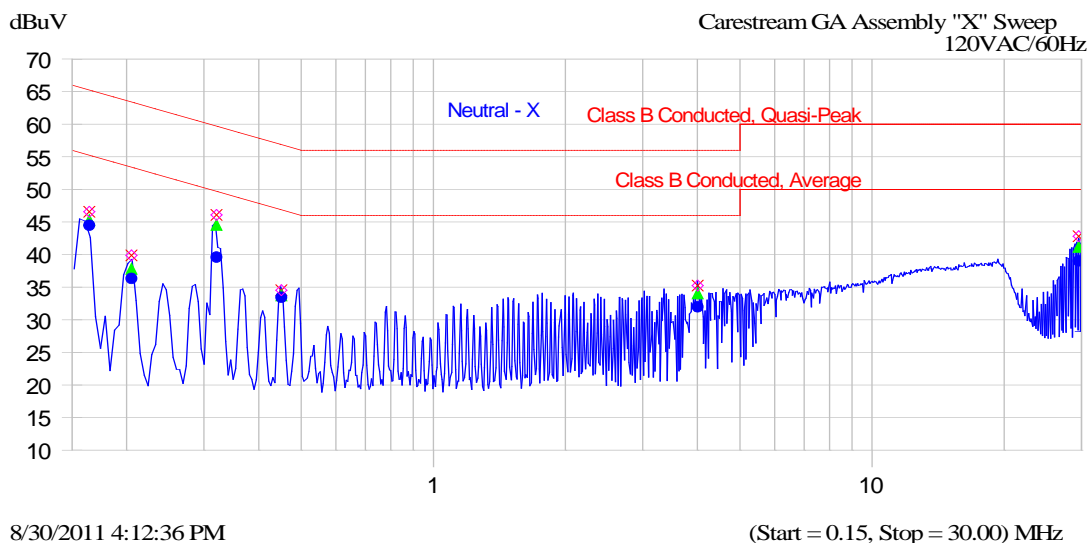NOTES:**Conducted Emissions @ 120V/60Hz**
Neutral**Neutral - X**

Frequency MHz	Peak dBuV	QP dBuV	Delta QP-QP Limit dB	Avg dBuV	Delta Avg-Avg Limit dB	Transducer Correction dB	Cable Correction dB
0.164	46.6	45.3	-20.0	44.5	-10.7	-0.2	10.1
0.205	39.9	37.8	-25.6	36.3	-17.1	-0.2	10.1
0.320	46.1	44.5	-15.2	39.6	-10.1	-0.2	10.1
0.450	34.5	33.7	-23.2	33.4	-13.4	-0.2	10.1
4.001	35.2	34.0	-22.0	32.0	-14.0	-1.6	10.5
29.558	42.8	41.2	-18.8	39.0	-11.0	-5.4	11.5

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

NOTES:

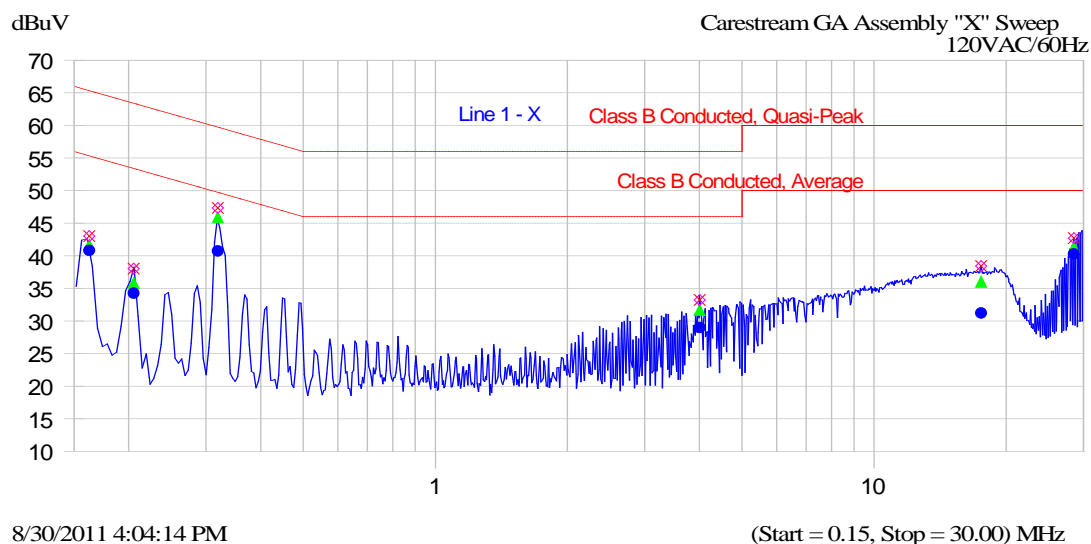Conducted Emissions @ 120V/60Hz**Line****Line 1 - X**

Frequency MHz	Peak dBuV	QP dBuV	Delta QP-QP Limit dB	Avg dBuV	Delta Avg-Avg Limit dB	Transducer Correction dB	Cable Correction dB
0.163	43.0	41.7	-23.7	40.8	-14.5	-0.2	10.1
0.205	38.0	35.8	-27.6	34.3	-19.1	-0.2	10.1
0.319	47.3	45.9	-13.9	40.7	-9.0	-0.2	10.1
4.001	33.2	31.6	-24.4	29.0	-17.0	-1.6	10.5
17.522	38.4	36.0	-24.0	31.2	-18.8	-4.8	11.1
28.508	42.7	41.3	-18.7	40.3	-9.7	-5.4	11.4

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

4.3 Restricted Bands of Operation

In accordance with 47 CFR Part 15.407(b)(7) Intentional radiators need to comply with the provisions of 47 CFR Part 15.205. The results of these measurements can be found in section 4.1

4.4 Antenna Requirements

In accordance with 47 CFR Part 15.203 an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


The EUT uses mounted coils for antenna elements and are soldered to the main PCB.

4.5 99% Bandwidth

In accordance with Industry Canada's RSS-210 Issue 8 Annex 9.2(1)



Marker 1 [T1]	RBW	10 kHz	RF Att	30 dB
87.54 dBmV	VBW	30 kHz		
Ref Lvl	SWT	15 ms	Unit	dBmV
107 dBmV				
320.64168337 kHz				

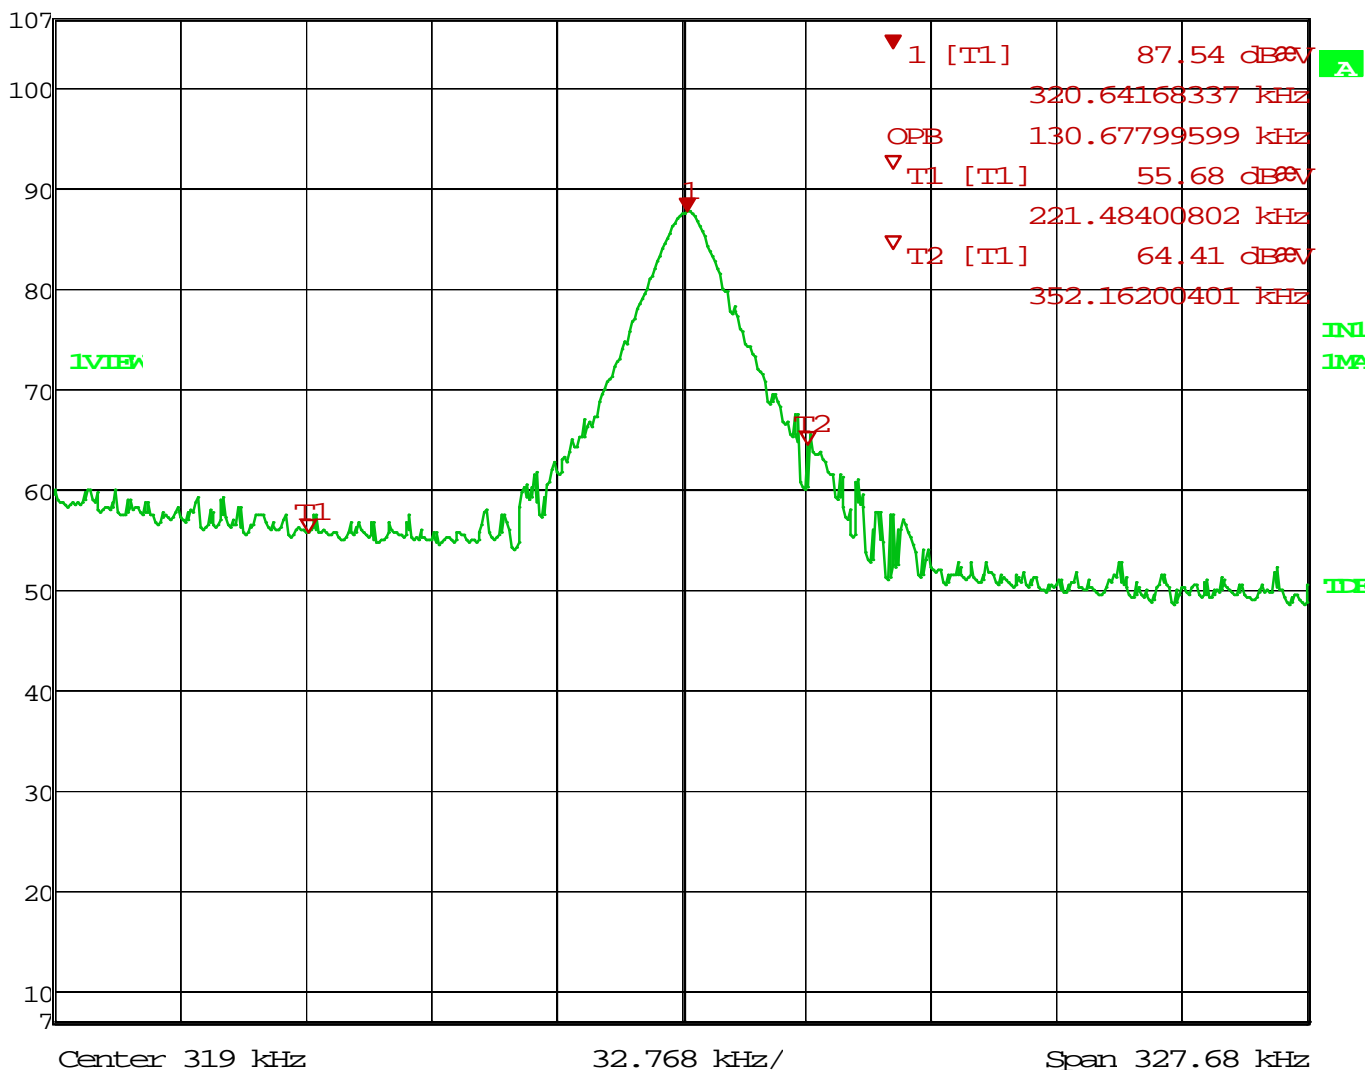

Date: 29.FEB.2012 13:29:38

Plot 1- 99% Bandwidth = 130.677 kHz

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

Appendix A

5 Test Plan

This test report is intended to follow this test plan outlined here in unless other wise stated in this here report. The following test plan will give details on product information, standards to be used, test set ups and refer to TUV test procedures. The test procedures will give the steps to be taken when performing the stated test. The product information below came via client, product manual, product itself and or the internet.

5.1 General Information

Client	Carestream Health Inc.
Address	150 Verona St
Address	Rochester NY, 14608
Contact Person	Ronald Cain
Telephone	585-627-8321
Fax	585-477-2718
e-mail	ronald.cain@carestreamhealth.com

5.2 Model(s) Name

GA

5.3 Type of Product

Grid Alignment Radio

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. This report must not be used by the applicant to claim product endorsement by TÜV Rheinland, NVLAP or any agency of the United States Government.

5.4 EUT Electrical Powered Information

5.4.1 Electrical Power Type

<input checked="" type="checkbox"/>	AC	<input type="checkbox"/>	DC	<input type="checkbox"/>	Batteries	<input type="checkbox"/>	Host -
-------------------------------------	----	--------------------------	----	--------------------------	-----------	--------------------------	--------

5.5 Electrical Support Equipment

Type	Manufacture	Model	Connected To
none			